

TPS22950-Q1 具有可调节电流 限值的 5V、2.7A、34mΩ 汽车负载开关

1 特性

- 符合汽车应用要求
- 符合 AEC-Q100 标准：
 - 器件温度等级 1：-40°C 至 125°C 的环境工作温度范围
- 输入电压范围 (V_{IN})：1.8V 至 5.5V
- 输出电流限制 (I_{LIMIT})：0.05A 至 3.5A (典型值)
- 热关断 (TSD)
- 导通电阻 (R_{ON})：
 - $V_{IN} = 5V$ 时, $R_{ON} : 34m\Omega$ (典型值)
 - $V_{IN} = 3.3V$ 时, $R_{ON} : 41m\Omega$ (典型值)
- 可限制浪涌电流的慢速导通时间 (典型值)：
 - $V_{IN} = 5V$ 时, $t_{ON} : 832\mu s$
 - $V_{IN} = 3.3V$ 时, $t_{ON} : 695\mu s$
- 常开的真反向电流阻断 (RCB)
- 故障指示 (FLT)
- 快速输出放电 (QOD)：130 Ω
- ON 引脚智能下拉电阻 ($R_{PD,ON}$)：
 - $ON \geq V_{IH}$ (I_{ON})：50nA (最大值)
 - $ON \leq V_{IL}$ ($R_{PD,ON}$)：500k Ω (典型值)
- 低功耗：
 - 导通状态 (I_Q)：40 μA (典型值)
 - 关闭状态 (I_{SD})：0.2 μA (典型值)
- UL 2367 认证文件编号 E169910
 - 已通过 $I_{LIM} = 66mA$ 至 2.46A 认证

2 应用

- 信息娱乐系统、仪表组和音响主机
- 汽车仪表组显示器
- ADAS 环视系统 ECU
- 车身控制模块和网关

3 说明

TPS22950-Q1 是一款小型单通道负载开关，能够通过可调输出电流限制、反向电流阻断和热关断提供强大的故障保护功能。


开关导通状态由数字输入控制，此输入可与低压控制信号直接连接。首次加电时，此器件使用智能下拉电阻来保持 ON 引脚不悬空，直到系统时序控制完成。故意将引脚驱动为高电平 ($>V_{IH}$) 后，智能下拉电阻会断开，以防止不必要的功率损耗。

TPS22950-Q1 采用标准 SOT 封装，工作环境温度范围为 -40°C 至 125°C。

封装信息

器件型号 ⁽¹⁾	封装	封装尺寸 (标称值)
TPS22950-Q1	DDC (SOT, 6)	2.90mm x 2.80mm

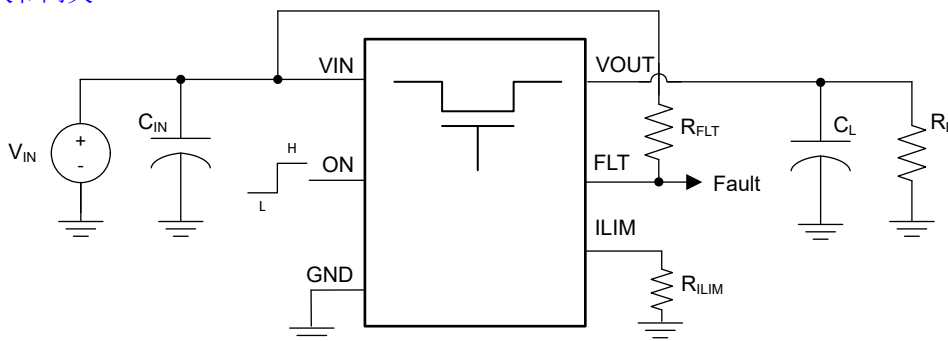(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。



典型应用



Table of Contents

1 特性	1	8.2 Functional Block Diagram	10
2 应用	1	8.3 Feature Description	10
3 说明	1	8.4 Device Functional Modes	12
4 Revision History	2	9 Application and Implementation	13
5 Pin Configuration and Functions	3	9.1 Application Information.....	13
6 Specifications	4	9.2 Typical Application.....	13
6.1 Absolute Maximum Ratings.....	4	9.3 Power Supply Recommendations.....	14
6.2 ESD Ratings.....	4	9.4 Layout.....	14
6.3 Recommended Operating Conditions.....	4	10 Device and Documentation Support	16
6.4 Thermal Information.....	4	10.1 接收文档更新通知.....	16
6.5 Electrical Characteristics.....	5	10.2 支持资源.....	16
6.6 Switching Characteristics.....	6	10.3 Trademarks.....	16
6.7 Typical Characteristics.....	7	10.4 Electrostatic Discharge Caution.....	16
7 Parameter Measurement Information	9	10.5 术语表.....	16
8 Detailed Description	10	11 Mechanical, Packaging, and Orderable Information	17
8.1 Overview.....	10		

4 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision * (September 2022) to Revision A (December 2022)	Page
• 将器件状态从 <i>预告信息</i> 更改为 <i>量产数据</i>	1

5 Pin Configuration and Functions

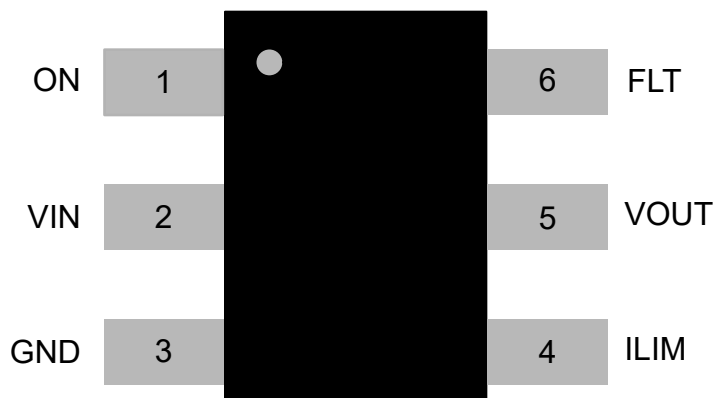


图 5-1. TPS22950-Q1, DDC Package 6-Pin SOT (Top View)

表 5-1. Pin Functions

PIN		I/O ⁽¹⁾	DESCRIPTION
NAME	NO.		
ON	1	I	Active high switch control input. Do not leave floating
VIN	2	I	Switch Input
GND	3	GND	Device Ground
ILIM	4	O	Adjusts device current limit through a resistor to ground
VOUT	5	O	Switch Output
FLT	6	O	Open-drain output, pulled low during thermal shutdown or reverse current-conditions

(1) Signal Types: I = Input, O = Output, GND = Ground.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
V _{IN}	Maximum Input Voltage Range	– 0.3	6	V
V _{OUT}	Maximum Output Voltage Range	– 0.3	6	V
V _{ON}	Maximum ON Pin Voltage Range	– 0.3	6	V
V _{FLT}	Maximum FLT Pin Voltage	– 0.3	6	V
I _{MAX}	Maximum Continuous Output Current		2.7	A
I _{MAX,PLS}	Maximum Pulsed Output Current (T _J = 85°C, duty cycle = 2%)		4.1	A
T _{STG}	Storage temperature	– 65	150	°C
T _{LEAD}	Maximum Lead Temperature (10 s soldering time)		300	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per AEC Q100-002 ⁽¹⁾	±2000	V
		HBM ESD classification level 1C		
		Charged-device model (CDM), per AEC Q100-011	±500	
		CDM ESD classification level C4A		

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
V _{IN}	Input Voltage Range	1.8		5.5	V
V _{OUT}	Output Voltage Range	0		5.5	V
V _{IH}	ON Pin High Voltage Range	1		5.5	V
V _{IL}	ON Pin Low Voltage Range	0		0.35	V
I _{LIM}	Output Current Limit	0.05		3.5	A
T _A	Ambient temperature	– 40		125	°C
T _J	Junction temperature	– 40		150	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS22950-Q1	UNIT
		DDC(SOT)	
		6 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	104.8	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	57.6	°C/W
R _{θJB}	Junction-to-board thermal resistance	36.3	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	12.8	°C/W

6.4 Thermal Information (continued)

THERMAL METRIC ⁽¹⁾		TPS22950-Q1	UNIT
		DDC(SOT)	
		6 PINS	
Ψ_{JB}	Junction-to-board characterization parameter	36.0	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

Unless otherwise noted, the characteristics in the following table apply across the recommended operating input voltage range with a load of $C_L = 0.1 \mu\text{F}$, $R_L = 100 \Omega$. Typical Values are at 5V and $T_A = 25^\circ\text{C}$.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Input Supply (VIN)							
IQ, VIN	VIN Quiescent Current	VON ≥ VIH, VOUT = Open	- 40 °C to 85 °C	40	60	μA	
			- 40 °C to 125 °C		60	μA	
ISD, VIN	VIN Shutdown Current	VON ≤ VIL, VOUT = GND	25 °C	0.2	0.4	μA	
			- 40 °C to 85 °C		9	μA	
			- 40 °C to 125 °C		46	μA	
ON-Resistance (RON)							
RON	ON-State Resistance	VIN = 5V, IOUT = -200 mA	25 °C	34	41	mΩ	
			- 40 °C to 85 °C		49	mΩ	
			- 40 °C to 125 °C		54	mΩ	
RON	ON-State Resistance	VIN = 3.3V, IOUT = -200 mA	25 °C	41	51	mΩ	
			- 40 °C to 85 °C		62		
			- 40 °C to 125 °C		68		
RON	ON-State Resistance	VIN = 1.8V, IOUT = -200 mA	25 °C	65	90	mΩ	
			- 40 °C to 85 °C		105	mΩ	
			- 40 °C to 125 °C		116	mΩ	
Output Current Limit (ILIM)							
ILIM	Output Current Limit	RI LIM = 610 Ω VOUT - VIN = 0.3V	- 40 °C to 125 °C	1.54	2	2.46	A
		RI LIM = 1.15k Ω VOUT - VIN = 0.3V	- 40 °C to 125 °C	0.75	1	1.25	A
		RI LIM = 2.21k Ω VOUT - VIN = 0.3V	- 40 °C to 125 °C	0.38	0.5	0.62	A
		RI LIM = 19.2k Ω VOUT - VIN = 0.3V	- 40 °C to 125 °C	0.034	0.05	0.066	A
tLIM	Current Limit Response Time	Output hard short (IOUT > ILIM)	- 40 °C to 125 °C	5			μs
Reverse Current Blocking (RCB)							
VRCB	Activation Threshold	VOUT Rising; VOUT > VIN	- 40 °C to 125 °C	44			mV
	Release Threshold	VOUT Falling; VOUT > VIN	- 40 °C to 125 °C	16			mV
tRCB	Response Time	VOUT = VIN + 1V	- 40 °C to 125 °C	3			μs
IOUT,RCB	Reverse Leakage Current into VOUT	VON ≤ VIL VIN = 0V, VOUT = 5V	- 40 °C to 125 °C		38		μA
Fault Indication (FLT)							
VOL, FLT	Output Low Voltage	IFLT = 1 mA	- 40 °C to 125 °C		0.1		V
tD,FLT	Fault Delay Time	VON ≥ VIH	- 40 °C to 125 °C	10			μs

6.5 Electrical Characteristics (continued)

Unless otherwise noted, the characteristics in the following table apply across the recommended operating input voltage range with a load of $C_L = 0.1 \mu\text{F}$, $R_L = 100 \Omega$. Typical Values are at 5V and $T_A = 25^\circ\text{C}$.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
I_{FLT}	Off State Leakage	$V_{\text{ON}} \leq V_{\text{IL}}$	-40°C to 125°C			50	nA
Enable Pin (ON)							
$R_{\text{PD, ON}}$	Smart Pull Down Resistance	$V_{\text{ON}} \leq V_{\text{IL}}$	-40°C to 125°C		500	650	k Ω
I_{ON}	ON Pin Leakage	$V_{\text{ON}} \geq V_{\text{IH}}$	-40°C to 125°C			50	nA
R_{QOD}	Quick Output Discharge Resistance	$V_{\text{IN}} = 5\text{V}$ $V_{\text{ON}} \leq V_{\text{IL}}$	-40°C to 125°C		120	160	Ω
R_{QOD}	Quick Output Discharge Resistance	$V_{\text{IN}} = 3.3\text{V}$ $V_{\text{ON}} \leq V_{\text{IL}}$	-40°C to 125°C		130	185	Ω
R_{QOD}	Quick Output Discharge Resistance	$V_{\text{IN}} = 1.8\text{V}$ $V_{\text{ON}} \leq V_{\text{IL}}$	-40°C to 125°C		200	355	Ω
Thermal Shutdown (TSD)							
TSD	Thermal Shutdown	Rising	N/A		170		$^\circ\text{C}$
		Falling (Hysteresis)	N/A		150		$^\circ\text{C}$

6.6 Switching Characteristics

Unless otherwise noted, the typical characteristics in the following table applies at 25°C with a load of $C_L = 1 \mu\text{F}$, $R_L = 100 \Omega$.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{ON}	Turn ON Time	$V_{\text{IN}} = 5\text{V}$		1037		μs
t_{ON}	Turn ON Time	$V_{\text{IN}} = 3.3\text{V}$		892		μs
t_{ON}	Turn ON Time	$V_{\text{IN}} = 1.8\text{V}$		730		μs
t_{R}	Output Rise Time	$V_{\text{IN}} = 5\text{V}$		621		μs
t_{R}	Output Rise Time	$V_{\text{IN}} = 3.3\text{V}$		474		μs
t_{R}	Output Rise Time	$V_{\text{IN}} = 1.8\text{V}$		313		μs
t_{D}	Output Delay Time	$V_{\text{IN}} = 5\text{V}$		415		μs
t_{D}	Output Delay Time	$V_{\text{IN}} = 3.3\text{V}$		415		μs
t_{D}	Output Delay Time	$V_{\text{IN}} = 1.8\text{V}$		415		μs
t_{OFF}	Turn OFF Time	$V_{\text{IN}} = 5\text{V}$		19		μs
t_{OFF}	Turn OFF Time	$V_{\text{IN}} = 3.3\text{V}$		14		μs
t_{OFF}	Turn OFF Time	$V_{\text{IN}} = 1.8\text{V}$		16		μs
t_{FALL}	Output Fall Time	$V_{\text{IN}} = 5\text{V}$		118		μs
t_{FALL}	Output Fall Time	$V_{\text{IN}} = 3.3\text{V}$		120		μs
t_{FALL}	Output Fall Time	$V_{\text{IN}} = 1.8\text{V}$		130		μs

6.7 Typical Characteristics

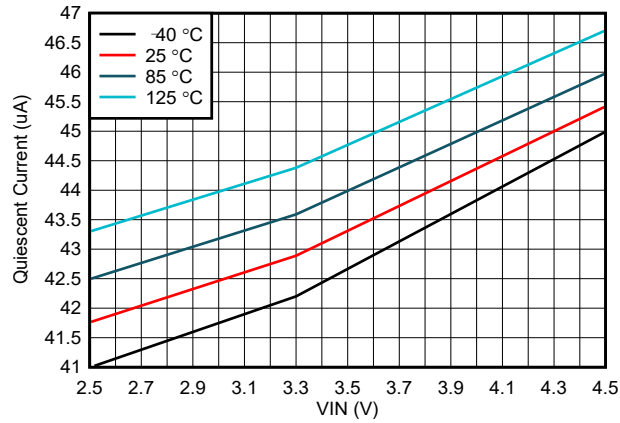


图 6-1. Quiescent Current vs Input Voltage

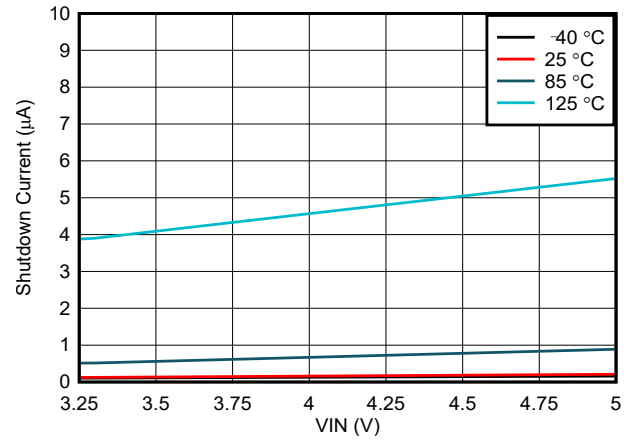


图 6-2. Shutdown Current vs Input Voltage

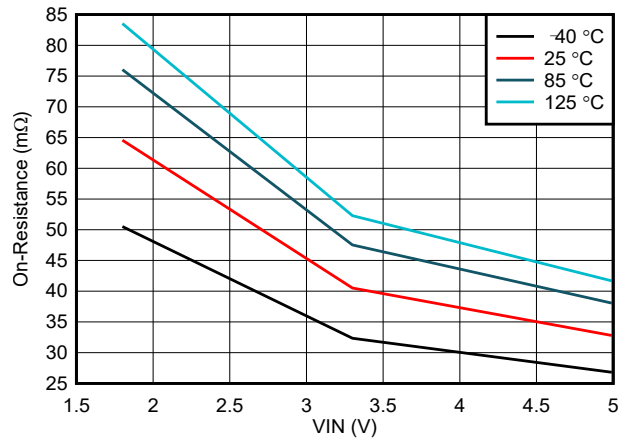


图 6-3. On-Resistance vs Input Voltage

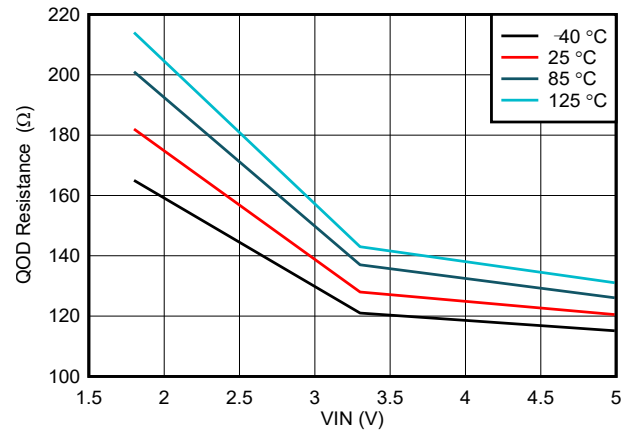


图 6-4. QOD Resistance vs Input Voltage

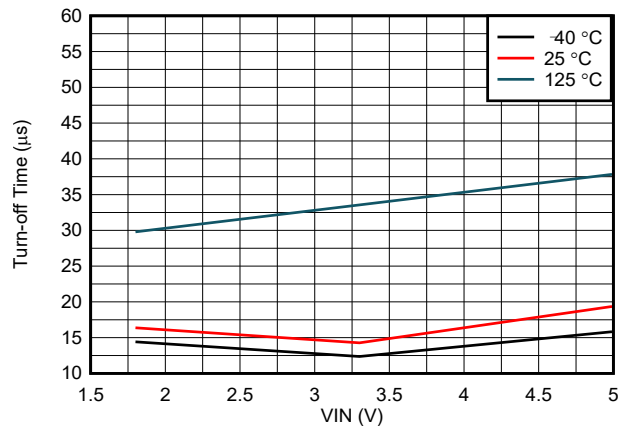


图 6-5. Turn-off Time vs Input Voltage

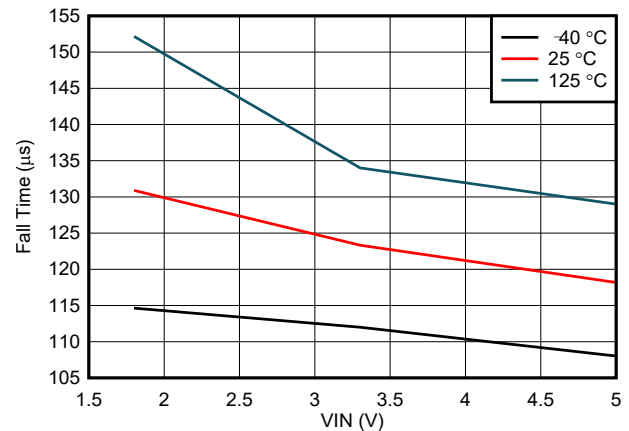


图 6-6. Fall Time vs Input Voltage

6.7 Typical Characteristics (continued)


 $C_L = 0.1\mu\text{F}$

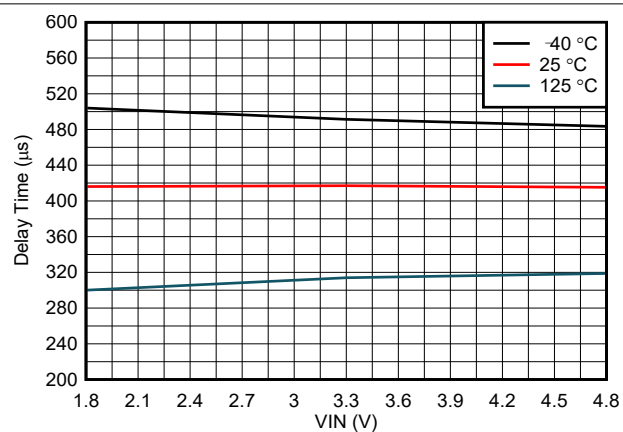图 6-7. Delay Time vs Input Voltage

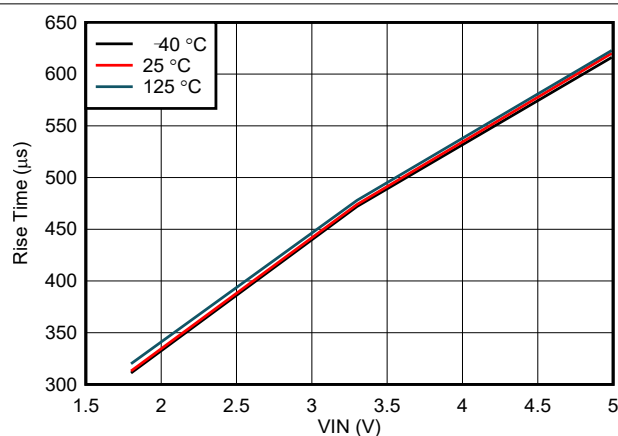
 $C_L = 0.1\mu\text{F}$

图 6-8. Rise Time vs Input Voltage

7 Parameter Measurement Information

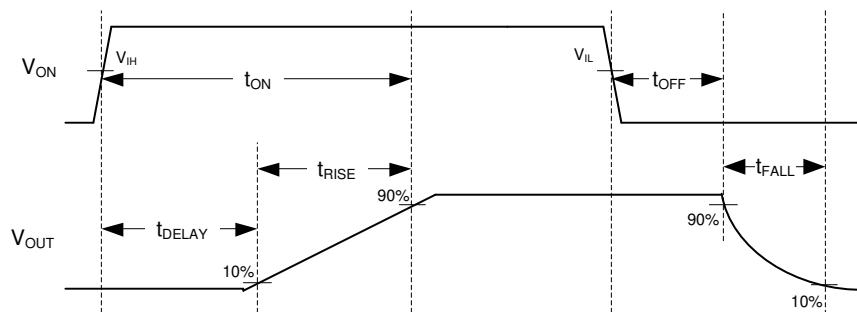



图 7-1. Timing Waveform

8 Detailed Description

8.1 Overview

The TPS22950-Q1 is a single channel load switch with a 34-mΩ power MOSFET capable of driving loads up to 2.7 A. While on, the device provides protection against fault cases through its adjustable output current limiting and thermal shutdown. The TPS22950-Q1 responds to overcurrent events with auto-retry behavior. The TPS22950 also provides reverse current blocking for when VOUT exceeds VIN. The switch ON state is controlled by a digital input that is capable of interfacing directly with low-voltage control signals, and a smart pulldown is used to keep the ON pin from floating until system sequencing is complete. When the device is turned off, quick output discharge is enabled, pulling the output voltage down to 0 V through a resistive path to GND.

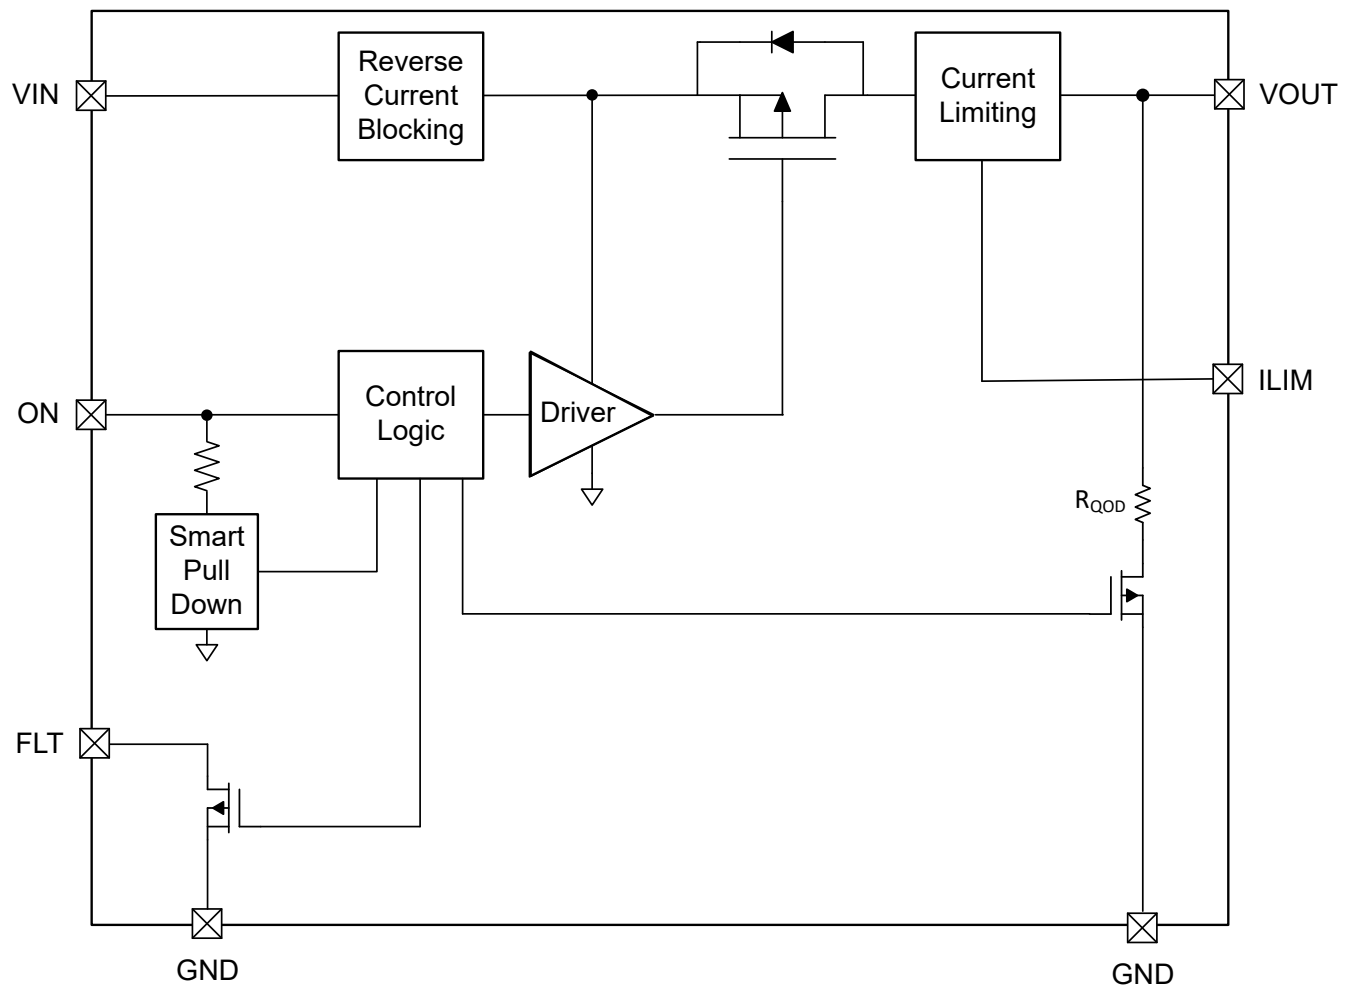8.2 Functional Block Diagram



8.3 Feature Description

8.3.1 Current Limiting

The TPS22950-Q1 responds to overcurrent conditions by limiting its output current to the I_{LIM} level shown in [Figure 8-1](#).

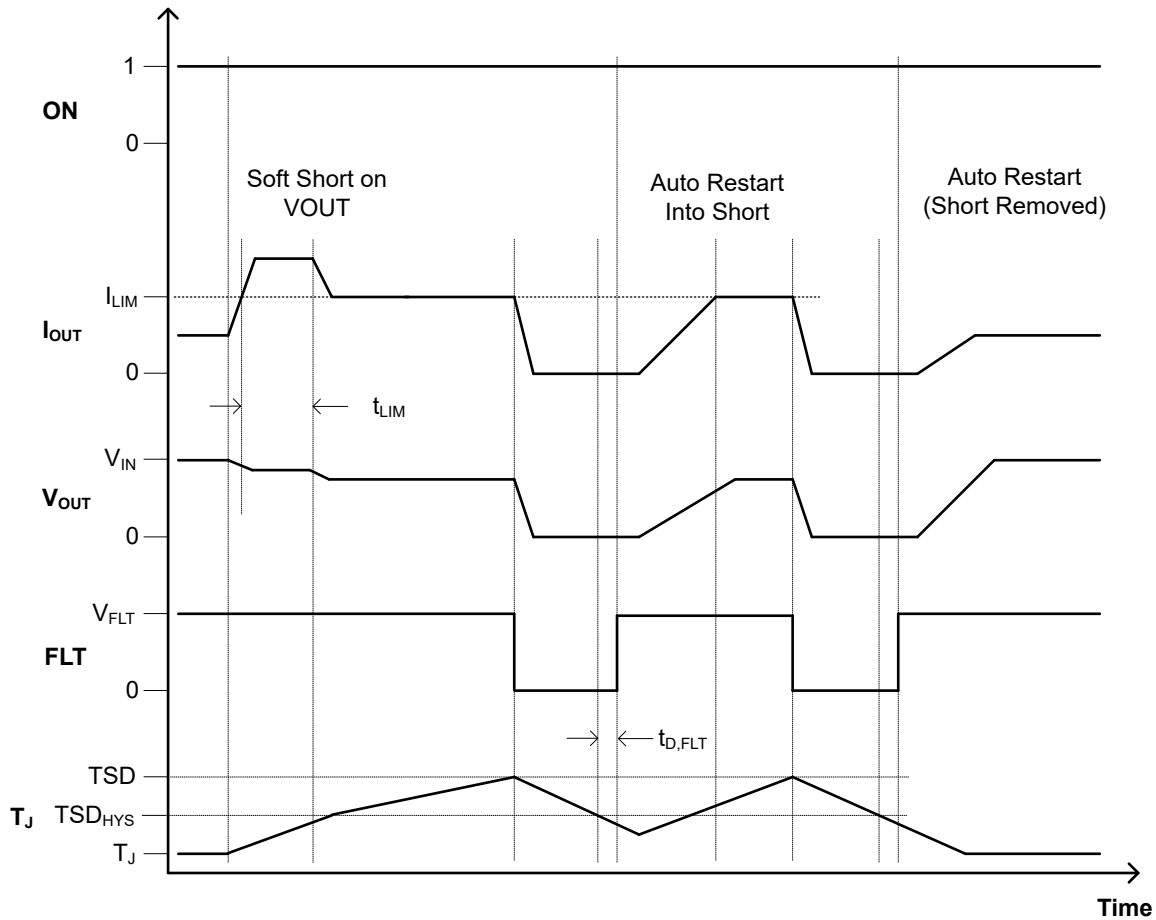


图 8-1. Output Current Limit for Short-Circuit Protection (t_{LIM})

When an overcurrent condition is detected, the device maintains a constant output current and reduces the output voltage accordingly. Two possible overload conditions can occur.

The first condition is when a short circuit or partial short circuit is present on the output and the ON pin is toggled high, turning the device on. The output voltage is held near zero potential with respect to ground and the TPS22950-Q1 ramps the output current to I_{LIM} . The TPS22950-Q1 device limits the current to I_{LIM} until the overload condition is removed or the internal junction temperature of the device reaches thermal shutdown and the device turns itself off. The device remains off until the junction temperature has lowered to T_{SD_HYS} , and the device turns itself back on. This action cycles until the overload condition is removed.

The second condition is when a short circuit, partial short circuit, or transient overload occurs after the device has been fully powered on. The device responds to the overcurrent condition within time t_{LIM} , as shown in 图 8-2, and before the current is able to exceed I_{LIM} . In the case of a fast transient, the current-sense amplifier is overdriven and momentarily disables the internal power FET. The current-sense amplifier recovers and limits the output current to I_{LIM} . Similar to the previous case, the TPS22950-Q1 limits the current to I_{LIM} until the overload condition is removed or the internal junction temperature of the device reaches thermal shutdown and begins thermally cycling on and off.

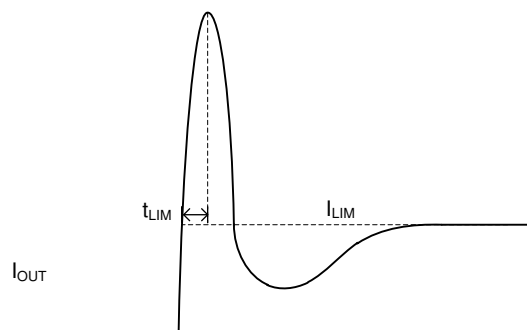


图 8-2. Transient Current Limit Waveform

8.3.1.1 Adjusting the Current Limit

The current limit is adjusted by connecting an external resistor from the ILIM pin to GND. Use [方程式 1](#) to choose the current limit resistor:

$$I_{LIM} = 1.18 \times (R_{ILIM})^{-1.072} \quad (1)$$

8.3.2 Reverse Current Blocking (RCB)

In a scenario where the device is enabled and V_{OUT} is greater than V_{IN} , there is potential for reverse current to flow through the pass FET or the body diode. When the reverse current threshold is exceeded (about 900 mA), there is a delay time (t_{RCB}) before the switch turns off to stop the current flow. The switch remains off and block reverse current as long as the reverse voltage condition exists. After V_{OUT} has dropped below the release voltage threshold (V_{RCB}) the device turns back on. When the ON pin is pulled low, the device constantly blocks reverse current.

8.4 Device Functional Modes

[表 8-1](#) summarizes the device functional modes.

表 8-1. Output Connection Table

ON	Fault Condition	VOUT State	FLT State
L	N/A	Hi-Z	Hi-Z
H	None	VIN (through R_{ON})	Hi-Z
H	Output short	Current limited	Hi-Z
H	Thermal shutdown	Hi-Z	L
H	Reverse current	Hi-Z	L

表 8-2. Smart ON
Functional Modes
($R_{PD,ON}$)

ON	ON Pin
$\leq V_{IL}$	Pulldown active
$\geq V_{IH}$	No pulldown

9 Application and Implementation

备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

This section highlights some of the design considerations when implementing this device in various applications.

9.2 Typical Application

This typical application demonstrates how the TPS22950-Q1 device can be used to set an adjustable current limit.

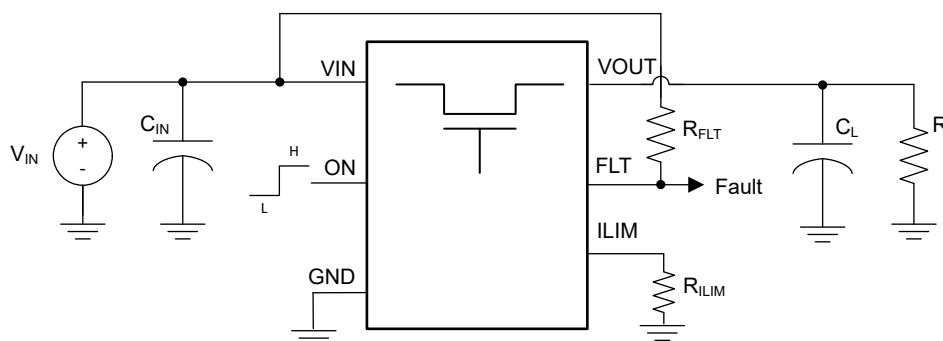


图 9-1. Typical Application

9.2.1 Design Requirements

For this example, the values in 表 9-1 are used as the design parameters.

表 9-1. Design Parameters

PARAMETER	VALUE
Input voltage (V_{IN})	5 V
Load current (mA)	100 mA
Typical current limit (mA)	500 mA

9.2.2 Detailed Design Procedure

In this example, the nominal load current is 100 mA, so the current limit can be set to 500 mA without disrupting normal operation. Use 方程式 2 to calculate the resistor needed on the ILIM pin.

$$I_{LIM} = 1.18 \times (R_{ILIM})^{-1.072} \quad (2)$$

where

- I_{LIM} = Typical current limit setting
- R_{ILIM} = Resistor on the ILIM pin

Based on 方程式 2, a 2.21-k Ω resistor must be used on the ILIM pin to set a typical current limit of 500 mA.

9.2.3 Application Curves

图 9-2 shows the device turning on into a fault condition and limiting the current to the specified amount of 500 mA.

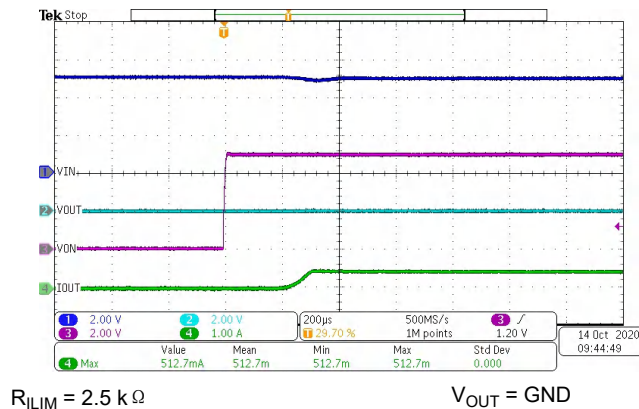


图 9-2. TPS22950-Q1 Turning On Into an Output Short

9.3 Power Supply Recommendations

The device is designed to operate with a VIN range of 1.8 V to 5.5 V. The VIN power supply must be well regulated and placed as close to the device terminal as possible. The power supply must be able to withstand all transient load current steps. In most situations, using an input capacitance (CIN) of 1 μF is sufficient to prevent the supply voltage from dipping when the switch is turned on. In cases where the power supply is slow to respond to a large transient current or large load current step, additional bulk capacitance can be required on the input.

9.4 Layout

9.4.1 Layout Guidelines

PCB layout is a critical piece of a good power supply design. To maximize the device performance, please use the following recommendations:

- Place R_{ILIM} as close as possible to the device and minimize the current loop to ground.
- Input and output capacitors must be placed close to the device to minimize the effects that parasitic trace inductance can have on normal operation.
- Use wide traces for VIN, VOUT, and GND. This helps minimize the parasitic electrical effects and maximizes the thermal capability of the device.

9.4.2 Layout Example

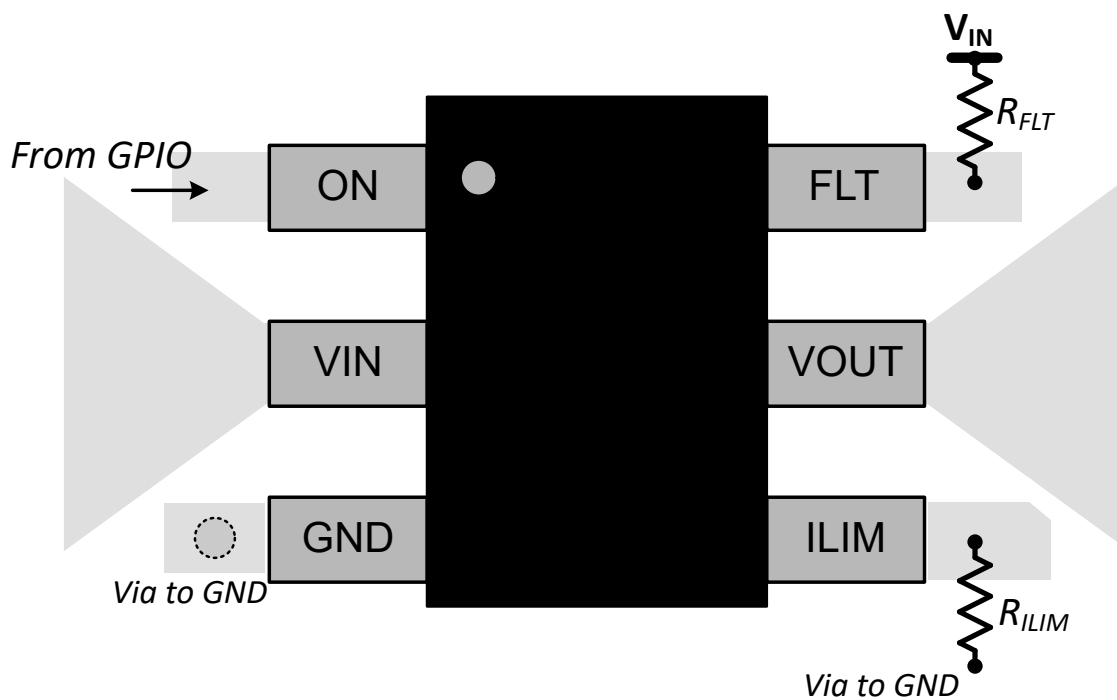


图 9-3. TPS22950-Q1 Layout Example

10 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

10.1 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

10.2 支持资源

[TI E2E™ 支持论坛](#) 是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《[使用条款](#)》。

10.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

10.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.5 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
PTPS22950CQDDCRQ1	Active	Preproduction	SOT-23-THIN (DDC) 6	3000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
PTPS22950CQDDCRQ1.A	Active	Preproduction	SOT-23-THIN (DDC) 6	3000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
TPS22950CQDDCRQ1	Active	Production	SOT-23-THIN (DDC) 6	3000 LARGE T&R	Yes	Call TI Sn	Level-1-260C-UNLIM	-40 to 125	950Q
TPS22950CQDDCRQ1.A	Active	Production	SOT-23-THIN (DDC) 6	3000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	950Q

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TPS22950-Q1 :

- Catalog : [TPS22950](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION



*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22950CQDDCRQ1	SOT-23-THIN	DDC	6	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22950CQDDCRQ1	SOT-23-THIN	DDC	6	3000	210.0	185.0	35.0

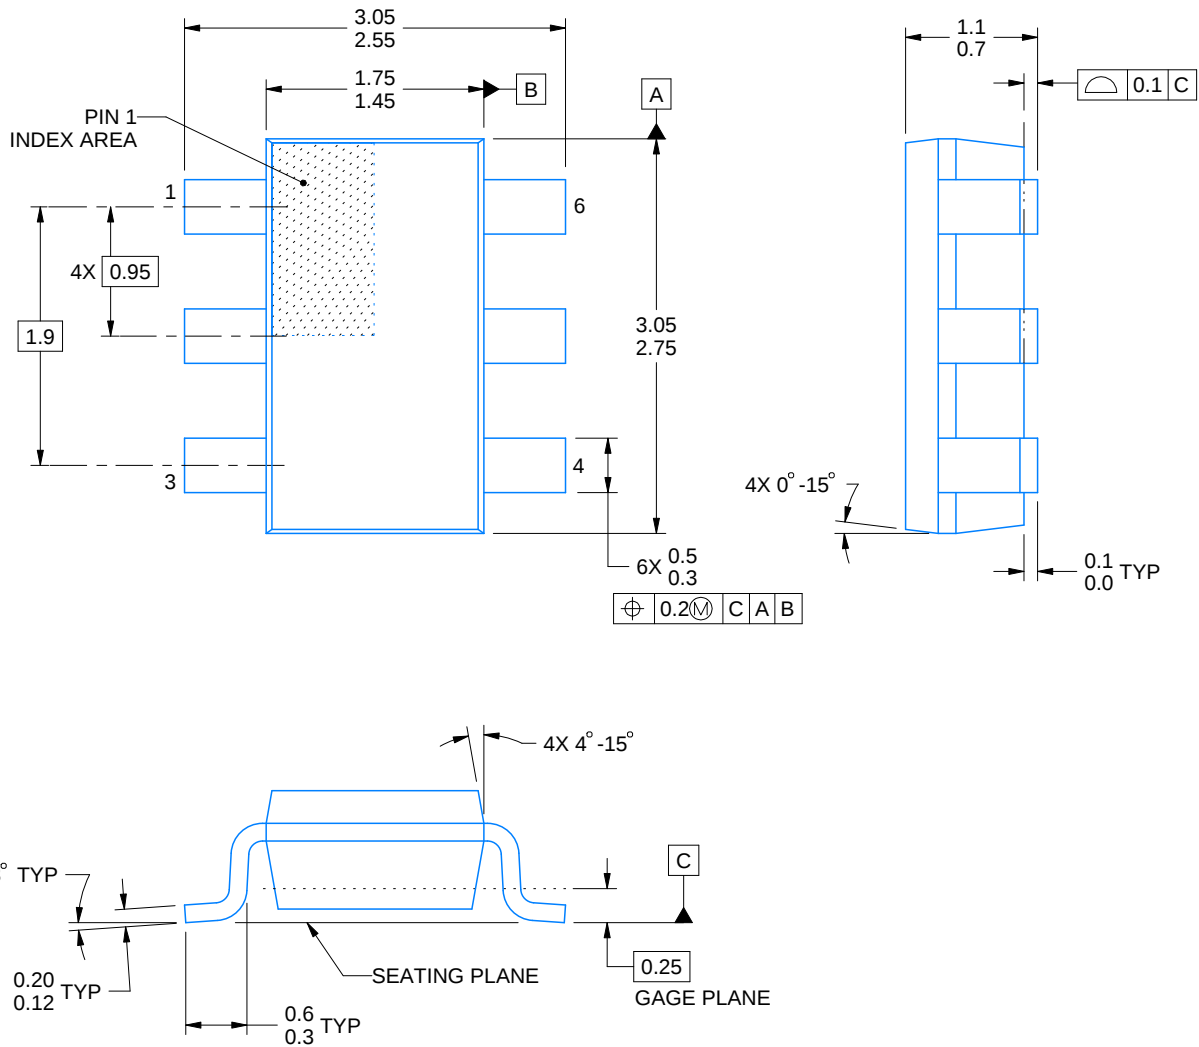

4214841/E 08/2024

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-193.

EXAMPLE BOARD LAYOUT


DDC0006A

SOT-23 - 1.1 max height

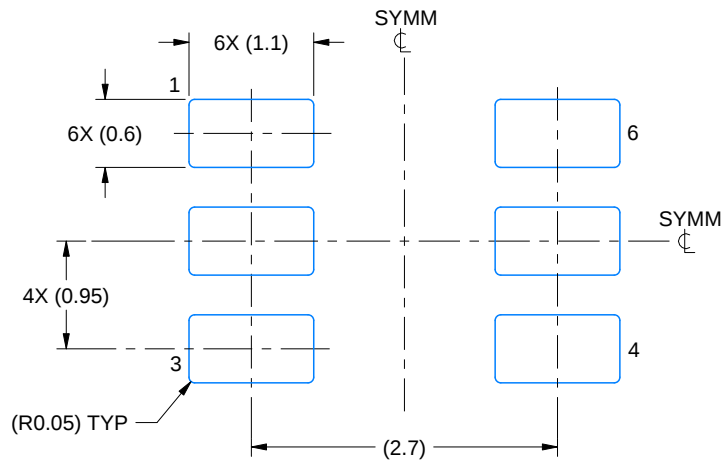SMALL OUTLINE TRANSISTOR



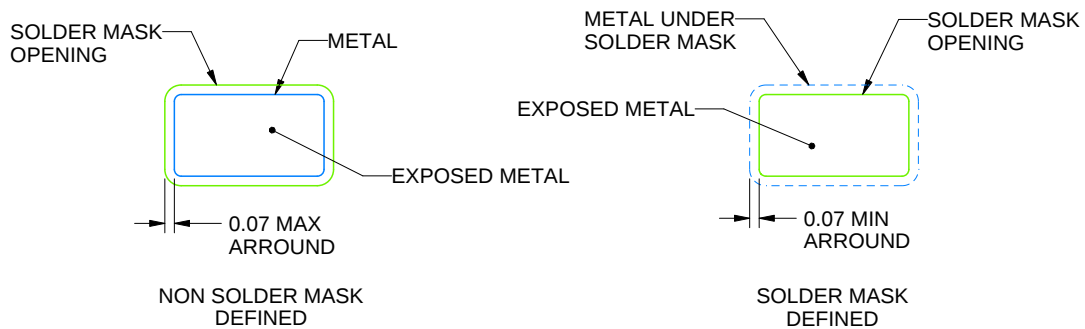LAND PATTERN EXAMPLE
EXPLODED METAL SHOWN
SCALE:15X




SOLDERMASK DETAILS

4214841/E 08/2024

NOTES: (continued)

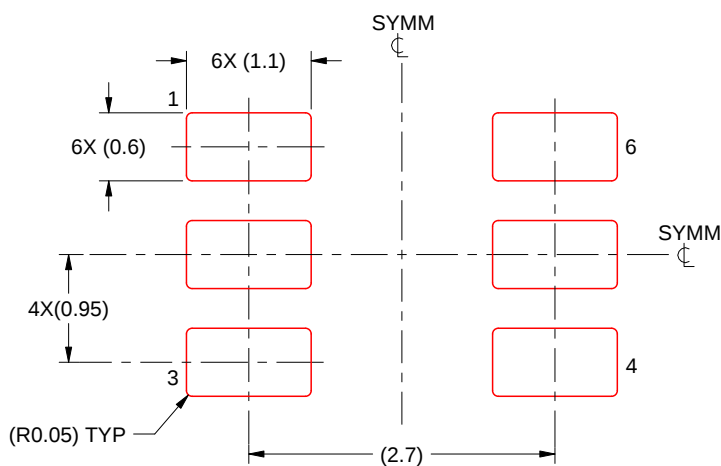4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOLDER PASTE EXAMPLE
 BASED ON 0.125 THICK STENCIL
 SCALE:15X

4214841/E 08/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月