

BQ25171-Q1: 适用于 1-2 节锂离子、磷酸铁锂以及 1-6 节镍氢电池的汽车类、独立 800mA 线性电池充电器

1 特性

- 符合面向汽车应用的 AEC-Q100 标准
 - 温度等级 1: $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$
 - HBM ESD 分类等级 2
 - CDM ESD 分类等级 C4B
- 可承受 40V 负载突降, 支持直接从 3V 至 18V 工作范围的主电池为备用电池充电
- 自动睡眠模式, 可降低功耗
 - 350nA 电池泄漏电流
 - 禁用充电时, 输入泄漏电流为 2 μ A
- 支持多化合物电池
 - 1-2 节锂离子、锂聚合物和磷酸铁锂电池
 - 1-6 节镍氢电池 (借助间歇性充电支持)
- 操作可使用外部电阻器进行编程
 - VSET 用于为锂离子电池设置 3.5V 至 8.4V 的电池稳压电压, 或为镍氢电池设置 1 至 6 节
 - ISET 用于设置 10mA 至 800mA 的充电电流
 - CHM_TMR 用于将电池化学成分设置为锂离子或镍氢并设置充电计时器时间
- 高精度
 - 充电电压精度为 $\pm 0.5\%$
 - 充电电流精度为 $\pm 10\%$
- 充电特性
 - 预充电电流为 20% ISET
 - 终止电流为 10% ISET
 - NTC 热敏电阻输入用于监控电池温度
 - $\overline{\text{CE}}$ 引脚用于充电功能控制
 - 两个开漏输出用于状态和故障指示
- 集成故障保护
 - 18V 输入过压保护
 - 基于 VSET 的输出过压保护
 - 1000mA 过流保护
 - 125 $^{\circ}\text{C}$ 热调节; 150 $^{\circ}\text{C}$ 热关断保护
 - OUT 短路保护
 - VSET、ISET、CHM_TMR 引脚短路/开路保护

3 说明

BQ25171-Q1 是一款符合汽车标准的 800mA 线性充电器, 适用于 1-2 节锂离子、锂聚合物和磷酸铁锂电池, 以及 1-6 节镍氢电池应用。该器件具有为电池充电的单电源输出。只要安全计时器期间内平均系统负载不会妨碍电池充满电, 就可以使系统负载与电池并联。当系统负载与电池并联时, 充电电流会由系统和电池共享。


该器件分三个阶段为锂离子电池充电: 对完全放电电池进行恢复性充电的预充电阶段, 为电池充上大部分电量的恒流快速充电阶段, 以及使电池电量充满的电压调节阶段。

该器件只会以恒定电流模式为镍氢电池充电, 并会在可编程计时器到期或电池电压超过 VOUT_OVP 阈值时, 终止充电周期。在所有充电阶段, 内部控制环路都会监控 IC 结温, 当其超过内部温度阈值 T_{REG} 时, 它会减少充电电流。

器件信息

器件型号 ⁽¹⁾	封装	封装尺寸 (标称值)
BQ25171-Q1	VSON (10)	3.0mm x 3.0mm

(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

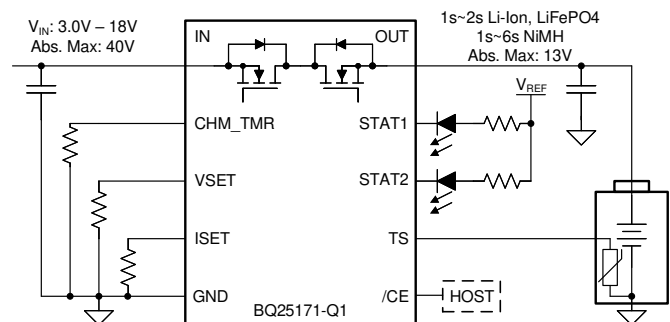

简化版原理图

2 应用

- 远程信息处理控制单元 (TCU)
- 紧急呼叫 (eCall)
- 车队管理、资产跟踪
- 远程无钥匙门禁 (RKE) 钥匙扣



Table of Contents

1 特性	1	7.4 Device Functional Modes.....	22
2 应用	1	8 Application and Implementation	24
3 说明	1	8.1 Application Information.....	24
4 Revision History	2	8.2 Typical Applications.....	24
5 Pin Configuration and Functions	3	9 Power Supply Recommendations	30
6 Specifications	4	10 Layout	30
6.1 Absolute Maximum Ratings	4	10.1 Layout Guidelines.....	30
6.2 ESD Ratings	4	10.2 Layout Example.....	30
6.3 Recommended Operating Conditions	4	11 Device and Documentation Support	31
6.4 Thermal Information	5	11.1 Device Support.....	31
6.5 Electrical Characteristics	6	11.2 Receiving Notification of Documentation Updates..	31
6.6 Timing Requirements	8	11.3 支持资源.....	31
6.7 典型特性.....	9	11.4 Trademarks.....	31
7 Detailed Description	11	11.5 静电放电警告.....	31
7.1 Overview.....	11	11.6 术语表.....	31
7.2 Functional Block Diagram.....	13	12 Mechanical, Packaging, and Orderable	
7.3 Feature Description.....	14	Information	32

4 Revision History

Changes from Revision * (August 2020) to Revision A (March 2021)	Page
• 将“预告信息”更改为“量产数据”	1

5 Pin Configuration and Functions

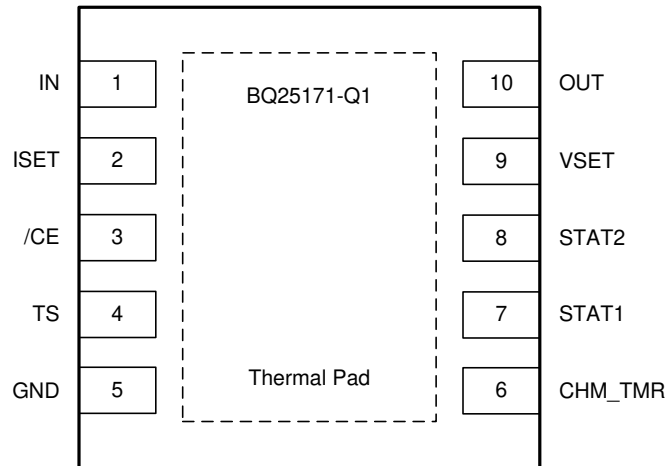


图 5-1. VSON Package 10-Pin (Top View)

表 5-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NUMBER		
IN	1	P	Input power, connected to external DC supply. Bypass IN with at least 1- μ F capacitor to GND, placed close to the IC.
ISET	2	I	Programs the fast-charge current setting. External resistor from ISET to GND defines fast-charge current value. Recommended range is 30 k Ω (10 mA) to 375 Ω (800 mA). $ICHG = K_{ISET} / R_{ISET}$. Precharge current is defined as 20% of ICHG. Termination current is defined as 10% of ICHG.
CE	3	I	Active Low Charge Enable pin. Battery charging is enabled when $\overline{CE}$ pin is low. IC remains in Shutdown Mode and battery charging is disabled when $\overline{CE}$ pin is high. An internal pulldown resistor (R_{PD_CE}) enables the IC by default if this pin is floating.
TS	4	I	Temperature Qualification Voltage Input. Connect a negative temperature coefficient (NTC) thermistor directly from TS to GND (AT103-2 recommended). Charge suspends when the TS pin voltage is out of range. If TS function is not needed, connect an external 10-k Ω resistor from TS to GND.
GND	5	–	Ground pin
CHM_TMR	6	I	Programs the chemistry and charge time to be used with a pull-down resistor. Valid resistor range is 3.6 k Ω to 100 k Ω , values outside this range will suspend charge. Refer to 节 7.3.1.2 for voltage level details.
STAT1	7	O	Open drain charge status 1 output. Connect to pullup rail via 10-k Ω resistor.
STAT2	8	O	Open drain charge status 2 output. Connect to pullup rail via 10-k Ω resistor.
VSET	9	I	Programs the regulation voltage for OUT pin with a pull-down resistor. Valid resistor range is 3.6 k Ω to 100 k Ω , values outside this range will suspend charge. Refer to 节 7.3.1.3 for voltage level details.
OUT	10	P	Battery Connection. System load may be connected in parallel to battery. Bypass OUT with at least 1- μ F capacitor to GND, placed close to the IC.
Thermal Pad	—	—	Exposed pad beneath the IC for heat dissipation. Solder thermal pad to the board with vias connecting to solid GND plane.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Voltage	IN	– 0.3	40	V
Voltage	OUT	– 0.3	13	V
Voltage	CE, CHM_TMR, ISET, STAT1, STAT2, TS, VSET	– 0.3	5.5	V
Output Sink Current	STAT1, STAT2		5	mA
T _J	Junction temperature	– 40	150	°C
T _{stg}	Storage temperature	– 65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per AEC Q100-002 ⁽¹⁾	±2000	V
		Charged device model (CDM), per AEC Q100-011	±750	
		Other pins	±500	

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V _{IN}	Input voltage	3.0		18	V
V _{OUT}	Output voltage			10.5	V
I _{OUT}	Output current			0.8	A
T _J	Junction temperature	– 40		125	°C
C _{IN}	IN capacitor	1			μF
C _{OUT}	OUT capacitor	1			μF
R _{CHM_TMR}	CHM_TMR resistor	3.6		100	k Ω
R _{VSET}	VSET resistor	3.6		100	k Ω
R _{VSET_CHM_TMR_TOL}	Tolerance for VSET, and CHM_TMR, resistors	–1		1	%
R _{VSET_CHM_TMR_TEMPCO}	Temperature coefficient for VSET, and CHM_TMR resistors			200	ppm/°C
R _{ISET}	ISET resistor	0.375		30	k Ω
R _{TS}	TS thermistor resistor (recommend 103AT-2)		10		k Ω

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		BQ25171-Q1	UNIT
		DRC	
		10 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance (EVM ⁽²⁾)	37	°C/W
$R_{\theta JA}$	Junction-to-ambient thermal resistance (JEDEC ⁽¹⁾)	60.3	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	73.1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	34.2	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	6.0	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	34.2	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	16.7	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.
- (2) 1oz Copper, 2-layer board

6.5 Electrical Characteristics

3.0V < V_{IN} < 18V and V_{IN} > V_{OUT} + V_{SLEEP}, T_J = -40°C to +125°C, and T_J = 25°C for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
QUIESCENT CURRENTS						
I _{Q_OUT}	Quiescent output current (OUT)	OUT = 4.2V, IN floating or IN = 0V - 5V, Charge Disabled ($\overline{\text{CE}}$ high), T _J = 25 °C	0.350	0.6		μA
		OUT = 4.2V, IN floating or IN = 0V - 5V, Charge Disabled ($\overline{\text{CE}}$ high), T _J < 105 °C	0.350	0.8		μA
I _{Q_OUT}	Quiescent output current (OUT)	OUT = 8.4V, IN floating or IN = 0V - 14V, Charge Disabled ($\overline{\text{CE}}$ high), T _J = 25 °C	0.8	1.2		μA
		OUT = 8.4V, IN floating or IN = 0V - 14V, Charge Disabled ($\overline{\text{CE}}$ high), T _J < 105 °C	0.8	1.5		μA
I _{SD_IN}	Shutdown input current (IN) with charge disabled	IN = 5V, Charge Disabled ($\overline{\text{CE}}$ high), no battery	2	4		μA
		IN = 14V, Charge Disabled ($\overline{\text{CE}}$ high), no battery	3.5	6		μA
I _{STANDBY_IN}	Standby input current (IN) with charge terminated	IN = 5V, Charge Enabled ($\overline{\text{CE}}$ low), charge terminated	190			μA
I _{STANDBY_IN}	Standby input current (IN) with charge terminated	IN = 14V, Charge Enabled ($\overline{\text{CE}}$ low), charge terminated	230			μA
I _{Q_IN}	Quiescent input current (IN)	IN = 5V, OUT = 3.8V, Charge Enabled ($\overline{\text{CE}}$ low), ICHG = 0A	0.45	0.6		mA
I _{Q_IN}	Quiescent input current (IN)	IN = 14V, OUT = 7.6V, Charge Enabled ($\overline{\text{CE}}$ low), ICHG = 0A	0.45	0.6		mA
INPUT						
V _{IN_OP}	IN operating range		3.0		18	V
V _{IN_LOWV}	IN voltage to start charging	IN rising	3.05	3.09	3.15	V
V _{IN_LOWV}	IN voltage to stop charging	IN falling	2.80	2.95	3.10	V
V _{SLEEPZ}	Exit sleep mode threshold	IN rising, V _{IN} - V _{OUT} , OUT = 4V	95	135	175	mV
V _{SLEEP}	Sleep mode threshold hysteresis	IN falling, V _{IN} - V _{OUT} , OUT = 4V		80		mV
V _{IN_OV}	VIN overvoltage rising threshold	IN rising	18.1	18.4	18.7	V
V _{IN_OVZ}	VIN overvoltage falling threshold	IN falling		18.2		V
CONFIGURATION PINS SHORT/OPEN PROTECTION						
R _{ISET_SHORT}	Highest resistor value considered short	R _{ISET} below this at startup, charger does not initiate charge, power cycle or $\overline{\text{CE}}$ toggle to reset			350	Ω
R _{VSET_SHORT}	Highest resistor value considered short	R _{VSET} below this at startup, charger does not initiate charge, power cycle or $\overline{\text{CE}}$ toggle to reset			2.8	kΩ
R _{VSET_OPEN}	Lowest resistor value considered open	R _{VSET} above this at startup, charger does not initiate charge, power cycle or $\overline{\text{CE}}$ toggle to reset	120			kΩ
R _{CHM_TMR_SHORT}	Highest resistor value considered short	R _{CHM_TMR} below this at startup, charger latches off, power cycle or $\overline{\text{CE}}$ toggle to reset			2.8	kΩ
R _{CHM_TMR_OPEN}	Lowest resistor value considered open	R _{CHM_TMR} above this at startup, charger latches off, power cycle or $\overline{\text{CE}}$ toggle to reset	120			kΩ
BATTERY CHARGER						
V _{DO}	Dropout voltage (V _{IN} - V _{OUT})	VIN falling, VOUT = 4.35V, IOUT = 500mA	425			mV
V _{REG_ACC}	OUT charge voltage regulation accuracy	T _J = 25°C, all VSET settings	- 0.5		0.5	%
		T _J = -40°C to 125°C, all VSET settings	- 0.8		0.8	%

6.5 Electrical Characteristics (continued)

3.0V < V_{IN} < 18V and V_{IN} > V_{OUT} + V_{SLEEP}, T_J = -40°C to +125°C, and T_J = 25°C for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I _{CHG_RANGE}	Typical charge current regulation range	V _{OUT} > V _{BAT_LOWV}	10		800	mA
K _{ISET}	Charge current setting factor, I _{CHG} = K _{ISET} / R _{ISET}	10mA < I _{CHG} < 800mA	270	300	330	A Ω
I _{CHG_ACC}	Charge current accuracy ⁽¹⁾	R _{ISET} = 375 Ω , OUT = 3.8V or 7.6V	720	800	880	mA
		R _{ISET} = 600 Ω , OUT = 3.8V or 7.6V	450	500	550	mA
		R _{ISET} = 3.0k Ω , OUT = 3.8V or 7.6V	90	100	110	mA
		R _{ISET} = 30k Ω , OUT = 3.8V or 7.6V	9	10	11	mA
I _{PRECHG}	Typical pre-charge current, as percentage of I _{CHG}	V _{OUT} < V _{BAT_LOWV}		20		%
I _{PRECHG_ACC}	Precharge current accuracy	R _{ISET} = 375 Ω , OUT = 2.5V or 5.0V	144	160	176	mA
		R _{ISET} = 600 Ω , OUT = 2.5V or 5.0V	85	100	110	mA
		R _{ISET} = 3.0k Ω , OUT = 2.5V or 5.0V	18	20	22	mA
		R _{ISET} = 30k Ω , OUT = 2.5V or 5.0V	1.4	2	2.6	mA
I _{TERM}	Typical termination current, as percentage of I _{CHG}	V _{OUT} = V _{REG}		10		%
I _{TERM_ACC}	Termination current accuracy	R _{ISET} = 600 Ω , OUT = V _{REG} = 4.2V or 8.4V	45	50	55	mA
		R _{ISET} = 3.0k Ω , OUT = V _{REG} = 4.2V or 8.4V	8.5	10	11.5	mA
		R _{ISET} =30k Ω , OUT = V _{REG} = 4.2V or 8.4V	0.4	1	1.6	mA
V _{BAT_SHORT}	Output (OUT) short circuit voltage rising threshold, per cell for Li-Ion chemistry	OUT rising, V _{SET} configured for Li-Ion , 1-cell or 2-cell	2.1	2.2	2.3	V
V _{BAT_SHORT}	Output (OUT) short circuit voltage rising threshold, per cell for LiFePO ₄ chemistry	OUT rising, V _{SET} configured for LiFePO ₄ , 1-cell or 2-cell	1.1	1.2	1.3	V
V _{BAT_SHORT_HYS}	Output (OUT) short circuit voltage hysteresis, per cell	OUT falling		200		mV
I _{BAT_SHORT}	OUT short circuit charging current	V _{OUT} < V _{BAT_SHORT}	12	16	20	mA
V _{BAT_LOWV}	Pre-charge to fast-charge transition threshold, per cell for Li-Ion chemistry	OUT rising, V _{SET} configured for Li-Ion , 1-cell or 2-cell	2.7	2.8	3.0	V
V _{BAT_LOWV}	Pre-charge to fast-charge transition threshold, per cell for Li-FePO ₄ chemistry	OUT rising, V _{SET} configured for LiFePO ₄ , 1-cell or 2-cell	1.9	2.0	2.1	V
V _{BAT_LOWV_HYS}	Battery LOWV hysteresis, per cell	OUT falling, all charger configurations		100		mV
V _{RECHG}	Battery recharge threshold, per cell for Li-Ion chemistry	OUT falling, V _{SET} configured for Li-Ion , 1-cell or 2-cell, V _{REG_ACC} - V _{OUT}	75	100	125	mV
V _{RECHG}	Battery recharge threshold, per cell for LiFePO ₄ chemistry	OUT falling, V _{SET} configured for LiFePO ₄ , 1-cell or 2-cell, V _{REG_ACC} - V _{OUT}	175	200	225	mV
V _{RECHG}	Battery recharge threshold, per cell for NiMH chemistry	OUT falling, V _{SET} configured for 2-cell with intermittent charge enabled	1.305	1.330	1.355	V
R _{ON}	Charging path FET on-resistance	I _N > 5V, T _J = 25°C		845	980	m Ω
		I _N > 5V, T _J = -40°C - 125°C		845	1350	m Ω
BATTERY CHARGER PROTECTION						
V _{OUT_OVP}	OUT overvoltage rising threshold	V _{OUT} rising, as percentage of V _{REG}	103	104	105	%
V _{OUT_OVP}	OUT overvoltage falling threshold	V _{OUT} falling, as percentage of V _{REG}	101	102	103	%
V _{OUT_OVP}	OUT overvoltage rising threshold, per cell for NiMH chemistry	V _{OUT} rising, TS normal	1.65	1.70	1.75	V

6.5 Electrical Characteristics (continued)

$3.0V < V_{IN} < 18V$ and $V_{IN} > V_{OUT} + V_{SLEEP}$, $T_J = -40^{\circ}C$ to $+125^{\circ}C$, and $T_J = 25^{\circ}C$ for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{OUT_OVP}	OUT overvoltage falling threshold, per cell for NiMH chemistry	VOOUT falling, TS normal	1.40	1.45	1.50	V
I_{OUT_OCP}	Output current limit threshold	IOOUT rising	0.9	1	1.1	A
TEMPERATURE REGULATION AND TEMPERATURE SHUTDOWN						
T_{REG}	Typical junction temperature regulation			125		$^{\circ}C$
T_{SHUT}	Thermal shutdown rising threshold	Temperature increasing		150		$^{\circ}C$
	Thermal shutdown falling threshold	Temperature decreasing		135		$^{\circ}C$
BATTERY-PACK NTC MONITOR						
I_{TS_BIAS}	TS nominal bias current		36.5	38	39.5	μA
V_{COLD}	Cold temperature threshold	TS pin voltage rising (approx. $0^{\circ}C$)	0.99	1.04	1.09	V
	Cold temperature exit threshold	TS pin voltage falling (approx. $4^{\circ}C$)	0.83	0.88	0.93	V
V_{HOT}	Hot temperature threshold	TS pin voltage falling (approx. $45^{\circ}C$)	176	188	200	mV
	Hot temperature exit threshold	TS pin voltage rising (approx. $40^{\circ}C$)	208	220	232	mV
V_{TS_CLAMP}	TS maximum voltage clamp	TS pin open-circuit (float)	2.3	2.6	2.9	V
LOGIC INPUT PIN (/CE)						
V_{IH}	Input high threshold level		1.3			V
V_{IL}	Input low threshold level				0.4	V
R_{PD_CE}	$\overline{CE}$ pin internal pulldown resistor		3.3			M Ω
LOGIC OUTPUT PIN (STAT1, STAT2)						
V_{OL}	Output low threshold level	Sink current = 5mA			0.4	V
I_{OUT_BIAS}	High-level leakage current	Pull up rail 3.3V			1	μA

(1) Temperature Regulation (TREG) loop may reduce the output current depending on power dissipation and ambient temperature

6.6 Timing Requirements

		MIN	NOM	MAX	UNIT
BATTERY CHARGER					
$t_{OUT_OCP_DGL}$	Deglint time for I_{OUT_OCP} , IOOUT rising		100		μs
t_{PRECHG}	Pre-charge safety timer accuracy	28.5	30	31.5	min
t_{SAFETY}	Fast-charge safety timer accuracy	9.5	10	10.5	hr
$t_{INTERMITTENT}$	Automotive Intermittent charge safety timer (NiMH), as percentage of t_{SAFETY}		25		%

6.7 典型特性

$C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $V_{IN} = 5V$, $V_{OUT} = 3.8V$ (除非另有说明)

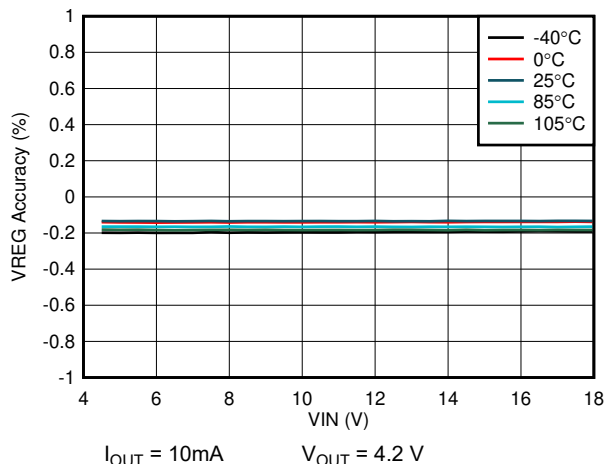


图 6-1. 线性调整率 (4.2V_{OUT} 时为 1s)

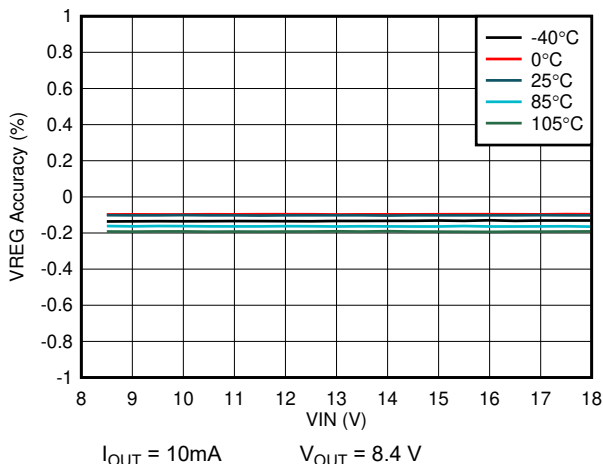


图 6-2. 线性调整率 (8.4V_{OUT} 时为 2s)

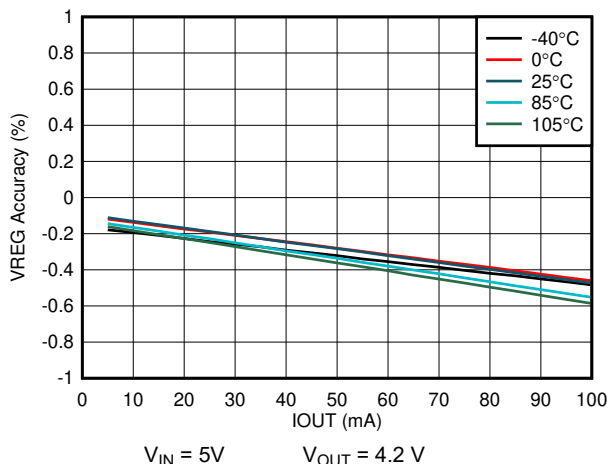


图 6-3. 负载调整率 (4.2V_{OUT} 时为 1s)

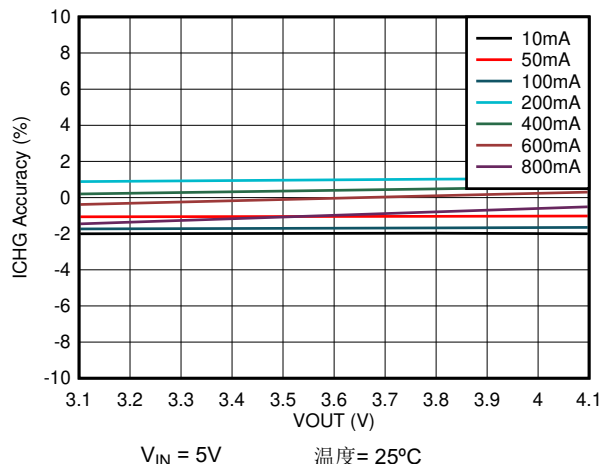


图 6-4. ICHG 精度与 V_{OUT} 间的关系

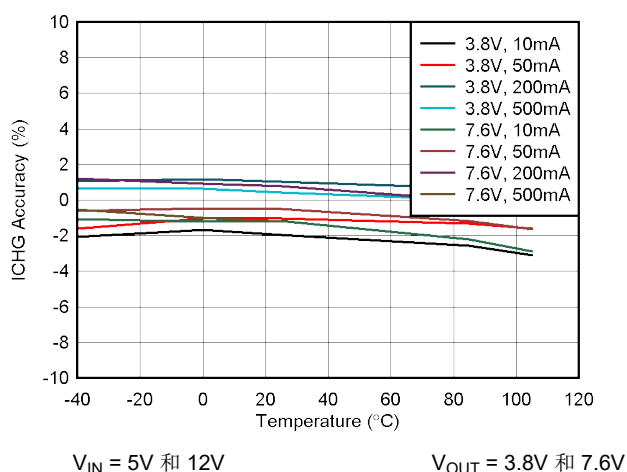


图 6-5. ISET 精度与温度间的关系

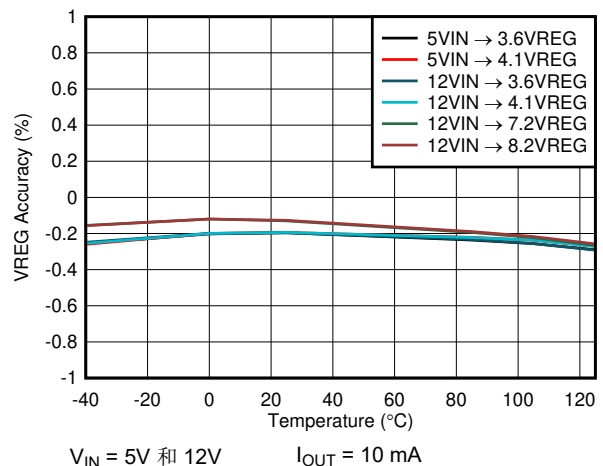


图 6-6. VSET 精度与温度间的关系

6.7 典型特性 (continued)

$C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $V_{IN} = 5V$, $V_{OUT} = 3.8V$ (除非另有说明)


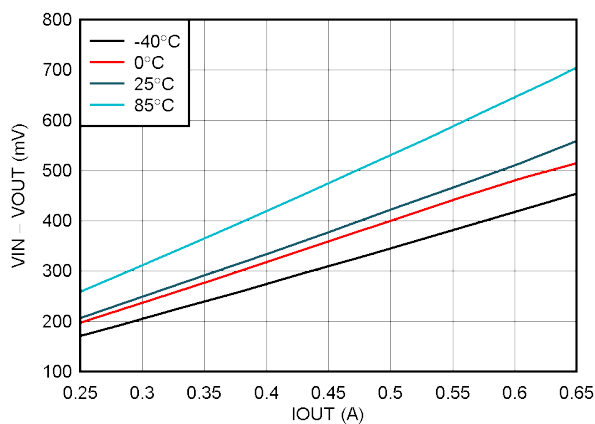



图 6-7. 压降电压与输出电流间的关系

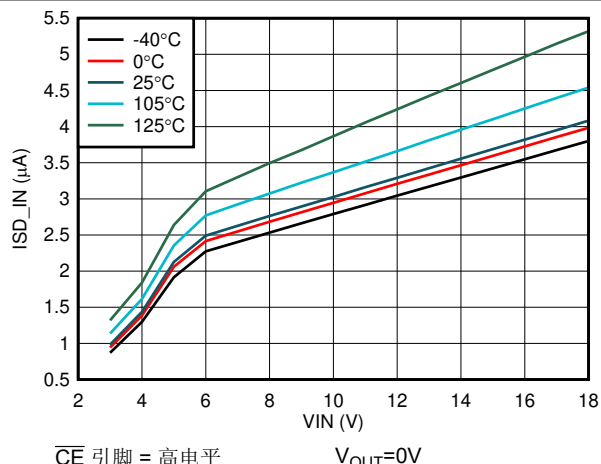

$\overline{CE}$ 引脚 = 高电平

$V_{OUT} = 0V$


图 6-8. 输入关断电流与输入电压间的关系

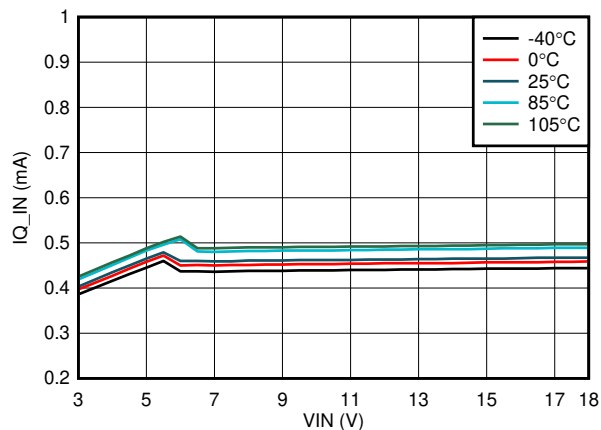

$\overline{CE}$ 引脚 = 低电平


$I_{CHG} = 0A$

图 6-9. 输入静态电流与输入电压间的关系

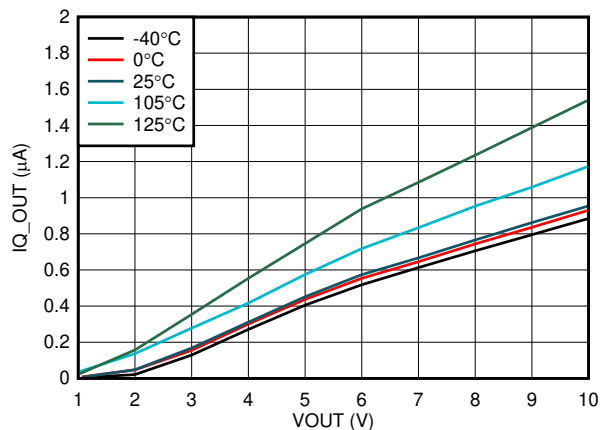

$V_{IN} = 0V$

图 6-10. 输出静态电流与输出电压间的关系

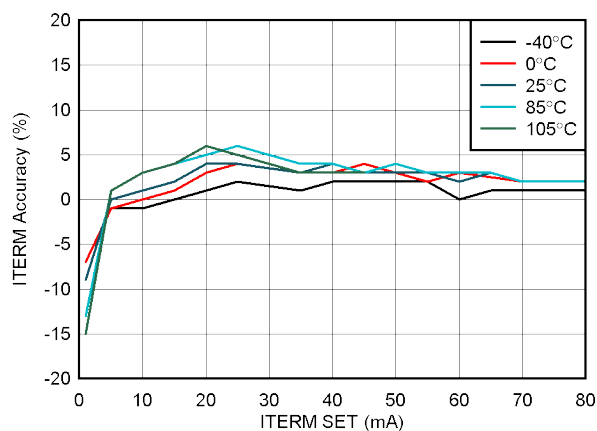

$V_{OUT} = 4.35V$

图 6-11. 终止电流精度与终止电流设置间的关系

7 Detailed Description

7.1 Overview

The BQ25171-Q1 is an automotive rated, 800-mA linear charger for 1-cell and 2-cell Li-Ion, Li-Polymer, and LiFePO₄, in addition to 1-cell up to 6-cell NiMH battery applications. The device has a single power output that charges the battery. The system load can be placed in parallel with the battery, as long as the average system load does not prevent the battery from charging fully within the safety timer duration. When the system load is placed in parallel with the battery, the input current is shared between the system and the battery.

The device has three phases for charging a Li-Ion battery: precharge to recover a fully discharged battery, fast-charge constant current to supply the bulk of the charge, and voltage regulation to reach full capacity.

The device charges a NiMH in constant current mode only, and terminates the charge cycle when the programmable timer expires or the battery voltage exceeds the VOUT_OVP threshold. An optional intermittent charging phase can be programmed to automatically recharge a full NiMH battery once its voltage falls below V_{RECHG}.

The charger includes flexibility in programming of the fast-charge current and regulation voltage. This charger is designed to work with a variety of input supply ranges including direct car battery connection.

The charger also comes with a full set of safety features: battery temperature monitoring, overvoltage protection, charge safety timers, and configuration pin (VSET, ISET, CHM_TMR) short and open protection. All of these features and more are described in detail below.

The charger is designed for a single path from the input to the output to charge the battery. Upon application of a valid input power source, the configuration pins are checked for short/open circuit.

If the Li-Ion battery voltage is below the V_{BAT_LOWV} threshold, the battery is considered discharged and a preconditioning cycle begins. The amount of precharge current is 20% of the programmed fast-charge current via ISET pin. The t_{PRECHG} safety timer is active, and stops charging after expiration if battery voltage fails to rise above V_{BAT_LOWV}.

Once the battery has charged to the V_{BAT_LOWV} threshold, Fast Charge Mode is initiated, applying the fast charge current and starting the t_{SAFETY} timer. The fast charge constant current is programmed using the ISET pin. The constant current phase provides the bulk of the charge. Power dissipation in the IC is greatest in fast charge with a lower battery voltage. If the IC temperature reaches T_{REG}, the IC enters thermal regulation, slows the timer clock by half, and reduces the charge current as needed to keep the temperature from rising any further. [图 7-1](#) shows the typical Lithium battery charging profile with thermal regulation. Under normal operating conditions, the IC's junction temperature is less than T_{REG} and thermal regulation is not entered.

Once the battery has charged to the regulation voltage, the voltage loop takes control and holds the battery at the regulation voltage until the current tapers to the termination threshold. The termination threshold is 10% of the programmed fast-charge current.

Further details are described in [节 7.3](#).


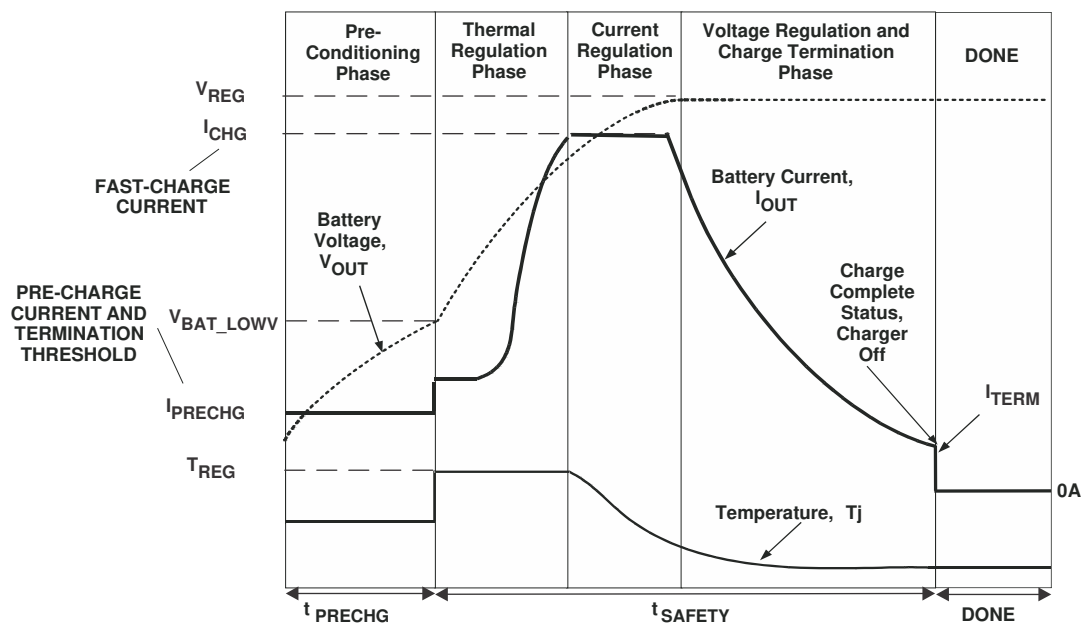


图 7-1. Lithium-Ion Battery Charging Profile with Thermal Regulation

7.2 Functional Block Diagram

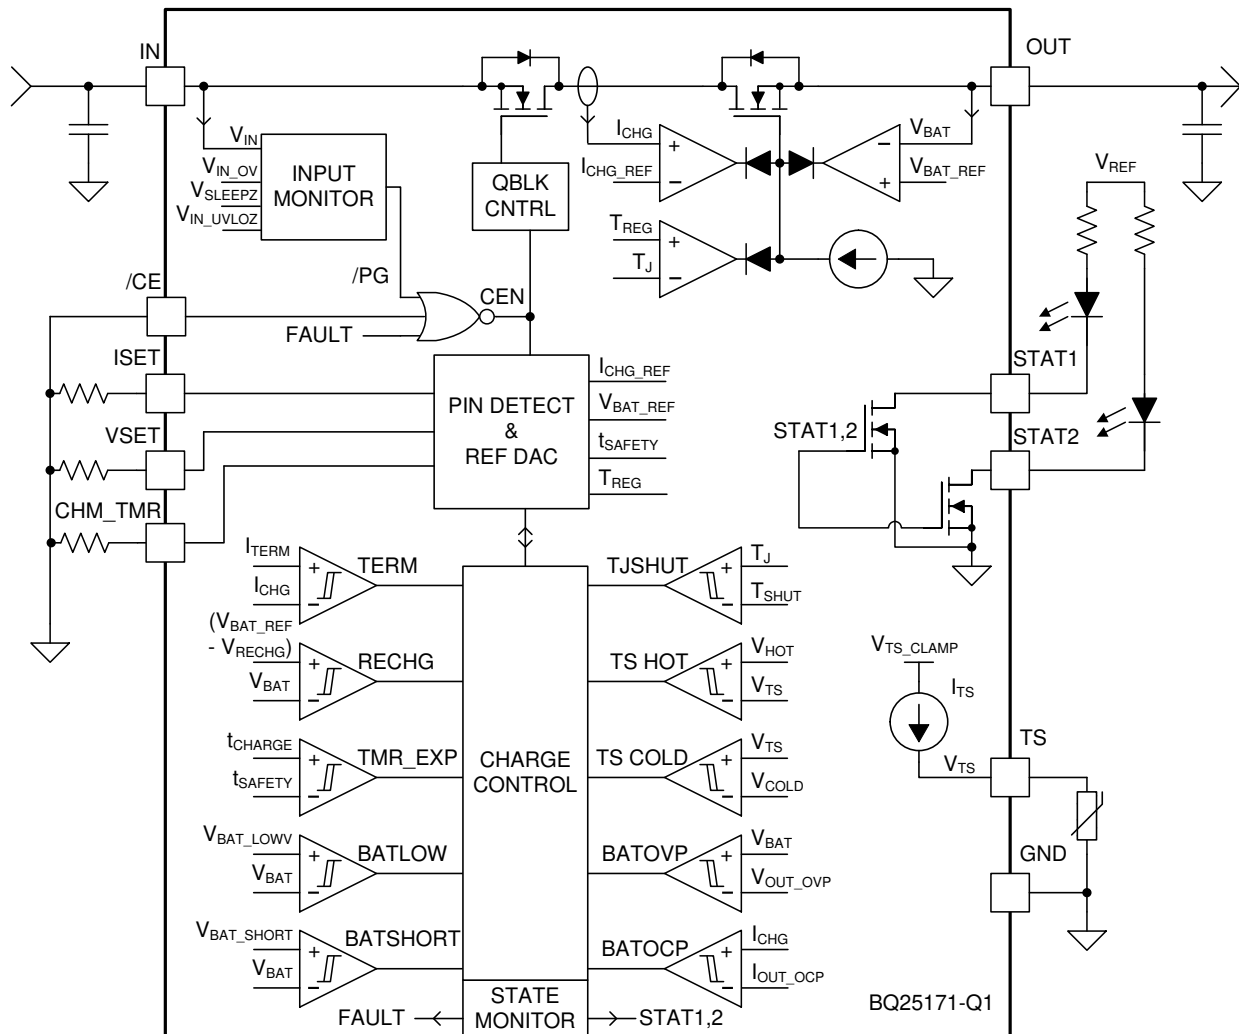

7.3 Feature Description

7.3.1 Device Power Up from Input Source

When an input source is plugged in and charge is enabled, the device checks the input source voltage to turn on all the bias circuits. It detects and sets the input chemistry configuration, charge current and charge voltage limits before the linear regulator is started. The power up sequence from input source is as listed:

1. ISET pin detection
2. CHM_TMR pin detection to select chemistry and charge timer
3. VSET pin detection to select charge voltage
4. Charger power up

7.3.1.1 ISET Pin Detection

15

starts the charger with no charge current. This pin is monitored while charging and changes in R_{ISET} while the charger is operating will immediately translate to changes in charge current.

An external pulldown resistor ($\pm 1\%$ or better recommended to minimize charge current error) from ISET pin to GND sets the charge current as:

$$I_{CHG} = \frac{K_{ISET}}{R_{ISET}} \quad (1)$$

where

- I_{CHG} is the desired fast-charge current
- K_{ISET} is a gain factor found in the electrical specifications
- R_{ISET} is the pulldown resistor from ISET pin to GND

For charge currents below 50 mA, an extra RC circuit is recommended on ISET to achieve more stable current signal. For greater accuracy at lower currents, part of the current-sensing FET is disabled to give better resolution.

7.3.1.2 CHM_TMR Pin Detection

CHM_TMR pin is used to program the device chemistry and safety timer using a $\pm 1\%$ pulldown resistor. The available pulldown resistor and corresponding behaviors are:

表 7-1. CHM_TMR Pin Resistor Value Table

RESISTOR	CHEMISTRY	CHARGE TIMER (HR)
> 150 k Ω	No charge (open-circuit)	No charge (open-circuit)
100 k Ω	Li+	5 hr
82 k Ω	Li+	10 hr
62 k Ω	Li+	Timer disable
47 k Ω	No charge (pin fault / margin)	No charge (pin fault / margin)
36 k Ω	NiMH	4 hr
27 k Ω	NiMH	6 hr
24 k Ω	NiMH	8 hr
18 k Ω	NiMH	10 hr
15 k Ω	NiMH	12 hr
11 k Ω	NiMH	14 hr
8.2 k Ω	NiMH	16 hr
6.2 k Ω	NiMH	18 hr
4.7 k Ω	NiMH	20 hr
3.6 k Ω	NiMH	22 hr
< 3.0 k Ω	No charge (short-circuit)	No charge (short-circuit)

If either a short- or open-circuit condition is detected, charger stops operation and remains in the FAULT state until the input or $\overline{CE}$ pin is toggled.

Once a value has been detected, it is latched in and the pin is not continuously monitored during operation. A change in this pin will not be acknowledged by the IC until the input supply or $\overline{CE}$ pin is toggled.

7.3.1.3 VSET Pin Detection

VSET pin is used to program the device regulation voltage at end-of-charge using a $\pm 1\%$ pulldown resistor. The available pulldown resistor and corresponding charging levels are:

表 7-2. VSET Pin Resistor Value Table

RESISTOR	Li+ CONFIGURATION	NiMH CONFIGURATION
	CHARGE VOLTAGE (V)	CELL COUNT
> 150 k Ω	No charge (open-circuit)	No charge (open-circuit)
100 k Ω	1-cell LiFePO ₄ : 3.50 V	No charge (open-circuit)
82 k Ω	1-cell LiFePO ₄ : 3.60 V	No charge (open-circuit)
62 k Ω	1-cell LiFePO ₄ : 3.70 V	1-cell
47 k Ω	1-cell Lilon: 3.80 V	1-cell + intermittent charge
36 k Ω	1-cell Lilon: 3.90 V	2-cell
27 k Ω	1-cell Lilon: 4.05 V	2-cell + intermittent charge
24 k Ω	1-cell Lilon: 4.10 V	3-cell
18 k Ω	1-cell Lilon: 4.20 V	3-cell + intermittent charge
15 k Ω	1-cell Lilon: 4.35 V	4-cell
11 k Ω	2-cell LiFePO ₄ : 7.00 V	4-cell + intermittent charge
8.2 k Ω	2-cell LiFePO ₄ : 7.20 V	5-cell
6.2 k Ω	2-cell LiFePO ₄ : 7.40 V	5-cell + intermittent charge
4.7 k Ω	2-cell Lilon: 8.20 V	6-cell
3.6 k Ω	2-cell Lilon: 8.40 V	6-cell + intermittent charge
< 3.0 k Ω	No charge (short-circuit)	No charge (short-circuit)

If either a short- or open-circuit condition is detected, charger stops operation and remains in the FAULT state until the input or $\overline{\text{CE}}$ pin is toggled.

Once a valid resistor value has been detected, the corresponding charge voltage is latched in and the pin is not continuously monitored during operation. A change in this pin will not be acknowledged by the IC until the input supply or $\overline{\text{CE}}$ pin is toggled.

7.3.1.4 Charger Power Up

After VSET, ISET and CHM_TMR pin resistor values have been validated, the device proceeds to enable the charger. The device automatically begins operation at the correct stage of battery charging depending on the OUT voltage.

7.3.2 Battery Charging Features

When charge is enabled, the device automatically completes a charging cycle according to the settings on VSET, ISET and CHM_TMR pins without any intervention. The lithium-based charging cycle is automatically terminated when the charging current is below termination threshold, charge voltage is above recharge threshold, and device is not in thermal regulation (TREG). When a full battery is discharged below the recharge threshold (V_{RECHG}), the device automatically starts a new charging cycle. After charge is done, toggling the input supply or the $\overline{\text{CE}}$ pin can initiate a new charging cycle.

7.3.2.1 Lithium-Ion Battery Charging Profile

The device charges a lithium based battery in four phases: trickle charge, precharge, constant current and constant voltage. At the beginning of a charging cycle, the device checks the battery voltage and regulates current and voltage accordingly.

If the charger is in thermal regulation during charging, the actual charging current will be less than the programmed value. In this case, termination is temporarily disabled and the charging safety timer is counted at half the clock rate. For more information, refer to 节 7.3.2.3.

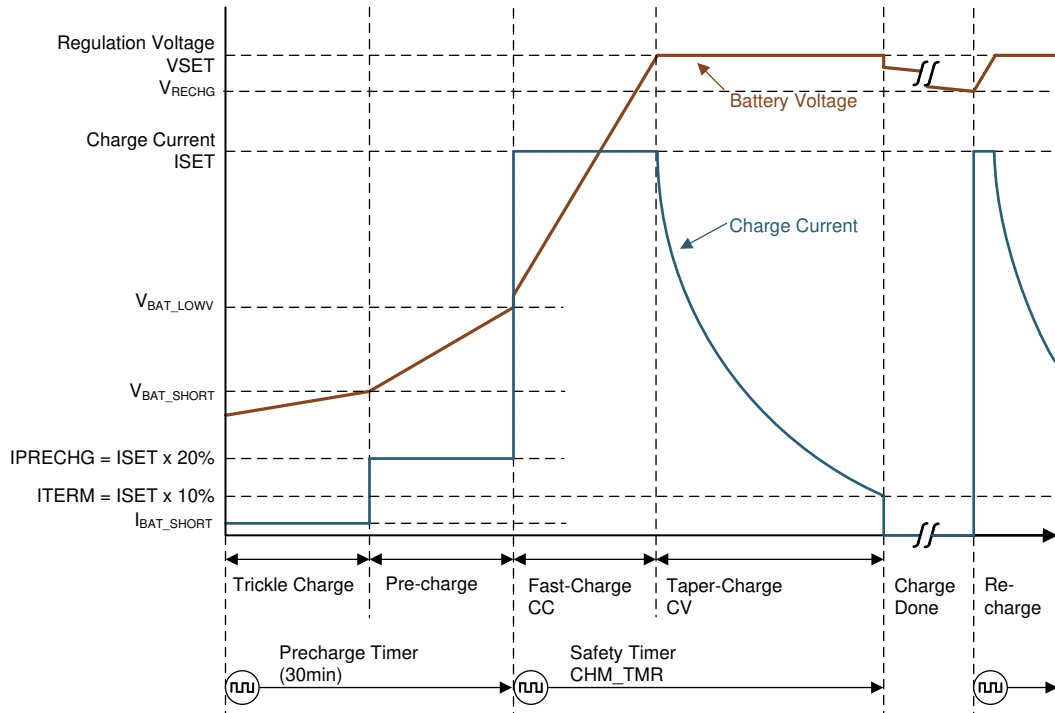


图 7-3. Lithium-Based Battery Charging Profile

7.3.2.1.1 NiMH Battery Charging Profile

The device charges a NiMH battery in two phases: constant current and intermittent charge (optional). The duration for constant current charging is controlled by the charge timer, which is programmed using the CHM_TMR pin. Intermittent charging is designed to replenish the natural self-discharge of NiMH by restarting a short charge cycle (25% of programmed charge timer) when the output voltage falls below V_{RECHG} threshold. If the intermittent charging function is disabled, the device will charge a battery once, and not start a recharge cycle automatically. In this case, a new charge cycle can be initiated by toggling the input supply or the $\overline{CE}$ pin.

Before initiating a NiMH charge cycle, the device checks for a full battery. If battery voltage is above V_{RECHG} , the battery is considered full and the device does not charge. Once the battery voltage falls below V_{RECHG} , the device automatically begins charging. If the intermittent charging function is disabled, a single charge cycle is initiated with the charge timer as programmed by CHM_TMR pin. If intermittent charging is enabled, an intermittent charge cycle is initiated with charge timer as 25% of CHM_TMR programmed value.

If the charger is in thermal regulation during charging, the actual charging current will be less than the programmed value. For NiMH charging, termination by timer is still enabled, but the charging safety timer is counted at half the clock rate. For more information, refer to 节 7.3.2.3.

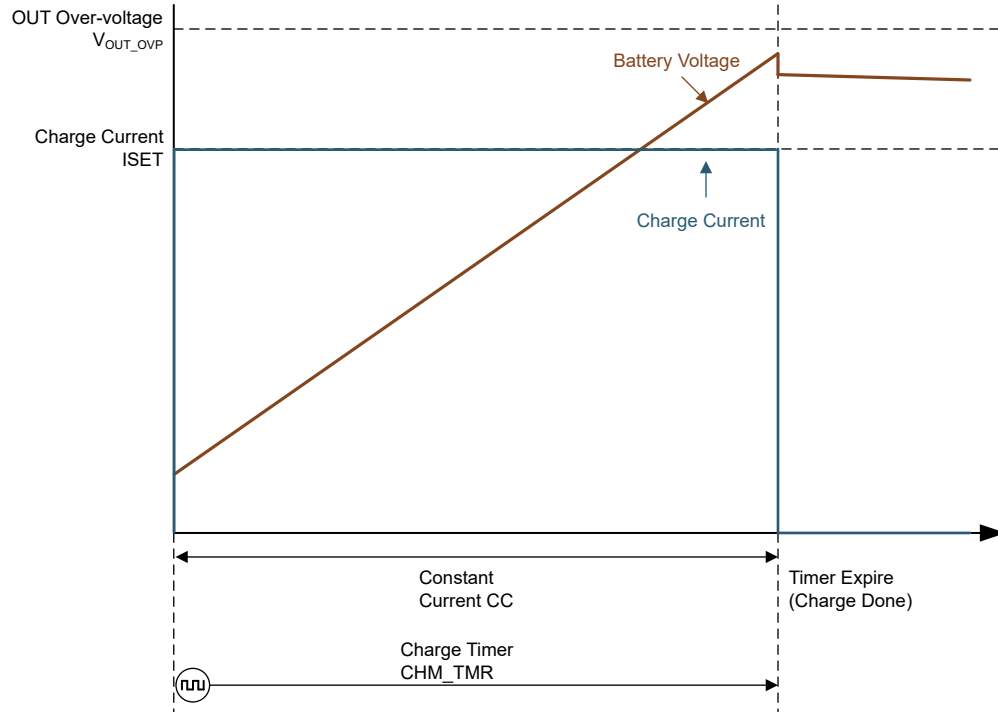


图 7-4. NiMH Battery Charging Profile with Intermittent Charging Disabled

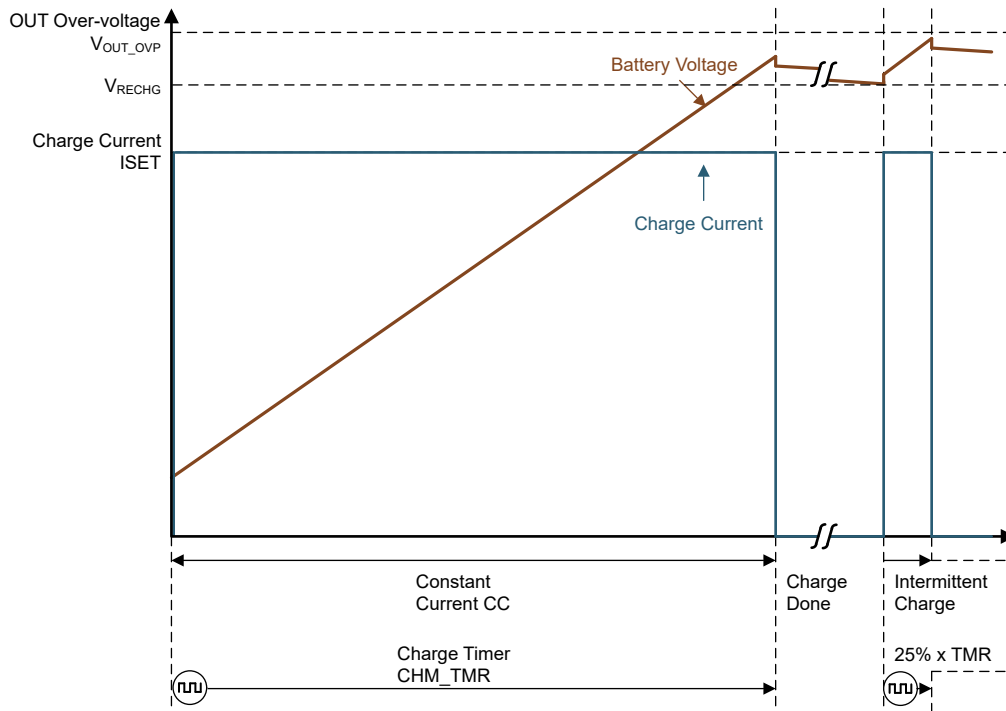


图 7-5. NiMH Battery Charging Profile with Intermittent Charging Enabled

7.3.2.2 Charge Termination and Battery Recharge

When configured as a lithium battery charger, the device terminates a charge cycle when the OUT pin voltage is above the recharge threshold (V_{RECHG}), and the current is below the termination threshold (I_{TERM}). Termination is temporarily disabled when the charger device is in thermal regulation. After charge termination is detected, the

linear regulator turns off and the device enters STANDBY state. Once the OUT pin drops below the V_{RECHG} threshold, a new charge cycle is automatically initiated.

When configured as NiMH battery charger, the device terminates a charge cycle when the charge safety timer expires. If intermittent charging is enabled, a new charge cycle with 25% of original programmed timer duration will start once the battery voltage falls below V_{RECHG} . For example, after a 20 hour charge cycle finishes, and then the battery falls below V_{RECHG} , the device recharges the battery for 5 hours: ($t_{INTERMITTENT} = 25\% \times t_{SAFETY}$). If intermittent charging is disabled, the device will not start a new charge cycle automatically based on the V_{RECHG} threshold. A toggle on the input supply or the $\overline{CE}$ pin is required to restart a charge cycle in this case.

7.3.2.3 Charging Safety Timers

The device has built-in safety timers to prevent an extended charging cycle due to abnormal battery conditions. The precharge timer is fixed at 30 minutes. The user can program or disable the fast charge safety timer through the CHM_TMR pin. When safety timer expires, the charge cycle ends. A toggle on the input supply or $\overline{CE}$ pin is required to restart a charge cycle after the safety timer has expired.

During thermal regulation, the safety timer counts at half clock rate as the actual charge current is likely to be below the ISET setting. For example, if the charger is in thermal regulation throughout the whole charging cycle, and the safety timer is 10 hours, then the timer will expire in 20 hours.

During faults which disable charging, such as VIN OVP, BAT OVP, TSHUT or TS faults, the timer is suspended. Once the fault goes away, charging and the safety timer resumes. If the charging cycle is stopped and started again, the timer gets reset (toggle $\overline{CE}$ pin restarts the timer).

The safety timer restarts counting for the following events:

1. Charging cycle stop and restart (toggle $\overline{CE}$ pin, charged battery falls below recharge threshold, or toggle input supply)
2. OUT pin voltage crosses the V_{BAT_LOWV} threshold in either direction

The precharge safety timer (fixed counter that runs when $V_{OUT} < V_{BAT_LOWV}$), follows the same rules as the fast-charge safety timer in terms of getting suspended, reset, and counting at half-rate.

7.3.2.4 Battery Cold, Hot Temperature Qualification (TS Pin)

While charging, the device continuously monitors battery temperature by sensing the voltage at the TS pin. A negative temperature coefficient (NTC) thermistor should be connected between the TS and GND pins (recommend: 103AT-2). If temperature sensing is not required in the application, connect a fixed 10-k Ω resistor from TS to GND to allow normal operation. Battery charging is allowed when the TS pin voltage falls between V_{COLD} and V_{HOT} thresholds (typically 0°C – 45°C). The temperature corresponding to these voltage thresholds can be modified by adding resistors in parallel and in series with the thermistor, as shown in [图 7-6](#). If the TS pin indicates battery temperature is outside this range, the device stops charging, enters the STANDBY state, and sets the STAT pins to STAT1 = LOW, STAT2 = HIGH to indicate a recoverable fault. Once battery temperature returns to normal conditions, charging resumes automatically.

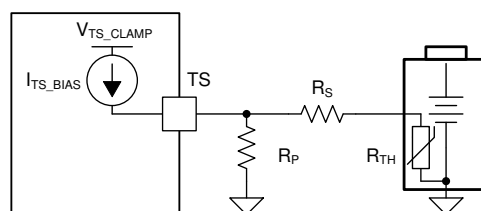


图 7-6. TS Resistor Network For Modified Temperature Charging Window

表 7-3. Recommended Resistor Values for Different Temperature Charging Windows

TEMPERATURE CHARGING WINDOW	R_S	R_P
0°C to 60°C	1.9 k Ω	400 k Ω
-10°C to 60°C	2.3 k Ω	70 k Ω
-10°C to 50°C	1.1 k Ω	70 k Ω

7.3.3 Status Outputs (STAT1, STAT2)

7.3.3.1 Charging Status Indicator (STAT1, STAT2)

The device indicates the charging state on the open-drain STAT1, STAT2 pin. This pin can drive an LED.

表 7-4. STAT1 and STAT2 Pin States

CHARGING STATE	STAT1 PIN STATE	STAT2 PIN STATE
Charge completed, charger in sleep mode or charge disabled (including $V_{OUT} > V_{RECHG}$ after TMR_EXP for NiMH charging)	HIGH	HIGH
Normal charge in progress (including intermittent charge active for NiMH, and automatic recharge for Li+ charger)	HIGH	LOW
Recoverable fault (VIN OVP, BAT OVP, TS HOT, TS COLD, TSHUT)	LOW	HIGH
Non-recoverable or latch-off fault (VSET/CHM_TMR/ISET pin short/open, BAT OCP, TMR_EXP for Li+ charging, $V_{OUT} < V_{RECHG}$ after TMR_EXP for NiMH charging)	LOW	LOW

Safety timer expiration event (TMR_EXP) is addressed differently depending on whether the charger is configured as a NiMH or Li+ charger. For Lithium-based charging, TMR_EXP is reported as a non-recoverable fault by setting STAT1 = LOW and STAT2 = LOW. For NiMH-based charging, TMR_EXP with $V_{OUT} > V_{RECHG}$ is the expected termination method, and shall be reported as charge complete with STAT1 = HIGH and STAT2 = HIGH. For NiMH-based charging, TMR_EXP with $V_{OUT} < V_{RECHG}$ is a non-recoverable fault and shall be reported by setting STAT1 = LOW and STAT2 = LOW. An input supply or $\overline{CE}$ pin toggle is required to attempt charging after a non-recoverable fault is detected.

7.3.4 Protection Features

The device closely monitors input and output voltage, as well as internal FET current and temperature for safe linear regulator operation.

7.3.4.1 Input Overvoltage Protection (VIN OVP)

If the voltage at IN pin exceeds V_{IN_OV} , the device turns off after a deglitch, $t_{VIN_OV_DGL}$. The safety timer suspends count and device enters STANDBY mode. Once the IN voltage recovers to normal level, the charge cycle and the safety timer automatically resume operation.

7.3.4.2 Output Overvoltage Protection (BAT OVP)

If the voltage at OUT pin exceeds V_{OUT_OVP} , the device immediately stops charging. The safety timer suspends count and device enters STANDBY mode. Once the OUT voltage recovers to normal level, the charge cycle and the safety timer resume operation.

7.3.4.3 Output Overcurrent Protection (BAT OCP)

During normal operation, the OUT current should be regulated to ISET programmed value. However, if a short circuit occurs on ISET pin, the OUT current may rise to unintended level. If the current at OUT pin exceeds I_{OUT_OCP} , the device turns off after a deglitch, $t_{OUT_OCP_DGL}$. The safety timer resets the count, and device remains latched off. An input supply or $\overline{CE}$ pin toggle is required to restart operation.

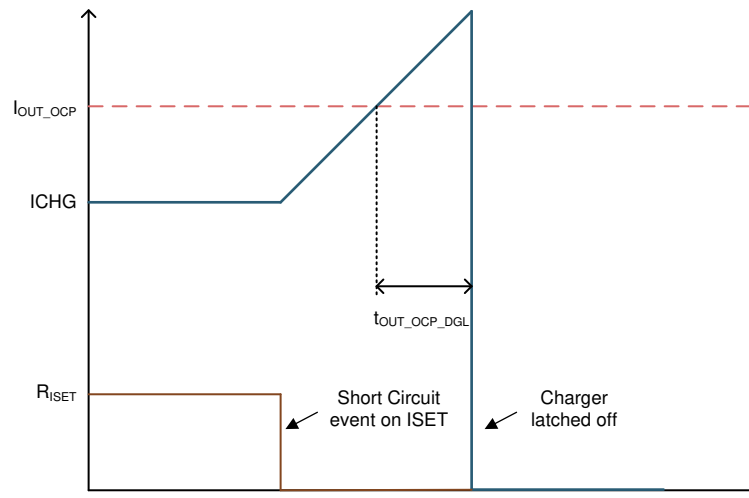


图 7-7. Overcurrent Protection

7.3.4.4 Thermal Regulation and Thermal Shutdown (TREG and TSHUT)

The device monitors its internal junction temperature (T_J) to avoid overheating and to limit the IC surface temperature. When the internal junction temperature exceeds the thermal regulation limit, the device automatically reduces the charge current to maintain the junction temperature at the thermal regulation limit (TREG). During thermal regulation, the actual charging current is usually below the programmed value on the ISET pin. Therefore, the termination comparator for the Lithium-Ion battery is disabled, and the safety timer runs at half the clock rate.

Additionally, the device has thermal shutdown to turn off the linear regulator when the IC junction temperature exceeds the TSHUT threshold. A recoverable fault is signaled via the status pins (STAT1 = LOW, STAT2 = HIGH). The charger resumes operation when the IC die temperature decreases below the TSHUT falling threshold.

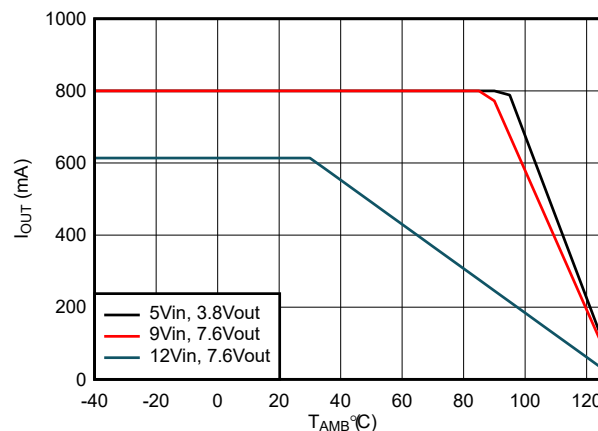


图 7-8. Typical Charge Current Capability vs Ambient Temperature

7.4 Device Functional Modes

7.4.1 Shutdown or Undervoltage Lockout (UVLO)

The device is in shutdown state if the IN pin voltage is less than V_{IN_LOWV} , or the $\overline{CE}$ pin is HIGH. The internal circuitry is powered down, all the pins are high impedance, and the device draws I_{SD_IN} from the input supply.

Once the IN voltage rises above the V_{IN_LOW} threshold and the $\overline{CE}$ pin is LOW, the IC will enter Sleep Mode or Active Mode depending on the OUT pin voltage.

7.4.2 Sleep Mode

The device is in Sleep Mode when $V_{IN_LOWV} < V_{IN} < V_{OUT} + V_{SLEEPZ}$. The device waits for the input voltage to rise above $V_{OUT} + V_{SLEEPZ}$ to start operation.

7.4.3 Active Mode

The device is powered up and charges the battery when the $\overline{CE}$ pin is LOW and the IN voltage ramps above both V_{IN_LOWV} , and $V_{OUT} + V_{SLEEPZ}$. The device draws I_{Q_IN} from the supply to bias the internal circuitry. For details on device power-up sequence, refer to [节 7.3.1](#).

7.4.3.1 Standby Mode

The device is in Standby Mode if a valid input supply is present and charge is terminated or if a recoverable fault is detected. The internal circuitry is partially biased, and the device continues to monitor for either VOUT to drop below V_{RECHG} , or the recoverable fault to be removed.

7.4.4 Fault Mode

The fault conditions are categorized into recoverable and nonrecoverable as follows:

- Recoverable(STAT1 = LOW, STAT2 = HIGH), from which the device should automatically recover once the fault condition is removed:
 - VIN OVP
 - BAT OVP
 - TS HOT
 - TS COLD
- Nonrecoverable(STAT1 = LOW, STAT2 = HIGH), requiring $\overline{CE}$ pin or input supply toggle to resume operation:
 - BAT OCP
 - ISET pin short detected
 - VSET pin short/open detected
 - CHM_TMR pin short/open detected

8 Application and Implementation

备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

8.1 Application Information

A typical application consists of the device configured as a standalone battery charger for Lithium-Ion, Li-Polymer, LiFePO₄, or NiMH batteries. The battery charge profile and the safety charge timer are configured using a pulldown resistor on the CHM_TMR pin. The charge voltage and the number of cells are configured using a pulldown resistor on the VSET pin. Charge current is configured using a pulldown resistor on the ISET pin. A battery thermistor may be connected to the TS pin to allow the device to monitor battery temperature and control charging. Pulling the CE pin high disables the charging function. Charger status is reported via the STAT1 and STAT2 status pins.

8.2 Typical Applications

8.2.1 1s LiFePO₄ Charger Design Example

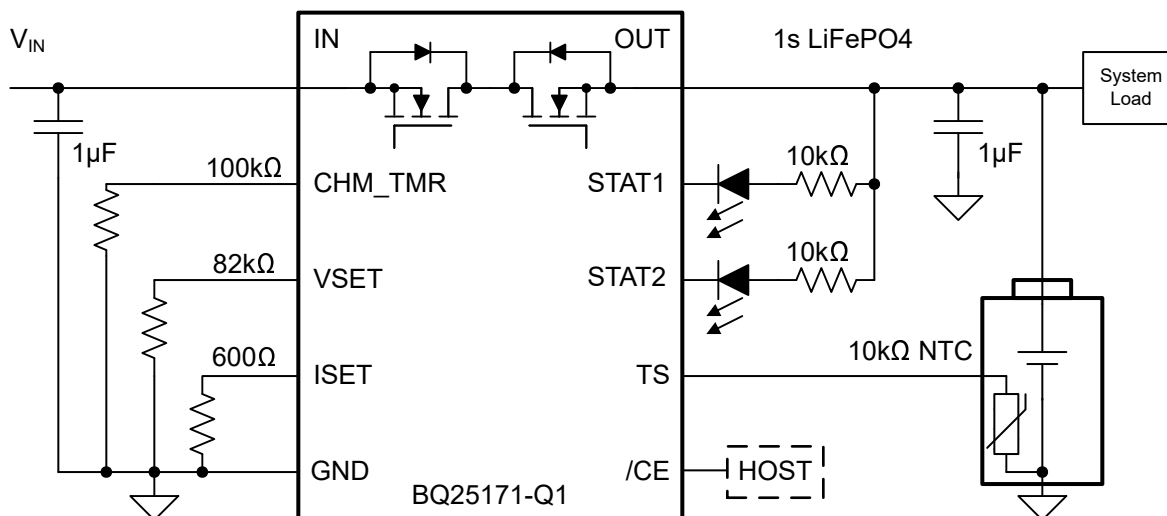


图 8-1. BQ25171-Q1 Typical Application for 1s LiFePO₄ Charging at 500 mA

8.2.1.1 Design Requirements

- Supply voltage = 5 V
- Battery is single-cell LiFePO₄
- Fast charge current: $I_{CHG} = 500 \text{ mA}$
- Charge voltage: $V_{REG} = 3.6 \text{ V}$
- Charge safety timer: $t_{SAFETY} = 5 \text{ hr}$
- Termination current: $I_{TERM} = 10\% \text{ of } I_{CHG} \text{ or } 50 \text{ mA}$
- Precharge current: $I_{PRECHG} = 20\% \text{ of } I_{CHG} \text{ or } 100 \text{ mA}$
- TS – Battery temperature sense = 10-kΩ NTC (103AT)
- CE is an open drain control pin

8.2.1.2 Detailed Design Procedure

- The regulation voltage is set via the VSET pin to 3.6 V, the input voltage is 5 V, and the charge current is programmed via the ISET pin to 500 mA.

- The charging chemistry and safety timer are set to LiFePO₄ and 5 hr, respectively, via the CHM_TMR pin.

8.2.1.2.1 Program the Fast Charge Current, ISET:

$$R_{ISET} = [K_{ISET} / I_{CHG}]$$

from electrical characteristics table. . . $K_{ISET} = 300 \text{ A}\Omega$

$$R_{ISET} = [300 \text{ A}\Omega / 0.5 \text{ A}] = 600 \Omega$$

Selecting the closest 1% resistor standard value, use a 604- Ω resistor between ISET and GND, for an expected I_{CHG} of 497 mA.


8.2.1.2.2 TS Function

Use a 10-k Ω NTC thermistor in the battery pack (recommend: 103AT-2). The V_{COLD} and V_{HOT} thresholds in the data sheet are designed to meet a charging window between 0°C and 45°C for a 10-k Ω NTC with $\beta = 3435 \text{ K}$.

To disable the TS sense function, use a fixed 10-k Ω resistor between the TS and GND pins.


8.2.1.3 Application Curves

$C_{IN} = 1 \mu F$, $C_{OUT} = 1 \mu F$, $V_{IN} = 5 V$, $V_{OUT} = 3.8 V$, $I_{CHG} = 250 mA$ (unless otherwise specified)

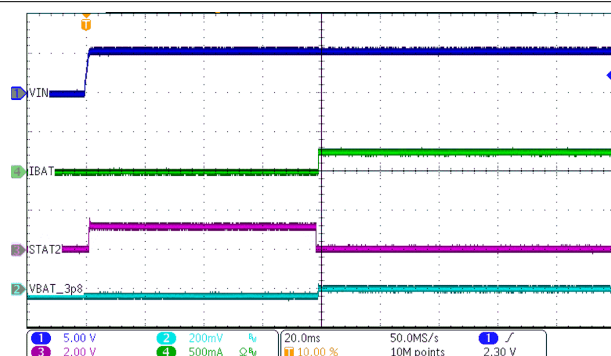


$R_{SET} = 1.2 k\Omega$

图 8-2. Power Up with Battery (1-cell Li-Ion)

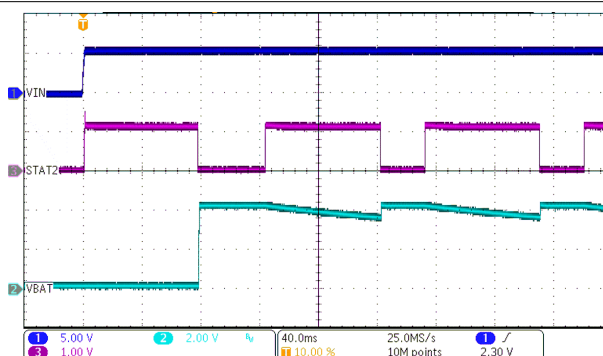


$R_{SET} = 1.2 k\Omega$ OUT = open-circuit

图 8-3. Power Up without Battery

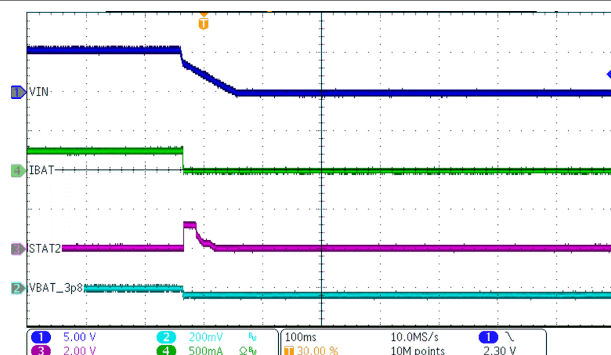


$V_{IN} = 5 V \rightarrow 0 V$

图 8-4. Power Down

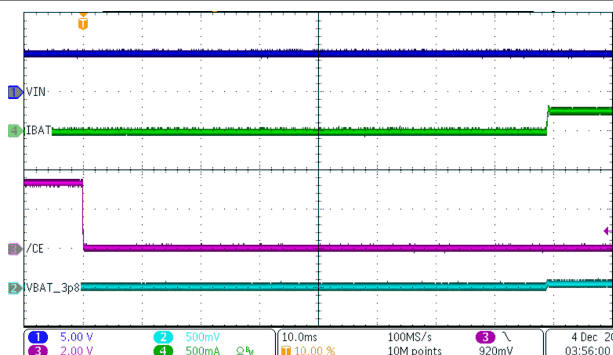

$\overline{CE} = \text{High} \rightarrow \text{Low}$

图 8-5. Charge Enable

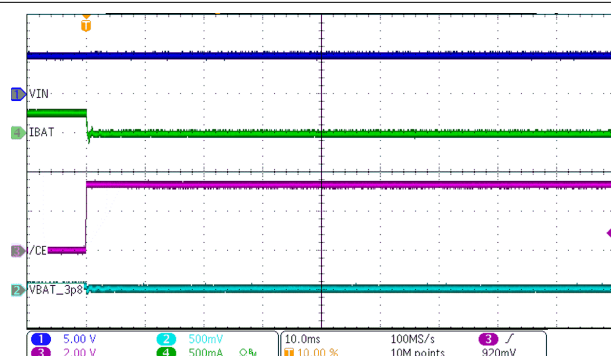

$\overline{CE} = \text{Low} \rightarrow \text{High}$

图 8-6. Charge Disable

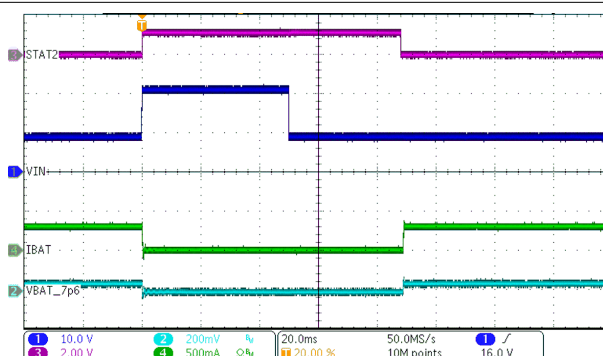


图 8-7. IN OVP Response

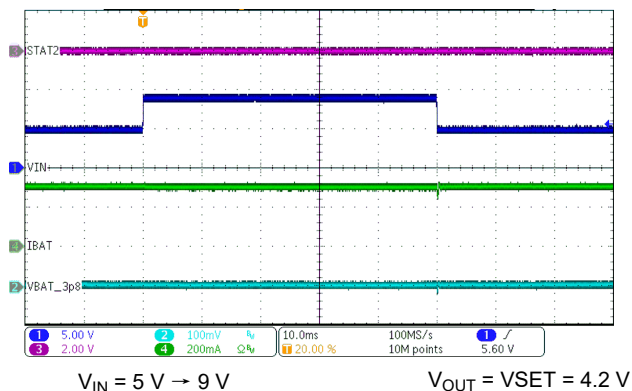


图 8-8. IN Transient Response

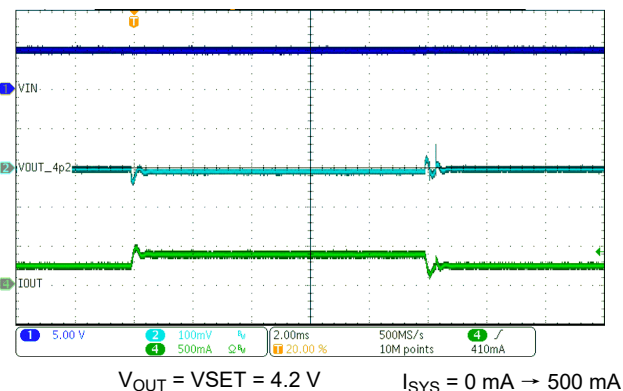


图 8-9. OUT Transient Response

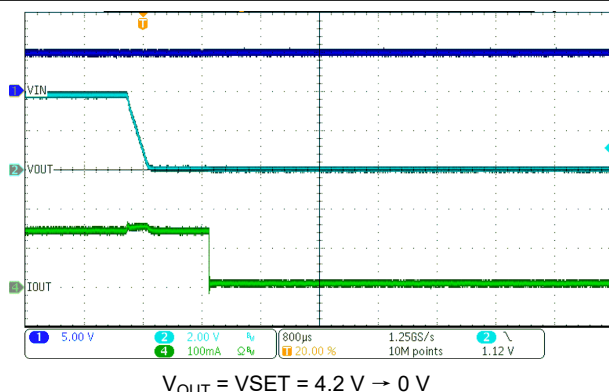


图 8-10. OUT Short-Circuit Response

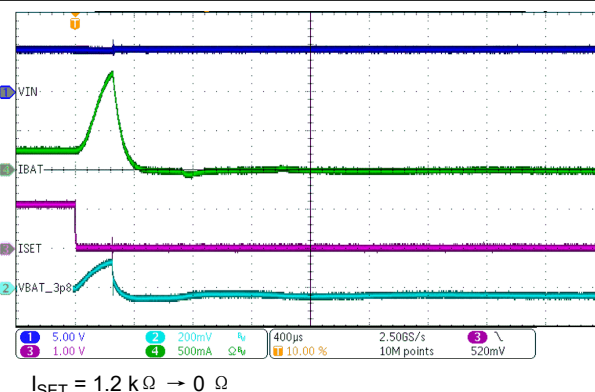


图 8-11. ISET Short-Circuit Response

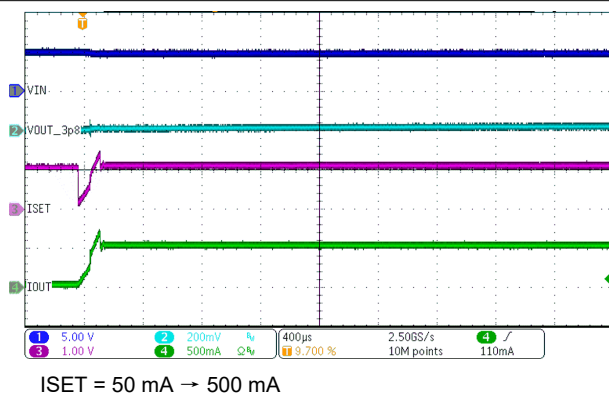


图 8-12. ISET Change Response

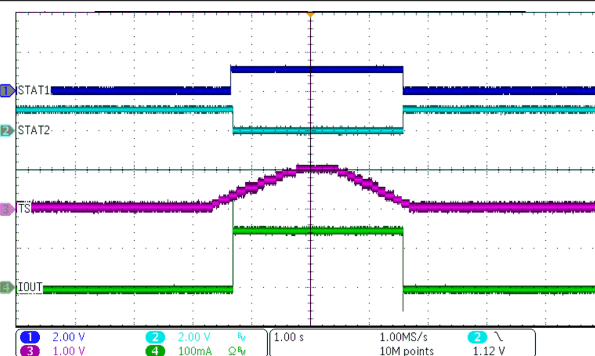


图 8-13. TS Change Response

8.2.2 2s Li-Ion Charger with Power Path Design Example

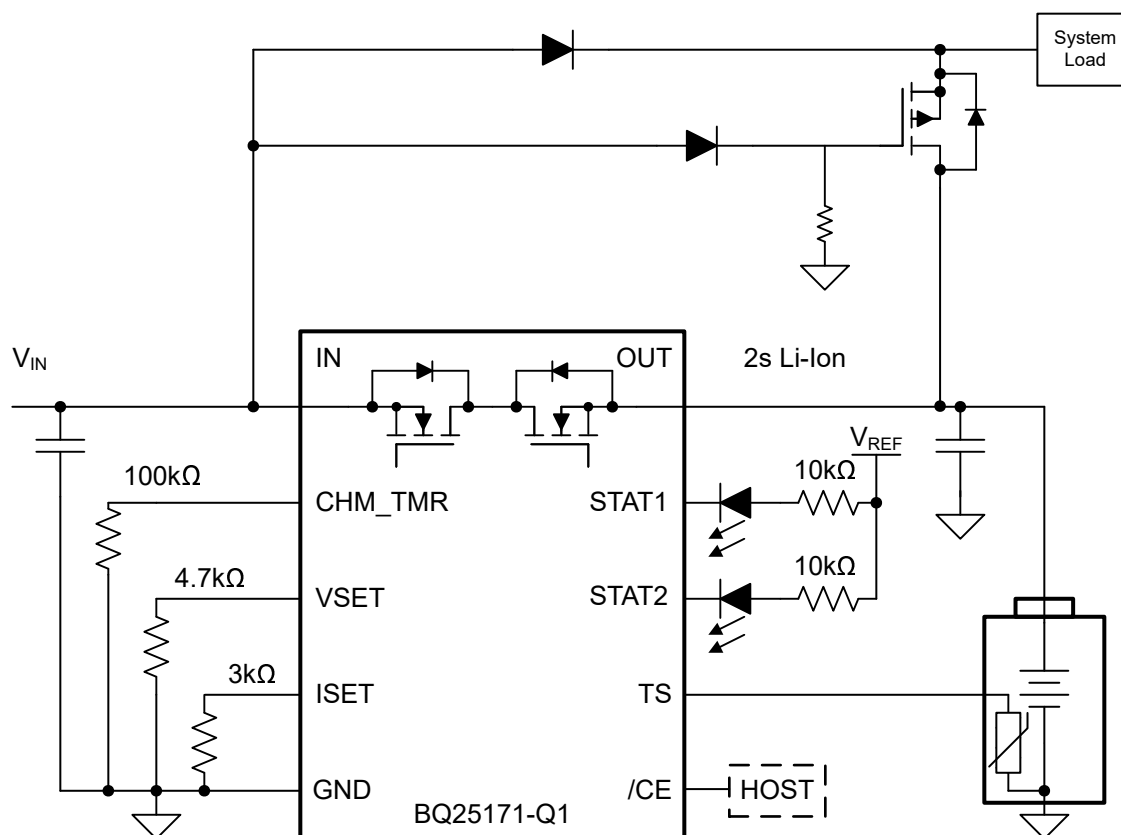


图 8-14. BQ25171-Q1 Typical Application for 2s Li-Ion Charging at 100 mA

8.2.2.1 Design Requirements

The design requirements include the following:

- Input supply up to 18 V
- Battery is 2-cell Li-Ion
- Fast charge current: $I_{CHG} = 100 \text{ mA}$
- Charge voltage: $V_{REG} = 8.2 \text{ V}$
- Charge safety timer: $t_{SAFETY} = 5 \text{ hr}$
- Termination current: $I_{TERM} = 10\% \text{ of } I_{CHG} \text{ or } 10 \text{ mA}$
- Precharge current: $I_{PRECHG} = 20\% \text{ of } I_{CHG} \text{ or } 20 \text{ mA}$
- TS – Battery temperature sense = 10-k Ω NTC (103AT)
 - Charging allowed between battery temperatures of 0°C to 45°C
- $\overline{CE}$ is a control pin, pull high to disable the charger

8.2.3 4s NiMH Charger Design Example

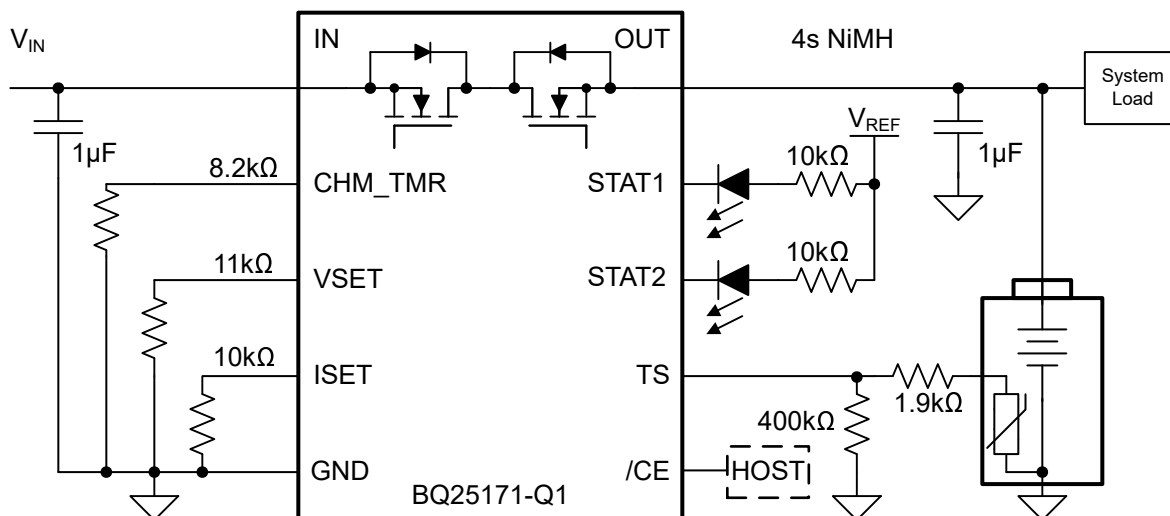


图 8-15. BQ25171-Q1 Typical Application for 4s NiMH with Intermittent Charging Enabled

8.2.3.1 Design Requirements

The design requirements include the following:

- Input supply up to 18 V
- Battery is 4-cell NiMH
- Fast charge current: $I_{CHG} = 30 \text{ mA}$
- Recharge voltage for intermittent cycles: $V_{RECHG} = 1.33\text{V} \times 4 = 5.32 \text{ V}$
- Charge safety timer: t_{SAFETY} : 16 hr
- TS - Battery temperature sense = 10-k Ω NTC (103AT-2)
 - $R_S = 1.9 \text{ k}\Omega$ and $R_P = 400 \text{ k}\Omega$ added to modify battery charging temperature window to: 0°C to 60°C
- $\overline{CE}$ is a control pin, pull high to disable the charger

9 Power Supply Recommendations

The device is designed to operate from an input voltage supply range between 3.0 V and 18 V (up to 40 V tolerant) and current capability of at least the maximum designed charge current. If located more than a few inches from the IN and GND pins, a larger capacitor is recommended.

10 Layout

10.1 Layout Guidelines

To obtain optimal performance, the decoupling capacitor from IN to GND and the output filter capacitor from OUT to GND should be placed as close as possible to the device, with short trace runs to both IN, OUT and GND.

- All low-current GND connections should be kept separate from the high-current charge or discharge paths from the battery. Use a single-point ground technique incorporating both the small signal ground path and the power ground path.
- The high current charge paths into IN pin and from the OUT pin must be sized appropriately for the maximum charge current in order to avoid voltage drops in these traces.

10.2 Layout Example

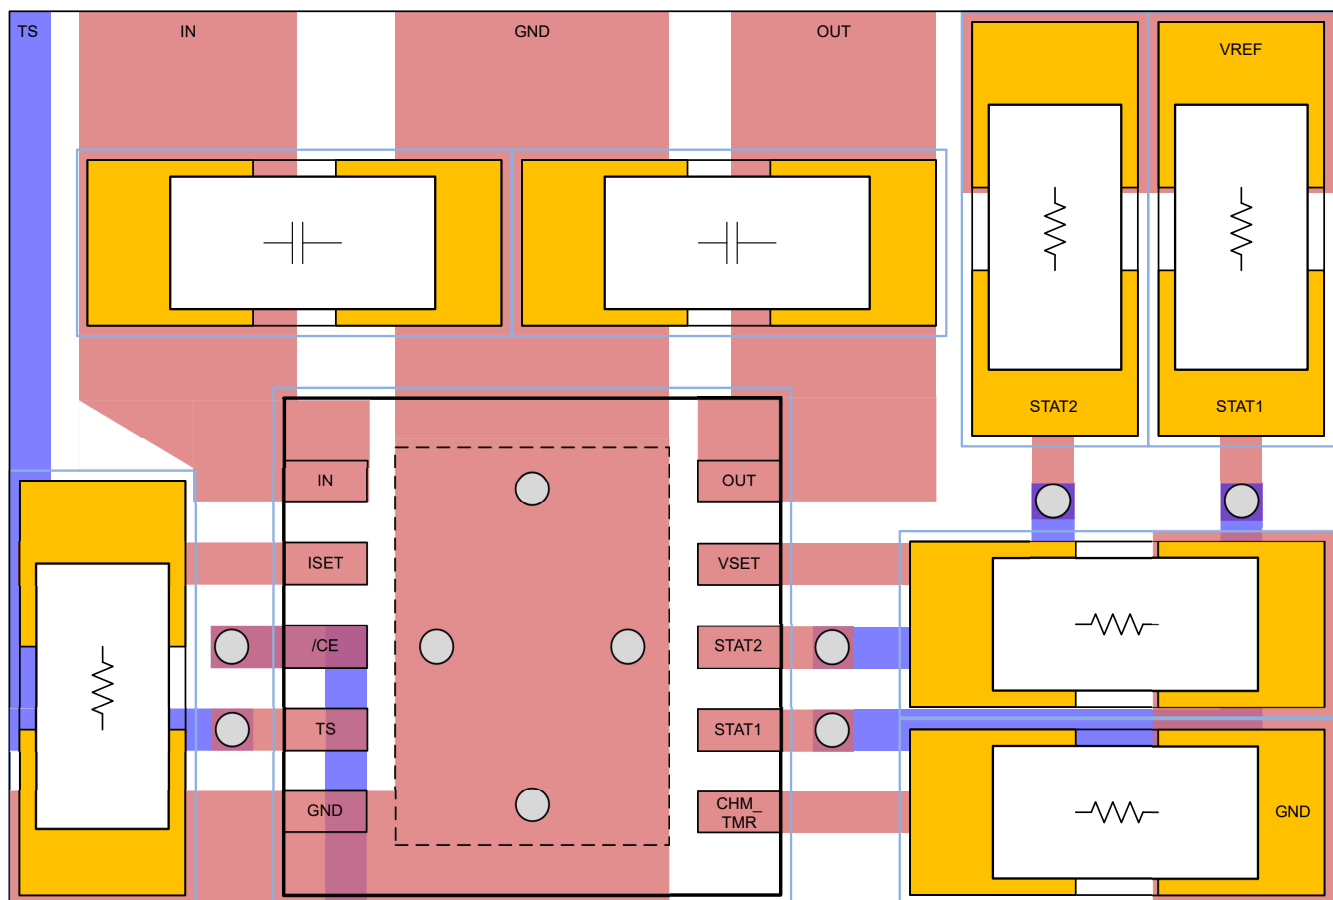


图 10-1. BQ25171-Q1 Board Layout Example

11 Device and Documentation Support

11.1 Device Support

11.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.3 支持资源

[TI E2E™ 支持论坛](#)是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《[使用条款](#)》。

11.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

11.5 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

11.6 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

重要声明和免责声明

TI 提供技术和可靠性数据 (包括数据表) 、设计资源 (包括参考设计) 、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 TI 的销售条款 (<https://www.ti.com/legal/termsofsale.html>) 或 [ti.com](https://www.ti.com) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2021，德州仪器 (TI) 公司

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
BQ25171QWDRCRQ1	Active	Production	VSON (DRC) 10	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	B171Q
BQ25171QWDRCRQ1.A	Active	Production	VSON (DRC) 10	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	B171Q

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
BQ25171QWDRCRQ1	VSON	DRC	10	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
BQ25171QWDRCRQ1	VSON	DRC	10	3000	367.0	367.0	35.0

GENERIC PACKAGE VIEW


DRC 10

VSON - 1 mm max height

3 x 3, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD


This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

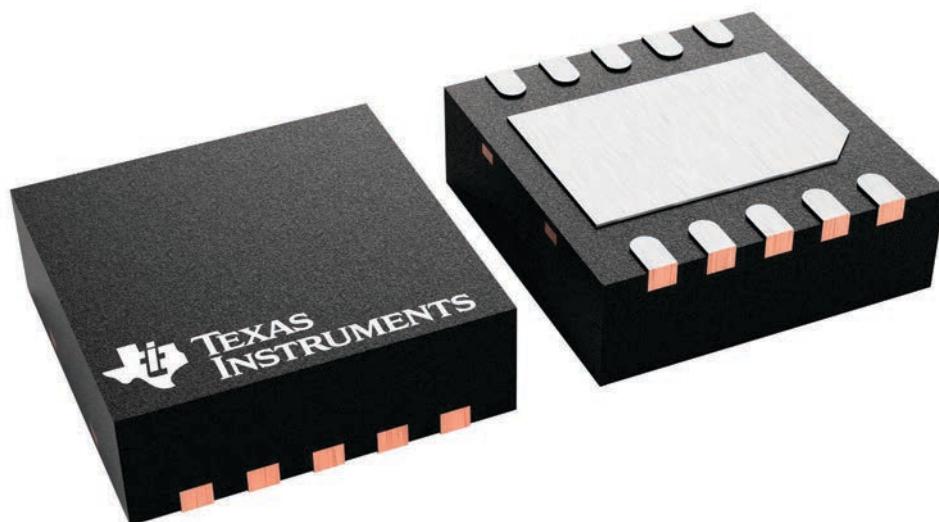



VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

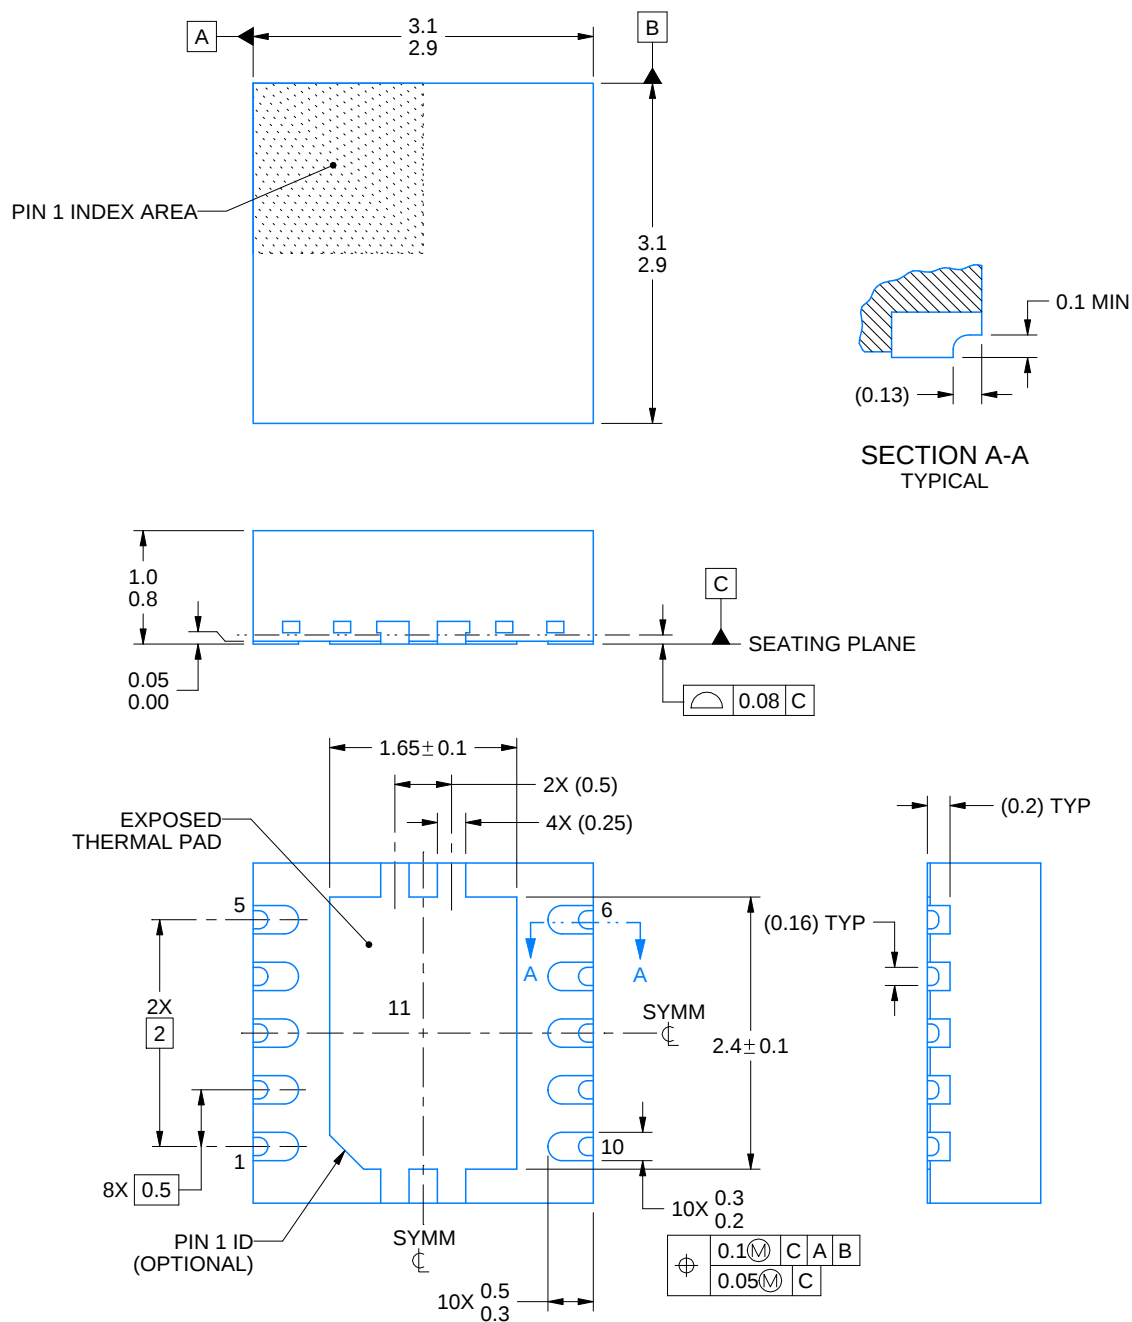

4225163/A 07/2019

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

EXAMPLE BOARD LAYOUT



DRC0010U

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

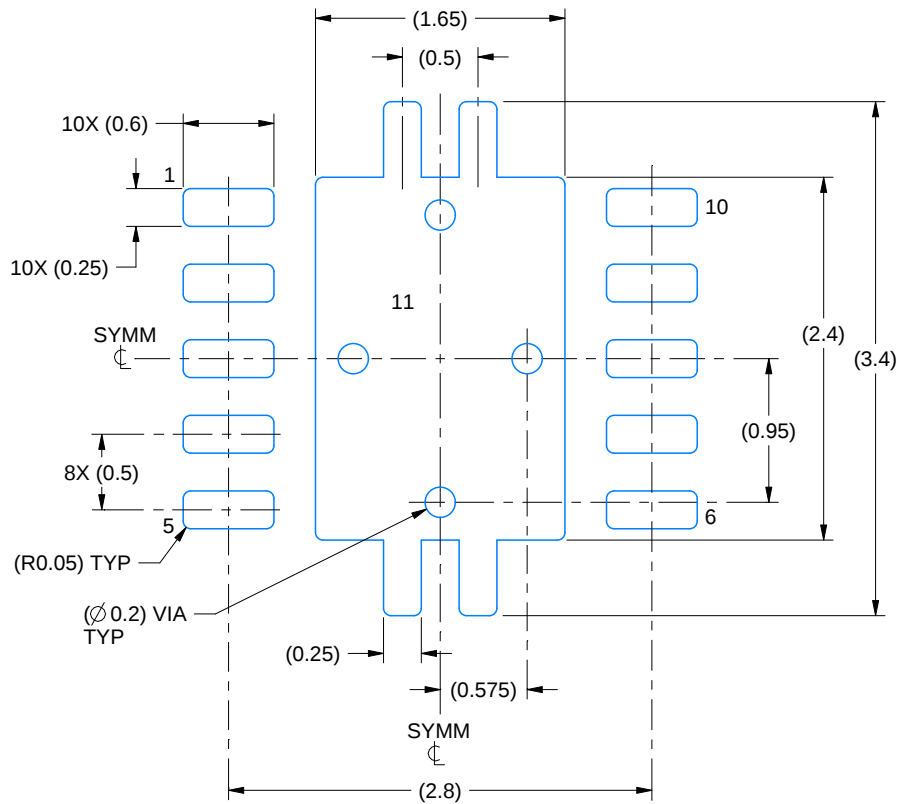

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

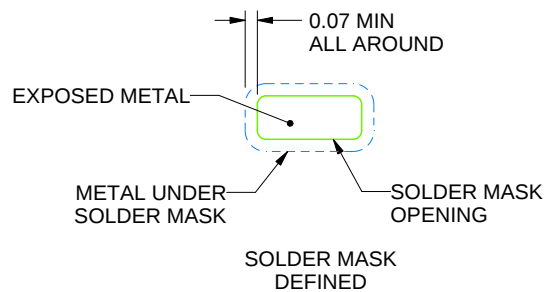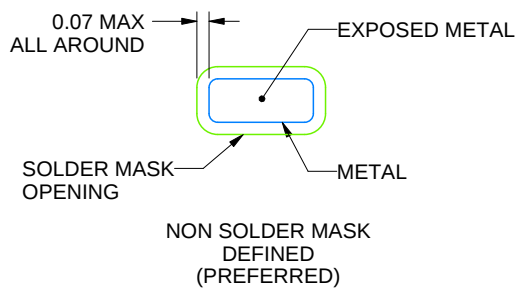

SOLDER MASK DETAILS

4225163/A 07/2019

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

DRC0010U

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

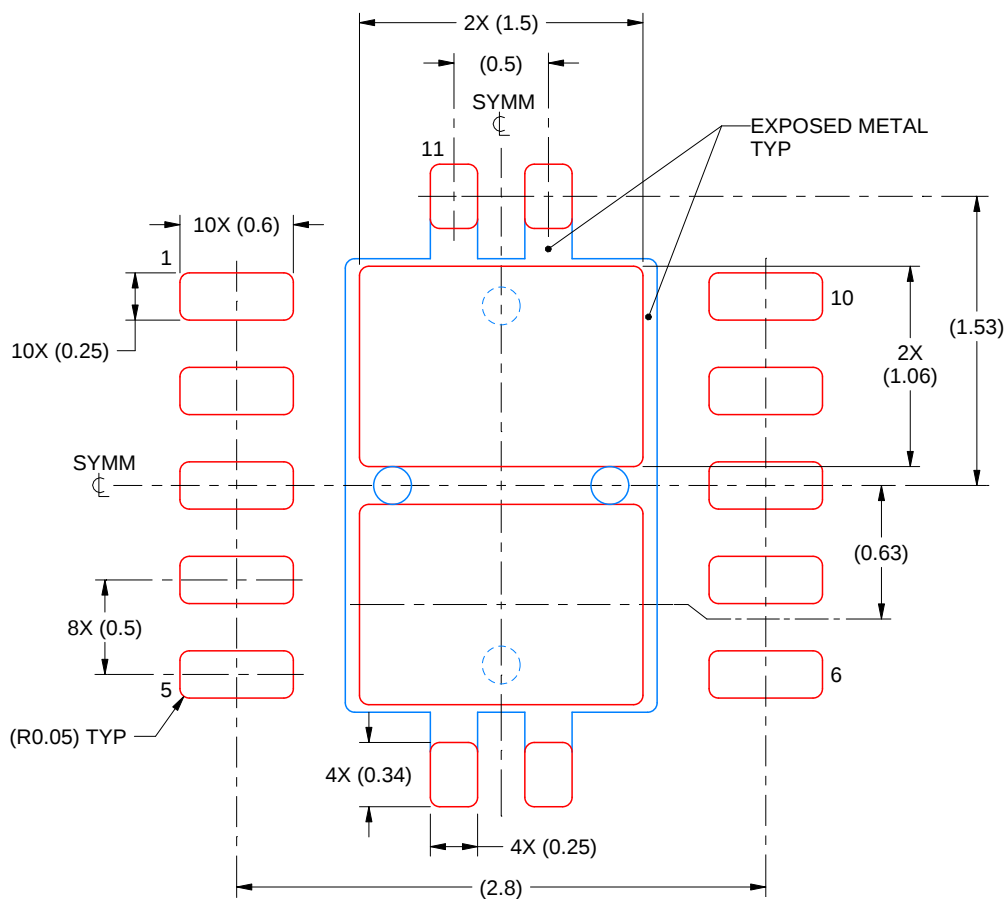

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 11:
80% PRINTED SOLDER COVERAGE BY AREA
SCALE:25X

4225163/A 07/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月