

## LP3943 具有独立 SMBUS/I<sup>2</sup>C 灯串控制的 16 通道 RGB、白光 LED 驱动器

### 1 特性

- 内部上电复位
- 低电平有效复位
- 内部精密振荡器
- 可调调光速率  
(从 6.25ms 至 1.6s ; 从 160Hz 至 0.625Hz)
- 16 个 LED 驱动器 (多个可编程状态: 以指定速率打开、关闭、输入和调光)
- 16 个开漏输出, 每个 LED 最多可驱动 25mA

### 2 应用

- 用于手机的定制闪烁 LED 灯
- 便携式应用
- 数码相机
- 指示灯
- 通用 I/O 扩展器
- 玩具

### 3 说明


LP3943 是一款集成式器件, 能够独立驱动 16 个 LED。该器件还包含一个内部精密振荡器, 用于提供驱动每个 LED 所需的所有必要计时。两个预分频器寄存器以及两个 PWM 寄存器可提供通用占空比控制。LP3943 能够在 SMBUS/I<sup>2</sup>C 应用中根据需要降低 LED 亮度, 从而减少总线流量。

传统上, 使用 74LS594/5 等串行移位寄存器进行 LED 调光需要串行总线上的大量流量。而 LP3943 只需要为每个输出引脚设置频率和占空比; 然后, 只需要来自主机的单个命令即可将每个单独的开漏输出切换到开启或关闭状态, 或按照编程的频率和占空比进行循环。最大输出灌电流为每引脚 25mA 和每封装 200mA。任何未用于控制 LED 的端口均可用于通用输入/输出扩展。

#### 器件信息 (1)

器件型号	封装	主体尺寸 (标称值)
LP3943	WQFN (24)	4.00mm × 4.00mm

(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

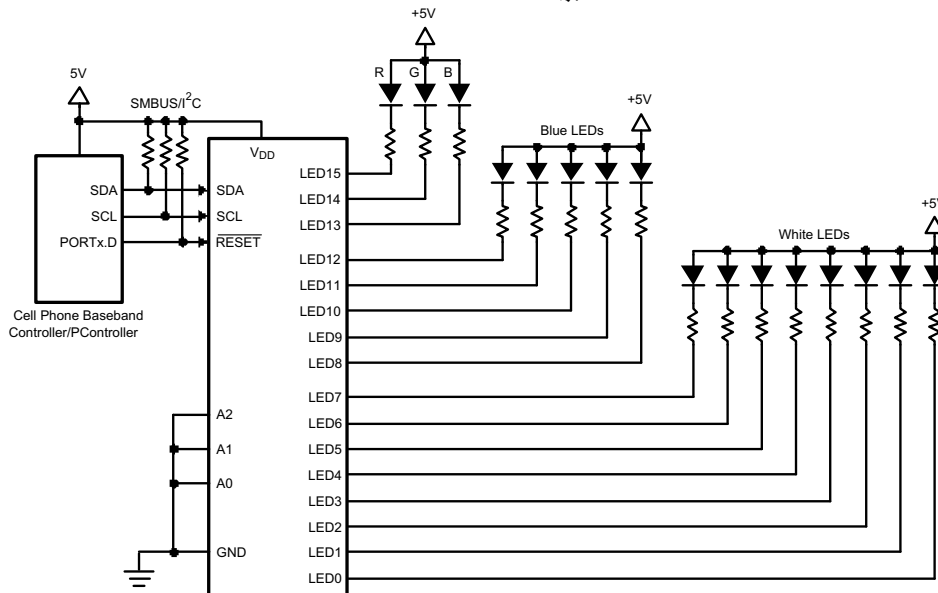

典型应用电路



## Table of Contents

<b>1 特性</b> .....	1	5.7 Typical Characteristic.....	6
<b>2 应用</b> .....	1	<b>6 Detailed Description</b> .....	7
<b>3 说明</b> .....	1	6.1 Overview.....	7
<b>4 Pin Configuration and Functions</b> .....	2	6.2 Functional Block Diagram.....	7
Pin Functions.....	2	6.3 Feature Description.....	8
<b>5 Specifications</b> .....	4	6.4 Device Functional Modes.....	8
5.1 Absolute Maximum Ratings.....	4	6.5 Programming.....	9
5.2 ESD Ratings.....	4	6.6 Register Maps.....	12
5.3 Recommended Operating Conditions.....	4	<b>7 Device and Documentation Support</b> .....	19
5.4 Thermal Information.....	4	7.1 Receiving Notification of Documentation Updates....	19
5.5 Electrical Characteristics.....	5	7.2 Community Resources.....	19
5.6 I <sup>2</sup> C Interface (SCL and SDA Pins) Timing Requirements.....	6	7.3 Trademarks.....	19
		<b>8 Revision History</b> .....	19

## 4 Pin Configuration and Functions

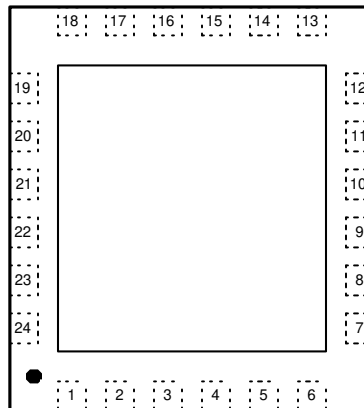


图 4-1. RTW Package 24-Pin WQFN With Exposed Pad Top View

### Pin Functions

PIN		I/O	DESCRIPTION
NUMBER	NAME		
1	LED0	Output	Output of LED0 Driver
2	LED1	Output	Output of LED1 Driver
3	LED2	Output	Output of LED2 Driver
4	LED3	Output	Output of LED3 Driver
5	LED4	Output	Output of LED4 Driver
6	LED5	Output	Output of LED5 Driver
7	LED6	Output	Output of LED6 Driver
8	LED7	Output	Output of LED7 Driver
9	GND	Ground	Ground
10	LED8	Output	Output of LED8 Driver
11	LED9	Output	Output of LED9 Driver
12	LED10	Output	Output of LED10 Driver

PIN		I/O	DESCRIPTION
NUMBER	NAME		
13	LED11	Output	Output of LED11 Driver
14	LED12	Output	Output of LED12 Driver
15	LED13	Output	Output of LED13 Driver
16	LED14	Output	Output of LED14 Driver
17	LED15	Output	Output of LED15 Driver
18	$\overline{\text{RST}}$	Input	Active Low Reset Input
19	SCL	Input	Clock Line for I <sup>2</sup> C Interface
20	SDA	Input/Output	Serial Data Line for I <sup>2</sup> C Interface
21	VDD	Power	Power Supply
22	A0	Input	Address Input 0
23	A1	Input	Address Input 1
24	A2	Input	Address Input 2
—	Exposed Pad	—	Tie internally to GND pin.

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1) (2) (3)</sup>

	MIN	MAX	UNIT
V <sub>DD</sub>	- 0.5	6	V
A0, A1, A2, SCL, SDA, RST (Collectively called digital pins)		6	V
Voltage on LED pins	V <sub>SS</sub> - 0.5	6	V
Junction temperature		150	°C
Power dissipation <sup>(4)</sup>		400	mW
Storage temperature	- 65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under [# 5.3](#). Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to the potential at the GND pin.
- (3) If Military/Aerospace specified devices are required, contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (4) The part cannot dissipate more than 400 mW.

### 5.2 ESD Ratings

		VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000
		Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	±1000
		Machine model	±200

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)<sup>(1) (2)</sup>

	MIN	NOM	MAX	UNIT
V <sub>DD</sub>	2.3		5.5	V
Junction temperature	- 40		125	°C
Operating ambient temperature	- 40		85	°C

- (1) *Absolute Maximum Ratings* are limits beyond which damage to the device might occur. *Recommended Operating Conditions* are conditions under which operation of the device is ensured. *Recommended Operating Conditions* do not imply ensured performance limits. For verified performance limits and associated test conditions, see [# 5.5](#).
- (2) All voltages are with respect to the potential at the GND pin.

### 5.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		LP3943	UNIT
		RTW (WQFN)	
		24 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	45.0	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	41.5	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	22.4	°C/W
ψ <sub>JT</sub>	Junction-to-top characterization parameter	0.5	°C/W
ψ <sub>JB</sub>	Junction-to-board characterization parameter	22.5	°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	3.7	°C/W

- (1) For more information about traditional and new thermal metrics, see [Semiconductor and IC Package Thermal Metrics](#).

## 5.5 Electrical Characteristics

Unless otherwise noted,  $V_{DD} = 5.5V$ . Typical values and limits apply for  $T_J = 25^\circ C$ . Minimum and maximum limits apply over the entire junction temperature range for operation,  $T_J = -40^\circ C$  to  $+125^\circ C$ .<sup>(1)</sup>

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>POWER SUPPLY</b>						
$V_{DD}$	Supply voltage		2.3	5	5.5	V
$I_Q$	Supply current	No load		350	550	$\mu A$
		Standby		2	5	
$\Delta I_Q$	Additional standby current	$V_{DD} = 5.5V$ , every LED pin at 4.3V			2	mA
$V_{POR}$	Power-On Reset voltage			1.8	1.96	V
$t_w$	Reset pulse width			10		ns
<b>LED</b>						
$V_{IL}$	Low level input voltage		-0.5		0.8	V
$V_{IH}$	High level input voltage		2		5.5	V
$I_{OL}$	Low level output current <sup>(2)</sup>	$V_{OL} = 0.4V, V_{DD} = 2.3V$	9			mA
		$V_{OL} = 0.4V, V_{DD} = 3V$	12			
		$V_{OL} = 0.4V, V_{DD} = 5V$	15			
		$V_{OL} = 0.7V, V_{DD} = 2.3V$	15			
		$V_{OL} = 0.7V, V_{DD} = 3V$	20			
		$V_{OL} = 0.7V, V_{DD} = 5V$	25			
$I_{LEAK}$	Input leakage current	$V_{DD} = 3.6V, V_{IN} = 0V$ or $V_{DD}$	-1		1	$\mu A$
$C_{I/O}$	Input/output capacitance	See <sup>(3)</sup>		2.6	5	pF
<b>ALL DIGITAL PINS (EXCEPT SCL AND SDA PINS)</b>						
$V_{IL}$	LOW level input voltage		-0.5		0.8	V
$V_{IH}$	HIGH level input voltage		2		5.5	V
$I_{LEAK}$	Input leakage current		-1		1	$\mu A$
$C_{IN}$	Input capacitance	$V_{IN} = 0V$ <sup>(3)</sup>		2.3	5	pF
<b>I<sup>2</sup>C INTERFACE (SCL AND SDA PINS)</b>						
$V_{IL}$	LOW level input voltage		-0.5		$0.3V_{DD}$	V
$V_{IH}$	HIGH level input voltage		$0.7V_{DD}$		5.5	V
$V_{OL}$	LOW level output voltage		0		$0.2V_{DD}$	V
$I_{OL}$	LOW level output current	$V_{OL} = 0.4V$	3	6.5		mA
$I_{Q\_SCL/SDA}$	SCL/SDA to VDD capable current			100		$\mu A$
$f_{CLK}$	Clock frequency				400	kHz

- (1) Limits are ensured. All electrical characteristics having room-temperature limits are tested during production with  $T_J = 25^\circ C$ . All hot and cold limits are ensured by correlating the electrical characteristics to process and temperature variations and applying statistical process control.
- (2) Each LED pin must not exceed 25 mA and each octal (LED0 - LED7; LED8 - LED15) must not exceed 100 mA. The package must not exceed a total of 200 mA.
- (3) Verified by design.


## 5.6 I<sup>2</sup>C Interface (SCL and SDA Pins) Timing Requirements

See<sup>(1)</sup>

		MIN	NOM	MAX	UNIT
t <sub>HOLD</sub>	Hold time repeated START condition	0.6			μs
t <sub>CLK-LP</sub>	CLK low period	1.3			μs
t <sub>CLK-HP</sub>	CLK high period	0.6			μs
t <sub>SU</sub>	Setup time repeated START condition	0.6			μs
t <sub>DATA-HOLD</sub>	Data hold time	300			ns
t <sub>DATA-SU</sub>	Data setup time	100			ns
t <sub>SU</sub>	Setup time for STOP condition	0.6			μs
t <sub>TRANS</sub>	Maximum pulse width of spikes that must be suppressed by the input filter of both DATA and CLK signals		50		ns

(1) All values verified by design.

## 5.7 Typical Characteristic

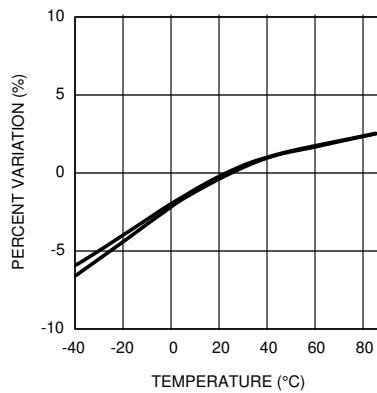

T<sub>A</sub> = -40°C to +85°C      V<sub>DD</sub> = 2.3V to 3V

图 5-1. Frequency vs. Temperature

## 6 Detailed Description


### 6.1 Overview

The LP3943 takes incoming data from the baseband controller and feeds them into several registers that control the frequency and the duty cycle of the LEDs. Two prescaler registers and two PWM registers provide two individual rates to dim or blink the LEDs (for more information on these registers, refer to 表 6-1). Each LED can be programmed in one of four states: ON, OFF, DIM0 rate, or DIM1 rate. Two read-only registers provide status on all 16 LEDs. The LP3943 can be used to drive RGB LEDs and/or single-color LEDs to create a colorful, entertaining, and informative setting. Alternatively, it can also drive RGB LED as a flashlight. This is particularly suitable for accessory functions in cellular phones and toys. Any LED pins not used to drive LED can be used for general purpose parallel input/output (GPIO) expansion.

The LP3943 is equipped with power-on reset that holds the chip in a reset state until  $V_{DD}$  reaches  $V_{POR}$  during power up. Once  $V_{POR}$  is achieved, the LP3943 comes out of reset and initializes itself to the default state.

To bring the LP3943 into reset, hold the  $\overline{RST}$  pin LOW for a period of  $TW$ . This puts the chip into its default state. The LP3943 can only be programmed after  $\overline{RST}$  signal is HIGH again.

### 6.2 Functional Block Diagram

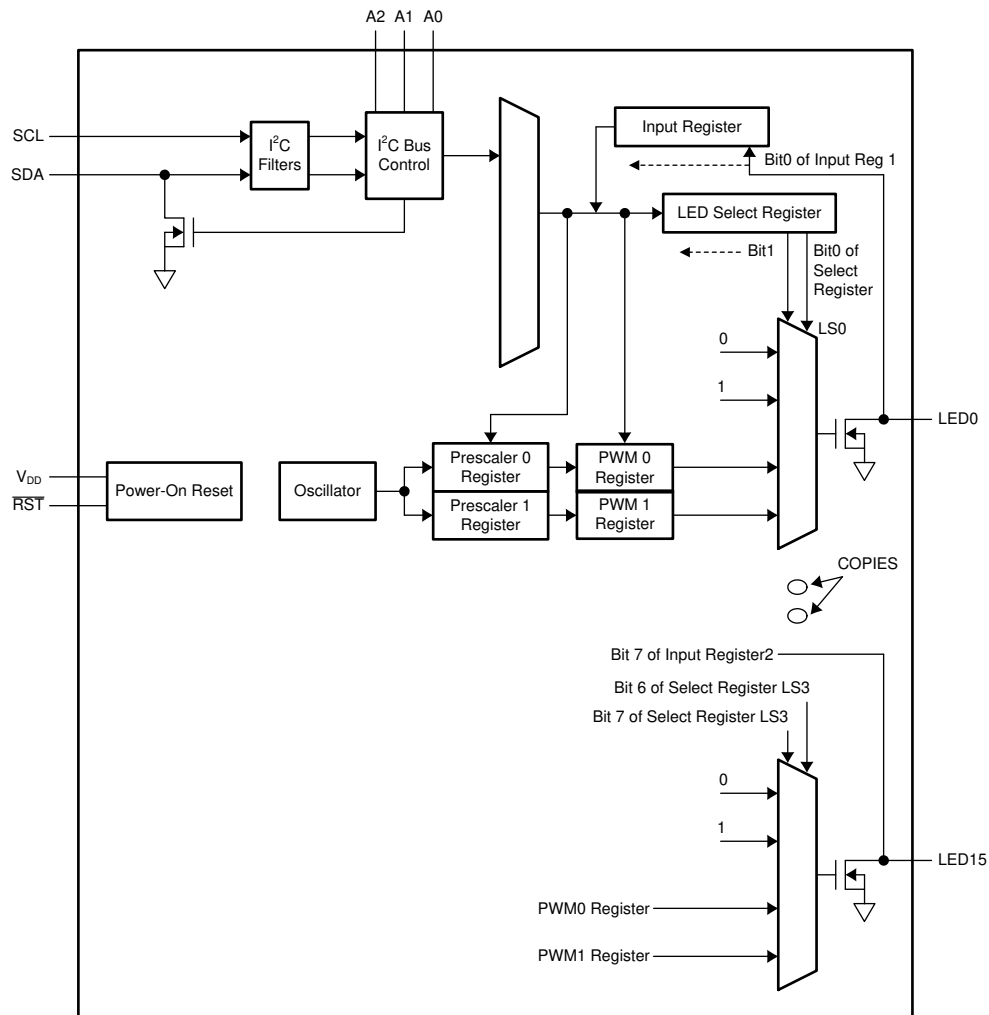

## 6.3 Feature Description

Some of the features of the LP3943 device are:

1. 16 low-side switches to control the current in 16 strings of LEDs with a maximum of 25mA per switch or a maximum of 200mA total.
2. Programmable internal PWM dimming:
  - a. Duty cycle control (8 bits). Any of the 16 current switches can be mapped to either PWM0 register or PWM1 register. Each register offers 8-bit PWM duty cycle control.
  - b. PWM Frequency control (8 bits). Any of the 16 current switches can be mapped to either PSC0 register or PSC1 register. Each register offers 8-bit PWM frequency control from 0.625Hz to 160Hz.
3.  $\overline{\text{RESET}}$  input.
4. Auto increment for I2C writes to reduce number of I2C clock pulses .
5. The LP3943 provides for an externally selectable I2C slave address via the ADR0, ADR1, and ADR2 inputs. See [图 6-3](#).

## 6.4 Device Functional Modes

1. Output set to high impedance. This is set by programming bits [B0 and B1] to 00 in the LS0, LS1, LS2, or LS3 registers (see Table 2)
2. Output set to ON state (current switch pulls low). This turns the LED on at the full current in the specified current switch bits [B0 and B1] set to 01 in the LS0, LS1, LS2, or LS3 registers (see [表 6-12](#)).
3. Output set to toggle at the programmed PWM duty cycle and PWM frequency. This turns on or off the specified current switch at the programmed PWM frequency and duty cycle. Each current switch is mapped to either of the PWM0/PSC0 or PWM1/PSC1 pairs by setting [B0 and B1] to 10 or 11 in the LS0, LS1, LS2, or LS3 registers (see [表 6-12](#)).



## 6.5 Programming

### 6.5.1 I<sup>2</sup>C Data Validity

The data on SDA line must be stable during the HIGH period of the clock signal (SCL). In other words, state of the data line can only be changed when CLK is LOW.

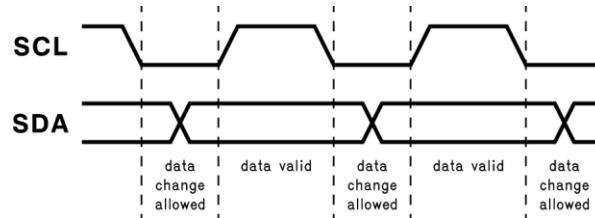


图 6-1. I<sup>2</sup>C Data Validity

### 6.5.2 I<sup>2</sup>C START and STOP Conditions

START and STOP bits classify the beginning and the end of the I<sup>2</sup>C session. START condition is defined as SDA signal transitioning from HIGH to LOW while SCL line is HIGH. STOP condition is defined as the SDA transitioning from LOW to HIGH while SCL is HIGH. The I<sup>2</sup>C master always generates START and STOP bits. The I<sup>2</sup>C bus is considered to be busy after START condition and free after STOP condition. During data transmission, I<sup>2</sup>C master can generate repeated START conditions. First START and repeated START conditions are equivalent, function-wise.

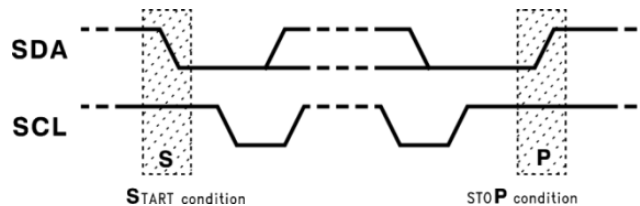


图 6-2. I<sup>2</sup>C START and STOP Conditions

### 6.5.3 Transferring Data

Every byte put on the SDA line must be eight bits long with the most significant bit (MSB) being transferred first. The number of bytes that can be transmitted per transfer is unrestricted. Each byte of data has to be followed by an acknowledge bit. The acknowledge related clock pulse is generated by the master. The transmitter releases the SDA line (HIGH) during the acknowledge clock pulse. The receiver must pull down the SDA line during the 9th clock pulse, signifying an acknowledge. A receiver which has been addressed must generate an acknowledge after each byte has been received.

After the START condition, a chip address is sent by the I<sup>2</sup>C master. This address is seven bits long followed by an eighth bit which is a data direction bit (R/W). The LP3943 hardwires bits 7 to 4 and leaves bits 3 to 1 selectable, as shown in 图 6-3. For the eighth bit, a 0 indicates a WRITE and a 1 indicates a READ. The LP3943 supports only a WRITE during chip addressing. The second byte selects the register to which the data is written. The third byte contains data to write to the selected register.


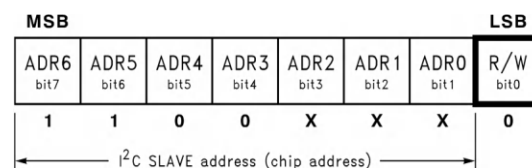



图 6-3. Chip Address Byte

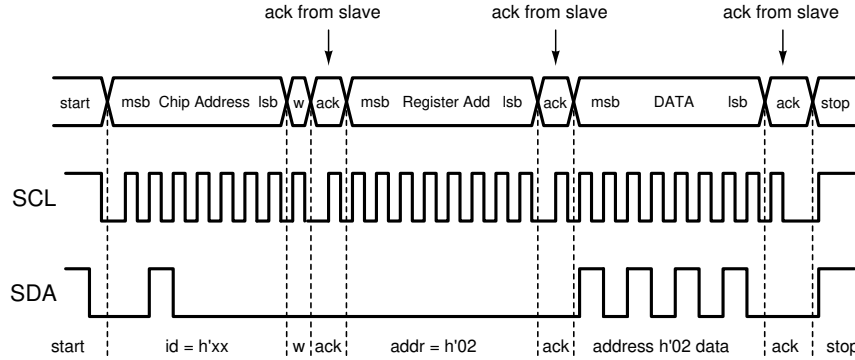

w = write (SDA = 0) r = read (SDA = 1) ack = acknowledge (SDA pulled LOW by either master or slave) rs = repeated start xx = 60 to 67

**图 6-4. LP3943 Register Write**

However, if a READ function is to be accomplished, a WRITE function must precede the READ function, as shown in 图 6-5.

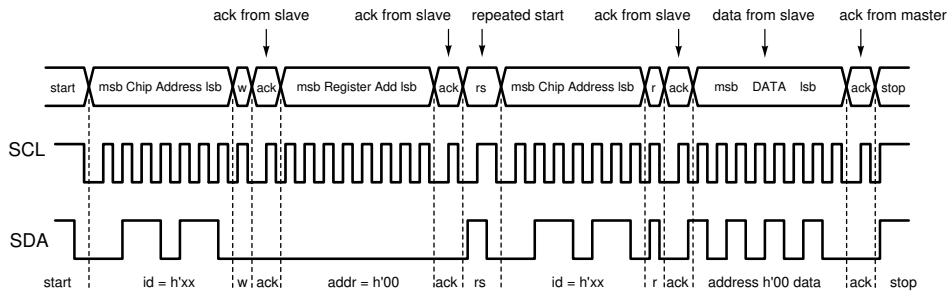


w = write (SDA = "0") r = read (SDA = "1") ack = acknowledge (SDA pulled LOW by either master or slave) rs = repeated start xx = 60 to 67

**图 6-5. LP3943 Register Read**

**6.5.4 Auto Increment**

Auto increment is a special feature supported by the LP3943 to eliminate repeated chip and register addressing when data are to be written to or read from registers in sequential order. The auto increment bit is inside the register address byte, as shown in 图 6-6. Auto increment is enabled when this bit is programmed to "1" and disabled when it is programmed to "0".

Bits 5, 6 and 7 in the register address byte must always be zero.

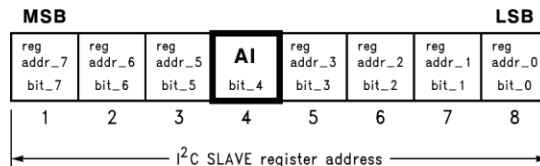


**图 6-6. Register Address Byte**

In the READ mode, when auto increment is enabled, I<sup>2</sup>C master could receive any number of bytes from LP3943 without selecting chip address and register address again. Every time the I<sup>2</sup>C master reads a register, the LP3943 increments the register address, and the next data register is read. When I<sup>2</sup>C master reaches the last register (09H), the register address rolls over to 00H.


In the WRITE mode, when auto increment is enabled, the LP3943 increments the register address every time I<sup>2</sup>C master writes to register. When the last register (09H register) is reached, the register address rolls over to

02H, not 00H, because the first two registers in LP3943 are read-only registers. It is possible to write to the first two registers independently, and the LP3943 device will acknowledge, but the data is ignored.

If auto increment is disabled, and the I<sup>2</sup>C master does not change register address, it continues to write data into the same register.

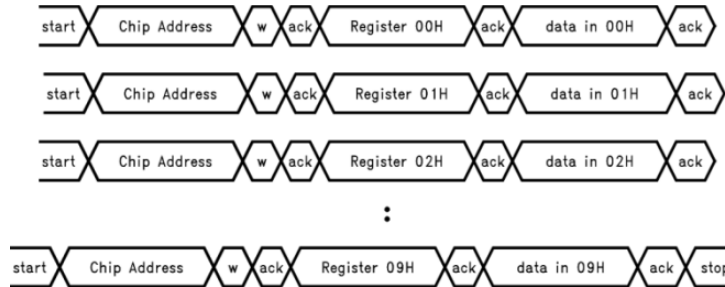

**图 6-7. Programming With Auto Increment Disabled (in WRITE Mode)**

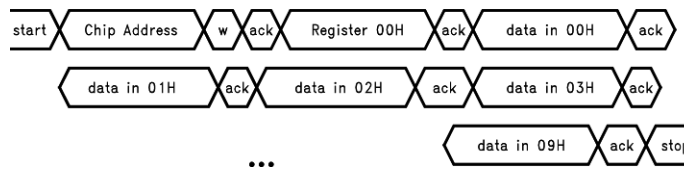

**图 6-8. Programming With Auto Increment Enabled (in WRITE Mode)**

## 6.6 Register Maps

表 6-1. LP3943 Register Table

Address (Hex)	Register Name	Read/Write	Register Function
0x00	Input 1	Read Only	LED0 - 7 Input Register
0x01	Input 2	Read Only	LED8 - 15 Input Register
0x02	PSC0	R/W	Frequency Prescaler 0
0x03	PWM0	R/W	PWM Register 0
0x04	PSC1	R/W	Frequency Prescaler 1
0x05	PWM1	R/W	PWM Register 1
0x06	LS0	R/W	LED0 - 3 Selector
0x07	LS1	R/W	LED4 - 7 Selector
0x08	LS2	R/W	LED8 - 11 Selector
0x09	LS3	R/W	LED12 - 15 Selector

### 6.6.1 Binary Format for Input Registers (Read-only)—Address 0x00 and 0x01

表 6-2. Address 0x00

Bit #	7	6	5	4	3	2	1	0
Default value	X	X	X	X	X	X	X	X
	LED7	LED6	LED5	LED4	LED3	LED2	LED1	LED0

表 6-3. Address 0x01

Bit #	7	6	5	4	3	2	1	0
Default value	X	X	X	X	X	X	X	X
	LED15	LED14	LED13	LED12	LED11	LED10	LED9	LED8

### 6.6.2 Binary Format for Frequency Prescaler and PWM Registers — Address 0x02 to 0x05

表 6-4. Address 0x02 (PSC0)

Bit #	7	6	5	4	3	2	1	0
Default value	0	0	0	0	0	0	0	0

表 6-5. Address 0x03 (PWM0)

Bit #	7	6	5	4	3	2	1	0
Default value	1	0	0	0	0	0	0	0

表 6-6. Address 0x04 (PSC1)

Bit #	7	6	5	4	3	2	1	0
Default value	0	0	0	0	0	0	0	0

表 6-7. Address 0x05 (PWM1)

Bit #	7	6	5	4	3	2	1	0
Default value	1	0	0	0	0	0	0	0

### 6.6.3 Binary Format for Selector Registers — Address 0x06 to 0x09

**表 6-8. Address 0x06 (LS0)**

Bit #	7	6	5	4	3	2	1	0
Default value	0	0	0	0	0	0	0	0
	B1	B0	B1	B0	B1	B0	B1	B0
	LED3		LED2		LED1		LED0	

**表 6-9. Address 0x07 (LS1)**

Bit #	7	6	5	4	3	2	1	0
Default value	0	0	0	0	0	0	0	0
	B1	B0	B1	B0	B1	B0	B1	B0
	LED7		LED6		LED5		LED4	

**表 6-10. Address 0x08 (LS2)**

Bit #	7	6	5	4	3	2	1	0
Default value	0	0	0	0	0	0	0	0
	B1	B0	B1	B0	B1	B0	B1	B0
	LED11		LED10		LED9		LED8	

**表 6-11. Address 0x09 (LS3)**

Bit #	7	6	5	4	3	2	1	0
Default value	0	0	0	0	0	0	0	0
	B1	B0	B1	B0	B1	B0	B1	B0
	LED15		LED14		LED13		LED12	

**表 6-12. LED States With Respect To Values in B1 and B0**

B1	B0	Function
0	0	Output Hi-Z (LED off)
0	1	Output LOW (LED on)
1	0	Output dims (DIM0 rate)
1	1	Output dims (DIM1 rate)

## Programming Example:

- Dim LEDs 0 to 7 at 1Hz at 25% duty cycle
- Dim LEDs 8 to 12 at 5Hz at 50% duty cycle
- Set LEDs 13, 14 and 15 off
- Step 1: Set PSC0 to achieve DIM0 of 1 s
- Step 2: Set PWM0 duty cycle to 25%
- Step 3: Set PSC1 to achieve DIM1 of 0.2 s
- Step 4: Set PWM1 duty cycle to 50%
- Step 5: Set LEDs 13, 14 and 15 off by loading the data into LS3 register
- Step 6: Set LEDs 0 to 7 to point to DIM0
- Step 7: Set LEDs 8 to 12 to point to DIM1

表 6-13. Programming Details

STEP	DESCRIPTION	REGISTER NAME	SET TO (HEX)
1	Set DIM0 = 1 s $1 = (\text{PSC0} + 1)/160$ PSC0 = 159	PSC0	0x09F
2	Set duty cycle to 25% Duty Cycle = PWM0/256 PWM0 = 64	PWM0	0x40
3	Set DIM1 = 0.2s $0.2 = (\text{PSC1} + 1)/160$ PSC1 = 31	PSC1	0x1F
4	Set duty cycle to 50% Duty Cycle = PWM1/256 PWM1 = 128	PWM1	0x80
5	LEDs 13, 14 and 15 off Output = HIGH	LS3	0x03
6	LEDs 0 to 7 Output = DIM0	LS0, LS1	LS0 = 0xAA LS1 = 0xAA
7	LEDs 8 to 12 Output = DIM1	LS2, LS3	LS2 = 0xFF LS3 = 0x03

## Application and Implementation

### 备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## 1 Application Information

The LP3943 is a 16-channel LED controller which has 16 low-side current switches. Each switch can control the LED current in its respective LED or LEDs by modulating its duty cycle and frequency.

## 2 Typical Application

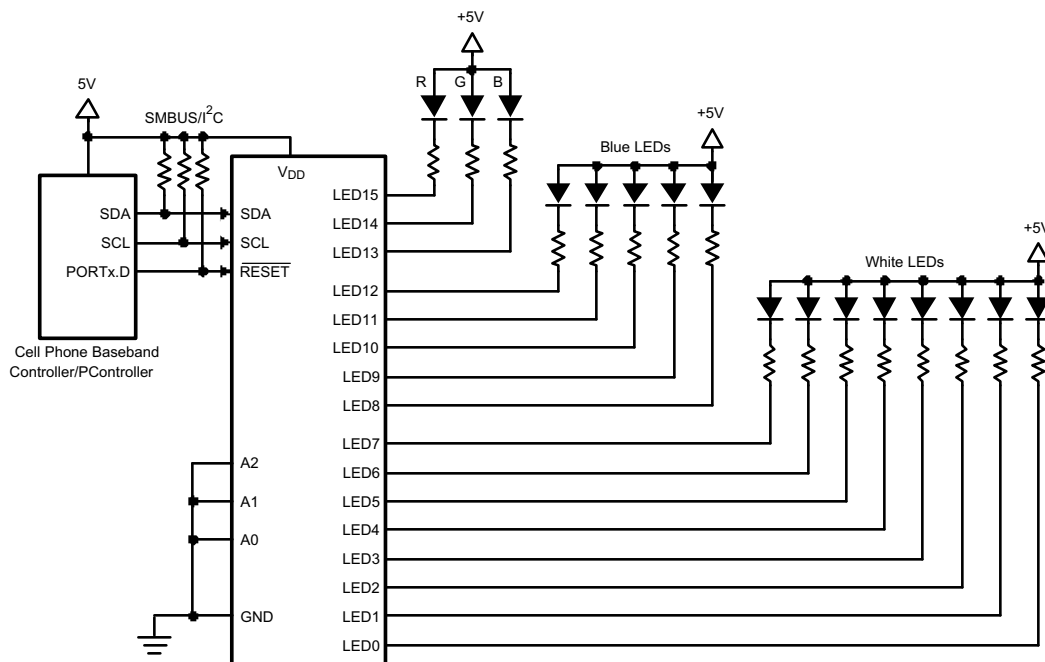


图 7-1. LP3943 Typical Application

### 2.1 Design Requirements

For typical RGB LED light-driver applications, use the parameters listed in 表 7-1.

表 7-1. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Minimum input voltage	2.3 V
Typical output voltage	5 V
Output current	20 mA

## 2.2 Detailed Design Procedure

### 2.2.1 Reducing $I_Q$ When LEDs are OFF

In many applications, the LEDs and the LP3943 share the same  $V_{DD}$ , as shown in 图 7-1. When the LEDs are off, the LED pins are at a lower potential than  $V_{DD}$ , causing extra supply current ( $\Delta I_Q$ ). To minimize this current, consider keeping the LED pins at a voltage equal to or greater than  $V_{DD}$ .

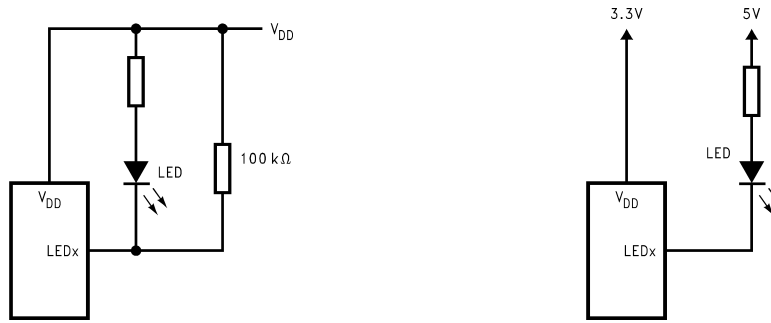


图 7-2. Methods to Reduce  $I_Q$  When LEDs are in OFF State

## 2.3 Application Curve

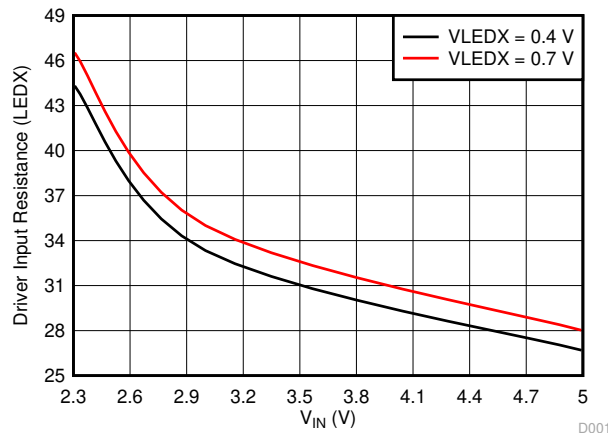


图 7-3. Typical LED Switch Resistance



### 3 System Examples

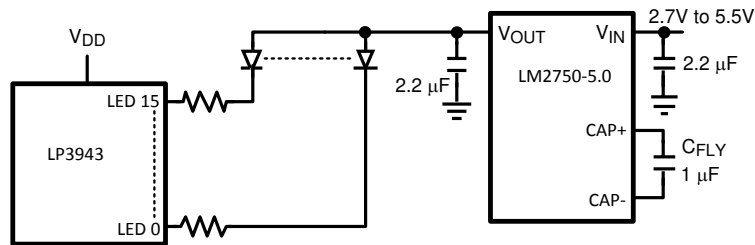


图 7-4. LP3943 With 5V Booster

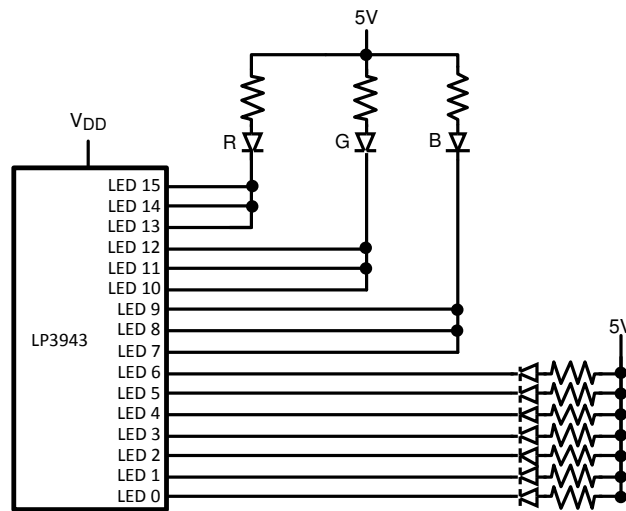


图 7-5. LP3943 Driving RGB LED as a Flash

### 4 Power Supply Recommendations

The LP3943 is designed to be powered from a 2.3V minimum to a 5.5V maximum supply input.

### 5 Layout

#### 5.1 Layout Guidelines

The LP3943 layout is not critical, but TI recommends providing a noise-free supply input at  $V_{DD}$ . This typically would require a  $1\mu\text{F}$  capacitor placed close to the  $V_{DD}$  pin and ground.

### 5.2 Layout Example

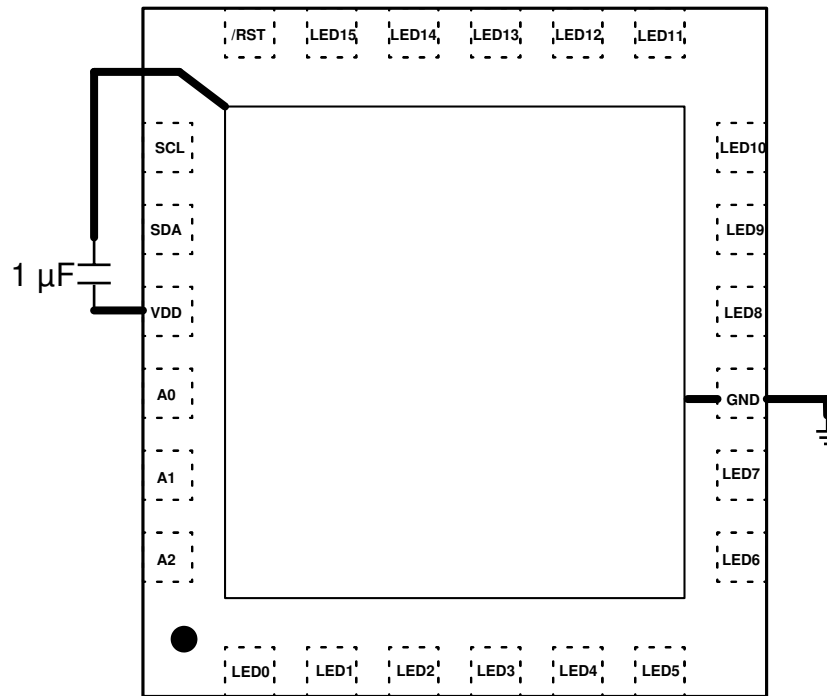


图 7-6. LP3943 Layout Example

## 7 Device and Documentation Support

### 7.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 7.2 Community Resources

### 7.3 Trademarks

所有商标均为其各自所有者的财产。

## 8 Revision History

注：以前版本的页码可能与当前版本的页码不同

### Changes from Revision D (October 2016) to Revision E (October 2024) Page

- Added SCL/SDA to VDD capable current parameter to the Electrical Characteristics table.....4

### Changes from Revision C (October 2015) to Revision D (October 2016) Page

- 更改了标题的措辞以添加 SEO 关键字..... 1
- Changed R<sub>θJA</sub> value from "37°C/W" to "45.0°C/W"; add additional thermal values.....4

### Changes from Revision B (September 2013) to Revision C (October 2015) Page

- 添加了器件信息与引脚配置和功能部分、ESD 等级表、特性说明、器件功能模式、应用和实施、电源相关建议、布局、器件和文档支持以及机械、封装和可订购信息部分..... 1

### Changes from Revision A (April 2013) to Revision B (September 2013) Page

- Changed layout of National Data Sheet to TI format; fixed format of Block Diagram..... 7

## Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
LP3943ISQ	OBSOLETE	WQFN	RTW	24		TBD	Call TI	Call TI	-40 to 85	3943SQ	
LP3943ISQ/NOPB	ACTIVE	WQFN	RTW	24	1000	RoHS & Green	SN	Level-1-260C-UNLIM	-40 to 85	3943SQ	Samples
LP3943ISQX/NOPB	ACTIVE	WQFN	RTW	24	4500	RoHS & Green	SN	Level-1-260C-UNLIM	-40 to 85	3943SQ	Samples

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LP3943ISQ/NOPB	WQFN	RTW	24	1000	178.0	12.4	4.3	4.3	1.3	8.0	12.0	Q1
LP3943ISQX/NOPB	WQFN	RTW	24	4500	330.0	12.4	4.3	4.3	1.3	8.0	12.0	Q1

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LP3943ISQ/NOPB	WQFN	RTW	24	1000	208.0	191.0	35.0
LP3943ISQX/NOPB	WQFN	RTW	24	4500	367.0	367.0	35.0

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司