

TPS389C03-Q1 具有 Q&A 看门狗功能的多通道过压和欠压 I²C 可编程电压监控器和监测器

1 特性

- 符合 ASIL-D 功能安全标准
 - 可帮助进行 ISO 26262 系统设计的文档
 - 系统可满足 ASIL D 级要求
 - 硬件可满足 ASIL D 要求
- 具有符合 AEC-Q100 标准的下列特性：
 - 器件温度等级 1：-40°C 至 +125°C
 - 器件 HBM ESD 分类等级 2
 - 器件 CDM ESD 分类等级 C7B
- 用于监测 SoC 软件运行的 Q&A 看门狗
 - 通过 I²C 实现可编程开/关看门狗定时 (1ms 至 864ms)
 - SoC 启动初始化的启动延迟 (2ms 至 3.46s)
 - WDO 置为有效前的可编程最大违例计数 (高达 7)
 - 看门狗禁用引脚 (WDE)
- 监控先进的 SOC
 - 3 通道, 具有 3 个遥感引脚 (TPS389C03-Q1)
 - 输入电压范围: 2.6V 至 5.5V
 - 欠压锁定 (UVLO): 2.6V
 - 高阈值精度:
 - ±5 mV (-40°C 至 +125°C)
 - 内置 ADC, 可提供电压读数
 - 固定窗口阈值电平
 - 5mV 阶跃 (0.2V 至 1.475V)
 - 其他范围内阶跃为 20 mV
- 微型解决方案和最低元件成本
 - 3mm × 3mm QFN 封装
 - 用户可通过 I²C 调节电压阈值电平
 - 用户可通过 I²C 调节毛刺抑制和迟滞电平
- 专为安全应用设计
 - 错误信号监测 (ESM)

- 通过 I²C 实现可编程 ESM 延迟 (1ms 至 864ms)
 - 循环冗余校验 (CRC)
 - 数据包错误检查 (PEC)
 - 低电平有效开漏 NIRQ、NRST 和 WDO 输出

2 应用

- 高级驾驶辅助系统 (ADAS)
- 传感器融合
 - 3 级至 5 级自主平台

3 说明


TPS389C03-Q1 器件是一款集成式多通道窗口监测复位 IC, 具有 3 个遥感引脚, 采用 16 引脚 3mm × 3mm QFN 封装。

这款高精度多通道电压监控器非常适合采用低电压电源轨的系统, 具有非常小的电源容差裕度, 并且内置毛刺抑制功能和噪声滤波器, 进一步消除了错误信号所导致的错误复位。该 TPS389C03-Q1 器件不需要使用任何外部电阻器来设置过压和欠压复位阈值, 因此进一步优化了整体精度、成本、解决方案大小并提高了安全系统的可靠性。I²C 功能可方便用户灵活选择阈值、复位延迟、毛刺干扰滤波器以及引脚功能。该器件可提供 CRC 错误检查功能, 并具有用于电压读数的内置 ADC, 从而实现冗余错误检查。该器件具有内置 Q&A 看门狗和错误信号监测器, 可实现独立的看门狗使能和看门狗输出功能。

封装信息

器件型号	封装 ⁽¹⁾	封装尺寸 ⁽²⁾
TPS389C03-Q1	RTE (WQFN, 16)	3mm × 3mm

- (1) 有关所有可用封装, 请参阅节 12。
 (2) 封装尺寸 (长 × 宽) 为标称值, 并包括引脚 (如适用)。

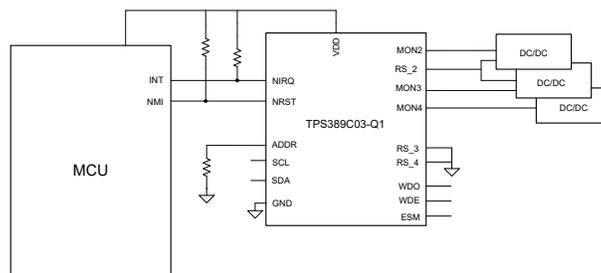

TPS389C03-Q1 典型电路



Table of Contents

1 特性	1	8.1 Registers Overview.....	47
2 应用	1	9 Application and Implementation	119
3 说明	1	9.1 Application Information.....	119
4 Device Comparison	3	9.2 Typical Application.....	120
5 Pin Configuration and Functions	5	9.3 Power Supply Recommendations.....	132
6 Specifications	6	9.4 Layout.....	132
6.1 Absolute Maximum Ratings.....	6	10 Device and Documentation Support	134
6.2 ESD Ratings.....	6	10.1 Device Nomenclature.....	134
6.3 Recommended Operating Conditions.....	6	10.2 Documentation Support.....	136
6.4 Thermal Information.....	7	10.3 接收文档更新通知.....	136
6.5 Electrical Characteristics.....	7	10.4 支持资源.....	136
6.6 Timing Requirements.....	9	10.5 Trademarks.....	136
7 Detailed Description	12	10.6 静电放电警告.....	136
7.1 Overview.....	12	10.7 术语表.....	136
7.2 Functional Block Diagram.....	12	11 Revision History	136
7.3 Feature Description.....	13	12 Mechanical, Packaging, and Orderable Information	137
7.4 Device Functional Modes.....	45		
8 Register Maps	47		

4 Device Comparison

图 4-1 illustrates the device nomenclature. See 表 4-1 and 表 4-2 for more detailed information regarding the configuration of currently released variants. 表 10-1 provides a more in depth description of register configuration and data value stored.

表 4-3 provides a summary of available device functions and corresponding part number. Contact TI sales representatives or go online to TI's [E2E forum](#) for details and availability of other options; minimum order quantities apply.

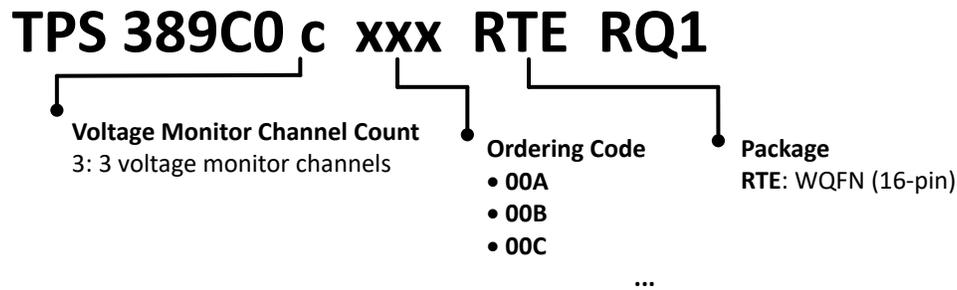


图 4-1. TPS389C03-Q1 Device Nomenclature

表 4-1. TPS389C0x-Q1 Device Threshold Table

Ordering Code	Monitor Channel Count	Thresholds	VMON2 (V)	VMON3 (V)	VMON4 (V)
TPS389C0300CRTERQ1	3	UV_HF/OV_HF	4.56/5.44	3.02/3.6	0.2/1.475
		UV_LF/OV_LF	4.56/5.44	3.02/3.6	0.2/1.475

表 4-2. TPS389C0x-Q1 Device Configuration Table


Ordering Code	Functions	Scaling	OV/UV DEBOUNCE	LF CUTOFF	BIST	PEC	WD Open (ms)	WD Close (ms)	Max WD violation count	I2c pull-up voltage (v)
TPS389C0300CRTERQ1	Monitor LF/HF	4/4/1	102.4 us	1kHz	At POR	Disabled	30	30	2	3.3V

表 4-3. Multichannel Supervisor Summary Table

Specification	TPS38900x-Q1	TPS389R0x-Q1 ⁽¹⁾	TPS38800x-Q1 ⁽¹⁾	TPS388R0x-Q1 ⁽¹⁾	TPS389C0x-Q1	TPS388C0x-Q1 ⁽¹⁾
Hardware ASIL Rating	D	D	B	B	D	B
Monitoring Channel Count	4 to 8	4 to 7	4 to 8	4 to 7	3 to 6	3 to 6
Monitoring Range	0.2 to 5.5V	0.2 to 5.5V	0.2 to 5.5V	0.2 to 5.5V	0.2 to 5.5V	0.2 to 5.5V
Comparator Monitoring (HF Faults)	✓	✓	✓	✓	✓	✓
ADC Monitoring (LF Faults)	✓	✓	x	x	✓	x
Watchdog	x	x	x	x	Q&A	Window
Voltage Telemetry	✓	✓	x	x	✓	x
Monitor Glitch Filtering	✓	✓	✓	✓	✓	✓
Sequence Logging	✓	x	✓	x	✓	✓
NIRQ PIN	✓	✓	✓	✓	✓	✓
NRST PIN	x	✓	x	✓	✓	✓
SYNC PIN	✓	x	x	x	x	x
WDO PIN	x	x	x	x	✓	✓
WDI PIN	x	x	x	x	x	✓
ESM PIN	x	x	x	x	✓	x

(1) Preview, contact TI sales representatives or on TI's [E2E forum](#) for details and availability of other options

5 Pin Configuration and Functions

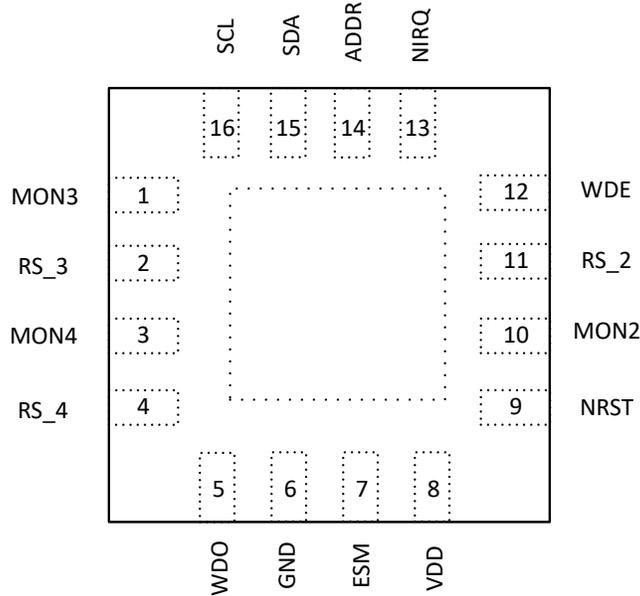

**图 5-1. RTE Package
16-Pin WQFN
TPS389C03-Q1 Top View**

表 5-1. Pin Functions

NO.	PIN		I/O	DESCRIPTION
	TPS389C03-Q1	NAME		
1	MON3		I	Voltage monitor channel 3
2	RS_3		I	Remote sense for channel 3
3	MON4		I	Voltage monitor channel 4
4	RS_4		I	Remote sense for channel 4
5	WDO		O	Open drain pin for Watch Dog errors
6	GND		-	Power ground
7	ESM		I	Error signal monitor
8	VDD		-	Power supply rail
9	NRST		O	Open drain Reset pin
10	MON2		I	Voltage monitor channel 2
11	RS_2		I	Remote sense for channel 2
12	WDE		I	Watch dog enable
13	NIRQ		O	Active-low open-drain interrupt output
14	ADDR		I	I ² C address select pin
15	SDA		I/O	I ² C data pin
16	SCL		I	I ² C clock pin
17	GND		-	Exposed power ground pad

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Voltage	VDD	-0.3	6	V
Voltage	NIRQ,NRST,WDO,ESM,WDE	-0.3	6	V
Voltage	SCL,SDA	-0.3	VDD+0.3	V
Voltage	ADDR	-0.3	2	V
Voltage	MONx	-0.3	6	V
Current	NIRQ,NRST,WDO		±10	mA
Temperature ⁽²⁾	Continuous total power dissipation	See the Thermal Information		
	Operating junction temperature, T _J	-40	150	°C
	Operating free-air temperature, T _A	-40	125	°C
	Storage temperature, T _{stg}	-65	150	°C

- (1) Stresses beyond values listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) As a result of the low dissipated power in this device, it is assumed that T_J = T_A.

6.2 ESD Ratings

		VALUE	UNIT	
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	
		Charged-device model (CDM), per AEC Q100-011	All pins	±500
			Corner pins	±750

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification

6.3 Recommended Operating Conditions

		MIN	NOM	MAX	UNIT
VDD	Supply pin voltage	2.6		5.5	V
NIRQ,NRST,WDO,ESM,WDE	Pin voltage	0		5.5	V
I _{NIRQ,NRST,WDO}	Pin Currents	0		±5	mA
ADDR	Address pin voltage	0		1.8	V
MONx	Monitor Pins	0		5.5	V
SCL,SDA	Pin Voltage	0		VDD	V
R _{UP} ⁽¹⁾	Pull-up resistor (Open Drain config)	1		100	kΩ
T _J	Junction temperature (free-air temperature)	-40		125	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS389C03-Q1	UNIT
		RTE (WQFN)	
		PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	53.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	51.4	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	17.2	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	0.3	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	20.7	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	3.9	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

At $2.6V \leq V_{DD} \leq 5.5V$, NIRQ Voltage = $10k\Omega$ to V_{DD} , NIRQ load = 10pF, and over the operating free-air temperature range of $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at $T_J = 25^{\circ}C$, typical conditions at $V_{DD} = 3.3V$.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
COMMON PARAMETERS						
VDD	Input supply voltage		2.6		5.5	V
VDD _{UVLO}	Rising Threshold		2.67		2.81	V
	Falling Threshold		2.48		2.6	V
V _{POR}	Power on Reset Voltage ⁽²⁾				1.65	V
I _{DD_Active}	Supply current into VDD pin	$V_{DD} \leq 5.5V$		1550	2000	μA
V _{MONX}	MON voltage range		0.2		5.5	V
I _{MONX}	Input current MONx pins	$V_{MON} = 5V$			20	μA
VMON_LF	1x mode (No scaling)		0.2		1.475	V
	4x mode		0.8		5.5	V
VMON_HF	1x mode (No scaling)		0.2		1.475	V
	4x mode		0.8		5.5	V
Threshold Granularity_L F	1x mode (No scaling)			5		mV
	4x mode			20		mV
Threshold Granularity_HF	1x mode (No scaling)			5		mV
Threshold Granularity_HF	4x mode			20		mV
Accuracy_HF	VMON	$0.2V \leq V_{MONX} \leq 1.0V$	-6		6	mV
		$1.0V < V_{MONX} \leq 1.475V$	-7.5		7.5	mV
		$1.475V < V_{MONX} \leq 2.95V$	-0.6		0.6	%
		$V_{MONX} > 2.95V$	-0.7		0.7	%
V _{HYS_HF}	Hysteresis on UV,OV pin(Hysteresis is with respect of the tripoint ((UV),(OV)) ⁽¹⁾)	$0.2V \leq V_{MONX} \leq 1.475V$		5	11	mV
		$1.475V < V_{MONX} \leq 2.95V$		9	16	mV
		$V_{MONX} > 2.95V$		17	28	mV
MON_OFF	OFF Voltage threshold	Monitored falling edge of V_{MON}	140		215	mV
NIRQ	On resistance- when asserted Low	Open Drain		12	17	Ω
V _{OL}	Low level output voltage-NIRQ	NIRQ, 5.5V/5mA			100	mV

6.5 Electrical Characteristics (续)

At $2.6V \leq V_{DD} \leq 5.5V$, NIRQ Voltage = $10k\Omega$ to V_{DD} , NIRQ load = 10pF, and over the operating free-air temperature range of $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at $T_J = 25^{\circ}C$, typical conditions at $V_{DD} = 3.3V$.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{lkg(OD)}$	Open-Drain output leakage current-NIRQ	NIRQ pin in High Impedance, VNIRQ=5.5, Not asserted			90	nA
NRST	On resistance- when asserted Low	Open Drain		10	15	Ω
V_{OL}	Low level output voltage-NRST	NRST , 5.5V/5mA			100	mV
$I_{lkg(OD)}$	Open-Drain output leakage current-NRST	NRST pin in High Impedance, VNRST=5.5, Not asserted			600	nA
WDO	On resistance- when asserted Low	Open Drain		12	17	Ω
V_{OL}	Low level output voltage-WDO	WDO , 5.5V/5mA			100	mV
$I_{lkg(OD)}$	Open-Drain output leakage current-WDO	WDO pin in High Impedance, VNRST=5.5, Not asserted			500	nA
ESM_L	Logic Low Input				0.24 x VDD	V
ESM_H	Logic High Input	VDD>4.5		0.55 x VDD		V
		VDD<4.5		0.6 x VDD		V
$I_{lkg(ESM)}$	Leakage current	ESM=5.5V			75	μA
WDE_L	Logic Low Input				0.36	V
WDE_H	Logic High Input		1.26			V
$I_{lkg(WDE)}$	Leakage current	WDE=5.5V			5	μA
I_{ADDR}	ADDR pin current			20		μA
I2C ADDR	(Hex format)	R=5.36k		0x30		
		R=16.2k		0x31		
		R=26.7k		0x32		
		R=37.4k		0x33		
		R=47.5k		0x34		
		R=59.0k		0x35		
		R=69.8k		0x36		
		R=80.6k		0x37		
TSD	Thermal Shutdown			155		$^{\circ}C$
TSD Hys	Thermal Shutdown Hysteresis			25		$^{\circ}C$
RS	Remote sense range		-100		100	mV
ADC SPECIFICATION						
V_{in}	Input Range		0.2		5.5	V
Resolution	1x mode	$0.2V \leq V_{MON} \leq 1.475V$		5		mV
	4x mode	$V_{MON} > 1.475V$		20		mV
f_s	Sample Rate			125		ksps
Accuracy_LF	VMON, 1x mode	$0.2V \leq V_{MON} \leq 1.475V$	-12		+12	mV
	VMON, 4x mode	$V_{MON} > 1.475V$	-40		+40	mV
I2C ELECTRICAL SPECIFICATIONS						
V_{HYS_LF}	Hysteresis LF Faults, 1x mode	$0.2V \leq V_{MON} \leq 1.475V$		10	15	mV
	Hysteresis LF Faults, 4x mode	$V_{MON} > 1.475V$		40	55	mV
C_B	Capacitive load for SDA and SCL				400	pF
SDA, SCL	Low Threshold	DEV_CONFIG.SOC_IF=0			0.84	V

6.5 Electrical Characteristics (续)

At $2.6V \leq VDD \leq 5.5V$, NIRQ Voltage = $10k\Omega$ to V_{DD} , NIRQ load = 10pF, and over the operating free-air temperature range of $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at $T_J = 25^{\circ}C$, typical conditions at $VDD = 3.3V$.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SDA,SCL	High Threshold	DEV_CONFIG.SOC_IF=0	2.31			V

- (1) Hysteresis is with respect of the trip point ($V_{IT-(UV)}$, $V_{IT+(OV)}$).
- (2) V_{POR} is the minimum V_{DDX} voltage level for a controlled output state.

6.6 Timing Requirements

At $2.6V \leq VDD \leq 5.5V$, NIRQ Voltage = $10k\Omega$ to VDD , NIRQ load = 10pF, and over the operating free-air temperature range of $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at $T_J = 25^{\circ}C$, typical conditions at $VDD = 3.3V$.

			MIN	NOM	MAX	UNIT
COMMON PARAMETERS						
t_{BIST}	POR to ready with BIST, TEST_CFG.AT_POR=1	includes OTP load			12	ms
t_{NBIST}	POR to ready without BIST, TEST_CFG.AT_POR=0	includes OTP load			2	ms
BIST	BIST time, TEST_CFG.AT_POR=1 or TEST_CFG.AT_SHDN=1				10	ms
t_{I2C_ACT}	I2C active from BIST complete				0	μs
t_{NRST}	Fault detection to NRST assertion latency				25	μs
t_{WDO}	Fault detection to WDO assertion latency				25	μs
t_{NIRQ}	Fault detection to NIRQ assertion latency (except OV/UV faults)				25	μs
$t_{PD_NIRQ_1X}$	HF fault Propagation detect delay (default deglitch filter) includes digital delay	$V_{IT_OV/UV} \pm 100mV$			650	ns
$t_{PD_NIRQ_4X}$	HF fault Propagation detect delay (default deglitch filter) includes digital delay	$V_{IT_OV/UV} \pm 400mV$			750	ns
t_D	RESET time delay	I2C Register time delay =000		200		μs
		I2C Register time delay =001		1		ms
		I2C Register time delay =010		10		ms
		I2C Register time delay =011		16		ms
		I2C Register time delay =100		20		ms
		I2C Register time delay =101		70		ms
		I2C Register time delay =110		100		ms
		I2C Register time delay =111		200		ms

6.6 Timing Requirements (续)

At $2.6V \leq VDD \leq 5.5V$, NIRQ Voltage = $10k\Omega$ to VDD, NIRQ load = 10pF, and over the operating free-air temperature range of -40°C to 125°C , unless otherwise noted. Typical values are at $T_J = 25^\circ\text{C}$, typical conditions at $VDD = 3.3V$.

			MIN	NOM	MAX	UNIT
t_{D_WD}	WDO delay	I2C Register time delay =000		1		ms
		I2C Register time delay =001		2		ms
		I2C Register time delay =010		5		ms
		I2C Register time delay =011		10		ms
		I2C Register time delay =100		20		ms
		I2C Register time delay =101		50		ms
		I2C Register time delay =110		100		ms
		I2C Register time delay =111		200		ms
$t_{\text{debounce_ESM}}$	Debounce time	I2C Register time delay =00		10		μs
		I2C Register time delay =01		25		
		I2C Register time delay =10		50		
		I2C Register time delay =11		100		
$t_{\text{GL_R}}$	UV & OV debounce range via I2C	FLT_HF(N)	0.1		102.4	μs

6.6 Timing Requirements (续)

At $2.6V \leq VDD \leq 5.5V$, NIRQ Voltage = $10k\Omega$ to VDD, NIRQ load = 10pF, and over the operating free-air temperature range of $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at $T_J = 25^{\circ}C$, typical conditions at $VDD = 3.3V$.

			MIN	NOM	MAX	UNIT
I2C TIMING CHARACTERISTICS						
f_{SCL}	Serial clock frequency	Standard mode			100	kHz
f_{SCL}	Serial clock frequency	Fast mode			400	kHz
f_{SCL}	Serial clock frequency	Fast mode +			1	MHz
t_{LOW}	SCL low time	Standard mode	4.7			μs
t_{LOW}	SCL low time	Fast mode	1.3			μs
t_{LOW}	SCL low time	Fast mode +	0.5			μs
t_{HIGH}	SCL high time	Standard mode	4			μs
t_{HIGH}	SCL high time	Fast mode +	0.26			μs
$t_{SU,DAT}$	Data setup time	Standard mode	250			ns
$t_{SU,DAT}$	Data setup time	Fast mode	100			ns
$t_{SU,DAT}$	Data setup time	Fast mode +	50			ns
$t_{HD,DAT}$	Data hold time	Standard mode	10			ns
$t_{HD,DAT}$	Data hold time	Fast mode	10			ns
$t_{HD,DAT}$	Data hold time	Fast mode +	10			ns
$t_{SU,STA}$	Setup time for a Start or Repeated Start condition	Standard mode	4.7			μs
$t_{SU,STA}$	Setup time for a Start or Repeated Start condition	Fast mode	0.6			μs
$t_{SU,STA}$	Setup time for a Start or Repeated Start condition	Fast mode +	0.26			μs
$t_{HD,STA}$	Hold time for a Start or Repeated Start condition	Standard mode	4			μs
$t_{HD,STA}$	Hold time for a Start or Repeated Start condition	Fast mode	0.6			μs
$t_{HD,STA}$	Hold time for a Start or Repeated Start condition	Fast mode +	0.26			μs
t_{BUF}	Bus free time between a STOP and START condition	Standard mode	4.7			μs
t_{BUF}	Bus free time between a STOP and START condition	Fast mode	1.3			μs
t_{BUF}	Bus free time between a STOP and START condition	Fast mode +	0.5			μs
$t_{SU,STO}$	Setup time for a Stop condition	Standard mode	4			μs
$t_{SU,STO}$	Setup time for a Stop condition	Fast mode	0.6			μs
$t_{SU,STO}$	Setup time for a Stop condition	Fast mode +	0.26			μs
t_{rDA}	Rise time of SDA signal	Standard mode			1000	
t_{rDA}	Rise time of SDA signal	Fast mode	20		300	ns
t_{rDA}	Rise time of SDA signal	Fast mode +			120	ns
t_{fDA}	Fall time of SDA signal	Standard mode			300	ns
t_{fDA}	Fall time of SDA signal	Fast mode	1.4		300	ns
t_{fDA}	Fall time of SDA signal	Fast mode +	6.5		120	ns
t_{rCL}	Rise time of SCL signal	Standard mode			1000	ns
t_{rCL}	Rise time of SCL signal	Fast mode	20		300	ns
t_{rCL}	Rise time of SCL signal	Fast mode +			120	ns
t_{fCL}	Fall time of SCL signal	Standard mode			300	ns
t_{fCL}	Fall time of SCL signal	Fast mode	6.5		300	ns
t_{fCL}	Fall time of SCL signal	Fast mode +	6.5		120	ns
t_{SP}	Pulse width of SCL and SDA spikes that are suppressed	Standard mode, Fast mode and Fast mode +			50	ns

7 Detailed Description

7.1 Overview

The TPS389C03-Q1 family of devices has three channels that can be configured for over voltage, under voltage or both in a window configuration. The TPS389C03-Q1 features a highly accurate window threshold voltages (up to $\pm 5\text{mV}$) and a variety voltage thresholds which can be factory configured or set on boot up by I2C commands.

The TPS389C03-Q1 includes the resistors used to set the overvoltage and undervoltage thresholds internal to the device. These internal resistors allow for lower component counts and greatly simplifies the design because no additional margins are needed to account for the accuracy of external resistors.

The TPS389C03-Q1 is designed to assert active low output signals (NIRQ and/or NRST) when the monitored voltage is outside the safe window. The default configuration has the interrupts enabled for over voltage and under voltage faults, sequence timeout set for 1ms, BIST enabled at POR, and over voltage and under voltage debounce set for 102.4 μs .

7.2 Functional Block Diagram

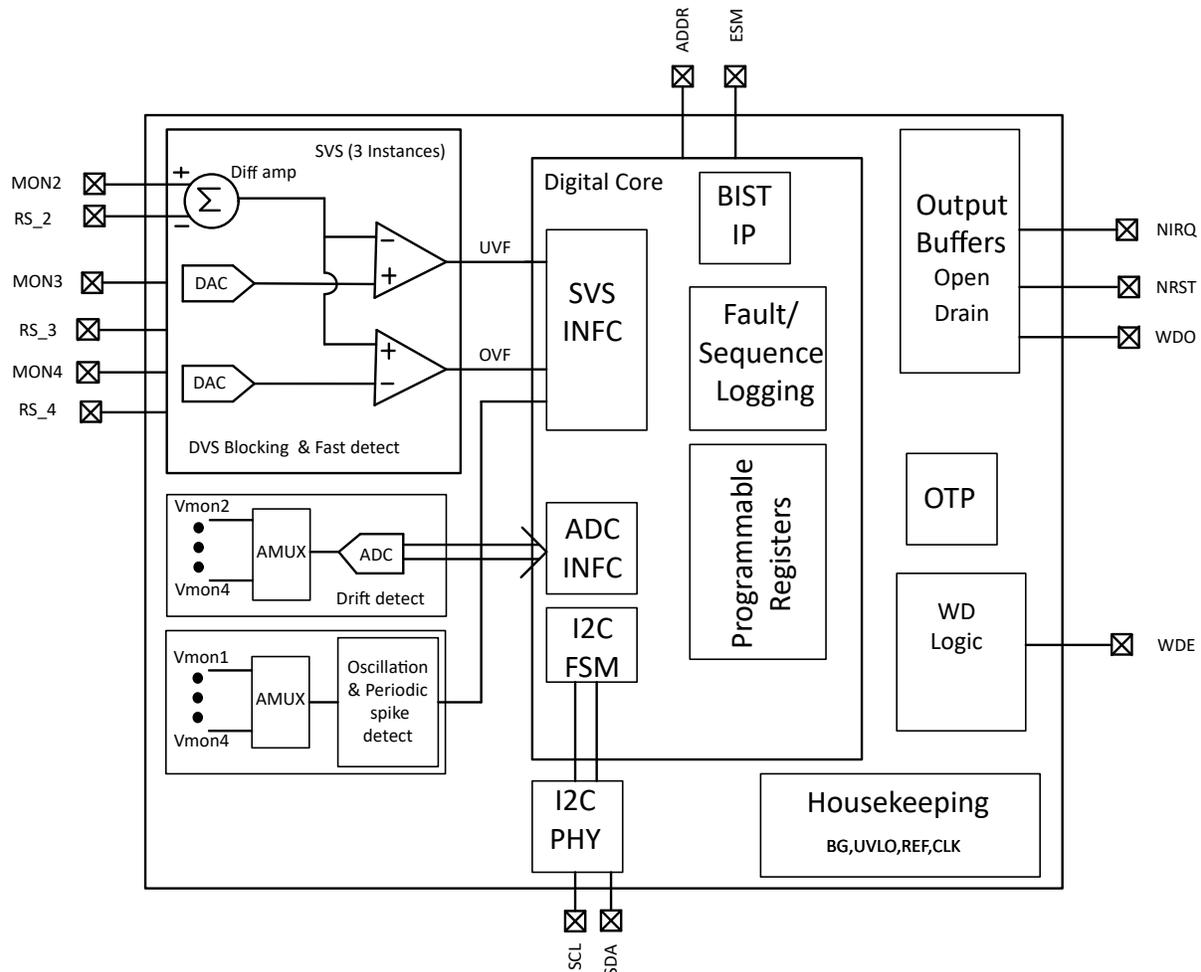


图 7-1. TPS389C03-Q1 Block Diagram

7.3 Feature Description

7.3.1 I²C

The TPS389C03-Q1 device follows the I²C protocol (up to 1MHz) to manage communication with host devices such as an MCU or System on Chip (SoC). I²C is a two wire communication protocol implemented using two signals, clock (SCL) and data (SDA). The host device is primary controller of communication. TPS389C03-Q1 device responds over the data line during read or write operation as defined by I²C protocol. Both SCL and SDA signals are open drain topology and can be used in a wired-OR configuration with other devices to share the communication bus. Both SCL and SDA pins need an external pull up resistance to supply voltage (10kΩ recommended).

图 7-2 shows the timing relationship between SCL and SDA lines to transfer 1 byte of data. SCL line is always controlled by host. To transfer 1 byte data, host needs to send 9 clocks on SCL. 8 clocks for data and 1 clock for ACK or NACK. SDA line is controlled by either host or TPS389C03-Q1 device based on the read or write operation. 图 7-3 and 图 7-4 highlight the communication protocol flow and which device controls SDA line at various instances during active communication.

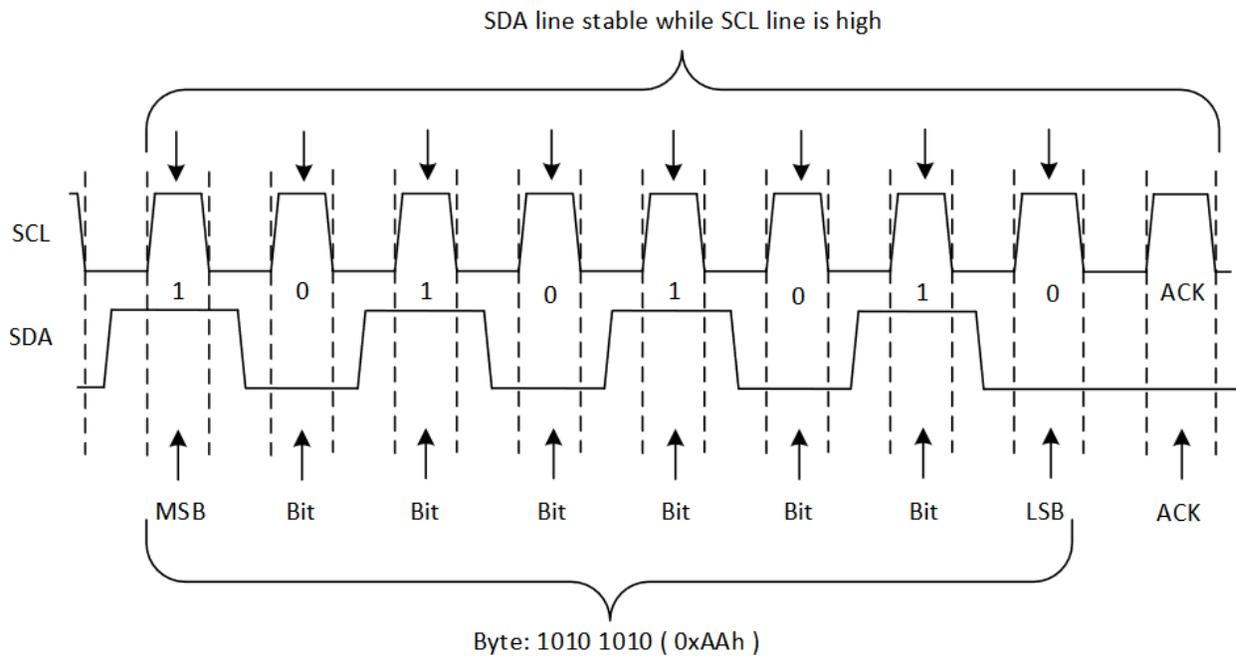


图 7-2. SCL to SDA timing for 1 byte data transfer

- Master Controls SDA Line
- Slave Controls SDA Line

Write to One Register in a Device

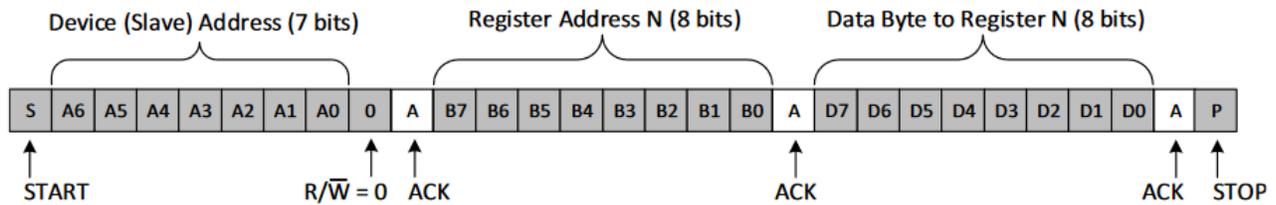


图 7-3. I²C write protocol

- Master Controls SDA Line
- Slave Controls SDA Line

Read From One Register in a Device

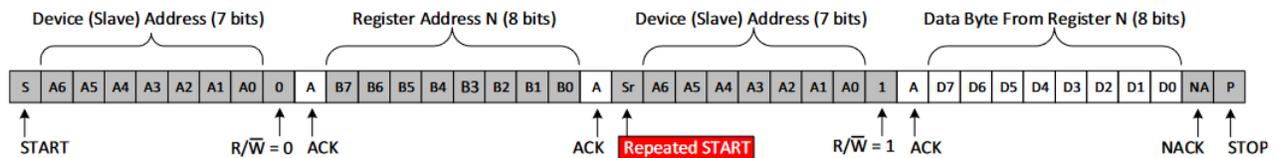


图 7-4. I²C read protocol

Before initiating communication over I²C protocol, host needs to confirm the I²C bus is available for communication. Monitor the SCL and SDA lines, if any line is pulled low, the I²C bus is occupied. Host needs to wait until the bus is available for communication. Once the bus is available for communication, the host can initiate read or write operation by issuing a START condition. Once the I²C communication is complete, release the bus by issuing STOP command. 图 7-5 shows how to implement START and STOP condition.

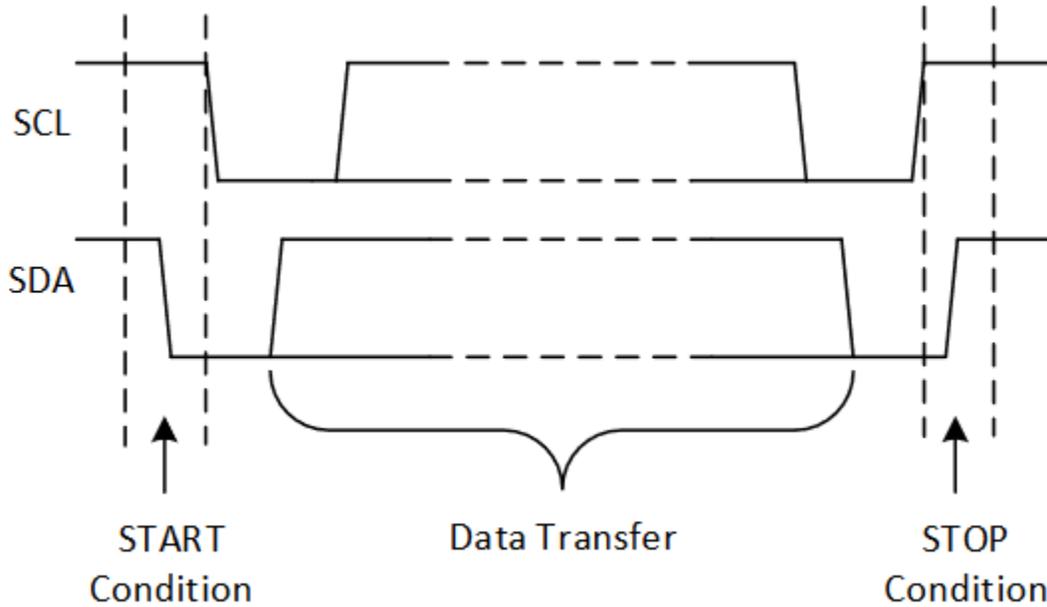


图 7-5. I²C START and STOP condition

The SDA line can get stuck in logic low level if required number of clocks are not provided by the host. In this scenario, the host provides multiple clocks on SCL line until the SDA line goes high. After this event, host must issue I²C stop command. This releases the I²C bus and other devices can use the I²C bus.

表 7-1 shows the different functionality available when programming with I²C.

表 7-1. User Programmable I²C Functions

FUNCTIONS	DESCRIPTION
Thresholds for OV/UV- HF	Adjustable in 5mV steps from 0.2V to 1.475V and 20mV steps from 0.8V to 5.5V
Thresholds for OV/UV - LF	Adjustable in 5mV steps from 0.2V to 1.475V and 20mV steps from 0.8V to 5.5V
Voltage Monitoring scaling	1 or 4
Glitch immunity for OV/UV- HF	0.1 us to 102.4 us
Low Frequency Cutoff filter	250Hz to 4kHz
Enable sequence timeout	1ms to 4s
Packet error checking for I ² C	Enabling or Disabling
Force NIRQ/NRST/WDO assertion	Controlled by I ² C register
Individual channel MON	Enable or Disable
Interrupt disable functions	BIST, PEC, TSD, CRC
ESM Threshold	1ms to 864ms
ESM Debounce	10us to 100us
Reset Delay	200us to 200ms
MAX Violation Count	0 to 7
Watchdog Startup Delay Multiplier	0 to 7
Watchdog Open and Close Window Times	1ms to 864ms
Watchdog Output Delay	200us to 200ms (only applicable for non-latched WDO)
OV/UV/ESM/WDT	Mappable individually to NIRQ, NRST, and WDO

7.3.2 Maskable Interrupt (AMSK)

In the case of power up, AMSK_ON register applies. AMSK_ON masks interrupts until the MON voltage crosses the UVLF threshold or sequence timeout expires whichever is sooner. In the case of power down AMSK_OFF register applies. AMSK_ON masks interrupts until the MON voltage is below the OFF threshold and then the OVLF interrupts are active.

表 7-2 summarizes the auto-mask operation for power up and power down.

表 7-2. Auto-Mask Operation for the Power Up and Power Down

TRANSITION	AUTO-MASK APPLIED	AUTO-MASK APPLIES TO	AUTO-MASK INACTIVE	INTERRUPTS ACTIVE FOR MON CHANNELS NOT IN AUTO-MASK
Power Up	AMSK_ON	IEN_UVLF, IEN_UVHF, IEN_OVHF	SEQ_TOUT expires or rail crosses UVLF	At Power Up
Power Down	AMSK_OFF		Auto-mask active in transition until SEQ_TOUT expires	Until SEQ_TOUT expires

7.3.3 VDD

The TPS389C03-Q1 is designed to operate from an input voltage supply range between 2.6V to 5.5V. An input supply capacitor is not required for this device; however, if the input supply is noisy good analog practice is to place a 1µF capacitor between the VDD pin and the GND pin.

V_{DD} needs to be at or above $V_{DD(MIN)}$ for at least the start-up delay ($t_{SD} + t_D$) for the device to be fully functional.

7.3.4 MON

The TPS389C03-Q1 combines two comparators with a precision reference voltage and a trimmed resistor divider per monitor (MON) channel. This configuration optimizes device accuracy because all resistor tolerances are accounted for in the accuracy and performance specifications. Both comparators also include built-in hysteresis that provides noise immunity and provides stable operation.

Each MON channel can be configured for Low Frequency (LF) and High Frequency (HF) fault detection. HF fault detection uses a comparator for UV and OV measurements referenced to the threshold voltage. A debounce filter for glitch immunity can be configured for HF faults using the FLT_HF registers in BANK1 associated with each MON channel.

LF fault detection measures the voltage through an ADC that can be used to monitor voltage drift. The LF detection thresholds can be configured for various purposes. For example, the OVLF threshold can be set lower than the OVHF threshold for drift monitoring. Alternatively, the OVLF threshold can be set to overlap with the OVHF threshold for redundancy. LF and HF faults are configured using the UV_HF, OV_HF, UV_LF, and OV_LF registers in BANK1. Each MON channel has unique UV_HF, OV_HF, UV_LF, and OV_LF registers. The diagram shown in 图 7-6 illustrates an example of how the LF and HF faults can be configured.

Ultra fast detection with comparators with deglitch filters (0.1us to 102.4us)

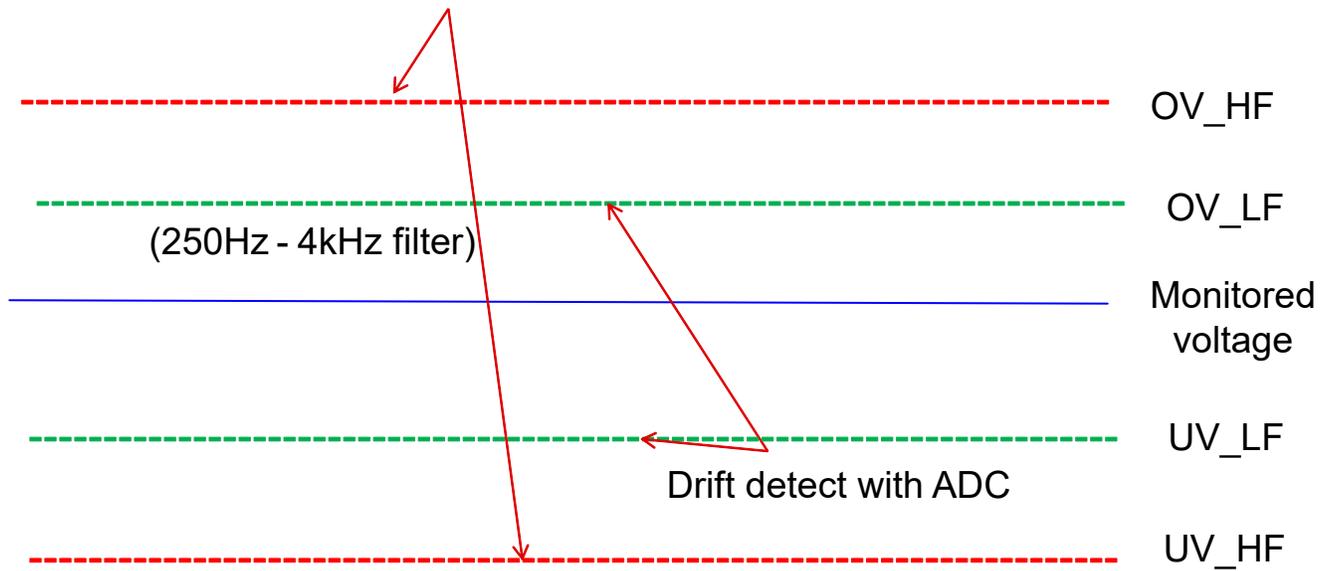


图 7-6. MON Channel State Diagram

Although not required in most cases, for noisy applications good analog design practice is to place a 1nF to 10nF bypass capacitor at the MON input to reduce sensitivity to transient voltages on the monitored signal. Specific debounce times or deglitch times can also be set independently for each MON via I²C registers

When monitoring VDD supply voltage, the MON pin can be connected directly to VDD. The outputs NIRQ and NRST are high impedance when voltage at the MON pin is between upper and lower boundary of threshold.

The MON channel settings can be adjusted by using the associated registers listed in the register maps found in 节 8. Using the register maps, the code example in 图 7-7 demonstrates how MON2 can be reconfigured.

```

ADDR 30
//          Go to Bank 1
WR F0 01
//          Check UVHF,OVHF thresholds for MON2 and MON3
RD 30 //MON2 UVHF
RD 31 //MON2 OVHF
RD 40 //MON3 UVHF
RD 41 //MON3 OVHF
//          Check UVLF,OVLf thresholds for MON2 and MON3
RD 32 //MON2 UVHF
RD 33 //MON2 OVHF
RD 42 //MON3 UVHF
RD 43 //MON3 OVHF
//          Example change OVHF threshold MON2 to 5.5V
WR 31 EB
//          Example change OVHF threshold MON2 to 5.48V
WR 31 EA
//          Example change OVHF threshold MON2 to 5.44V
WR 31 E8
//          Telemetry read the voltages being monitored
//          Go to Bank 0
WR F0 00
RD 41 // MON2 Voltage
RD 42 // MON3 Voltage
//          Simulate an OV fault on MON2
//          Go to Bank 1
WR F0 01
WR 31 C8 // Change OVHF threshold to 4.8V
//          NIRQ,NRST asserts (depends on mapping)
//          Clearing OVHF fault MON2
//          Go to Bank 0
WR F0 00
RD 16 // 02 READ SINCE OVHF on MON2
WR 16 02 // WRITE 1(bit 2) to clear

```

图 7-7. MON2 Setting Software Example

7.3.5 NRST

The NRST pin features a programmable reset delay time that can be adjusted from 0.2ms to 200ms when using TI_CONTROL register. NRST is an open-drain output that must be pulled up through a 1k Ω to 100k Ω pullup resistor. When the device is powered up and POR is complete, NRST is asserted low until the BIST is complete. After the BIST, NRST remains high (not asserted) until triggered by a mappable fault condition. An NRST_MISMATCH fault is asserted if the NRST pin is pulled to an unexpected state. For example, if the NRST pin is in a high-impedance state (logic high) and is externally pulled low, then an NRST_MISMATCH fault asserts. During an NRST toggle NRST mismatch is active after 2 μ s, NRST must exceed 0.6*VDD to be considered in a logic high state.

NRST is mappable to the watchdog fault, and the ESM fault when using the IEN_VENDOR register. If NRST is mapped to the ESM fault, the NRST pin asserts following the ESM delay and be de-asserted after the reset delay (t_D). If NRST is mapped to the watchdog fault, the NRST pin asserts during a watchdog fault and de-asserts following the reset delay (t_D).

NRST is also mappable to the OVHF and UVHF faults using the FC_LF[n] registers. If a monitored voltage falls or rises outside of the programmed OVHF and UVHF thresholds, then NRST is asserted, driving the NRST pin low. When the monitored voltage comes back into the valid window, a reset delay circuit is enabled that holds NRST low for a specified reset delay period (t_D). Note if NRST is un-mapped from OVHF and UVHF faults while NRST is asserted then NRST deasserts, NRST reasserts when re-mapped assuming the voltage is still outside the valid window

The t_D period is determined by the RST_DLY[2:0] value found in the TI_CONTROL register. When the reset delay has elapsed, the NRST pin goes to a high-impedance state and uses a pullup resistor to hold NRST high. The pullup resistor must be connected to the proper voltage rail to allow other devices to be connected at the correct interface voltage. To ensure proper voltage levels, give some consideration when choosing the pullup resistor values. The pullup resistor value is determined by output logic low voltage (VOL), capacitive loading, and leakage current.

7.3.6 NIRQ

NIRQ is a interrupt error output with latched behavior, if a monitored voltage falls or rises outside of the programmed OVHF and UVHF thresholds NIRQ is asserted. NIRQ remains in its low state until the action causing the fault is no longer present and a 1-to-clear is written to the bit signaling the fault. Un-mapping NIRQ from a fault reporting register does not de-assert the NIRQ signal. NIRQ is In a typical TPS389C03-Q1 application, the NIRQ output is connected to a reset or enable input of a processor [such as a digital signal processor (DSP) or application-specific integrated circuit (ASIC), or other processor type].

The TPS389C03-Q1 has an open drain active low output that requires a pull-up resistor to hold these lines high to the required voltage logic. Connect the pull-up resistor to the proper voltage rail to enable the output to be connected to other devices at the correct interface voltage levels. To meet proper voltage levels, give some consideration when choosing the pull-up resistor values. The pull-up resistor value is determined by V_{OL} , output capacitive loading, and output leakage current. These values are specified in 节 6. The open drain output can be connected as a wired-OR logic with other open drain signals such as another TPS389C03-Q1 NIRQ pin.

7.3.7 ADC

The ADC used in the TPS389C03Q-1 runs on a 1MHz clock with an effective sampling rate of 1/8MHz (= 125kHz). Initially, the ADC records with a resolution of 12 bits (1LSB = 0.41667mV) which is later round off to 8-bit data for I²C transaction. (1LSB = 5mV) The ADC uses ping-pong architecture in which it requires 2us for both sampling and conversion per channel with a total of 2 sampling channels. While CH0 performs coarse conversion, CH1 does fine conversion and vice verse.

Digitized 8-bit data is updated once the fine conversion is completed, which occurs once every 8 μ s. Each I²C transaction initiated for reading 8-bit MON_LVL data (the ADC data of a particular channel), 8-bit data is paused from updating until the I²C transaction completes.

Voltage scaling is done using a resistor ladder, but for differential mode channels, a chopping circuit is used to get the average of both of the voltages (VMON + VMON_RS)/2 since VMON_RS can be negative and can't be converted into an ADC code. VMON - VMON_RS is calculated digitally by subtracting ((VMON + VMON_RS) /2) from VMON and then multiplying by 2.

The MONX channels can be configured in 1x (0.2V to 1.475V) or 4x mode (0.8V to 5.5V). For differential mode channels configured in 1x mode, (MON1 and MON2) the ADC range is limited up to 1.7V. To configure an ADC channel above 1.7V, please use 4x mode.

Real time voltage measurements use.

$$V_M = ((ADC[7:0] * 5mV) + 0.2) * (VRANGE_MULT) \quad (1)$$

1. ADC[7:0] is translated to a corresponding decimal value. The value of ADC[7:0] corresponding to MON2-MON4 can be read from BANK0, registers 0x41 to 0x43 found in 表 8-1.
2. VRANGE_MULT corresponds to the selected monitor voltage multiplier set in BANK1, register 0x1F of 表 8-26.

3. VRANGE_MULT is set to a decimal 1 or 4 value depending on monitored value.

7.3.8 Packet Error Checking (PEC)

TPS389C03-Q1 supports Packet Error Checking (PEC) as a way to implement Cyclic Redundancy Checking (CRC). PEC is a dynamic CRC that happens only during read or write transactions if enabled. With the initial value of CRC set to 0x00, the PEC uses a CRC-8 represented by the polynomial:

$$C(x) = x^8 + x^2 + x + 1 \tag{2}$$

The polynomial is meant to catch any bit flips or noise in I2C communication which cause data and PEC byte to have a mismatch. The PEC calculation includes all bytes in the transmission, including address, command and data. The PEC calculation does not include ACK or NACK bits or START, STOP or REPEATED START conditions. If PEC is enabled, and the TPS389C03-Q1 is transmitting data, then the TPS389C03-Q1 is responsible for sending the PEC byte. If PEC is enabled, and the TPS389C03-Q1 is receiving data from the MCU, then the MCU is responsible for sending the PEC byte. In case of faster communications needs like servicing the watchdog the required PEC feature can be effectively used to handle missing PEC information and to avoid triggering faults. [图 7-8](#) and [图 7-9](#) highlight the communication protocol flow when PEC is required and which device controls SDA line at various instances during active communication.




图 7-8. Single Byte Write with PEC




图 7-9. Single Byte Read with PEC

[表 7-3](#) summarises the registers associated with a PEC Write command and resulting device behavior. [表 7-4](#) summarises the registers associated with a PEC Read command and resulting device behavior.

表 7-3. PEC Write Summary

EN_PEC	REQ_PEC	PEC_INT	Interrupt Status
0	x	x	PEC byte is not required in write operation, NO NIRQ assertion.
1	0	x	A write command missing a PEC byte is treated as OK, the write command executes and result in a I2C ACT. A write command with an incorrect PEC is treated as an error, the write command does not execute and result in a I2C NACK. NO NIRQ assertion.
1	1	0	A missing PEC is treated as an error, a write command executes only if the correct PEC byte is provided. I2C communication still responds with an ACT although write command did not execute. A write command with an incorrect PEC is treated as an error, the write command does not execute and result in a I2C NACK. NO NIRQ assertion.
1	1	1	A missing PEC is treated as an error, a write command executes only if the correct PEC byte is provided. I2C communication still responds with an ACT although write command did not execute. A write command with an incorrect PEC is treated as an error, the write command does not execute and result in a I2C NACK. NIRQ is asserted when a write command with a incorrect or missing PEC byte is attempted.

表 7-4. PEC Read Summary

EN_PEC	REQ_PEC	PEC_INT	Interrupt Status
0	x	x	I2C read operation reponds with data stored in register, I2C read command does not respond with registers corresponding PEC byte.
1	x	x	I2C read operation responds with data stored in register and corresponding PEC byte.

7.3.9 Q&A Watchdog

The Question and Answer Watchdog requires specific data to be sent from the MCU to the TPS389C03-Q1 within a specific time interval.

The TPS389C03-Q1 generates questions for the MCU to read during the OPEN and CLOSE windows. Questions are read as the combination of ANSW_CNT[1:0] and TOKEN[3:0] status bits found in the WD_STAT_QA register in BANK0. After reading a question, the MCU calculates the Reference Answer using the logic equations shown in [图 7-10](#) and responds by writing the 8-bit answer into the WDT_ANSWER register in BANK1. A code example for Reference Answer calculation is shown in [图 7-13](#). For a typical application, changing the value of FDBK[1:0], found in the WDT_QA_CFG register in BANK1, from the default value of FDBK[1:0] = 00b is not required. However, FDBK[1:0] can be changed if a different Reference Answer calculation is needed. Question generation and answer calculations are explained in more detail in [节 7.3.9.1](#).

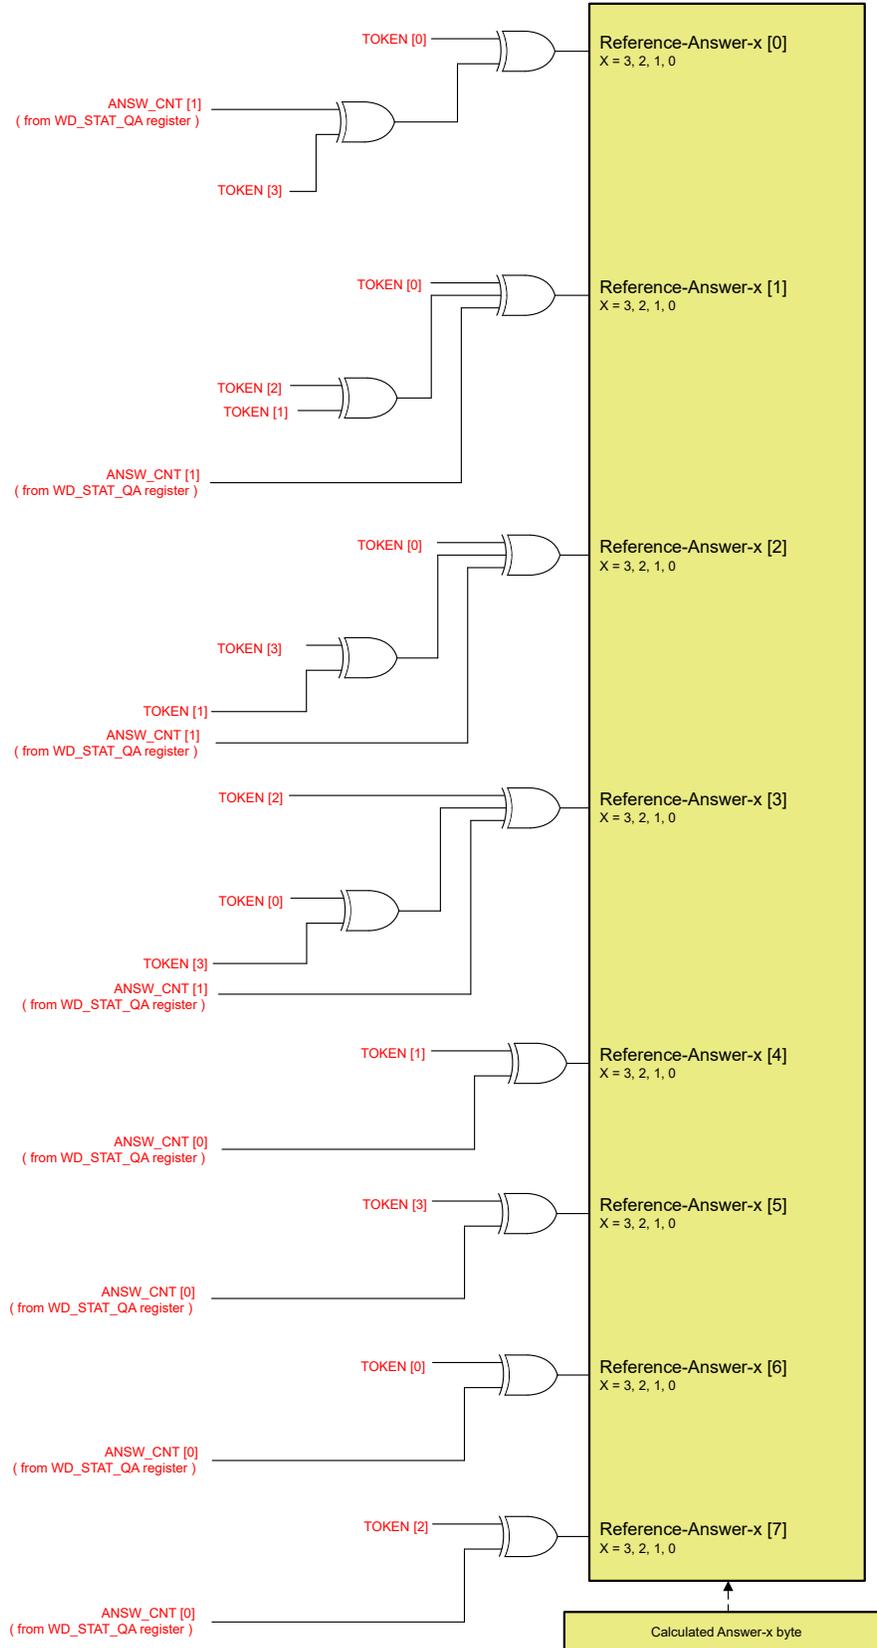


图 7-10. Watchdog Answer Calculation for FDBK[1:0] = 00b

During one “event,” the TPS389C03-Q1 generates three questions within the CLOSE window and one question within the OPEN window. The MCU must correctly read and answer all three questions within the specified CLOSE window and the question within the specified OPEN window for a “good event” to occur. At the start of an event, $ANSW_CNT[1:0] = 11b$. A correctly answered question decrements $ANSW_CNT[1:0]$ to generate the next question. Once a good event occurs, $ANSW_CNT[1:0]$ is reset to $ANSW_CNT[1:0] = 11b$, and the value of $TOKEN[3:0]$ changes to generate a new set of questions for the next event.

An incorrectly answered question increments the violation count, resets the $ANSW_CNT[1:0]$ to $ANSW_CNT[1:0] = 11b$, and restarts the CLOSE window. The maximum violation count, $MAX_VIOLATION_COUNT[2:0]$, is programmed using the WDT_CFG register in BANK1. When the violation count reaches its maximum value, the TPS389C03-Q1 WDO (latched) low, and asserts NIRQ and NRST low depending on the fault mapping. Note if NIRQ is un-mapped from watchdog fault reporting while NIRQ is asserted then NIRQ deasserts, NIRQ reasserts when re-mapped assuming the fault has not been cleared. A good event decrements the violation count if the violation count is not already equal to zero. When the watchdog enters the Idle state, the violation count is reset. When the the watchdog enters the suspend state, the violation count remains unchanged. The watchdog state diagram is illustrated in [图 7-22](#).

Within an event, the CLOSE window time is a fixed value, and does not change if all three questions are answered faster than the set time. For example, if the CLOSE window time is set to 10ms, and the three questions are correctly answered in 5ms, then the TPS389C03-Q1 waits the remaining 5ms before transitioning to the OPEN window. During the OPEN window, if the question is answered faster than the selected OPEN window time, then the TPS389C03-Q1 automatically transitions on to the next event's CLOSE window. An incorrectly answered question within either the CLOSE or OPEN windows results in the TPS389C03-Q1 restarting the CLOSE window.

7.3.9.1 Question and Token Generation

A question is presented to the MCU as a combination of the $TOKEN[3:0]$ and the $ANSW_CNT[1:0]$ status bits found in the WD_STAT_WA register. $ANSW_CNT[1:0]$ has a default value of $ANSW_CNT[1:0] = 11b$ and is decremented when a question is answered correctly. The value of $ANSW_CNT[1:0]$ is reset to $ANSW_CNT[1:0] = 11b$ when a question is answered incorrectly or a good event is completed.

The watchdog uses the Token Counter ($TOKEN_CNT[3:0]$ bits [图 7-12](#)) and a Linear Feedback Shift Register (LFSR) to generate the 4-bit $TOKEN[3:0]$. The LFSR architecture can be configured using $POLY[1:0]$ in the WDT_QA_CFG register in BANK1 as shown in [图 7-12](#). In a typical application, not necessary to change the value of $POLY[1:0]$ from the default 00b. However, $POLY[1:0]$ can be configured if a different LFSR architecture is required. The diagram illustrated in [图 7-11](#) represents how questions are generated by the watchdog.

During the watchdog startup state, the LFSR is set with the initial value $SEED[3:0]$, which is located in the WDT_QA_CFG register in BANK1. $SEED[3:0]$ has a default value of 0000b.


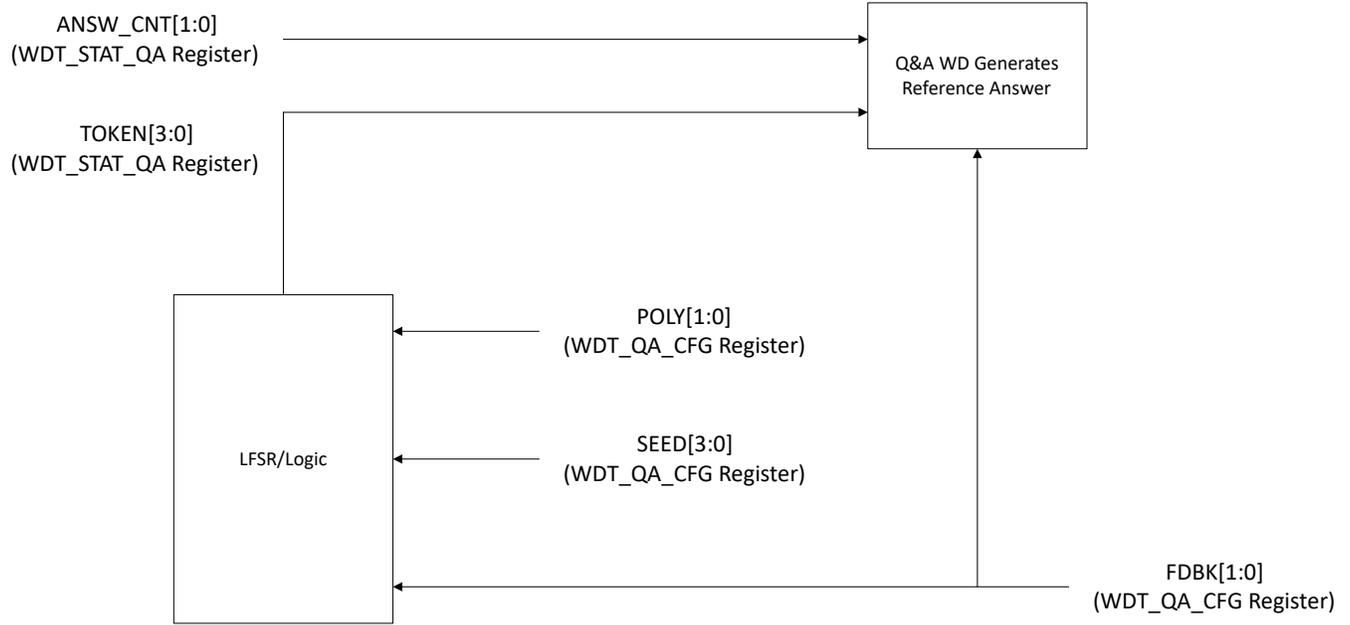


图 7-11. Watchdog Question Generation

At the end of a good event, the Token Counter is incremented, and the value of **TOKEN[3:0]** changes as a result of the mux and logic combinations shown in [图 7-12](#).

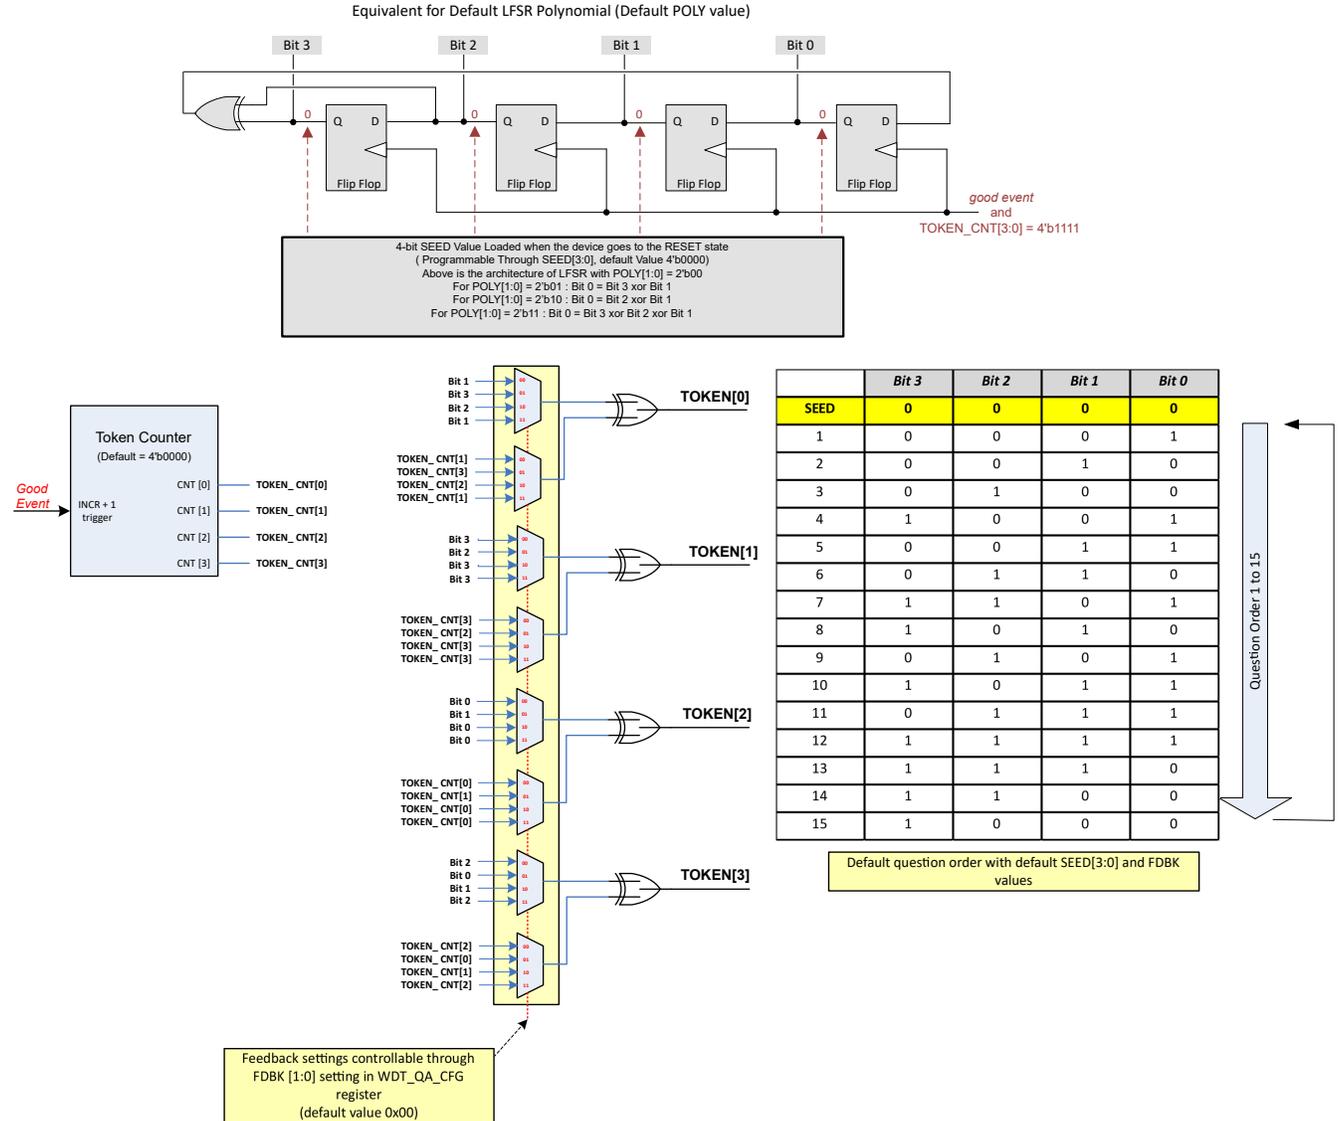

A. A value of 0000b is a special seed and equates to 0001b, including the default loading of 0000b during power up.

图 7-12. Watchdog Question and Token Generation

Once the Token Counter has reached the maximum value of 1111b, the counter resets and provide a clock pulse to the LFSR. The clock pulse left shifts the value stored in the LFSR, which changes the value of the TOKEN[3:0]. During the special case of SEED[3:0] = 0000b, Bit 0 of the LFSR is incremented the first time the Token Counter resets. Subsequent Token Counter resets provides the typical clock pulse that left-shifts the LFSR. While left shifting, the value of seed cycles through values 1 to 15 as listed in 图 7-12.

The mux devices that generate TOKEN[3:0] are configured using FDBK[1:0] (WDT_QA_CFG register in BANK1). Not necessary to change the value of FDBK[1:0] from the default value of 00b, and important to note that changing FDBK[1:0] also changes the logic equations required to calculate the reference answer. The different reference answer logic equations are listed below:

For FDBK[1:0] = 00b :

- Reference-Answer[0] = TOKEN[0] XOR (TOKEN[3] XOR ANSW_CNT[1])
- Reference-Answer[1] = TOKEN[0] XOR (TOKEN[1] XOR TOKEN[2]) XOR ANSW_CNT[1]
- Reference-Answer[2] = TOKEN[0] XOR (TOKEN[3] XOR TOKEN[1]) XOR ANSW_CNT[1]

- Reference-Answer[3] = TOKEN[2] XOR (TOKEN[0] XOR TOKEN[3]) XOR ANSW_CNT[1]
- Reference-Answer[4] = TOKEN[1] XOR ANSW_CNT[0]
- Reference-Answer[5] = TOKEN[3] XOR ANSW_CNT[0]
- Reference-Answer[6] = TOKEN[0] XOR ANSW_CNT[0]
- Reference-Answer[7] = TOKEN[2] XOR ANSW_CNT[0]

For FDBK[1:0] = 01b :

- Reference-Answer[0] = TOKEN[1] XOR (TOKEN[2] XOR ANSW_CNT[1])
- Reference-Answer[1] = TOKEN[1] XOR (TOKEN[1] XOR TOKEN[1]) XOR ANSW_CNT[1]
- Reference-Answer[2] = TOKEN[3] XOR (TOKEN[2] XOR TOKEN[1]) XOR ANSW_CNT[1]
- Reference-Answer[3] = TOKEN[1] XOR (TOKEN[3] XOR TOKEN[3]) XOR ANSW_CNT[1]
- Reference-Answer[4] = TOKEN[0] XOR ANSW_CNT[0]
- Reference-Answer[5] = TOKEN[2] XOR ANSW_CNT[0]
- Reference-Answer[6] = TOKEN[3] XOR ANSW_CNT[0]
- Reference-Answer[7] = TOKEN[1] XOR ANSW_CNT[0]

For FDBK[1:0] = 10b :

- Reference-Answer[0] = TOKEN[2] XOR (TOKEN[1] XOR ANSW_CNT[1])
- Reference-Answer[1] = TOKEN[2] XOR (TOKEN[0] XOR TOKEN[1]) XOR ANSW_CNT[1]
- Reference-Answer[2] = TOKEN[1] XOR (TOKEN[1] XOR TOKEN[1]) XOR ANSW_CNT[1]
- Reference-Answer[3] = TOKEN[0] XOR (TOKEN[2] XOR TOKEN[3]) XOR ANSW_CNT[1]
- Reference-Answer[4] = TOKEN[2] XOR ANSW_CNT[0]
- Reference-Answer[5] = TOKEN[1] XOR ANSW_CNT[0]
- Reference-Answer[6] = TOKEN[2] XOR ANSW_CNT[0]
- Reference-Answer[7] = TOKEN[0] XOR ANSW_CNT[0]

For FDBK[1:0] = 11b

- Reference-Answer[0] = TOKEN[3] XOR (TOKEN[0] XOR ANSW_CNT[1])
- Reference-Answer[1] = TOKEN[3] XOR (TOKEN[3] XOR TOKEN[1]) XOR ANSW_CNT[1]
- Reference-Answer[2] = TOKEN[1] XOR (TOKEN[0] XOR TOKEN[1]) XOR ANSW_CNT[1]
- Reference-Answer[3] = TOKEN[3] XOR (TOKEN[1] XOR TOKEN[3]) XOR ANSW_CNT[1]
- Reference-Answer[4] = TOKEN[3] XOR ANSW_CNT[0]
- Reference-Answer[5] = TOKEN[0] XOR ANSW_CNT[0]
- Reference-Answer[6] = TOKEN[1] XOR ANSW_CNT[0]
- Reference-Answer[7] = TOKEN[3] XOR ANSW_CNT[0]

Example code for answer calculation when FDBK[1:0] = 00b is included in [图 7-13](#).

Expression:

```

Locals.Answer[7] = Locals.WDT_status_Bin[2] ^ Locals.WDT_status_Bin[4],
Locals.Answer[6] = Locals.WDT_status_Bin[0] ^ Locals.WDT_status_Bin[4],
Locals.Answer[5] = Locals.WDT_status_Bin[3] ^ Locals.WDT_status_Bin[4],
Locals.Answer[4] = Locals.WDT_status_Bin[1] ^ Locals.WDT_status_Bin[4],
Locals.Answer[3] = Locals.WDT_status_Bin[2] ^ (Locals.WDT_status_Bin[0] ^ Locals.WDT_status_Bin[3]) ^ Locals.WDT_status_Bin[5],
Locals.Answer[2] = Locals.WDT_status_Bin[0] ^ (Locals.WDT_status_Bin[3] ^ Locals.WDT_status_Bin[1]) ^ Locals.WDT_status_Bin[5],
Locals.Answer[1] = Locals.WDT_status_Bin[0] ^ (Locals.WDT_status_Bin[2] ^ Locals.WDT_status_Bin[1]) ^ Locals.WDT_status_Bin[5],
Locals.Answer[0] = Locals.WDT_status_Bin[0] ^ (Locals.WDT_status_Bin[3] ^ Locals.WDT_status_Bin[5]),

Locals.Final_Answer = 128* Locals.Answer[7] + 64*Locals.Answer[6] + 32*Locals.Answer[5] + 16*Locals.Answer[4] + 8*Locals.Answer[3] + 4*Locals.Answer[2] + 2*Locals.Answer[1] + Locals.Answer[0],

Locals.Question[4*Locals.X + 0] = Locals.REG_READ[0],
Locals.Answer_val [4*Locals.X + 0] = Locals.Final_Answer
    
```

图 7-13. Watchdog Answer Calculation Code for FDBK[1:0] = 00b

7.3.9.2 Q&A Watchdog Open and Close Window Delay

TPS389C03-Q1 offers a Open and Close window delay accuracy of $\pm 5\%$, window delay can be adjusted through register 0xAC and 0xAB respectively. During a reset event, the Open and Close window delays do not change from the programmed value (default OTP or user changes). 表 7-5 lists delay time and associated register value.

表 7-5. Open and Close Window Delay

Reg Value	Time	Notes
0-31	1-32ms	1ms steps
32-63	34-96 ms	2ms steps
64-255	100-864 ms	4ms steps

The startup delay is calculated using the WDT_Startup_DLY_MULTIPLIER[2:0] (register 0xAA), Close window delay, and the Open window delay. It is important to note that changing either the Close window delay or the Open window delay changes the resulting startup delay. Use 方程式 3 to calculate total startup delay.

$$t_{\text{Startup}} = (\text{WDT_Startup_DLY_MULTIPLIER}+1) * (\text{WDT_OPEN} + \text{WDT_CLOSE}) \quad (3)$$

7.3.9.3 Q&A Watchdog Status Register

Read status register 0x37 to determine watchdog state of operation. 表 7-6 provides the operating state with its associated value. Bits ST_WDUV and ST_WDEXP of register 0x37 are cleared when read.

表 7-6. Q&A Watchdog Operating State

OPERATING STATE	STATE DESCRIPTION	VALUE
IDLE	WD is waiting for a fault to be cleared or WDE is low. The violation count is reset.	0x00
OPEN	WD open window.	0x01
CLOSE	WD close window.	0x02
START UP	WD startup window.	0x03
SUSPEND	WDE is high and another fault has asserted output pins unrelated to the WD, or I ² C MR bit is set to 1. Violation count remains unchanged.	0x04

7.3.9.4 Q&A Watchdog Timing

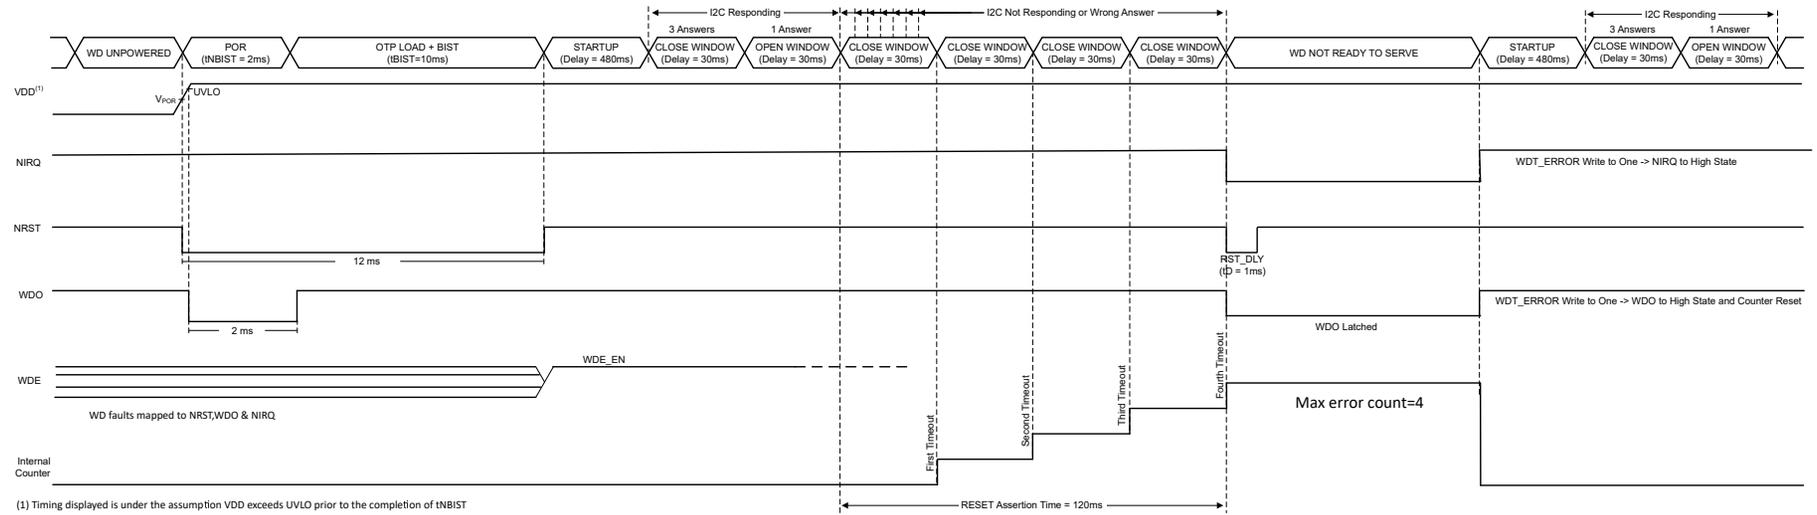


图 7-14. TPS389C03 CLOSE Window Error WDO Latched


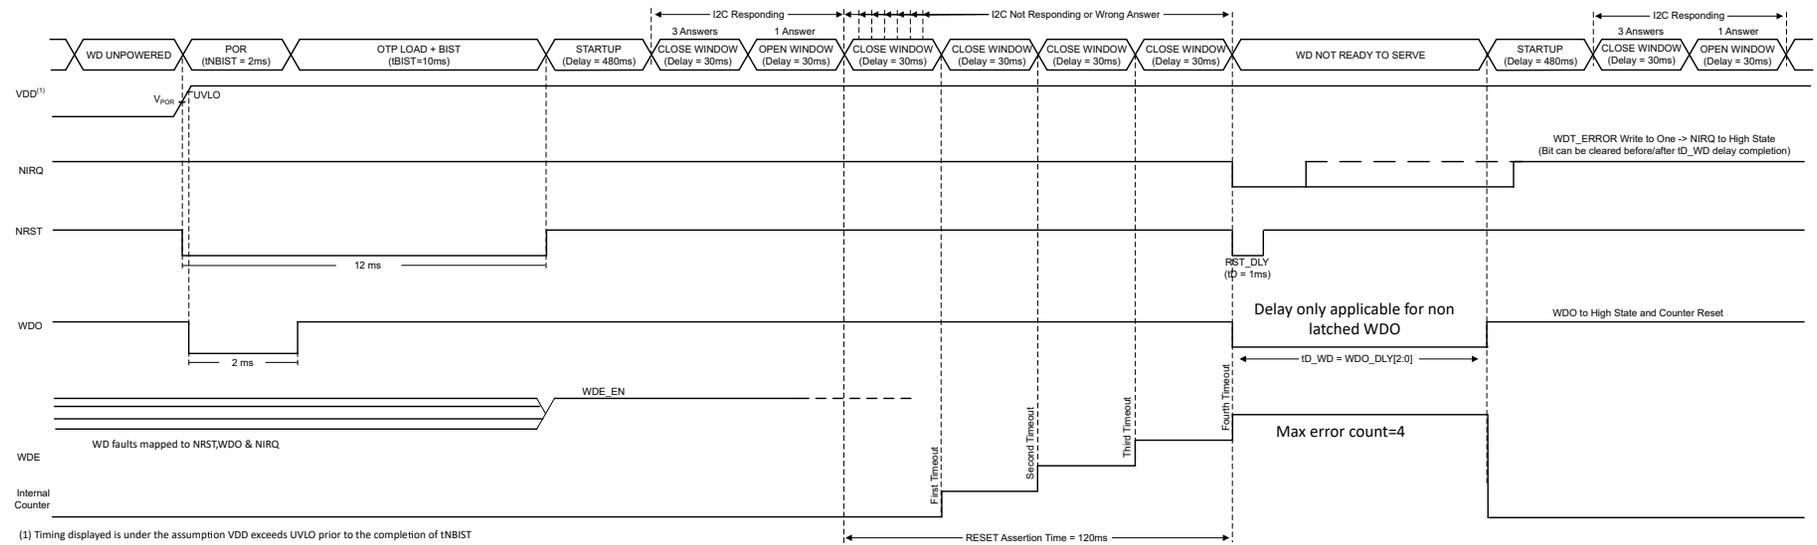


图 7-15. TPS389C03 CLOSE Window Error WDO Delay


TPS389C03-Q1

ZHCSQE8G - NOVEMBER 2022 - REVISED JANUARY 2025

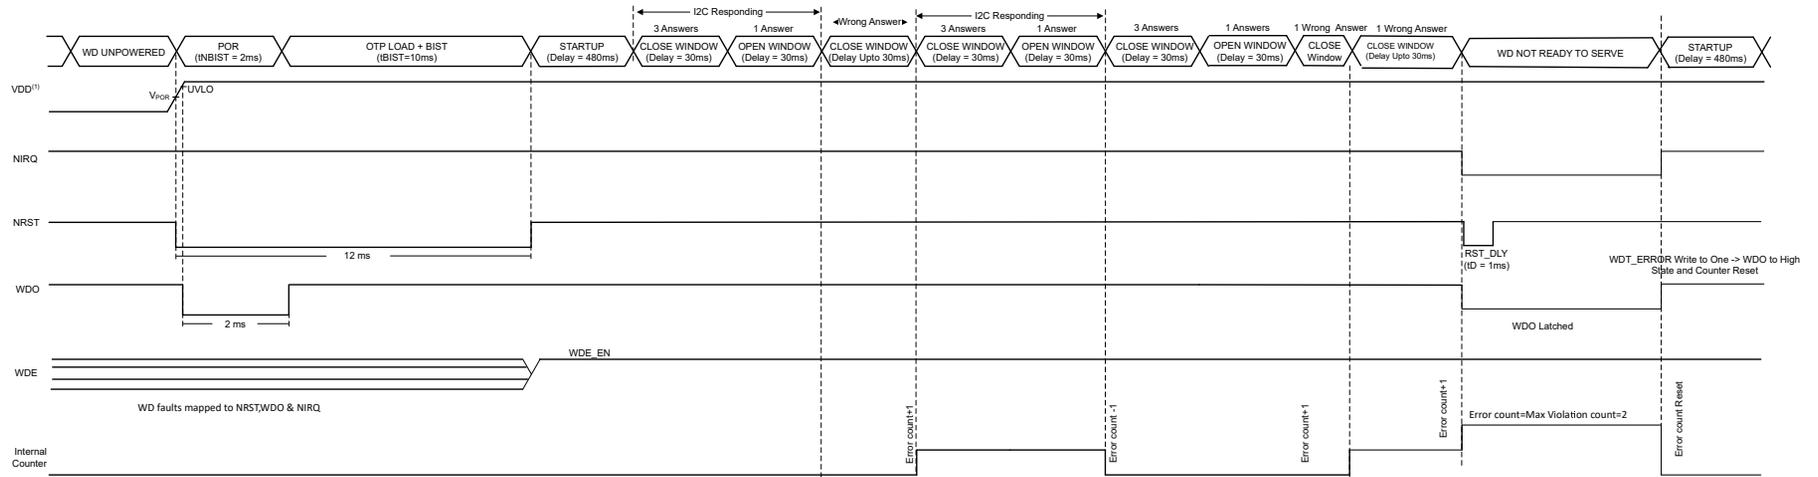

(1) Timing displayed is under the assumption VDD exceeds UVLO prior to the completion of tNBIST

图 7-16. TPS389C03 CLOSE Window Error WDO Delay with Max Violation Count Reached

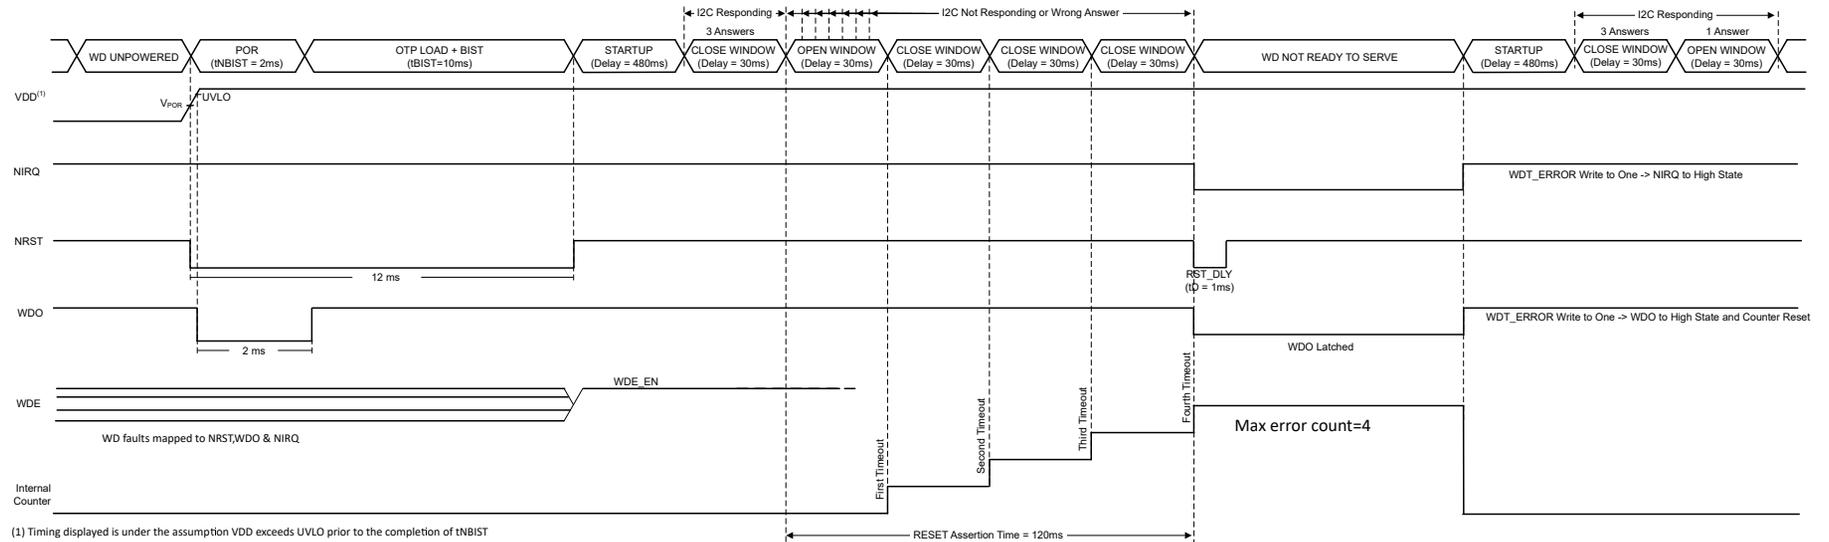

(1) Timing displayed is under the assumption VDD exceeds UVLO prior to the completion of tNBIST

图 7-17. TPS389C03 OPEN Window Error WDO Latched

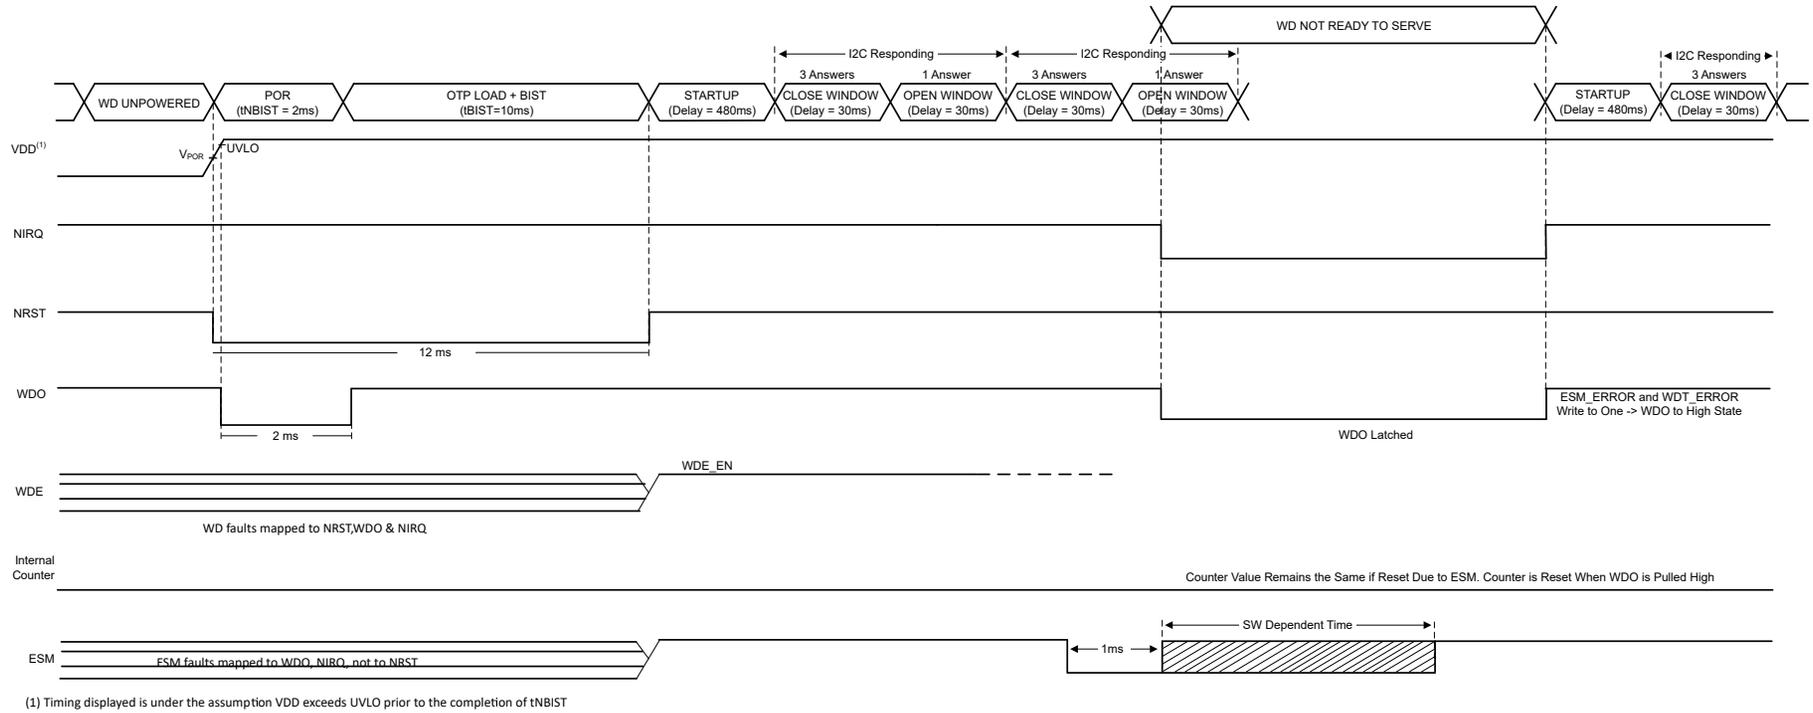


图 7-18. TPS389C03 ESM Error with No WD Faults

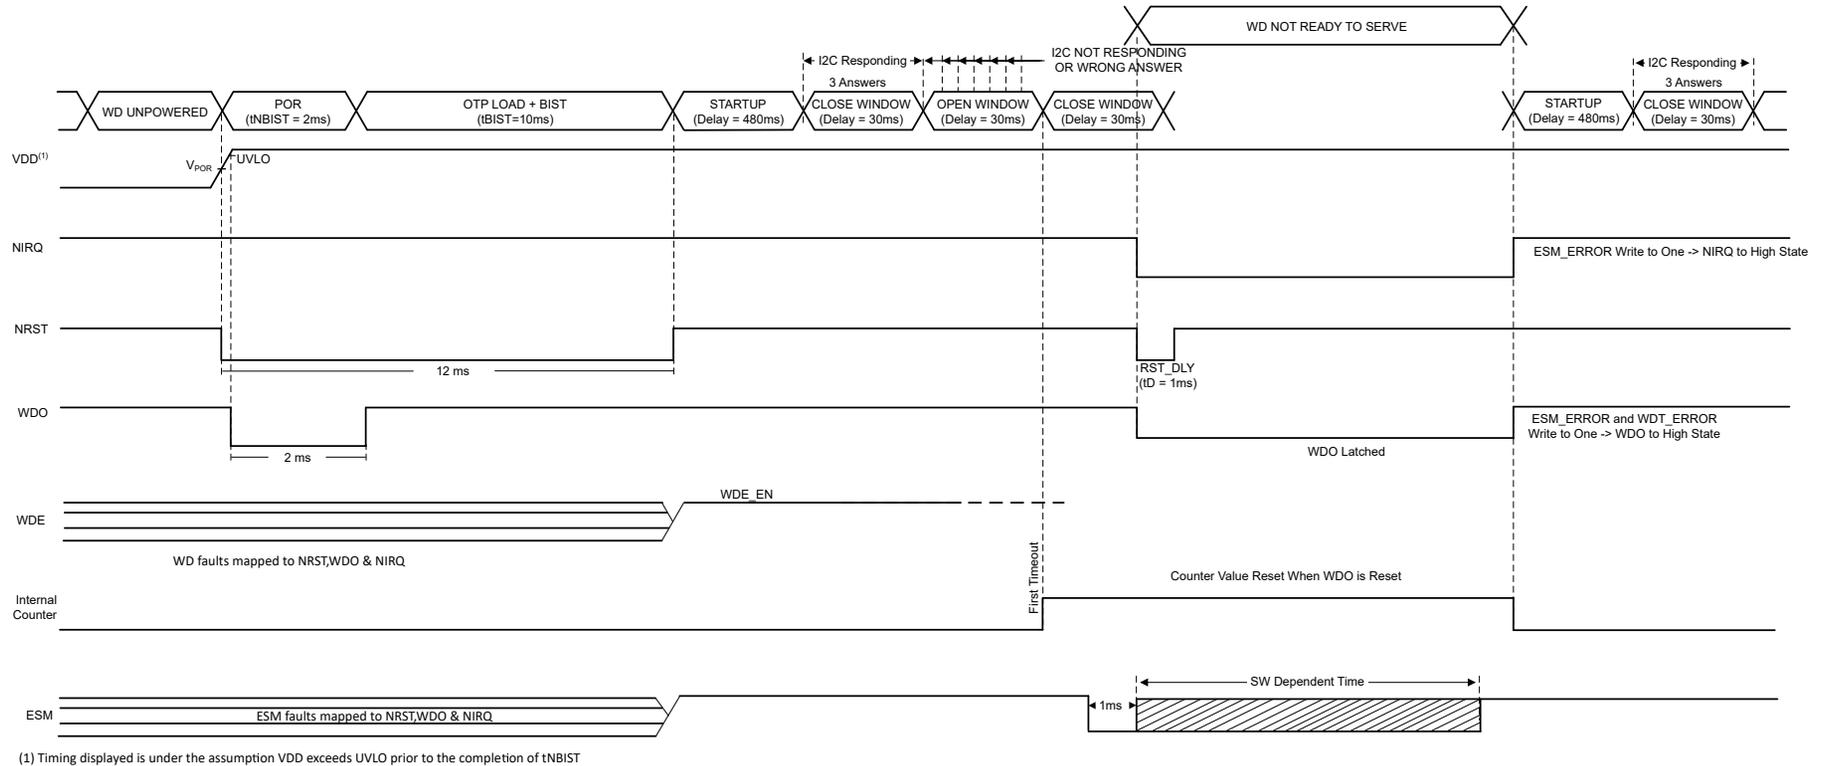


图 7-19. TPS389C03 ESM Error After WD Time-out

7.3.9.5 Q&A Watchdog State Machine and Test Program

The flowchart shown in [图 7-20](#) and [图 7-21](#) describes the operation of the Q&A watchdog with an MCU. The associated state machine diagram drawn in [图 7-22](#) is referenced to [表 7-6](#) and describes the transition between states for the Q&A watchdog.

The single test program in [图 7-23](#) to [图 7-25](#) demonstrates how the watchdog can be tested.

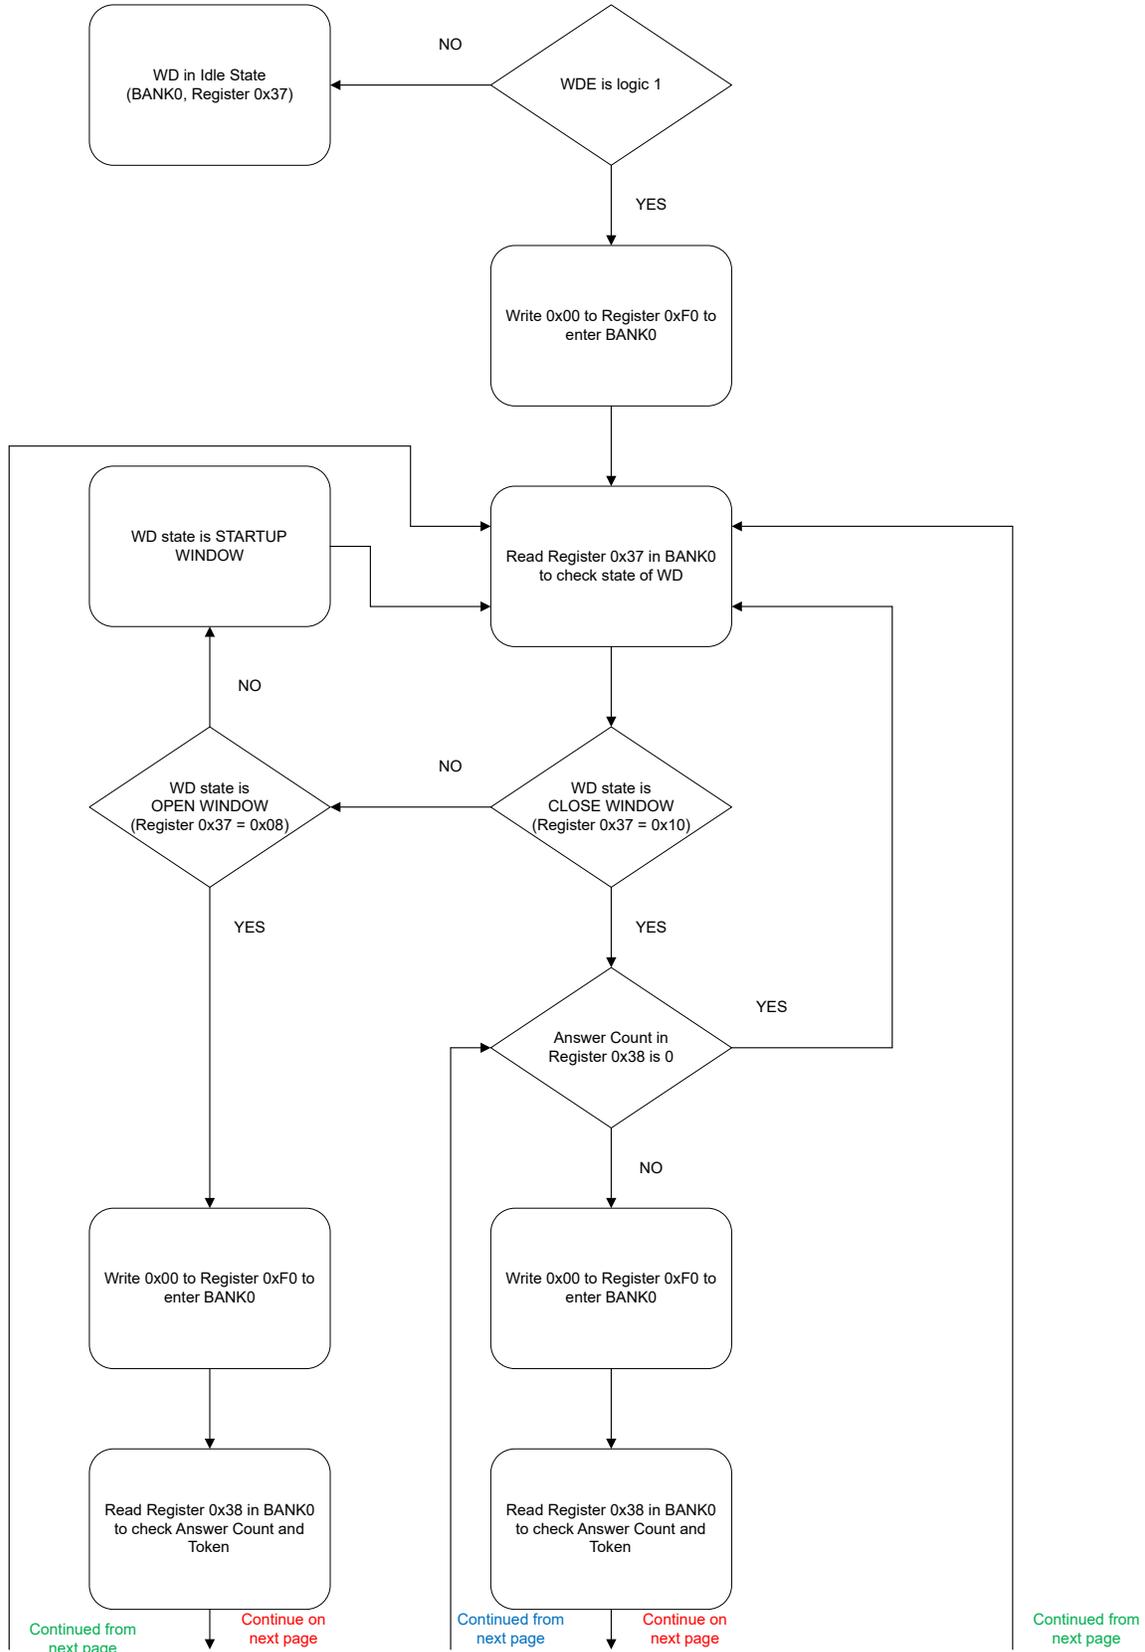


图 7-20. Q&A Watchdog Operation Flowchart Page 1

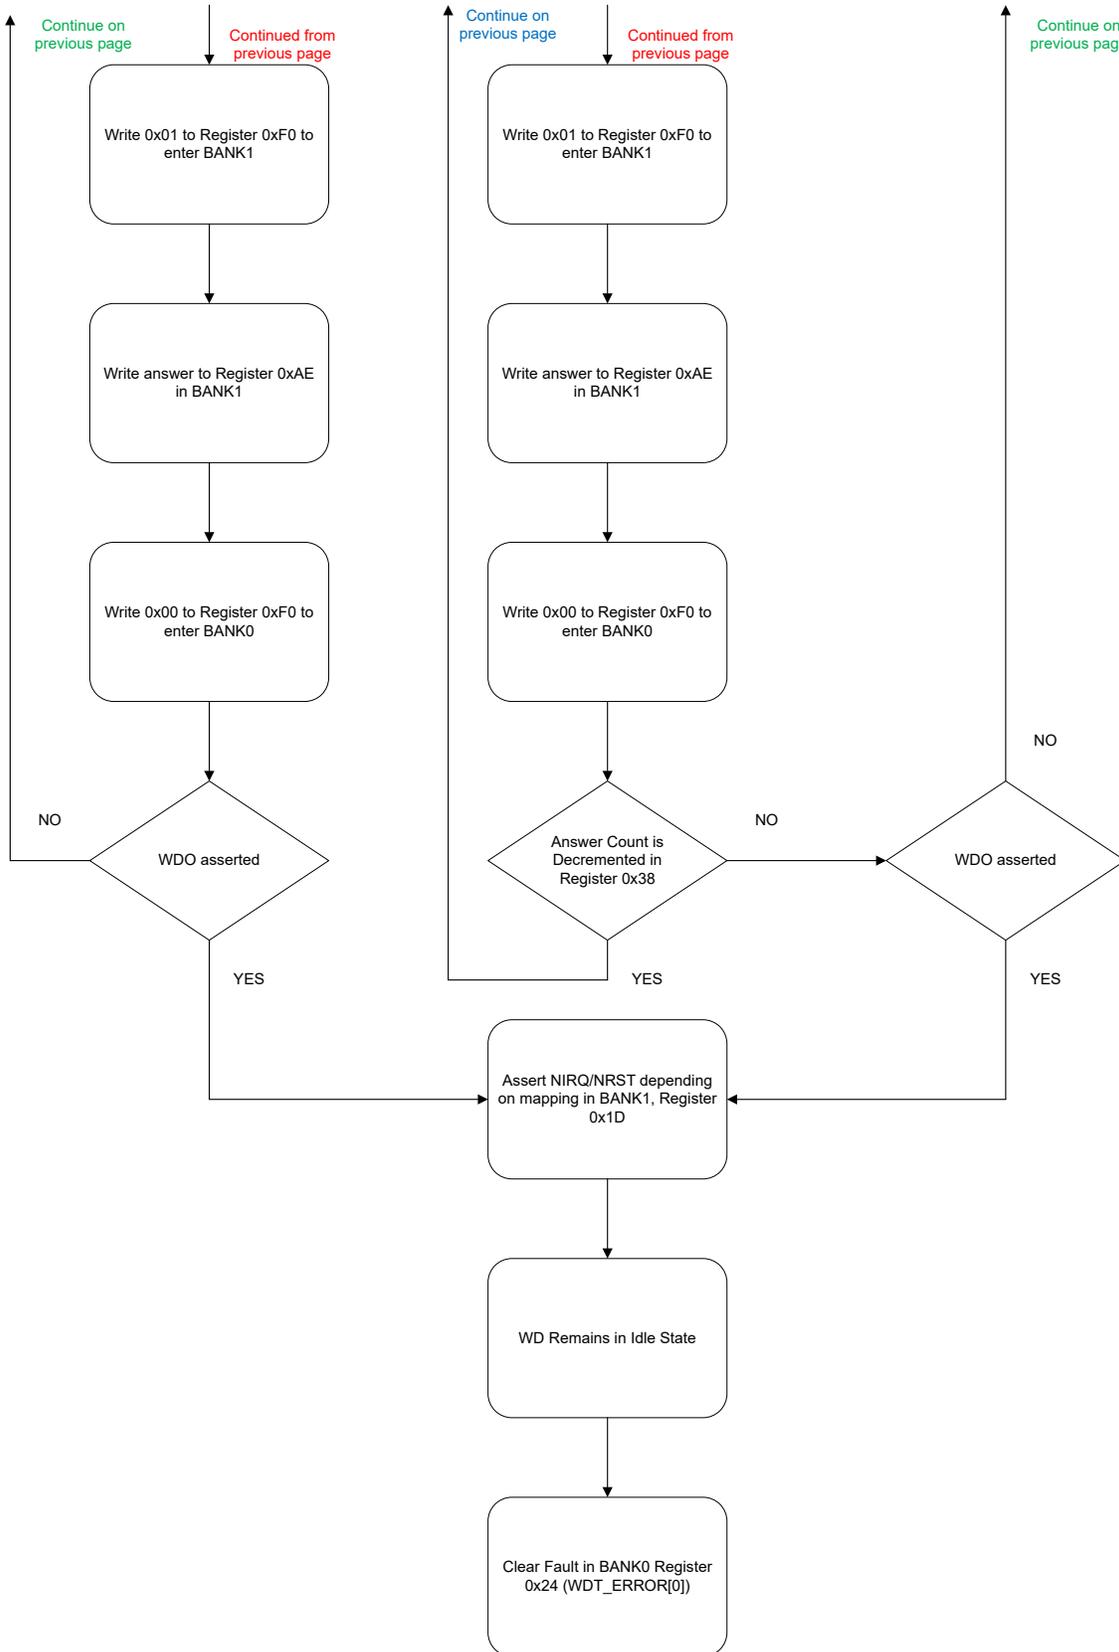


图 7-21. Q&A Watchdog Operation Flowchart Page 2

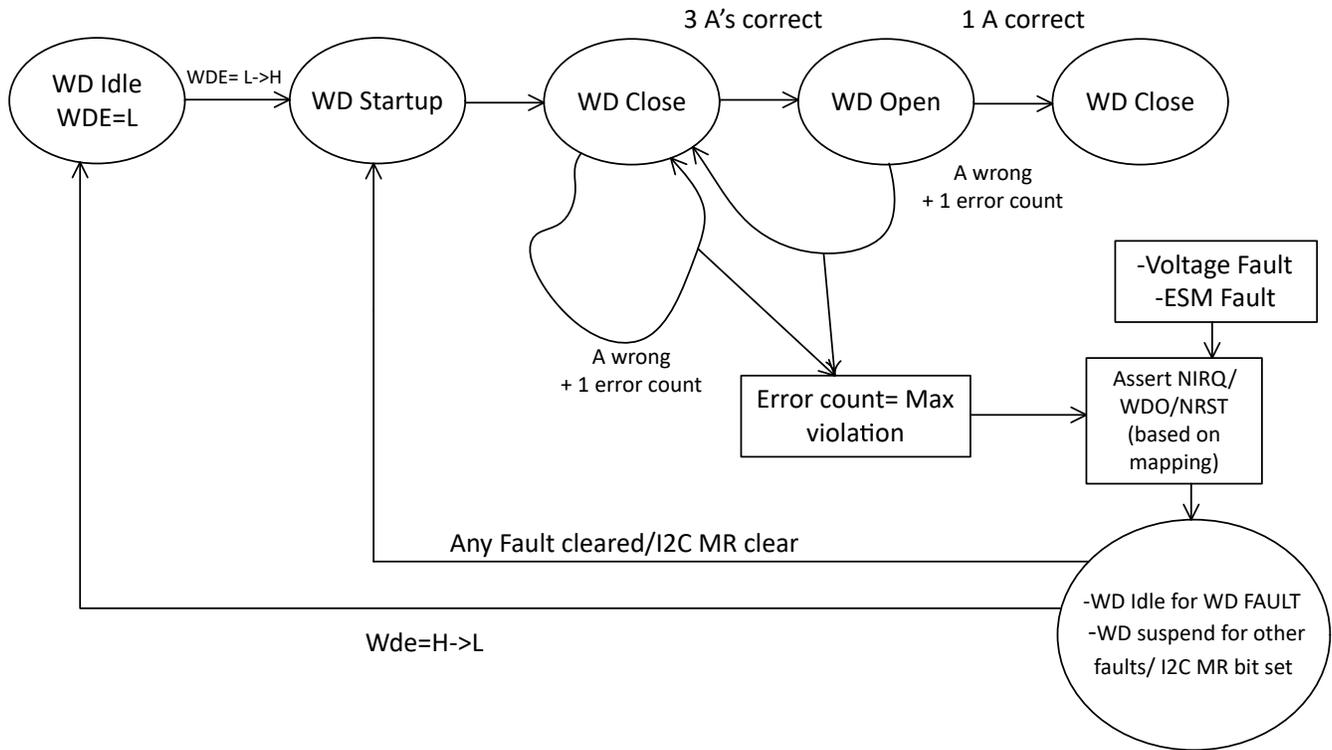


图 7-22. Q&A Watchdog State Diagram

Main (55) Label Switching to Bank 1 F0 = 1 WDT Config AA Open Window Timeout AB Close Window Timeout AC		WDT configuration. 0xAA → WDT_DLY and Violation Count 0xAB → Open window timeout 0xAC → Close window timeout. Can be skipped to use default values	Power up the device and bring VMONs within threshold levels before power up Action, AF I2C Write Registers.vi Action, AF I2C Write Registers.vi Action, AF I2C Write Registers.vi Action, AF I2C Write Registers.vi TimeInterval(0.1) Call SMU Force voltage in <Current File>
Wait WD Enable Input = High WD_EN		Wait for few ms and Pull WDE pin high	Call SMU Force voltage in <Current File>
Switch to Bank 0 F0 WDT_STAT // Checking for startup timeout REG READ Readback WDT_STAT until STARTUP window expires. Goto		Switch to Bank 0 and read 0x37 to check the state of WD. Keep reading in loop till WD state goes to close window.(0x37 = 0'd24)	Action, AF I2C Write Registers.vi Action, AF I2C Read Registers.vi Goto REG READ Add String Forcing Condition Locals.X = 0; Locals.X < 100; Locals.X += 1

图 7-23. Q&A Watchdog Test Program Page 1

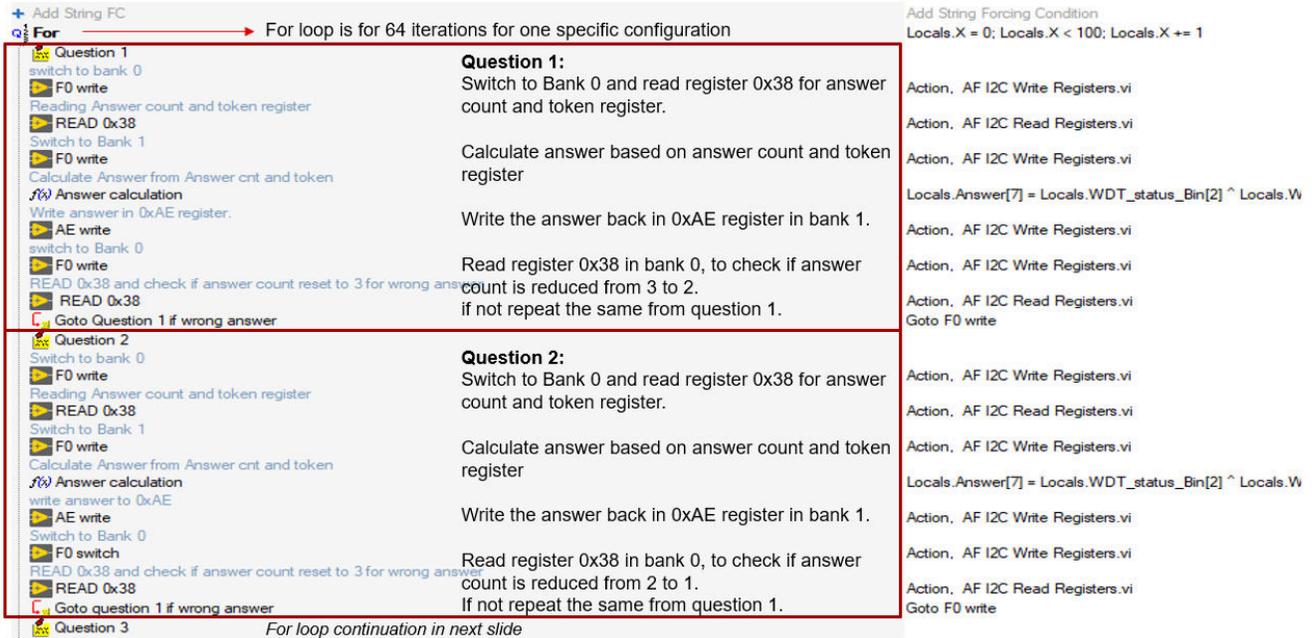


图 7-24. Q&A Watchdog Test Program Page 2

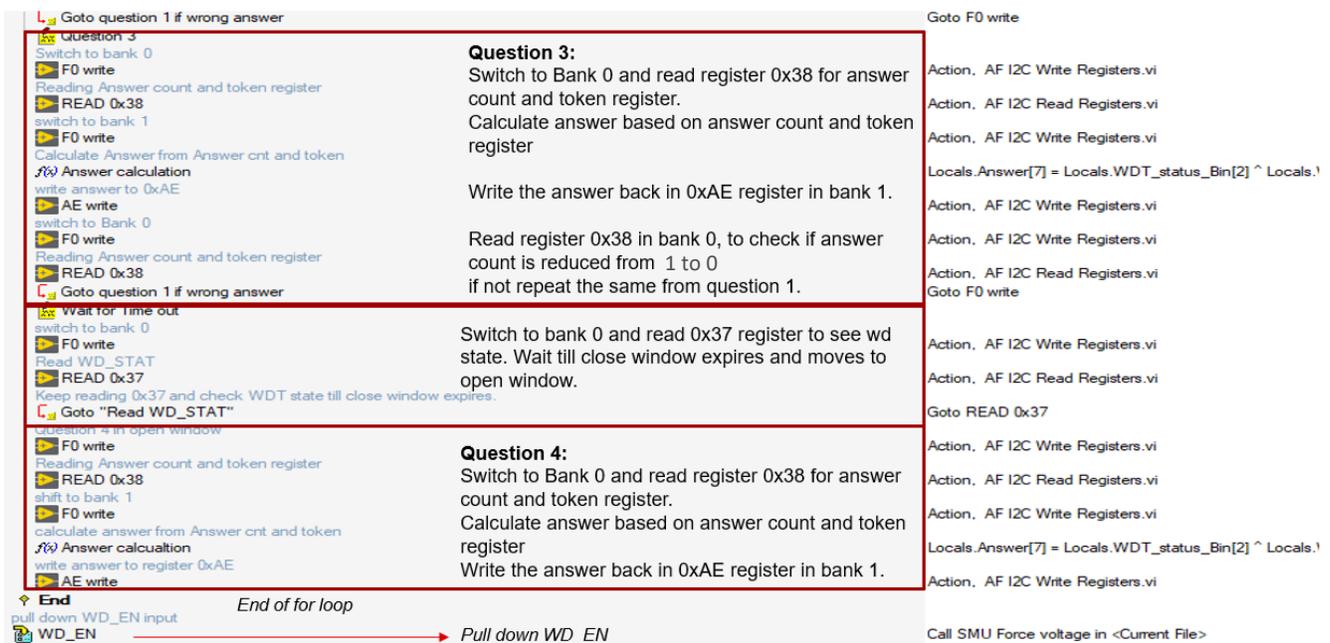


图 7-25. Q&A Watchdog Test Program Page 3

7.3.10 Error Signal Monitoring (ESM)

The Error Signal Monitoring (ESM) pin is used to monitor the error output of the SOC or microcontroller. The internal types of errors that need to happen to assert the ESM pin low can be configured in the microcontroller. Once the ESM pin is asserted low, the actions or results of the microcontroller cannot be relied on. The ESM pin has a programmable threshold delay (Bank 1_0x09E_Threshold) to prevent unintended false trips. The ESM pin also has a configurable debounce (Bank 1_0x09F_ESM_DEB). When the ESM pin of TPS389C03-Q1 is asserted low an ESM_ERROR is flagged by a bit located in the INT_VENDOR register. The ESM pin is pulled

low by default through an internal 100k pull-down resistance, thus an ESM_ERROR is flagged by default if no external source is applied to the ESM pin. Note the pull down resistor is only active when VDD has been applied, otherwise the pin is left floating.

表 7-7. ESM Threshold Delay Time

REG VALUE	TIME	NOTES
0-31	1-32ms	1ms steps
32-63	34-96 ms	2ms steps
64-255	100-864 ms	4ms steps

The configurations listed in 表 7-8 to 表 7-14 demonstrate how TPS389C03-Q1 responds when mapped to different fault outputs such as NRST, NIRQ and WDO. Faults mapped to NIRQ are always latched behavior. Note if NIRQ is un-mapped from ESM while NIRQ is asserted (latched) then NIRQ de-asserts, NIRQ re-asserts when re-mapped assuming the ESM_ERROR bit was not cleared. Faults mapped to WDO can be latched or have an associated WDO delay based on the OTP setting. If the ESM function is being used as a reset method, then it is recommended to map ESM to WDO to avoid NRST toggling. If WDE is pulled low in operation, it is recommended to have ESM fault mapped only to NIRQ.

When ESM is mapped to WDO, an ESM fault, with the resulting WDO assertion, is not flagged in the WDT_ERROR bit. However, it is recommended to write 1 to the WDT_ERROR bit and the ESM_ERROR bit found in the INT_VENDOR (表 8-11) register to clear all of the latched outputs. The WDO output can also be de-asserted by toggling the WDE pin. Note if ESM is un-mapped from WDO while WDO is asserted (latched), WDO stays asserted until write 1 to the WDT_ERROR bit and the ESM_ERROR bit.

表 7-8. ESM Mapped to WDO, NIRQ, and NRST

	WDE	WDO	NIRQ	NRST
ESM fault	High	After ESM delay, WDO asserted and ESM fault set. I2C write to clear and deassert.	After ESM delay, NIRQ asserted and ESM fault set. I2C write to clear and deassert.	After ESM delay, NRST asserted and deasserted after reset delay. ESM pin state not checked until WDO is deasserted.
	Low	ESM fault not asserted WDO.	After ESM delay, NIRQ asserted and ESM fault set. I2C write to clear and deassert.	After ESM delay, NRST asserted and deasserted after reset delay. ESM pin state checked after ESM delay. If ESM stays low, NRST toggles.

表 7-9. ESM Mapped to NIRQ and NRST

	WDE	WDO	NIRQ	NRST
ESM fault	High	Not asserted.	After ESM delay, NIRQ asserted and ESM fault set. I2C write to clear and deassert.	After ESM delay, NRST asserted and deasserted after reset delay. ESM pin state checked after ESM delay. If ESM stays low, NRST toggles.
	Low	Not asserted.	After ESM delay, NIRQ asserted and ESM fault set. I2C write to clear and deassert.	After ESM delay, NRST asserted and deasserted after reset delay. ESM pin state checked after ESM delay. If ESM stays low, NRST toggles.

表 7-10. ESM Mapped to WDO and NIRQ

	WDE	WDO	NIRQ	NRST
ESM fault	High	After ESM delay, WDO asserted and ESM fault set. I2C write to clear and deassert.	After ESM delay, NIRQ asserted and ESM fault set. I2C write to clear and deassert.	Not asserted.
	Low	Not asserted.	After ESM delay, NIRQ asserted and ESM fault set. I2C write to clear and deassert.	Not asserted.

表 7-11. ESM Mapped to WDO and NRST

	WDE	WDO	NIRQ	NRST
ESM fault	High	After ESM delay, WDO asserted and ESM fault set. I2C write to clear and deassert.	Not asserted.	After ESM delay, NRST asserted and deasserted after reset delay. ESM pin state not checked until WDO is deasserted.
	Low	Not asserted.	Not asserted.	After ESM delay, NRST asserted and deasserted after reset delay. ESM pin state checked after ESM delay. If ESM stays low NRST toggles.

表 7-12. ESM Mapped to NRST

	WDE	WDO	NIRQ	NRST
ESM fault	High	Not asserted.	Not asserted.	After ESM delay, NRST asserted and deasserted after reset delay. ESM pin state checked after ESM delay. If ESM stays low NRST toggles.
	Low	Not asserted.	Not asserted.	After ESM delay, NRST asserted and deasserted after reset delay. ESM pin state checked after ESM delay. If ESM stays low NRST toggles.

表 7-13. ESM Mapped to NIRQ

	WDE	WDO	NIRQ	NRST
ESM fault	High	Not asserted.	After ESM delay, NIRQ asserted and ESM fault set. I2C write to clear and deassert.	Not asserted.
	Low	Not asserted.	After ESM delay, NIRQ asserted and ESM fault set. I2C write to clear and deassert.	Not asserted.

表 7-14. ESM Mapped to WDO

	WDE	WDO	NIRQ	NRST
ESM fault	High	After ESM delay, WDO asserted and ESM fault set. I2C write to clear and deassert.	Not asserted.	Not asserted.
	Low	ESM fault not asserted WDO.	Not asserted.	Not asserted.

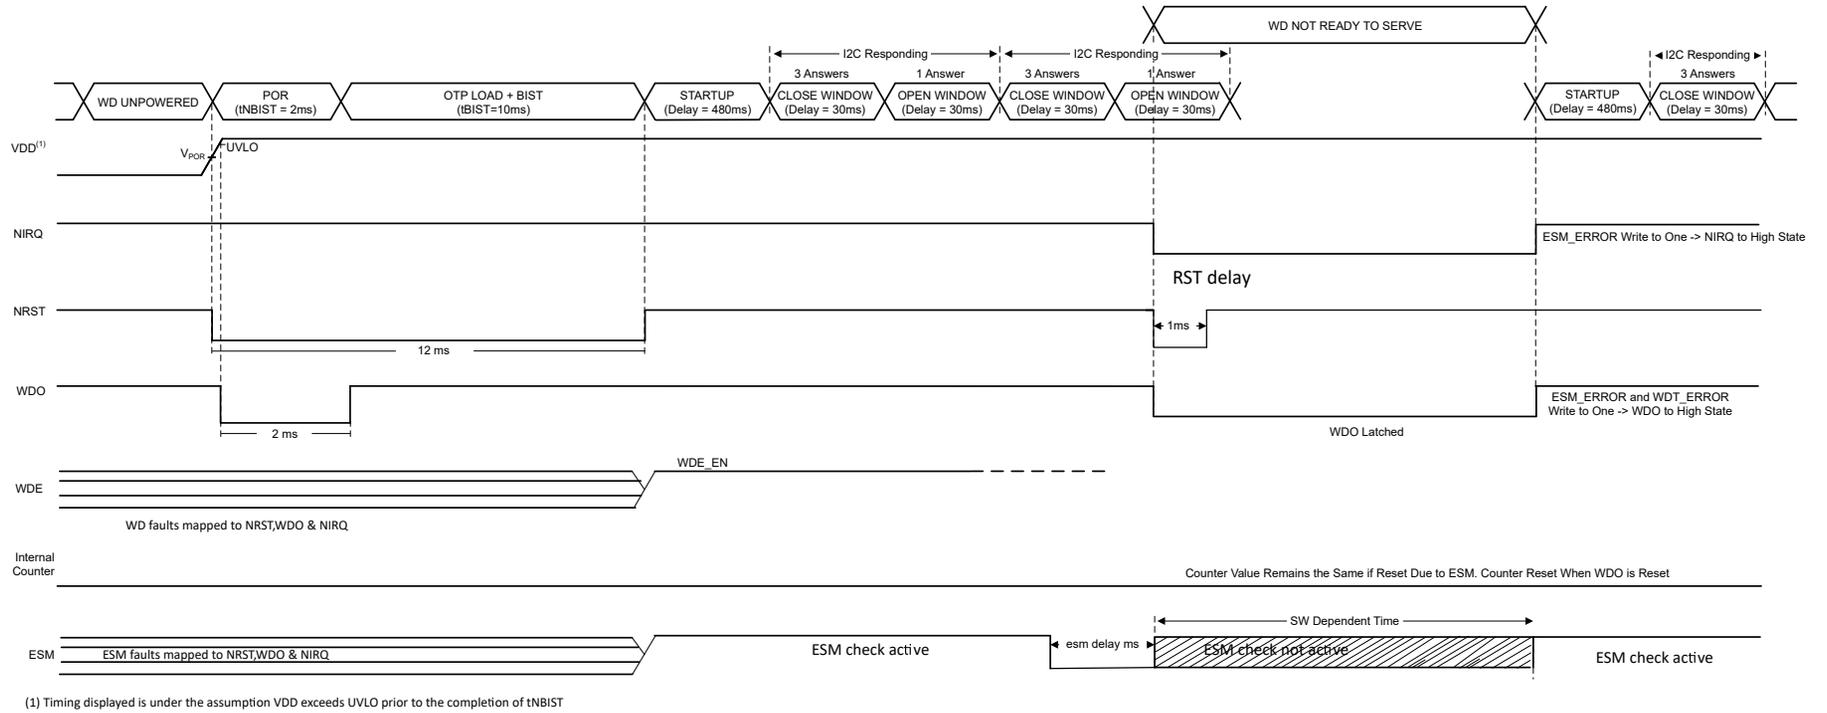


图 7-27. ESM Fault (WD Enabled)

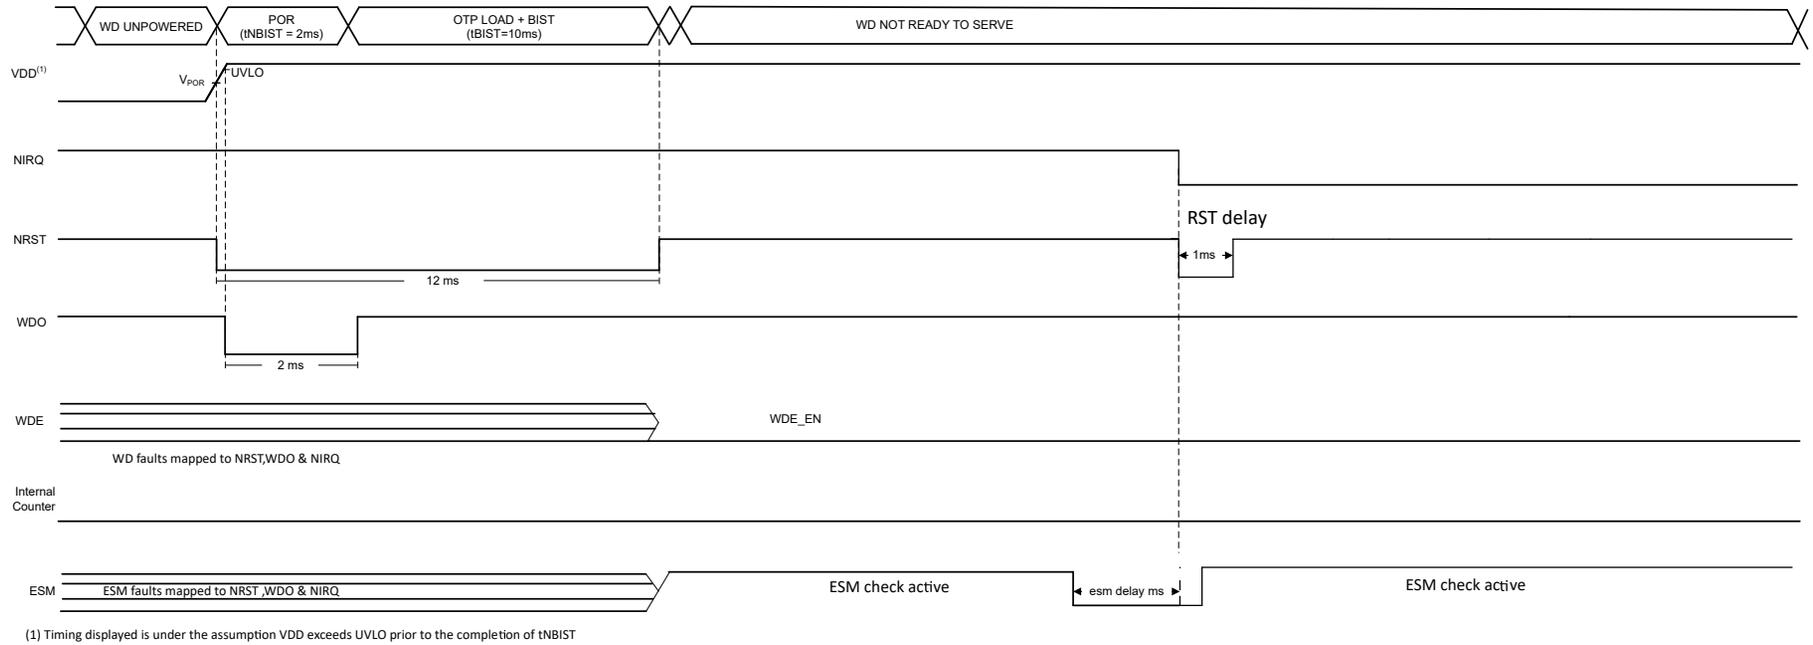


图 7-28. Transient ESM Fault (WD Disabled)

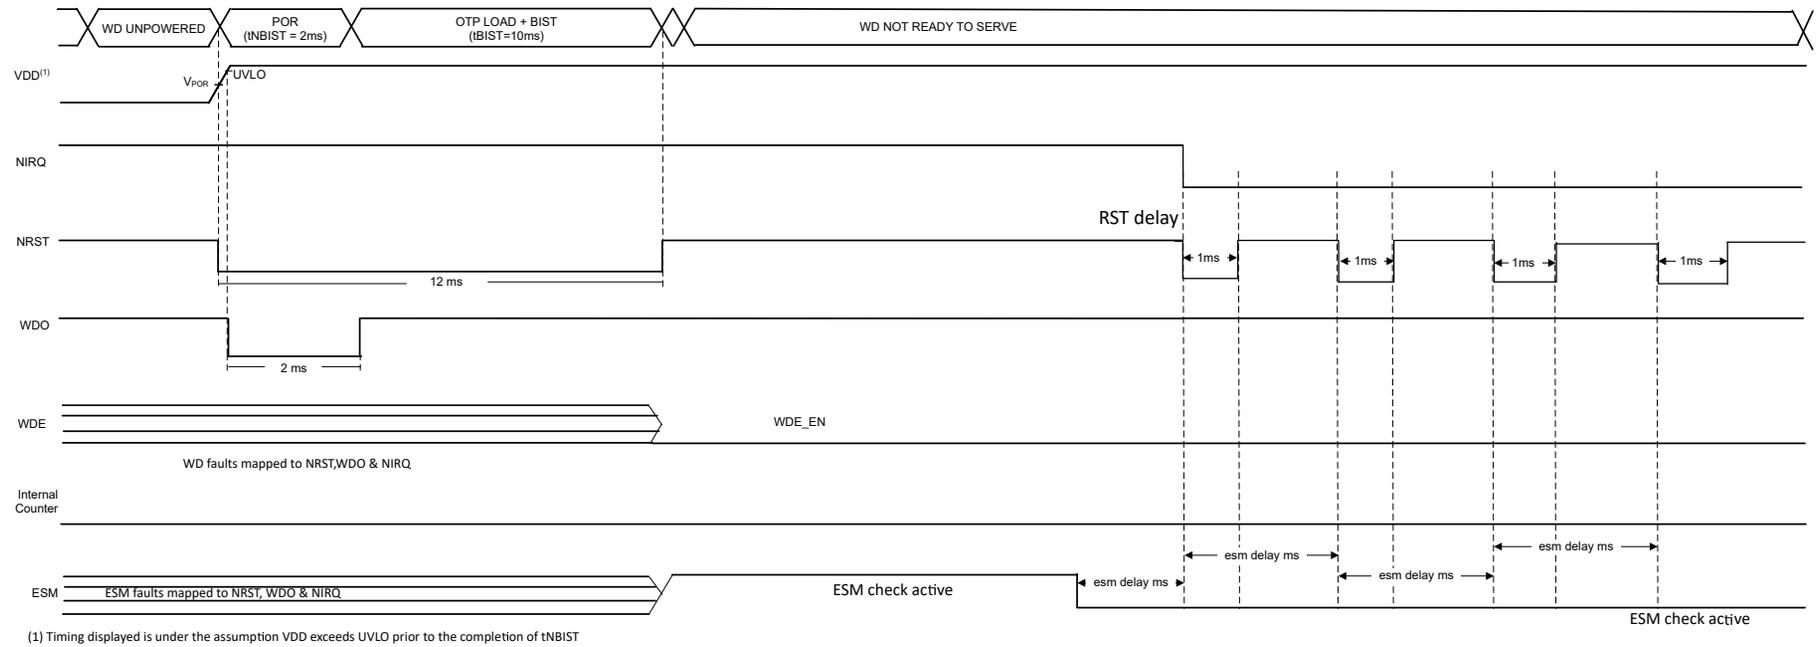


图 7-29. Permanent ESM Fault (WD Disabled)

7.3.11 Register Protection

TPS389C03-Q1 features register protection enabled through registers PROT1 0xF1h and PROT2 0xF2h. Registers PROT1 and PROT2 composition is shown in table [表 7-15](#)

表 7-15. PROT1 Register Description

Register	Bit	7	6	5	4	3	2	1	0
PROT1 (0xF1)	R/W	RSVD	RSVD	WRKC	RSVD	CFG	IEN	MON	SEQ
PROT2 (0xF2)	R/W	RSVD	RSVD	WRKC	RSVD	CFG	IEN	MON	SEQ

To write-protect a register group, the host must set the relevant bit in both registers PROT1 and PROT2. Register groups are split up into categories as shown in [表 7-16](#). Register groups are only applicable to registers in Bank One. Registers concerning ESM and Watchdog are not protected by any register group as seen in [表 7-16](#).

表 7-16. Write-Protect Register Group Summary

Register name	PROT group	Register name	PROT group
VMON_CTL	WRKC	ESM	N/A
VMON_MISC	CFG	TI_CONTROL	N/A
TEST_CFG	CFG	AMSK_ON	IEN
IEN_UVHP	IEN	AMSK_OFF	IEN
IEN_UVLP	IEN	SEQ_TOUT_MSB	SEQ
IEN_OVHP	IEN	SEQ_TOUT_LSB	SEQ
IEN_OVLP	IEN	SEQ_UP_THLD	SEQ
IEN_CONTROL	IEN	SEQ_DN_THLD	SEQ
IEN_TEST	IEN	WDT_CFG	N/A
IEN_VENDOR	IEN	WDT_CLOSE	N/A
VIN_CH_EN	CFG	WDT_OPEN	N/A
VRANGE_MULT	CFG	WDT_QA_CFG	N/A
MON2 settings	MON[2]	WDT_ANSWER	N/A
MON3 settings	MON[3]	BANK_SEL	N/A
MON4 settings	MON[4]		

If individual monitor protection is desired this can be achieved through the use of register PROT_MON (0xF3) as seen in figure [表 7-17](#).

表 7-17. PROT_MON Register Description

Register	Bit	7	6	5	4	3	2	1	0
PROT_MON (0xF3)	R/W	RSVD	RSVD	RSVD	RSVD	MON[4]	MON[3]	MON[2]	RSVD

Register PROT_MON selects the monitor channel which is protected once PROT1 AND PROT2 registers are written to protect the MON group. Register PROT_MON is set to a value of 0xFF by default, this makes it such that when MON protection is applied through registers PROT1 and PROT2 the protection is applied to all monitors. If a user wishes to not apply protection to a specific monitor channel then the user must set the bit corresponding to the monitor channel in question to a value of 0 prior to PROT1 and PROT2 being set.

At start up registers PROT1 and PROT2 are set to a default value of 0x00. Once a bit is set to 1 in PROT1 or PROT2 the bit becomes read-only and cannot be cleared by a write command. To reset PROT1 and PROT2 the user can utilize RESET_PROT, bit 3 of the VMON_CTL register. RESET_PROT is part of the WRKC register set

therefore if the user desires to use RESET_PROT's functionality WRKC protection must not be included when configuring PROT1 and PROT2 protection registers. If WRKC protection is enabled when configuring PROT1 and PROT2 then protection registers can only be reset through a device power cycle.

7.4 Device Functional Modes

The TPS389C03-Q1 has three key functional modes that the device enters over the course of operation. When no power is applied to the device, it is in the OFF state where the monitoring channels and the watchdog is inactive. Once VDD is greater than UVLO, the device enters the ACTIVE state after the BIST and OTP loading have finished. During the ACTIVE state, the device is capable of full monitoring and the watchdog is active. If a BIST failure, double-error detect (DED) during the OTP loading, thermal shutdown, or an address pin fault occurs, the device enters the FAILSAFE mode. Once in FAILSAFE, NRST and NIRQ are asserted low. To leave the FAILSAFE state, power to the TPS389C03-Q1 must be cycled. Reading register 0x30 in BANK0 provides information on the state of the device. See 表 8-12 for details. The state diagram drawn in 图 7-30 follows the progression through each state.

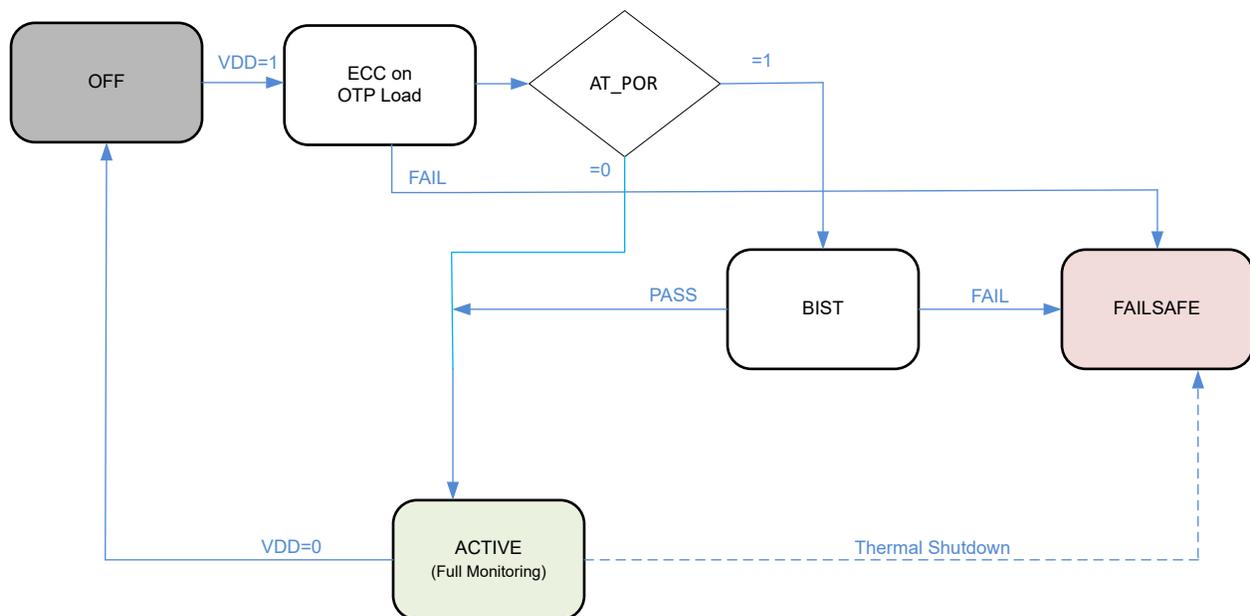


图 7-30. TPS389C03-Q1 State Diagram

7.4.1 Built-In Self Test and Configuration Load

Built-In Self Test (BIST) is performed at Power On Reset (POR), if TEST_CFG.AT_POR=1.

Configuration load from OTP is assisted by ECC (supporting SEC-DED). This is to protect against data integrity issues and to maximize system availability.

During BIST, NIRQ is de-asserted (asserted in case of failure), input pins are ignored, and the I²C block is inactive with SDA and SCL de-asserted. The BIST includes device testing to meet the Technical Safety Requirements. Once BIST is completed without failure, I²C is immediately active and the device enters the ACTIVE state after loading the configuration data from OTP. If BIST fails and/or ECC reports Double-Error Detection (DED), NIRQ is asserted low, NRST is asserted low, the device enters FAILSAFE state. The TEST_INFO register found in 表 8-13 provides information on the test coverage and results. Additionally, Watchdog and ESM are covered in Logic BIST as well and verified in BIST_L.

The detailed behavior upon success/failure of the BIST is controlled by INT_TEST and IEN_TEST registers. Reporting of the BIST results is carried out through:

- NIRQ pin: pulled low depending on the test result and BIST_C and BIST bits in IEN_TEST

- I_BIST_C and BIST bits in INT_TEST register depending on IEN_TEST settings
- VMON_STAT.ST_BIST_C register bit
- TEST_INFO[3:0] register bits

7.4.1.1 Notes on BIST Execution

Upon POR the TPS389C03-Q1 needs to make a decision whether to run BIST or not, based on the value of the TEST_CFG.AT_POR register bit. Assuming that ECC on this register is performed after BIST has checked the ECC logic itself, it is not possible to guarantee its data integrity before running BIST.

BIST can be triggered manually during normal operation by writing 1 to the ENTER_BIST bit found in BANK1 Register 0x9F. It is not recommended to use BIST when faults are asserted by the TPS389C03-Q1.

7.4.2 TPS389C03-Q1 Power ON

When the TPS389C03-Q1 is powered ON, BIST is optionally executed (depending on TEST_CFG.AT_POR register bit); I²C and fault reporting (through NIRQ) become active as soon as BIST is complete and configuration is loaded from OTP (assisted by ECC, supporting SEC-DED).

The details of the configuration load ECC and BIST results are reported in TEST_INFO register.

Upon detection of the VDD rising edge past UVLO, the TPS389C03-Q1 starts the sequence timeout timer. The UV faults are masked until the sequence timeout has expired.

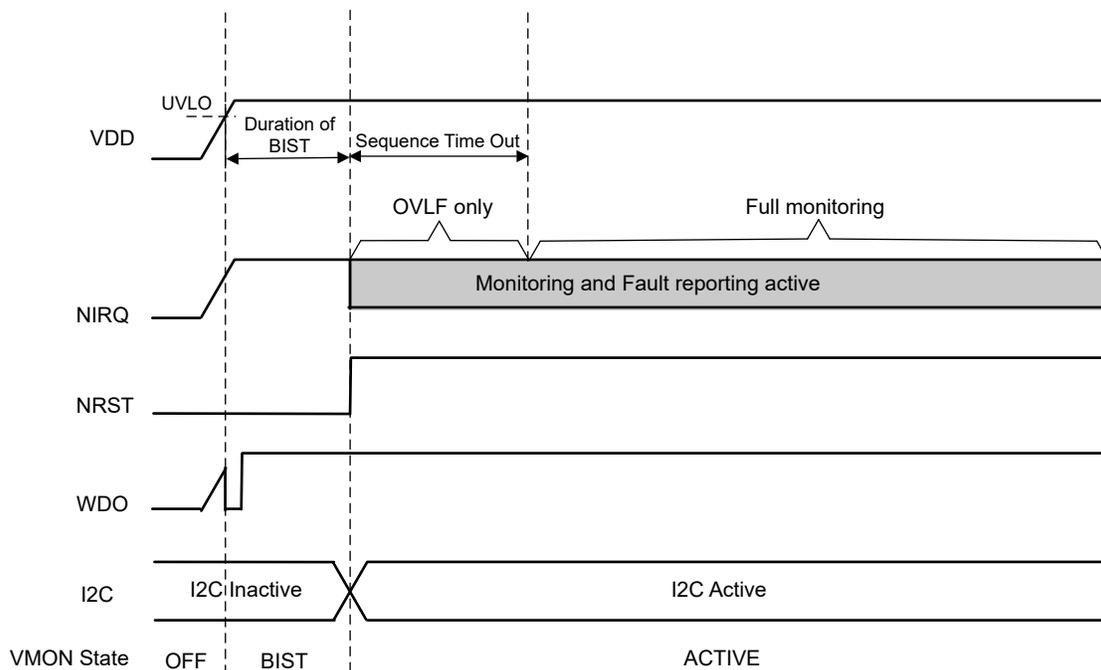


图 7-31. TPS389C03-Q1 Power ON Signaling and Internal States

BIST completion can be detected through interrupt or register polling:

- Interrupt: INT_TEST.I_BIST_C flag is set and NIRQ is asserted if IEN_TEST.BIST_C=1
- Polling: VMON_STAT register can be polled to read the ST_BIST_C bit

8 Register Maps

8.1 Registers Overview

The register map is designed to support up to 3 channels through register banks, with the following organization:

- Bank 0 - Status Register Set Summary
 - Vendor info and usage registers (bank independent)
 - Interrupt registers
 - Status registers
 - Bank selection register (bank independent)
 - Protection registers (bank independent)
 - Device configuration registers (bank independent)
- Bank 1 - Configuration Register Set Summary
 - Vendor info and usage registers (bank independent)
 - Control registers (device global registers)
 - Monitor configuration registers (channel specific registers)
 - Sequence configuration registers (both device global and channel specific registers)
 - Bank selection register (bank independent)
 - Protection registers (bank independent)
 - Device configuration registers (bank independent)

Bank independent registers are accessible at the same address irrespective of the current bank selection. Access to other registers requires the proper bank being selected.

All registers are 8-bit wide, and are loaded at boot with the default value described here or with the OTP value programmed at the factory. Unused registers addresses are reserved for future use and support up to 3 channels.

Write accesses to protected registers (see PROT1/2 details), invalid registers, or valid registers with invalid data is NACK'd.

If the default value found in the register map is listed as "X", then the value can be found in TPS389C0300CRTERQ1 OTP Configuration.

8.1.1 BANK0 Registers

表 8-1 lists the memory-mapped registers for the BANK0 registers. All register offset addresses not listed in 表 8-1 should be considered as reserved locations and the register contents should not be modified.

表 8-1. BANK0 Registers

Offset	Acronym	Register Name	Section
10h	INT_SRC	Global Interrupt Source Status register.	节 8.1.1.1
11h	INT_MONITOR	Voltage Monitor Interrupt Status register.	节 8.1.1.2
12h	INT_UVHF	High Frequency channel Under-Voltage Interrupt Status register.	节 8.1.1.3
14h	INT_UVLF	Low Frequency channel Under-Voltage Interrupt Status register.	节 8.1.1.4
16h	INT_OVHF	High Frequency channel Over-Voltage Interrupt Status register	节 8.1.1.5
18h	INT_OVLF	Low Frequency channel Over-Voltage Interrupt Status register	节 8.1.1.6
22h	INT_CONTROL	Control and Communication Interrupt Status register.	节 8.1.1.7
23h	INT_TEST	Internal Test and Configuration Load Interrupt Status register.	节 8.1.1.8
24h	INT_VENDOR	Vendor Specific Internal Interrupt Status register.	节 8.1.1.9
30h	VMON_STAT	Status flags for internal operations and other non critical conditions.	节 8.1.1.10
31h	TEST_INFO	Internal Self-Test and ECC information.	节 8.1.1.11
32h	OFF_STAT	Channel OFF status.	节 8.1.1.12
37h	WDT_STAT	Watchdog Status	节 8.1.1.13
38h	WD_STAT_QA	Watchdog Answer Count and Token	节 8.1.1.14
41h	MON_LVL[2]	Channel 2 voltage level.	节 8.1.1.15
42h	MON_LVL[3]	Channel 3 voltage level.	节 8.1.1.16
43h	MON_LVL[4]	Channel 4 voltage level.	节 8.1.1.17
F0h	BANK_SEL	Bank Select.	节 8.1.1.18
F1h	PROT1	Locks or unlocks register changes. Must match PROT2.	节 8.1.1.19
F2h	PROT2	Locks or unlocks register changes. Must match PROT1.	节 8.1.1.20
F3h	PROT_MON	Locks MON registers in tandem with PROT1 and PROT2.	节 8.1.1.21
F9h	I2CADDR	I2C Address	节 8.1.1.22
FAh	DEV_CFG	Status of I2C interface voltage levels.	节 8.1.1.23

Complex bit access types are encoded to fit into small table cells. 表 8-2 shows the codes that are used for access types in this section.

表 8-2. BANK0 Access Type Codes

Access Type	Code	Description
Read Type		
R	R	Read
Write Type		
W	W	Write
W1C	W 1C	Write 1 to clear
Reset or Default Value		

表 8-2. BANK0 Access Type Codes (续)

Access Type	Code	Description
-n		Value after reset or the default value

8.1.1.1 INT_SRC Register (Offset = 10h) [Reset = 00h]

INT_SRC is shown in [表 8-3](#).

Return to the [Summary Table](#).

Global Interrupt Source Status register.

表 8-3. INT_SRC Register Field Descriptions

Bit	Field	Type	Reset	Description
7	F_OTHER	R	0h	Vendor internal defined faults. Details reported in INT_Vendor. Represents ORed value of all bits in INT_Vendor. 0 = No Vendor defined faults detected 1 = Vendor defined faults detected
6-3	RESERVED	R	0h	Reserved
2	TEST	R	0h	Internal test or configuration load fault. Details reported in INT_TEST. Represents ORed value of all bits in INT_TEST. 0 = No test/configuration fault detected 1 = Test/configuration fault detected
1	CONTROL	R	0h	Control status or communication fault. Details reported in INT_CONTROL. Represents ORed value of all bits in INT_CONTROL. 0 = No status or communication fault detected 1 = Status or communication fault detected
0	MONITOR	R	0h	Voltage monitor fault. Details reported in INT_MONITOR. Represents ORed value of all bits in INT_MONITOR. 0 = No voltage fault detected 1 = Voltage fault detected

8.1.1.2 INT_MONITOR Register (Offset = 11h) [Reset = 00h]

INT_MONITOR is shown in [表 8-4](#).

Return to the [Summary Table](#).

Voltage Monitor Interrupt Status register.

表 8-4. INT_MONITOR Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R	0h	Reserved
3	OVLf	R	0h	Over-Voltage Low Frequency Fault reported by ADC based measurement. Details reported in INT_OVLf. Represents ORed value of all bits in INT_OVLf. 0 = No OVLf fault detected 1 = OVLf fault detected
2	OVHF	R	0h	Over-Voltage High Frequency Fault reported by comparator based monitoring. Details reported in INT_OVHF. Represents ORed value of all bits in INT_OVHF. 0 = No OVHF fault detected 1 = OVHF fault detected
1	UVLf	R	0h	Under-Voltage Low Frequency Fault reported by ADC based measurement. Details reported in INT_UVLf. Represents ORed value of all bits in INT_UVLf. 0 = No UVLf fault detected 1 = UVLf fault detected
0	UVHF	R	0h	Under-Voltage High Frequency Fault reported by comparator based monitoring. Details reported in INT_UVHF. Represents ORed value of all bits in INT_UVHF. 0 = No UVHF fault detected 1 = UVHF fault detected

8.1.1.3 INT_UVHF Register (Offset = 12h) [Reset = 00h]

INT_UVHF is shown in 表 8-5.

Return to the [Summary Table](#).

High Frequency channel Under-Voltage Interrupt Status register.

表 8-5. INT_UVHF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W1C	0h	Reserved
3	F_UVHF[4]	R/W1C	0h	Under-Voltage High Frequency Fault for MON4. Trips if MON4 High Frequency signal goes below UVHF[4]. 0 = MON4 has no UVHF fault detected (or interrupt disabled in IEN_UVHF register) 1 = MON4 has UVHF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the UVHF fault condition is also removed (MON4 High Frequency signal is above UVHF[4]).
2	F_UVHF[3]	R/W1C	0h	Under-Voltage High Frequency Fault for MON3. Trips if MON3 High Frequency signal goes below UVHF[3]. 0 = MON3 has no UVHF fault detected (or interrupt disabled in IEN_UVHF register) 1 = MON3 has UVHF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the UVHF fault condition is also removed (MON3 High Frequency signal is above UVHF[3]).
1	F_UVHF[2]	R/W1C	0h	Under-Voltage High Frequency Fault for MON2. Trips if MON2 High Frequency signal goes below UVHF[2]. 0 = MON2 has no UVHF fault detected (or interrupt disabled in IEN_UVHF register) 1 = MON2 has UVHF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the UVHF fault condition is also removed (MON2 High Frequency signal is above UVHF[2]).
0	RESERVED	R/W1C	0h	Reserved

8.1.1.4 INT_UVLF Register (Offset = 14h) [Reset = 00h]

INT_UVLF is shown in [表 8-6](#).

Return to the [Summary Table](#).

Low Frequency channel Under-Voltage Interrupt Status register.

表 8-6. INT_UVLF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W1C	0h	Reserved
3	F_UVLF[4]	R/W1C	0h	Under-Voltage Low Frequency Fault for MON4 . Trips if MON4 Low Frequency signal goes below UVLF[4]. 0 = MON4 has no UVLF fault detected (or interrupt disabled in IEN_UVLF register) 1 = MON4 has UVLF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the UVLF fault condition is also removed (MON4 Low Frequency signal is above UVLF[4]).
2	F_UVLF[3]	R/W1C	0h	Under-Voltage Low Frequency Fault for MON3. Trips if MON3 Low Frequency signal goes below UVLF[3]. 0 = MON3 has no UVLF fault detected (or interrupt disabled in IEN_UVLF register) 1 = MON3 has UVLF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the UVLF fault condition is also removed (MON3 Low Frequency signal is above UVLF[3]).
1	F_UVLF[2]	R/W1C	0h	Under-Voltage Low Frequency Fault for MON2. Trips if MON2 Low Frequency signal goes below UVLF[2]. 0 = MON2 has no UVLF fault detected (or interrupt disabled in IEN_UVLF register) 1 = MON2 has UVLF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the UVLF fault condition is also removed (MON2 Low Frequency signal is above UVLF[2]).
0	RESERVED	R/W1C	0h	Reserved

8.1.1.5 INT_OVHF Register (Offset = 16h) [Reset = 00h]

INT_OVHF is shown in 表 8-7.

Return to the [Summary Table](#).

High Frequency channel Over-Voltage Interrupt Status register

表 8-7. INT_OVHF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W1C	0h	Reserved
3	F_OVHF[4]	R/W1C	0h	Over-Voltage High Frequency Fault for MON4. Trips if MON4 High Frequency signal goes above OVHF[4]. 0 = MON4 has noOVHF fault detected (or interrupt disabled in IEN_OVHF register) 1 = MON4 has OVHF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the OVHF fault condition is also removed (MON4 High Frequency signal is below OVHF[4])
2	F_OVHF[3]	R/W1C	0h	Over-Voltage High Frequency Fault for MON3. Trips if MON3 High Frequency signal goes above OVHF[3]. 0 = MON3 has no OVHF fault detected (or interrupt disabled in IEN_OVHF register) 1 = MON3 has OVHF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the OVHF fault condition is also removed (MON3 High Frequency signal is below OVHF[3])
1	F_OVHF[2]	R/W1C	0h	Over-Voltage High Frequency Fault for MON2. Trips if MON2 High Frequency signal goes above OVHF[2]. 0 = MON2 has no OVHF fault detected (or interrupt disabled in IEN_OVHF register) 1 = MON2 has OVHF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the OVHF fault condition is also removed (MON2 High Frequency signal is below OVHF[2])
0	RESERVED	R/W1C	0h	Reserved

8.1.1.6 INT_OVLF Register (Offset = 18h) [Reset = 00h]

INT_OVLF is shown in 表 8-8.

Return to the [Summary Table](#).

Low Frequency channel Over-Voltage Interrupt Status register

表 8-8. INT_OVLF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W1C	0h	Reserved
3	F_OVLF[4]	R/W1C	0h	Over-Voltage Low Frequency Fault for MON4. Trips if MON4 Low Frequency signal goes above OVLF[4]. 0 = MON4 has no OVLF fault detected (or interrupt disabled in IEN_OVLF register) 1 = MON4 has OVLF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the OVLF fault condition is also removed (MON4 Low Frequency signal is below OVLF[4]).
2	F_OVLF[3]	R/W1C	0h	Over-Voltage Low Frequency Fault for MON3. Trips if MON3 Low Frequency signal goes above OVLF[3]. 0 = MON3 has no OVLF fault detected (or interrupt disabled in IEN_OVLF register) 1 = MON3 has OVLF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the OVLF fault condition is also removed (MON3 Low Frequency signal is below OVLF[3]).
1	F_OVLF[2]	R/W1C	0h	Over-Voltage Low Frequency Fault for MON2. Trips if MON2 Low Frequency signal goes above OVLF[2]. 0 = MON2 has no OVLF fault detected (or interrupt disabled in IEN_OVLF register) 1 = MON2 has OVLF fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the OVLF fault condition is also removed (MON2 Low Frequency signal is below OVLF[2]).
0	RESERVED	R/W1C	0h	Reserved

8.1.1.7 INT_CONTROL Register (Offset = 22h) [Reset = 00h]

INT_CONTROL is shown in [表 8-9](#).

Return to the [Summary Table](#).

Control and Communication Interrupt Status register.

表 8-9. INT_CONTROL Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W1C	0h	Reserved
4	F_CRC	R/W1C	0h	Runtime register CRC Fault: 0 = No fault detected (or IEN_CONTROL.RT_CRC is disabled) 1 = Register CRC fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit. The bit will be set again during next register CRC check if the same fault is detected
3	F_NIRQ	R/W1C	0h	Interrupt pin fault (fault bit always enabled; no enable bit available): 0 = No fault detected on NIRQ pin 1 = Low resistance path to supply detected on NIRQ pin The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the NIRQ fault condition is also removed.
2	F_TSD	R/W1C	0h	Thermal Shutdown fault: 0 = No TSD fault detected (or IEN_CONTROL.TSD is disabled) 1 = TSD fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the TSD fault condition is also removed
1	RESERVED	R/W1C	0h	Reserved
0	F_PEC	R/W1C	0h	Packet Error Checking fault: 0 = PEC mismatch has not occurred (or IEN_CONTROL.PEC is disabled) 1 = PEC mismatch has occurred, or VMON_MISC.REQ_PEC=1 and PEC is missing in a write transaction The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit. The bit will be set again during next I2C transaction if the same fault is detected.

8.1.1.8 INT_TEST Register (Offset = 23h) [Reset = 00h]

INT_TEST is shown in [表 8-10](#).

Return to the [Summary Table](#).

Internal Test and Configuration Load Interrupt Status register.

表 8-10. INT_TEST Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W1C	0h	Reserved
3	ECC_SEC	R/W1C	0h	ECC single-error corrected on OTP configuration load: 0 = No single-error corrected (or IEN_TEST.ECC_SEC is disabled) 1 = Single-error corrected Write-1-to-clear will clear the bit. The bit will be set again during next OTP configuration load if the same fault is detected.
2	ECC_DED	R/W1C	0h	ECC double-error detected on OTP configuration load: 0 = No double-error detected on OTP load 1 = Double-error detected on OTP load The fault bit is always enabled (there is no associated interrupt enable bit). The device will move to failsafe mode on double error detection.
1	BIST_Complete_INT	R/W1C	0h	Indication of Built-In Self-Test complete: 0 = BIST not complete (or IEN_TEST.BIST_C is disabled) 1 = BIST complete Write-1-to-clear will clear the bit. The bit will be set again on completion of next BIST execution
0	BIST_Fail_INT	R/W1C	0h	Built-In Self-Test fault: 0 = No BIST fault detected (or IEN_TEST.BIST is disabled) 1 = BIST fault detected Write-1-to-clear will clear the bit. The bit will be set again during next BIST execution if the fault is detected

8.1.1.9 INT_VENDOR Register (Offset = 24h) [Reset = 00h]

INT_VENDOR is shown in 表 8-11.

Return to the [Summary Table](#).

Vendor Specific Internal Interrupt Status register.

表 8-11. INT_VENDOR Register Field Descriptions

Bit	Field	Type	Reset	Description
7	Self-Test_CRC	R/W1C	0h	Startup register CRC self-test 0 = Self-test Pass 1 = Self-test Fail Write-1-to clear
6	LDO_OV_Error	R/W1C	0h	Internal LDO Overvoltage error. 0 = No internal LDO overvoltage fault detected 1 = Internal LDO overvoltage fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the LDO fault condition is also removed.
5	NRST_MISMATCH	R/W1C	0h	Designates error due to drive state and read back. During an NRST toggle NRST mismatch will be active after 2 μ s, NRST must exceed 0.6*VDD to be considered in a logic high state. 0 = No fault detected on NRST pin 1 = Error due to drive state and read back. The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the NRST fault condition is also removed.
4	Freq_DEV_Error	R/W1C	0h	Designates internal frequency errors. 0 = No internal frequency fault detected 1 = Internal frequency fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the frequency fault condition is also removed.
3	SHORT_DET	R/W1C	0h	Address pin short detect. 0 = No address pin short fault detected 1 = Address pin short fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the address pin short fault condition is also removed.
2	OPEN_DET	R/W1C	0h	Address pin open detect. 0 = No address pin open fault detected 1 = Address pin open fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the address pin open fault condition is also removed.
1	ESM_ERROR	R/W1C	0h	Indication of ESM fault. 0 = No ESM fault detected 1 = ESM fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the ESM fault condition is also removed.
0	WDT_ERROR	R/W1C	0h	Indication of Watchdog fault. 0 = No Watchdog fault detected 1 = Watchdog fault detected The recovery of the fault condition does NOT clear the bit. It can only be cleared by the host with a write-1-to-clear. Write-1-to-clear will clear the bit only if the Watchdog fault condition is also removed.

8.1.1.10 VMON_STAT Register (Offset = 30h) [Reset = 7Eh]

VMON_STAT is shown in [表 8-12](#).

Return to the [Summary Table](#).

Status flags for internal operations and other non critical conditions.

表 8-12. VMON_STAT Register Field Descriptions

Bit	Field	Type	Reset	Description
7	FAILSAFE	R	0h	1 = Device in FAILSAFE state
6	ST_BIST_C	R	1h	Built-In Self-Test state: 0 = BIST not complete 1 = BIST complete
5	ST_VDD	R	1h	Status VDD
4	ST_NIRQ	R	1h	Status NIRQ pin
3	RESERVED	R	0h	Reserved
2	ACTIVE	R	1h	1 = Device in ACTIVE state
1	RESERVED	R	0h	Reserved
0	RESERVED	R	0h	Reserved

8.1.1.11 TEST_INFO Register (Offset = 31h) [Reset = 00h]

TEST_INFO is shown in [表 8-13](#).

Return to the [Summary Table](#).

Internal Self-Test and ECC information.

表 8-13. TEST_INFO Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R	0h	Reserved
5	ECC_SEC	R	0h	Status of ECC single-error correction on OTP configuration load. 0 = no error correction applied 1 = single-error correction applied
4	ECC_DED	R	0h	Status of ECC double-error detection on OTP configuration load. 0 = no double-error detected 1 = double-error detected
3	BIST_VM	R	0h	Status of Volatile Memory test output from BIST. 0 = Volatile Memory test pass 1 = Volatile Memory test fail
2	BIST_NVM	R	0h	Status of Non-Volatile Memory test output from BIST. 0 = Non-Volatile Memory test pass 1 = Non-Volatile Memory test fail
1	BIST_L	R	0h	Status of Logic test output from BIST. 0 = Logic test pass 1 = Logic test fail
0	BIST_A	R	0h	Status of Analog test output from BIST. 0 = Analog test pass 1 = Analog test fail

8.1.1.12 OFF_STAT Register (Offset = 32h) [Reset = 00h]

OFF_STAT is shown in [表 8-14](#).

Return to the [Summary Table](#).

Channel OFF status.

表 8-14. OFF_STAT Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R	0h	Reserved
3	MON[4]	R	0h	Represents the OFF status of each channel: 0 = channel 4 is NOT OFF 1 = channel 4 is OFF (below OFF threshold)
2	MON[3]	R	0h	Represents the OFF status of each channel: 0 = channel 3 is NOT OFF 1 = channel 3 is OFF (below OFF threshold)
1	MON[2]	R	0h	Represents the OFF status of each channel: 0 = channel 2 is NOT OFF 1 = channel 2 is OFF (below OFF threshold)
0	RESERVED	R	0h	Reserved

8.1.1.13 WDT_STAT Register (Offset = 37h) [Reset = 00h]

WDT_STAT is shown in [表 8-15](#).

Return to the [Summary Table](#).

Watchdog Status

表 8-15. WDT_STAT Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R	0h	Reserved
5-3	WD_STATE	R	0h	Represents Watchdog state. 000 = WD Idle state 001 = WD Open state 010 = WD Close state 011 = WD Startup state 100 = WD suspend state
2	ST_WDEXP	R	0h	Will flag if close window expires before writing 3 answers or if open window expires. 1 = close window or open window expired (bit clears when read)
1	RESERVED	R	0h	Reserved
0	ST_WDUV	R	0h	Will flag if an extra answer in close window (4 answers in close window) OR a wrong answer in close window OR a wrong answer in open window. 1 = extra or wrong answer (bit clears when read)

8.1.1.14 WD_STAT_QA Register (Offset = 38h) [Reset = 3Ch]

WD_STAT_QA is shown in [表 8-16](#).

Return to the [Summary Table](#).

Watchdog Answer Count and Token

表 8-16. WD_STAT_QA Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R	0h	Reserved
5-4	ANSW_CNT[1:0]	R	3h	Represents Answer count in real time
3-0	TOKEN[3:0]	R	Ch	Represents Token in real time. Enabling the watchdog sets the Token value to 0.

8.1.1.15 MON_LVL[2] Register (Offset = 41h) [Reset = 00h]

MON_LVL[2] is shown in [表 8-17](#).

Return to the [Summary Table](#).

Channel 2 voltage level.

表 8-17. MON_LVL[2] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	ADC[7:0]	R	0h	Represents MON2 voltage telemetry value in hex

8.1.1.16 MON_LVL[3] Register (Offset = 42h) [Reset = 00h]

MON_LVL[3] is shown in [表 8-18](#).

Return to the [Summary Table](#).

Channel 3 voltage level.

表 8-18. MON_LVL[3] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	ADC[7:0]	R	0h	Represents MON3 voltage telemetry value in hex

8.1.1.17 MON_LVL[4] Register (Offset = 43h) [Reset = 00h]

MON_LVL[4] is shown in [表 8-19](#).

Return to the [Summary Table](#).

Channel 4 voltage level.

表 8-19. MON_LVL[4] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	ADC[7:0]	R	0h	Represents MON4 voltage telemetry value in hex

8.1.1.18 BANK_SEL Register (Offset = F0h) [Reset = 00h]

BANK_SEL is shown in [表 8-20](#).

Return to the [Summary Table](#).

Bank Select.

表 8-20. BANK_SEL Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	0h	Reserved
0	BANK_Select	R/W	0h	Represents bank selection. 0 = Bank 0 1 = Bank 1

8.1.1.19 PROT1 Register (Offset = F1h) [Reset = 00h]

PROT1 is shown in [表 8-21](#).

Return to the [Summary Table](#).

Locks or unlocks register changes. Must match PROT2.

表 8-21. PROT1 Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R/W	0h	Reserved
5	WRKC	R/W	0h	Represents Protection from writes for WRKC group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible
4	RESERVED	R/W	0h	Reserved
3	CFG	R/W	0h	Represents Protection from writes for CFG group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible
2	IEN	R/W	0h	Represents Protection from writes for IEN group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible
1	MON	R/W	0h	Represents Protection from writes for MON group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible
0	SEQ	R/W	0h	Represents Protection from writes for SEQ group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible

8.1.1.20 PROT2 Register (Offset = F2h) [Reset = 00h]

PROT2 is shown in [表 8-22](#).

Return to the [Summary Table](#).

Locks or unlocks register changes. Must match PROT1.

表 8-22. PROT2 Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R/W	0h	Reserved
5	WRKC	R/W	0h	Represents Protection from writes for CFG group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible
4	RESERVED	R/W	0h	Reserved
3	CFG	R/W	0h	Represents Protection from writes for CFG group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible
2	IEN	R/W	0h	Represents Protection from writes for IEN group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible
1	MON	R/W	0h	Represents Protection from writes for MON group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible
0	SEQ	R/W	0h	Represents Protection from writes for SEQ group. Both PROT1 and PROT2 need to be set for protection. 0 = Changes to register are possible 1 = Changes to register are not possible

8.1.1.21 PROT_MON Register (Offset = F3h) [Reset = 1Fh]

PROT_MON is shown in [表 8-23](#).

Return to the [Summary Table](#).

Locks MON registers in tandem with PROT1 and PROT2.

表 8-23. PROT_MON Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	1h	Protects MON4 from writes along with PROT1 and PROT2. 0= Changes are possible 1= Changes are not possible
2	MON[3]	R/W	1h	Protects MON3 from writes along with PROT1 and PROT2. 0= Changes are possible 1= Changes are not possible
1	MON[2]	R/W	1h	Protects MON2 from writes along with PROT1 and PROT2. 0= Changes are possible 1= Changes are not possible
0	RESERVED	R/W	0h	Reserved

8.1.1.22 I2CADDR Register (Offset = F9h) [Reset = 30h]

I2CADDR is shown in [表 8-24](#).

Return to the [Summary Table](#).

I2C Address

表 8-24. I2CADDR Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R/W	0h	Reserved
6-3	ADDR_NVM[3:0]	R	6h	Represents I2C address from internal OTP. Default value of 30 hex. Also the default I2C address for fail safe mode if I2C communication fails
2-0	ADDR_STRAP[2:0]	R	0h	Represents I2C address from resistor value on ADDR pin.

8.1.1.23 DEV_CFG Register (Offset = FAh) [Reset = 00h]

DEV_CFG is shown in [表 8-25](#).

Return to the [Summary Table](#).

Status of I2C interface voltage levels.

表 8-25. DEV_CFG Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	RESERVED	R	0h	Reserved

8.1.2 BANK1 Registers

表 8-26 lists the memory-mapped registers for the BANK1 registers. All register offset addresses not listed in 表 8-26 should be considered as reserved locations and the register contents should not be modified.

表 8-26. BANK1 Registers

Offset	Acronym	Register Name	Section
10h	VMON_CTL	VMON device control register.	节 8.1.2.1
11h	VMON_MISC	Miscellaneous VMON configurations.	节 8.1.2.2
12h	TEST_CFG	Built-In Self Test (BIST) execution configuration.	节 8.1.2.3
13h	IEN_UVHF	High Frequency channel Under-Voltage Interrupt Enable register	节 8.1.2.4
14h	IEN_UVLF	Low Frequency channel Under-Voltage Interrupt Enable register.	节 8.1.2.5
15h	IEN_OVHF	High Frequency channel Over-Voltage Interrupt Enable register.	节 8.1.2.6
16h	IEN_OVLF	Low Frequency channel Over-Voltage Interrupt Enable register.	节 8.1.2.7
1Bh	IEN_CONTROL	Control and Communication Fault Interrupt Enable register.	节 8.1.2.8
1Ch	IEN_TEST	Internal Test and Configuration Load Fault Interrupt Enable register	节 8.1.2.9
1Dh	IEN_VENDOR	Vendor Specific Internal Interrupt Enable register.	节 8.1.2.10
1Eh	MON_CH_EN	Channel Voltage Monitoring Enable.	节 8.1.2.11
1Fh	VRANGE_MULT	Channel Voltage Monitoring Range/Scaling.	节 8.1.2.12
30h	UV_HF[2]	Channel 2 High Frequency channel Under-Voltage threshold.	节 8.1.2.13
31h	OV_HF[2]	Channel 2 High Frequency channel Over-Voltage threshold.	节 8.1.2.14
32h	UV_LF[2]	Channel 2 Low Frequency channel Under-Voltage threshold.	节 8.1.2.15
33h	OV_LF[2]	Channel 2 Low Frequency channel Over-Voltage threshold.	节 8.1.2.16
34h	FLT_HF[2]	Channel 2 UV and OV debouncing for High Frequency thresholds comparator output.	节 8.1.2.17
35h	FC_LF[2]	Channel 2 Low Frequency Path G(s) Cutoff Frequency (-3dB point). The register changes the filter properties of the programmable LPF such that the total frequency response G(s) meets these cutoff frequencies.	节 8.1.2.18
40h	UV_HF[3]	Channel 3 High Frequency channel Under-Voltage threshold.	节 8.1.2.19
41h	OV_HF[3]	Channel 3 High Frequency channel Over-Voltage threshold.	节 8.1.2.20
42h	UV_LF[3]	Channel 3 Low Frequency channel Under-Voltage threshold.	节 8.1.2.21
43h	OV_LF[3]	Channel 3 Low Frequency channel Over-Voltage threshold.	节 8.1.2.22
44h	FLT_HF[3]	Channel 3 UV and OV debouncing for High Frequency thresholds comparator output.	节 8.1.2.23
45h	FC_LF[3]	Channel 3 Low Frequency Path G(s) Cutoff Frequency (-3dB point). The register changes the filter properties of the programmable LPF such that the total frequency response G(s) meets these cutoff frequencies.	节 8.1.2.24
50h	UV_HF[4]	Channel 4 High Frequency channel Under-Voltage threshold.	节 8.1.2.25

表 8-26. BANK1 Registers (续)

Offset	Acronym	Register Name	Section
51h	OV_HF[4]	Channel 4 High Frequency channel Over-Voltage threshold.	节 8.1.2.26
52h	UV_LF[4]	Channel 4 Low Frequency channel Under-Voltage threshold.	节 8.1.2.27
53h	OV_LF[4]	Channel 4 Low Frequency channel Over-Voltage threshold.	节 8.1.2.28
54h	FLT_HF[4]	Channel 4 UV and OV debouncing for High Frequency thresholds comparator output.	节 8.1.2.29
55h	FC_LF[4]	Channel 4 Low Frequency Path G(s) Cutoff Frequency (-3dB point). The register changes the filter properties of the programmable LPF such that the total frequency response G(s) meets these cutoff frequencies.	节 8.1.2.30
9Eh	ESM	ESM threshold time for asserting a fault.	节 8.1.2.31
9Fh	TI_CONTROL	Manual BIST/WD EN/Manual Reset via I2C/ESM deglitch/Reset delay	节 8.1.2.32
A1h	AMSK_ON	Auto-mask UVLF, UVHF, and OVHF interrupts on power up transitions.	节 8.1.2.33
A2h	AMSK_OFF	Auto-mask UVLF, UVHF, and OVHF interrupts on power down transitions.	节 8.1.2.34
A5h	SEQ_TOUT_MSB	Timeout for UV faults during powerup and power down.	节 8.1.2.35
A6h	SEQ_TOUT_LSB	Timeout for UV faults during powerup and power down.	节 8.1.2.36
A8h	SEQ_UP_THLD	Threshold at which AMSK is released (VMON considered on) for power up.	节 8.1.2.37
A9h	SEQ_DN_THLD	Threshold at which AMSK is released (VMON considered off) for power down.	节 8.1.2.38
AAh	WDT_CFG	Max violation count for WD and Delay multiplier for Start Up Window.	节 8.1.2.39
ABh	WDT_CLOSE	Close Window Time.	节 8.1.2.40
ACh	WDT_OPEN	Open Window Time.	节 8.1.2.41
ADh	WDT_QA_CFG	Feedback/Poly/Seed for Watchdog.	节 8.1.2.42
AEh	WDT_ANSWER	Answer for the Watchdog.	节 8.1.2.43
F0h	BANK_SEL	Bank Select.	节 8.1.2.44

Complex bit access types are encoded to fit into small table cells. 表 8-27 shows the codes that are used for access types in this section.

表 8-27. BANK1 Access Type Codes

Access Type	Code	Description
Read Type		
R	R	Read
Write Type		
W	W	Write
Reset or Default Value		
-n		Value after reset or the default value

8.1.2.1 VMON_CTL Register (Offset = 10h) [Reset = 20h]

VMON_CTL is shown in [表 8-28](#).

Return to the [Summary Table](#).

VMON device control register.

表 8-28. VMON_CTL Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	0h	Reserved
4	FORCE_WDO_LOW	R/W	0h	Force assertion of WDO
3	RESET_PROT	R/W	0h	Reset_Prot = read 0, write 1 to clear Protection registers
2-1	RESERVED	R/W	0h	Reserved
0	FORCE_NIRQ_LOW	R/W	0h	Force assertion of NIRQ

8.1.2.2 VMON_MISC Register (Offset = 11h) [Reset = X0h]

VMON_MISC is shown in [表 8-29](#).

Return to the [Summary Table](#).

Miscellaneous VMON configurations.

表 8-29. VMON_MISC Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R/W	0h	Reserved
6-4	WDO_DLY[2:0]	R/W	0h	WDO_Delay (not applicable for latched WDO)
3-2	RESERVED	R/W	0h	Reserved
1	REQ_PEC	R/W	Xh	Require PEC. 0 = PEC not required 1 = PEC required
0	EN_PEC	R/W	Xh	Enable PEC. 0 = PEC not enabled 1 = PEC enabled

8.1.2.3 TEST_CFG Register (Offset = 12h) [Reset = X0h]

TEST_CFG is shown in [表 8-30](#).

Return to the [Summary Table](#).

Built-In Self Test (BIST) execution configuration.

表 8-30. TEST_CFG Register Field Descriptions

Bit	Field	Type	Reset	Description
7-3	RESERVED	R/W	0h	Reserved
2	AT_SHDN	R/W	Xh	Run BIST at SHDN
1	AT_POR[1]	R/W	Xh	Run BIST at POR, 2nd bit for redundancy
0	AT_POR[0]	R/W	Xh	Run BIST at POR

8.1.2.4 IEN_UVHF Register (Offset = 13h) [Reset = X0h]

IEN_UVHF is shown in [表 8-31](#).

Return to the [Summary Table](#).

High Frequency channel Under-Voltage Interrupt Enable register

表 8-31. IEN_UVHF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	UVHF interrupt enable for MON4, 0 = Disable, 1 = Enable
2	MON[3]	R/W	Xh	UVHF interrupt enable for MON3, 0 = Disable, 1 = Enable
1	MON[2]	R/W	Xh	UVHF interrupt enable for MON2, 0 = Disable, 1 = Enable
0	RESERVED	R/W	0h	Reserved

8.1.2.5 IEN_UVLF Register (Offset = 14h) [Reset = X0h]

IEN_UVLF is shown in [表 8-32](#).

Return to the [Summary Table](#).

Low Frequency channel Under-Voltage Interrupt Enable register.

表 8-32. IEN_UVLF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	UVLF interrupt enable for MON4, 0 = Disable, 1 = Enable
2	MON[3]	R/W	Xh	UVLF interrupt enable for MON3, 0 = Disable, 1 = Enable
1	MON[2]	R/W	Xh	UVLF interrupt enable for MON2, 0 = Disable, 1 = Enable
0	RESERVED	R/W	0h	Reserved

8.1.2.6 IEN_OVHF Register (Offset = 15h) [Reset = X0h]

IEN_OVHF is shown in [表 8-33](#).

Return to the [Summary Table](#).

High Frequency channel Over-Voltage Interrupt Enable register.

表 8-33. IEN_OVHF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	OVHF interrupt enable for MON4, 0 = Disable, 1 = Enable
2	MON[3]	R/W	Xh	OVHF interrupt enable for MON3, 0 = Disable, 1 = Enable
1	MON[2]	R/W	Xh	OVHF interrupt enable for MON2, 0 = Disable, 1 = Enable
0	RESERVED	R/W	0h	Reserved

8.1.2.7 IEN_OVLF Register (Offset = 16h) [Reset = X0h]

IEN_OVLF is shown in [表 8-34](#).

Return to the [Summary Table](#).

Low Frequency channel Over-Voltage Interrupt Enable register.

表 8-34. IEN_OVLF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	OVLf interrupt enable for MON4, 0 = Disable, 1 = Enable
2	MON[3]	R/W	Xh	OVLf interrupt enable for MON3, 0 = Disable, 1 = Enable
1	MON[2]	R/W	Xh	OVLf interrupt enable for MON2, 0 = Disable, 1 = Enable
0	RESERVED	R/W	0h	Reserved

8.1.2.8 IEN_CONTROL Register (Offset = 1Bh) [Reset = X0h]

IEN_CONTROL is shown in [表 8-35](#).

Return to the [Summary Table](#).

Control and Communication Fault Interrupt Enable register.

表 8-35. IEN_CONTROL Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	0h	Reserved
4	RT_CRC_Int	R/W	0h	Register Run time CRC (Cyclic Redundancy Checking) error Interrupt is a static CRC performed on the register map content. If enabled there does not need to be any data read or write for this CRC check to occur. The purpose of this CRC is to identify if a static bit flip or random error in the register map content has occurred. This safety mechanism is carried out using a CRC-8 polynomial, in the case of a read or write operation the register map content will change and the polynomial is re-calculated with the new value after the changes. Interrupt is reported in INT_CONTROL_F_CRC register of Bank 0. 0 = Disable Interrupt Mapping, 1 = Enable Interrupt Mapping
3	RESERVED	R/W	0h	Reserved
2	TSD_INT	R/W	Xh	Thermal shutdown Interrupt. 0 = Disable, 1 = Enable
1	RESERVED	R/W	0h	Reserved
0	PEC_INT	R/W	Xh	PEC Error Interrupt. 0 = Disable, 1 = Enable

8.1.2.9 IEN_TEST Register (Offset = 1Ch) [Reset = X0h]

IEN_TEST is shown in [表 8-36](#).

Return to the [Summary Table](#).

Internal Test and Configuration Load Fault Interrupt Enable register

表 8-36. IEN_TEST Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	ECC_SEC	R/W	Xh	SEC Error Interrupt. 0 = Disable, 1 = Enable
2	RESERVED	R/W	0h	Reserved
1	BIST_Complete_INT	R/W	Xh	BIST complete Interrupt. 0 = Disable, 1 = Enable
0	BIST_Fail_INT	R/W	Xh	BIST Fail Interrupt. 0 = Disable, Enable = 1

8.1.2.10 IEN_VENDOR Register (Offset = 1Dh) [Reset = X0h]

IEN_VENDOR is shown in [表 8-37](#).

Return to the [Summary Table](#).

Vendor Specific Internal Interrupt Enable register.

表 8-37. IEN_VENDOR Register Field Descriptions

Bit	Field	Type	Reset	Description
7	Startup Self-Test_CRC	R/W	0h	Startup Self-Test_CRC Interrupt. 0 = Disable Interrupt Mapping, 1 = Enable Interrupt Mapping
6	RESERVED	R/W	0h	Reserved
5	NRST_MISMATCH	R/W	0h	NRST mismatch Interrupt. 0 = Disable Interrupt Mapping, 1 = Enable Interrupt Mapping
4	ESM_TO_WDO	R/W	0h	Maps ESM fault to WDO. 0 = Not mapped 1 = Mapped
3	ESM_TO_NIRQ	R/W	Xh	Maps ESM fault to NIRQ. 0 = Not mapped 1 = Mapped
2	WDT_TO_NIRQ	R/W	Xh	Maps Watchdog fault to NIRQ. 0 = Not mapped 1 = Mapped
1	ESM_TO_NRST	R/W	Xh	Maps ESM fault to NRST. 0 = Not mapped 1 = Mapped
0	WDT_TO_NRST	R/W	Xh	Maps Watchdog fault to NRST. 0 = Not mapped 1 = Mapped

8.1.2.11 MON_CH_EN Register (Offset = 1Eh) [Reset = X0h]

MON_CH_EN is shown in [表 8-38](#).

Return to the [Summary Table](#).

Channel Voltage Monitoring Enable.

表 8-38. MON_CH_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	Enables MON4 monitoring. 0 = Disabled, 1 = Enabled
2	MON[3]	R/W	Xh	Enables MON3 monitoring. 0 = Disabled, 1 = Enabled
1	MON[2]	R/W	Xh	Enables MON2 monitoring. 0 = Disabled, 1 = Enabled
0	RESERVED	R/W	0h	Reserved

8.1.2.12 VRANGE_MULT Register (Offset = 1Fh) [Reset = X0h]

VRANGE_MULT is shown in [表 8-39](#).

Return to the [Summary Table](#).

Channel Voltage Monitoring Range/Scaling.

表 8-39. VRANGE_MULT Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	Scalar for MON4. 0 = 1x, 1 = 4x
2	MON[3]	R/W	Xh	Scalar for MON3. 0 = 1x, 1 = 4x
1	MON[2]	R/W	Xh	Scalar for MON2. 0 = 1x, 1 = 4x
0	RESERVED	R/W	0h	Reserved

8.1.2.13 UV_HF[2] Register (Offset = 30h) [Reset = X0h]

UV_HF[2] is shown in [表 8-40](#).

Return to the [Summary Table](#).

Channel 2 High Frequency channel Under-Voltage threshold.

表 8-40. UV_HF[2] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Undervoltage threshold for High Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.14 OV_HF[2] Register (Offset = 31h) [Reset = X0h]

OV_HF[2] is shown in [表 8-41](#).

Return to the [Summary Table](#).

Channel 2 High Frequency channel Over-Voltage threshold.

表 8-41. OV_HF[2] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Overvoltage threshold for High Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.15 UV_LF[2] Register (Offset = 32h) [Reset = X0h]

UV_LF[2] is shown in [表 8-42](#).

Return to the [Summary Table](#).

Channel 2 Low Frequency channel Under-Voltage threshold.

表 8-42. UV_LF[2] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Undervoltage threshold for Low Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.16 OV_LF[2] Register (Offset = 33h) [Reset = X0h]

OV_LF[2] is shown in [表 8-43](#).

Return to the [Summary Table](#).

Channel 2 Low Frequency channel Over-Voltage threshold.

表 8-43. OV_LF[2] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Overvoltage threshold for Low Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.17 FLT_HF[2] Register (Offset = 34h) [Reset = X0h]

FLT_HF[2] is shown in [表 8-44](#).

Return to the [Summary Table](#).

Channel 2 UV and OV debouncing for High Frequency thresholds comparator output.

表 8-44. FLT_HF[2] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	OV_DEB[3:0]	R/W	0h	Overvoltage comparator output debounce time (dont assert until output is stable for debounce time) for High Frequency monitoring path. 0000b = 0.1µs 1000b = 25.6µs 0001b = 0.2µs 1001b = 51.2µs 0010b = 0.4µs 1010b = 102.4µs 0011b = 0.8µs 1011b = 102.4µs 0100b = 1.6µs 1100b = 102.4µs 0101b = 3.2µs 1101b = 102.4µs 0110b = 6.4µs 1110b = 102.4µs 0111b = 12.8µs 1111b = 102.4µs
3-0	UV_DEB[3:0]	R/W	Xh	Undervoltage comparator output debounce time (dont assert until output is stable for debounce time) for High Frequency monitoring path. 0000b = 0.1µs 1000b = 25.6µs 0001b = 0.2µs 1001b = 51.2µs 0010b = 0.4µs 1010b = 102.4µs 0011b = 0.8µs 1011b = 102.4µs 0100b = 1.6µs 1100b = 102.4µs 0101b = 3.2µs 1101b = 102.4µs 0110b = 6.4µs 1110b = 102.4µs 0111b = 12.8µs 1111b = 102.4µs

8.1.2.18 FC_LF[2] Register (Offset = 35h) [Reset = X0h]

FC_LF[2] is shown in [表 8-45](#).

Return to the [Summary Table](#).

Channel 2 Low Frequency Path G(s) Cutoff Frequency (-3dB point). The register changes the filter properties of the programmable LPF such that the total frequency response G(s) meets these cutoff frequencies.

表 8-45. FC_LF[2] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	0h	Reserved
4	OVHF_TO_NRST	R/W	0h	Maps MON2 OVHF fault to NRST 0 = Not mapped, 1 = Mapped
3	UVHF_TO_NRST	R/W	Xh	Maps MON2 UVHF fault to NRST 0 = Not mapped, 1 = Mapped
2-0	Cut_off_Freq[2:0]	R/W	Xh	MON2 Cut of frequency for LF faults filter 000 = Invalid 001 = Invalid 010 = 250Hz 011 = 500Hz 100 = 1kHz 101 = 2kHz 110 = 4kHz 111 = Invalid

8.1.2.19 UV_HF[3] Register (Offset = 40h) [Reset = X0h]

UV_HF[3] is shown in [表 8-46](#).

Return to the [Summary Table](#).

Channel 3 High Frequency channel Under-Voltage threshold.

表 8-46. UV_HF[3] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Undervoltage threshold for High Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.20 OV_HF[3] Register (Offset = 41h) [Reset = X0h]

OV_HF[3] is shown in [表 8-47](#).

Return to the [Summary Table](#).

Channel 3 High Frequency channel Over-Voltage threshold.

表 8-47. OV_HF[3] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Overvoltage threshold for High Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.21 UV_LF[3] Register (Offset = 42h) [Reset = X0h]

UV_LF[3] is shown in [表 8-48](#).

Return to the [Summary Table](#).

Channel 3 Low Frequency channel Under-Voltage threshold.

表 8-48. UV_LF[3] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Undervoltage threshold for Low Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.22 OV_LF[3] Register (Offset = 43h) [Reset = X0h]

OV_LF[3] is shown in [表 8-49](#).

Return to the [Summary Table](#).

Channel 3 Low Frequency channel Over-Voltage threshold.

表 8-49. OV_LF[3] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Overvoltage threshold for Low Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.23 FLT_HF[3] Register (Offset = 44h) [Reset = X0h]

FLT_HF[3] is shown in [表 8-50](#).

Return to the [Summary Table](#).

Channel 3 UV and OV debouncing for High Frequency thresholds comparator output.

表 8-50. FLT_HF[3] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	OV_DEB[3:0]	R/W	0h	Overtoltage comparator output debounce time (dont assert until output is stable for debounce time) for High Frequency monitoring path. 0000b = 0.1µs 1000b = 25.6µs 0001b = 0.2µs 1001b = 51.2µs 0010b = 0.4µs 1010b = 102.4µs 0011b = 0.8µs 1011b = 102.4µs 0100b = 1.6µs 1100b = 102.4µs 0101b = 3.2µs 1101b = 102.4µs 0110b = 6.4µs 1110b = 102.4µs 0111b = 12.8µs 1111b = 102.4µs
3-0	UV_DEB[3:0]	R/W	Xh	Undervoltage comparator output debounce time (dont assert until output is stable for debounce time) for High Frequency monitoring path. 0000b = 0.1µs 1000b = 25.6µs 0001b = 0.2µs 1001b = 51.2µs 0010b = 0.4µs 1010b = 102.4µs 0011b = 0.8µs 1011b = 102.4µs 0100b = 1.6µs 1100b = 102.4µs 0101b = 3.2µs 1101b = 102.4µs 0110b = 6.4µs 1110b = 102.4µs 0111b = 12.8µs 1111b = 102.4µs

8.1.2.24 FC_LF[3] Register (Offset = 45h) [Reset = X0h]

FC_LF[3] is shown in 表 8-51.

Return to the [Summary Table](#).

Channel 3 Low Frequency Path G(s) Cutoff Frequency (-3dB point). The register changes the filter properties of the programmable LPF such that the total frequency response G(s) meets these cutoff frequencies.

表 8-51. FC_LF[3] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	0h	Reserved
4	OVHF_TO_NRST	R/W	0h	Maps MON3 OVHF fault to NRST 0 = Not mapped, 1 = Mapped
3	UVHF_TO_NRST	R/W	Xh	Maps MON3 UVHF fault to NRST 0 = Not mapped, 1 = Mapped
2-0	Cut_off_Freq[2:0]	R/W	Xh	MON3 Cut of frequency for LF faults filter 000 = Invalid 001 = Invalid 010 = 250Hz 011 = 500Hz 100 = 1kHz 101 = 2kHz 110 = 4kHz 111 = Invalid

8.1.2.25 UV_HF[4] Register (Offset = 50h) [Reset = X0h]

UV_HF[4] is shown in [表 8-52](#).

Return to the [Summary Table](#).

Channel 4 High Frequency channel Under-Voltage threshold.

表 8-52. UV_HF[4] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Undervoltage threshold for High Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.26 OV_HF[4] Register (Offset = 51h) [Reset = X0h]

OV_HF[4] is shown in [表 8-53](#).

Return to the [Summary Table](#).

Channel 4 High Frequency channel Over-Voltage threshold.

表 8-53. OV_HF[4] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Overvoltage threshold for High Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.27 UV_LF[4] Register (Offset = 52h) [Reset = X0h]

UV_LF[4] is shown in [表 8-54](#).

Return to the [Summary Table](#).

Channel 4 Low Frequency channel Under-Voltage threshold.

表 8-54. UV_LF[4] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Undervoltage threshold for Low Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.28 OV_LF[4] Register (Offset = 53h) [Reset = X0h]

OV_LF[4] is shown in [表 8-55](#).

Return to the [Summary Table](#).

Channel 4 Low Frequency channel Over-Voltage threshold.

表 8-55. OV_LF[4] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Overvoltage threshold for Low Frequency component of monitored channel. The 8-bit value interpretation depends on the scaling setting in register VRANGE_MULT. With scaling = 1x, the 8-bit value represents the range 0.2V to 1.475V with 1 LSB = 5mV. With scaling = 4x, the 8-bit value represents the range 0.8V to 5.9V with 1 LSB = 20mV.

8.1.2.29 FLT_HF[4] Register (Offset = 54h) [Reset = X0h]

FLT_HF[4] is shown in [表 8-56](#).

Return to the [Summary Table](#).

Channel 4 UV and OV debouncing for High Frequency thresholds comparator output.

表 8-56. FLT_HF[4] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	OV_DEB[3:0]	R/W	0h	Overtoltage comparator output debounce time (dont assert until output is stable for debounce time) for High Frequency monitoring path. 0000b = 0.1µs 1000b = 25.6µs 0001b = 0.2µs 1001b = 51.2µs 0010b = 0.4µs 1010b = 102.4µs 0011b = 0.8µs 1011b = 102.4µs 0100b = 1.6µs 1100b = 102.4µs 0101b = 3.2µs 1101b = 102.4µs 0110b = 6.4µs 1110b = 102.4µs 0111b = 12.8µs 1111b = 102.4µs
3-0	UV_DEB[3:0]	R/W	Xh	Undervoltage comparator output debounce time (dont assert until output is stable for debounce time) for High Frequency monitoring path. 0000b = 0.1µs 1000b = 25.6µs 0001b = 0.2µs 1001b = 51.2µs 0010b = 0.4µs 1010b = 102.4µs 0011b = 0.8µs 1011b = 102.4µs 0100b = 1.6µs 1100b = 102.4µs 0101b = 3.2µs 1101b = 102.4µs 0110b = 6.4µs 1110b = 102.4µs 0111b = 12.8µs 1111b = 102.4µs

8.1.2.30 FC_LF[4] Register (Offset = 55h) [Reset = X0h]

FC_LF[4] is shown in [表 8-57](#).

Return to the [Summary Table](#).

Channel 4 Low Frequency Path G(s) Cutoff Frequency (-3dB point). The register changes the filter properties of the programmable LPF such that the total frequency response G(s) meets these cutoff frequencies.

表 8-57. FC_LF[4] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	0h	Reserved
4	OVHF_TO_NRST	R/W	0h	Maps MON4 OVHF fault to NRST 0 = Not mapped, 1 = Mapped
3	UVHF_TO_NRST	R/W	Xh	Maps MON4 UVHF fault to NRST 0 = Not mapped, 1 = Mapped
2-0	Cut_off_Freq[2:0]	R/W	Xh	MON4 Cut of frequency for LF faults filter 000 = Invalid 001 = Invalid 010 = 250Hz 011 = 500Hz 100 = 1kHz 101 = 2kHz 110 = 4kHz 111 = Invalid

8.1.2.31 ESM Register (Offset = 9Eh) [Reset = X0h]

ESM is shown in [表 8-58](#).

Return to the [Summary Table](#).

ESM threshold time for asserting a fault.

表 8-58. ESM Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	THRESHOLD[7:0]	R/W	Xh	Threshold value representing the ESM delay time (1ms to 864ms)

8.1.2.32 TI_CONTROL Register (Offset = 9Fh) [Reset = X0h]

TI_CONTROL is shown in 表 8-59.

Return to the [Summary Table](#).

Manual BIST/WD EN/Manual Reset via I2C/ESM deglitch/Reset delay

表 8-59. TI_CONTROL Register Field Descriptions

Bit	Field	Type	Reset	Description
7	ENTER_BIST	R/W	0h	Manual BIST. 1 = Enter BIST
6	WDT_EN	R/W	0h	Watchdog EN to be used along with hardware WD_EN pin. 1 = Watchdog Enabled, 0 = Watchdog Disabled
5	I2C_MR	R/W	0h	Manual Reset. 1 = Assert NRST low
4-3	ESM_DEB[1:0]	R/W	Xh	ESM debounce filter 00 = 10µs 01 = 25µs 10 = 50µs 11 = 100µs
2-0	RST_DLY[2:0]	R/W	Xh	Reset delay 000 = 200µs 001 = 1ms 010 = 10ms 011 = 16ms 100 = 20ms 101 = 70ms 110 = 100ms 111 = 200ms

8.1.2.33 AMSK_ON Register (Offset = A1h) [Reset = X0h]

AMSK_ON is shown in [表 8-60](#).

Return to the [Summary Table](#).

Auto-mask UVLF, UVHF, and OVHF interrupts on power up transitions.

表 8-60. AMSK_ON Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	Automask at power on for MON4. 0 = Disabled 1 = Enabled
2	MON[3]	R/W	Xh	Automask at power on for MON3. 0 = Disabled 1 = Enabled
1	MON[2]	R/W	Xh	Automask at power on for MON2. 0 = Disabled 1 = Enabled
0	RESERVED	R/W	0h	Reserved

8.1.2.34 AMSK_OFF Register (Offset = A2h) [Reset = X0h]

AMSK_OFF is shown in [表 8-61](#).

Return to the [Summary Table](#).

Auto-mask UVLF, UVHF, and OVHF interrupts on power down transitions.

表 8-61. AMSK_OFF Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	Automask at power off for MON4. 0 = Disabled 1 = Enabled
2	MON[3]	R/W	Xh	Automask at power off for MON3. 0 = Disabled 1 = Enabled
1	MON[2]	R/W	Xh	Automask at power off for MON2. 0 = Disabled 1 = Enabled
0	RESERVED	R/W	0h	Reserved

8.1.2.35 SEQ_TOUT_MSB Register (Offset = A5h) [Reset = X0h]

SEQ_TOUT_MSB is shown in [表 8-62](#).

Return to the [Summary Table](#).

Timeout for UV faults during powerup and power down.

表 8-62. SEQ_TOUT_MSB Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	MILLISEC[15:8]	R/W	Xh	Sequence time out MSB

8.1.2.36 SEQ_TOUT_LSB Register (Offset = A6h) [Reset = X0h]

SEQ_TOUT_LSB is shown in [表 8-63](#).

Return to the [Summary Table](#).

Timeout for UV faults during powerup and power down.

表 8-63. SEQ_TOUT_LSB Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	MILLISEC[7:0]	R/W	Xh	Sequence time out LSB

8.1.2.37 SEQ_UP_THLD Register (Offset = A8h) [Reset = X0h]

SEQ_UP_THLD is shown in [表 8-64](#).

Return to the [Summary Table](#).

Threshold at which AMSK is released (VMON considered on) for power up.

表 8-64. SEQ_UP_THLD Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	AMSK releases at UVLF or OFF threshold for MON4. 0 = off threshold, 1 = UVLF threshold
2	MON[3]	R/W	Xh	AMSK releases at UVLF or OFF threshold for MON3. 0 = off threshold, 1 = UVLF threshold
1	MON[2]	R/W	Xh	AMSK releases at UVLF or OFF threshold for MON2. 0 = off threshold, 1 = UVLF threshold
0	RESERVED	R/W	0h	Reserved

8.1.2.38 SEQ_DN_THLD Register (Offset = A9h) [Reset = X0h]

SEQ_DN_THLD is shown in [表 8-65](#).

Return to the [Summary Table](#).

Threshold at which AMSK is released (VMON considered off) for power down.

表 8-65. SEQ_DN_THLD Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	Reserved
3	MON[4]	R/W	Xh	AMSK releases at UVLF or OFF threshold for MON4. 0 = off threshold, 1 = UVLF threshold
2	MON[3]	R/W	Xh	AMSK releases at UVLF or OFF threshold for MON3. 0 = off threshold, 1 = UVLF threshold
1	MON[2]	R/W	Xh	AMSK releases at UVLF or OFF threshold for MON2. 0 = off threshold, 1 = UVLF threshold
0	RESERVED	R/W	0h	Reserved

8.1.2.39 WDT_CFG Register (Offset = AAh) [Reset = X0h]

WDT_CFG is shown in [表 8-66](#).

Return to the [Summary Table](#).

Max violation count for WD and Delay multiplier for Start Up Window.

表 8-66. WDT_CFG Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R/W	0h	Reserved
6-4	MAX_VIOLATION_COUNT	R/W	0h	Max violation count for Watchdog 000 = 0 001 = 1 010 = 2 011 = 3 100 = 4 101 = 5 110 = 6 111 = 7
3	RESERVED	R/W	0h	Reserved
2-0	WDT_Startup_DLY_MULTIPLIER[2:0]	R/W	Xh	Watchdog Startup delay multiplier 000 = 0 001 = 1 010 = 2 011 = 3 100 = 4 101 = 5 110 = 6 111 = 7

8.1.2.40 WDT_CLOSE Register (Offset = ABh) [Reset = X0h]

WDT_CLOSE is shown in [表 8-67](#).

Return to the [Summary Table](#).

Close Window Time.

表 8-67. WDT_CLOSE Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	CLOSE[7:0]	R/W	Xh	Close window time (1ms to 864ms)

8.1.2.41 WDT_OPEN Register (Offset = ACh) [Reset = X0h]

WDT_OPEN is shown in [表 8-68](#).

Return to the [Summary Table](#).

Open Window Time.

表 8-68. WDT_OPEN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	OPEN[7:0]	R/W	Xh	Open window time (1ms to 864ms)

8.1.2.42 WDT_QA_CFG Register (Offset = ADh) [Reset = 00h]

WDT_QA_CFG is shown in [表 8-69](#).

Return to the [Summary Table](#).

FeedbackPolt/Seed for Watchdog.

表 8-69. WDT_QA_CFG Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	FDBK[1:0]	R/W	0h	Feedback used for computing answer
5-4	POLY[1:0]	R/W	0h	Poly used for computing answer
3-0	SEED[3:0]	R/W	0h	Seed used for computing answer

8.1.2.43 WDT_ANSWER Register (Offset = AEh) [Reset = 00h]

WDT_ANSWER is shown in [表 8-70](#).

Return to the [Summary Table](#).

Answer for the Watchdog.

表 8-70. WDT_ANSWER Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	ANSWER[7:0]	R/W	0h	Answer

8.1.2.44 BANK_SEL Register (Offset = F0h) [Reset = 00h]

BANK_SEL is shown in [表 8-71](#).

Return to the [Summary Table](#).

Bank Select.

表 8-71. BANK_SEL Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	0h	Reserved
0	BANK_Select	R/W	0h	Represents bank selection. 0 = Bank 0 1 = Bank 1

9 Application and Implementation

备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

Modern SOC and FPGA devices typically have multiple power rails to provide power to the different blocks within the IC. Accurate voltage level and timing requirements are common and must be met to provide proper operation of these devices. By utilizing TPS389C03-Q1 along with a multichannel voltage sequencer, the power up and power down sequencing requirements as well as the core voltage requirements of the target SOC or FPGA device can be met. This design focuses on meeting the timing requirements for an SOC by using the TPS389C03-Q1.

9.2 Typical Application

9.2.1 Automotive Multichannel Sequencer and Monitor

A typical application for the TPS389C03-Q1 is shown in [图 9-1](#). TPS389C03-Q1 is used to provide the proper voltage monitoring for the target SOC device. A multichannel voltage monitor TPS389C03-Q1 is used to monitor the voltage rails as these rails power up and power down to ensure that the correct sequence occurs in both occasions. A safety microcontroller is also used to provide ACT, NIRQ, and I²C commands to the TPS389C03-Q1 and sequencer. The ACT signal from the safety microcontroller determines when the TPS389C03-Q1 enters into ACTIVE or SHDN states while the NIRQ pin of the TPS389C03-Q1 acts as an interrupt pin that is set when a fault has occurred. The host microcontroller can clear the fault by writing 1 to the affected register. The power rails for the safety microcontroller are not shown in [图 9-1](#) for simplicity.

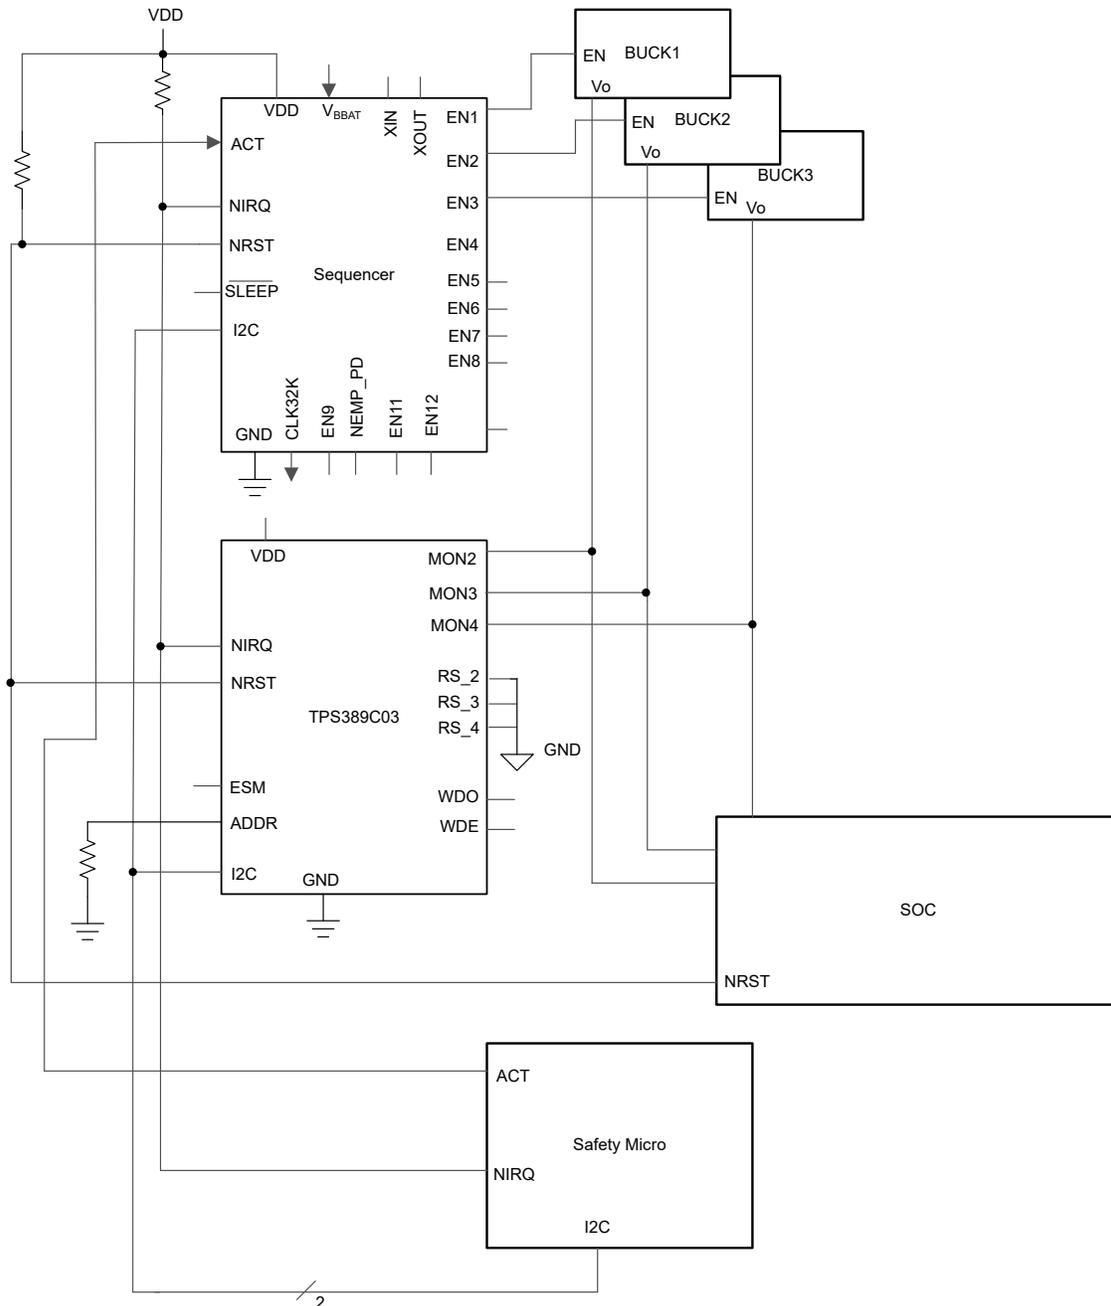


图 9-1. TPS389C03-Q1 Voltage Monitor Design Block Diagram

9.2.2 Design Requirements

- Three different voltage rails supplied by DC/DC converters need to be properly monitored in this design.
- All detected failures in sequencing are reported via an external hardware interrupt signal.
- All detected failures are logged in internal registers and be accessible to an external processor via I²C.

9.2.3 Detailed Design Procedure

- TPS389C03-Q1 device option comes preprogrammed with default values for over voltage, under voltage.
- NIRQ pin requires a pull up resistor in the range of 1k Ω to 100k Ω .
- NRST pin requires a pull up resistor in the range of 1k Ω to 100k Ω .
- WDO pin requires a pull up resistor in the range of 1k Ω to 100k Ω .
- SDA and SCL lines require pull up resistors in the range of 10k Ω .
- The safety microcontroller is used to clear fault interrupts reported through the NIRQ interrupt pin and the INT_SCR1 and INT_SCR2 registers. The interrupt flags can only be cleared by the host microcontroller with a write-1-to-clear operation; interrupt flags are not automatically cleared if the fault condition is no longer present.

9.2.4 Application Curves

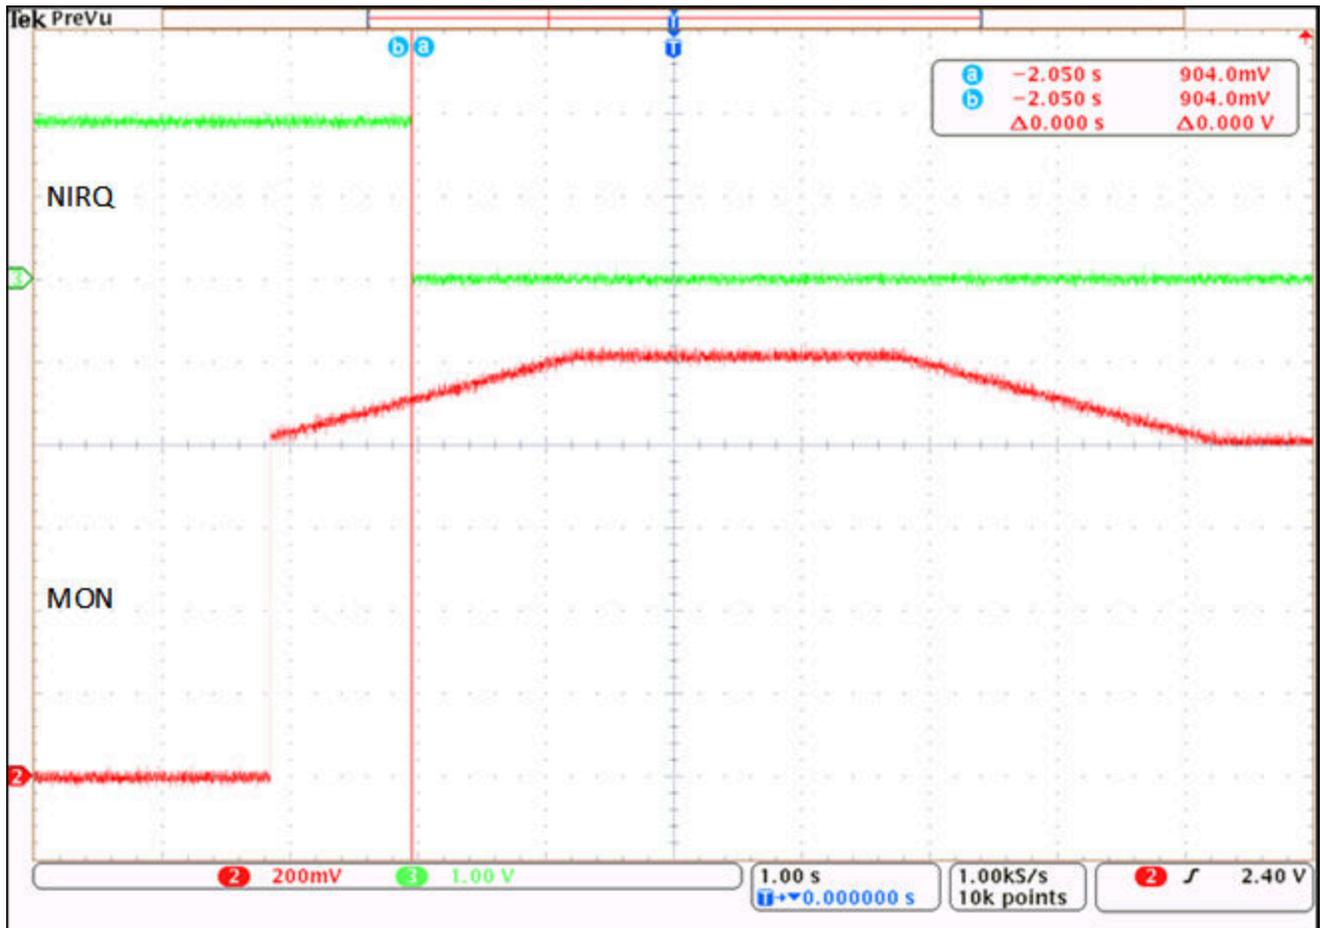


图 9-2. NIRQ Triggered After an Overvoltage Fault

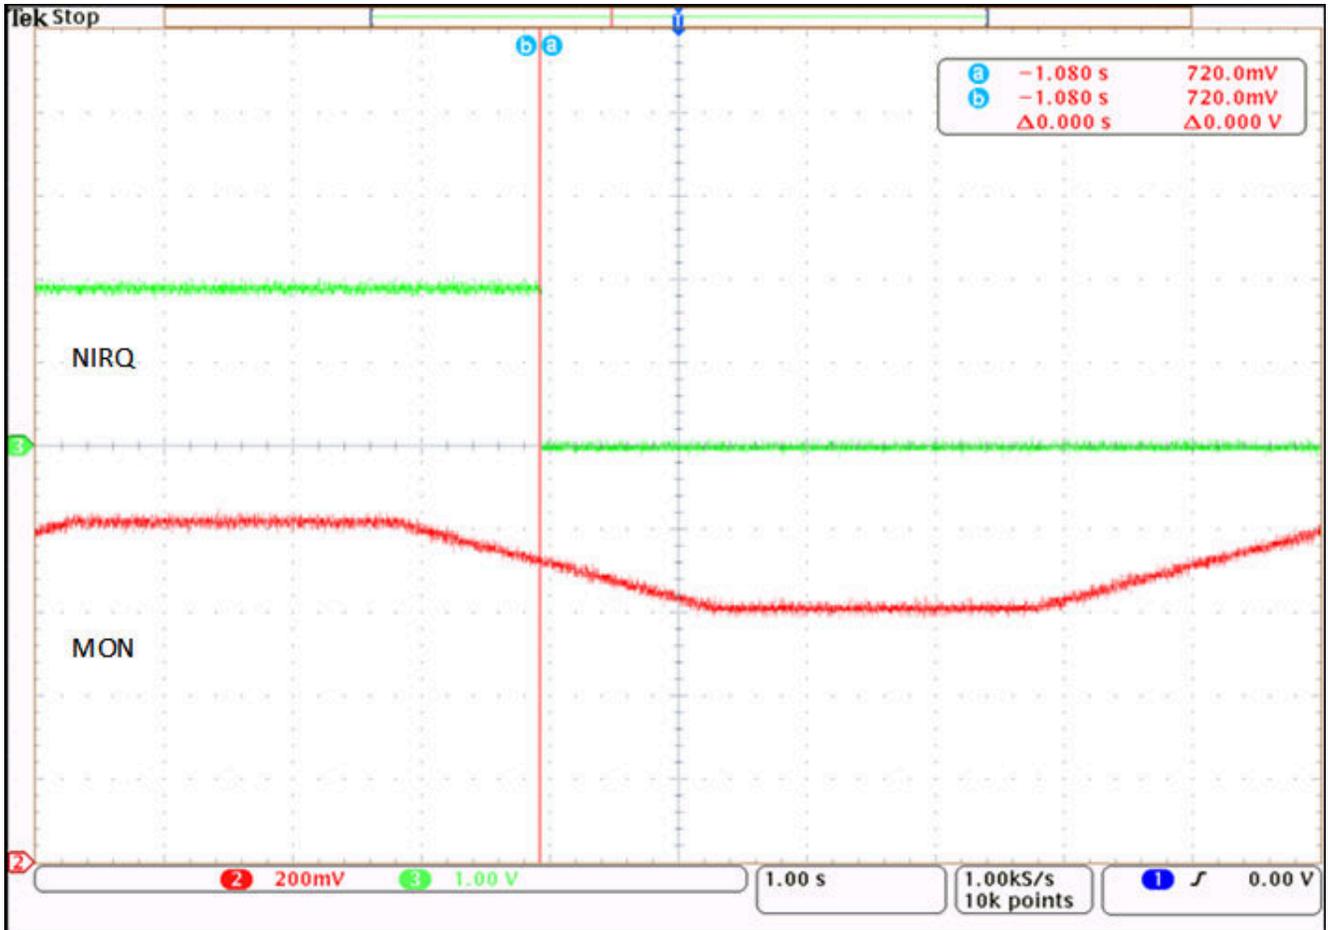


图 9-3. NIRQ Triggered After an Undervoltage Fault

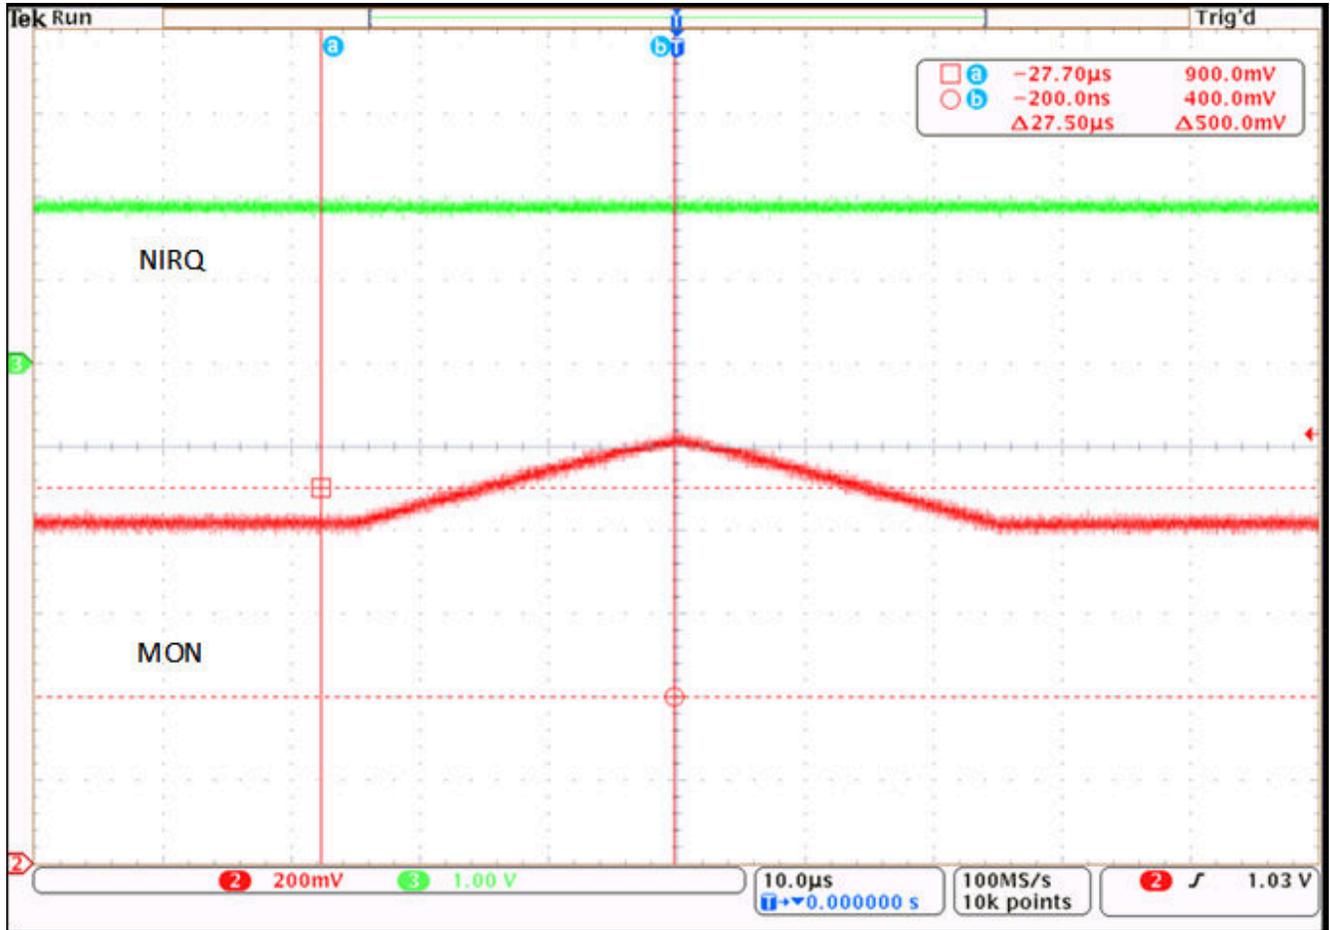


图 9-4. NIRQ Not Triggered on Overvoltage Fault with 51.2 us OV Debounce Filter

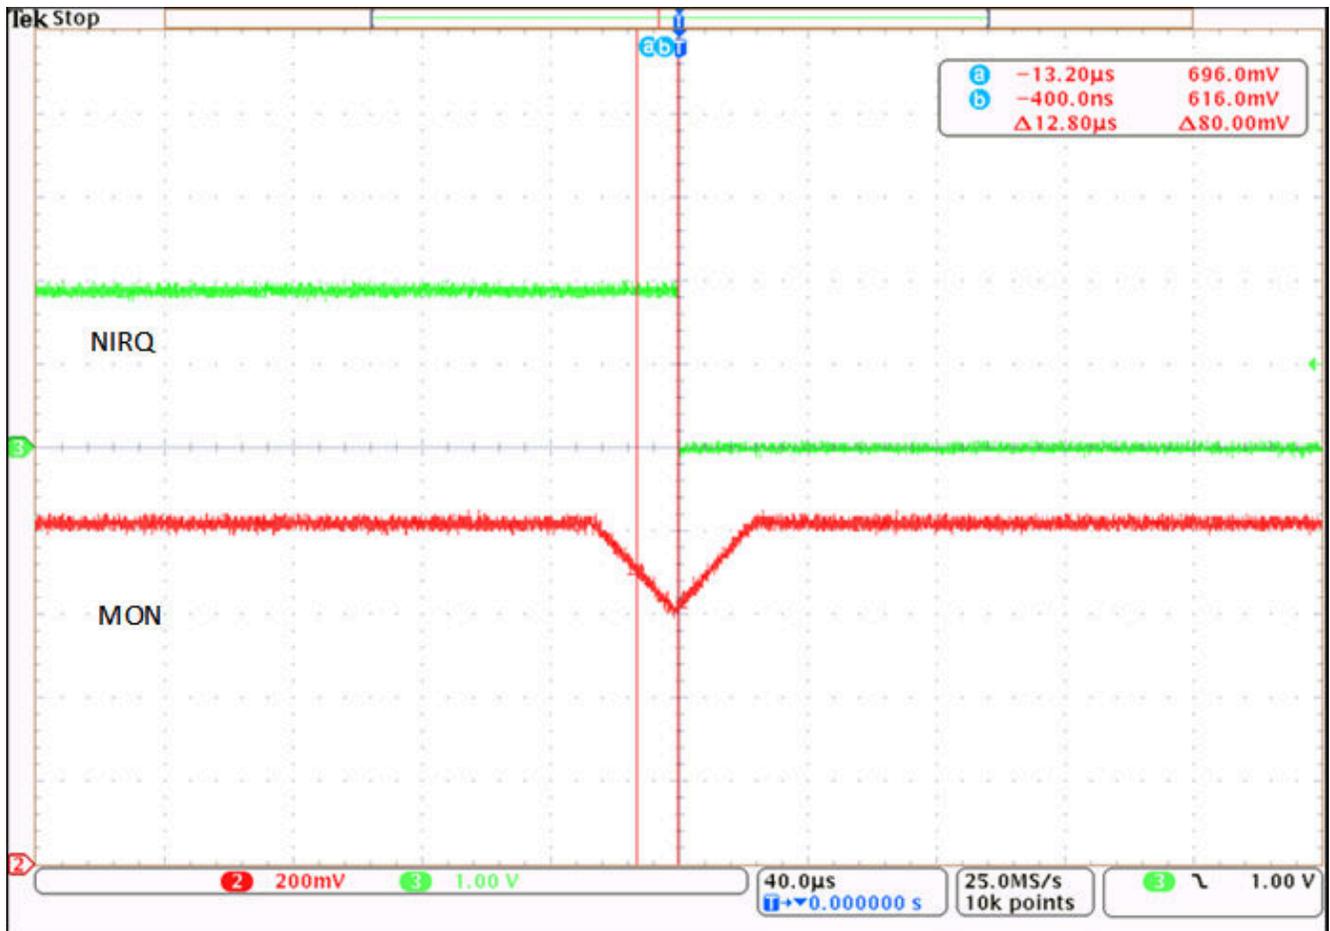


图 9-5. NIRQ Triggered on Undervoltage Fault with 12.8 us UV Debounce Filter

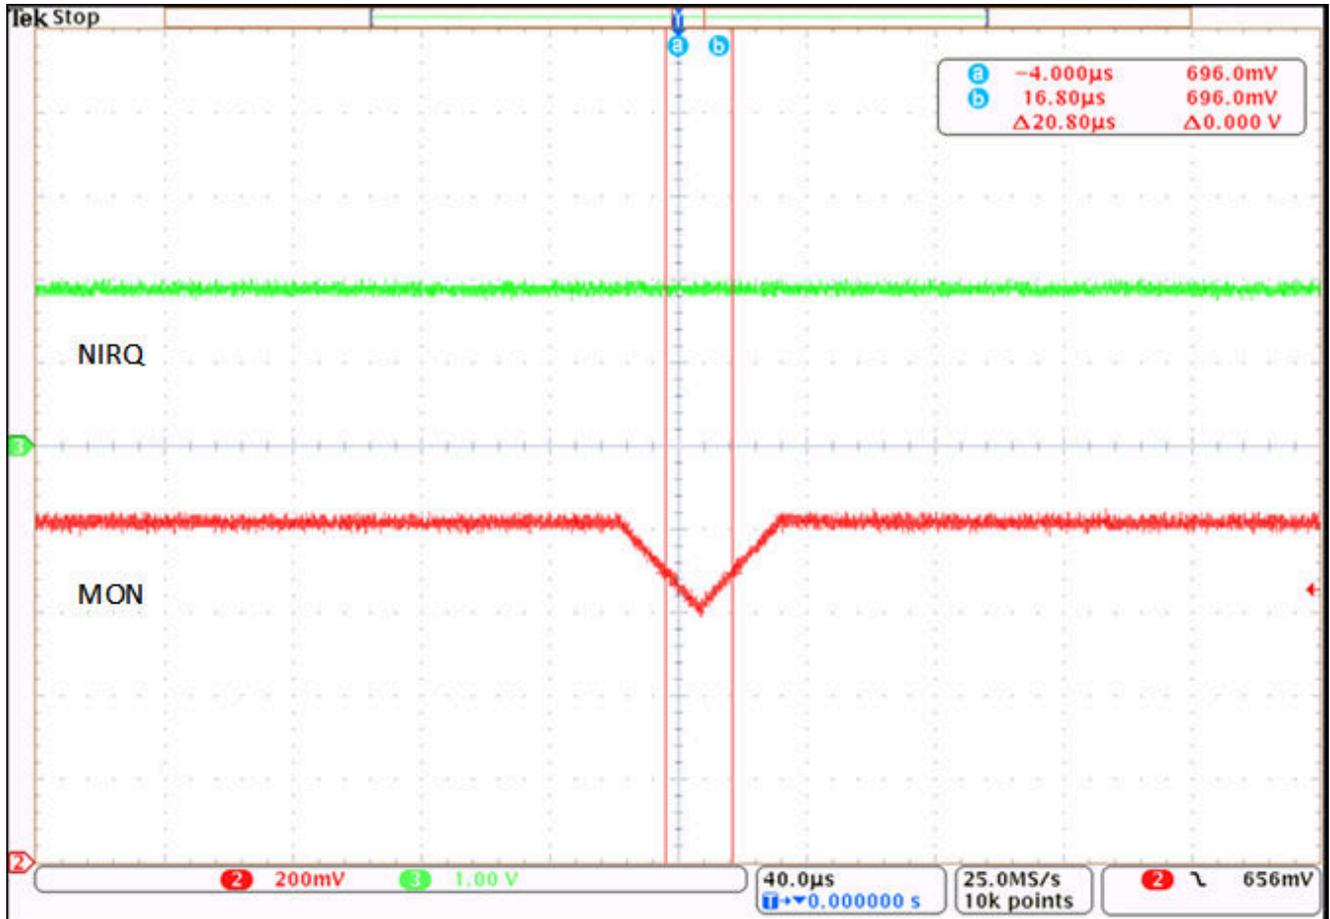


图 9-6. NIRQ Not Triggered on Undervoltage Fault with 25 us UV Debounce Filter

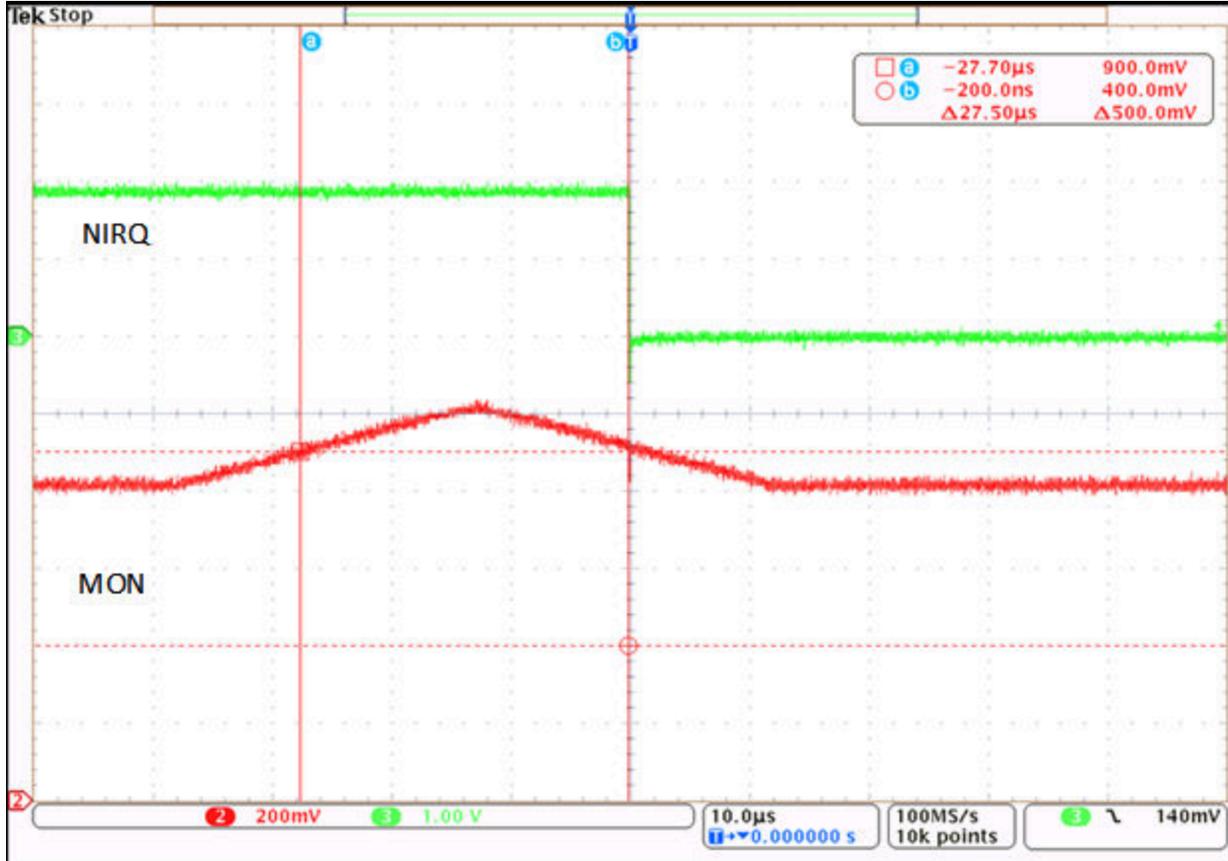


图 9-7. NIRQ Triggered on Overvoltage Fault with 25 us OV Debounce Filter

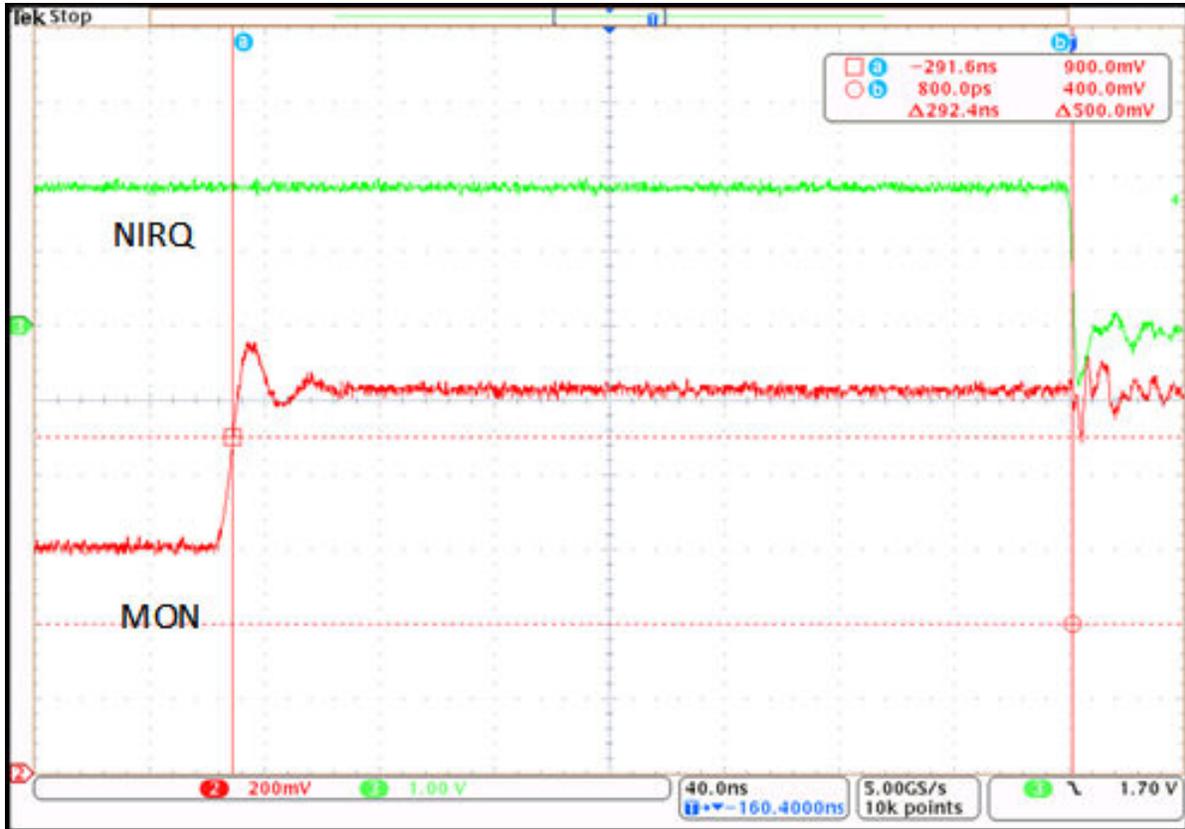


图 9-8. NIRQ Propagation Delay Resulting from Overvoltage Fault

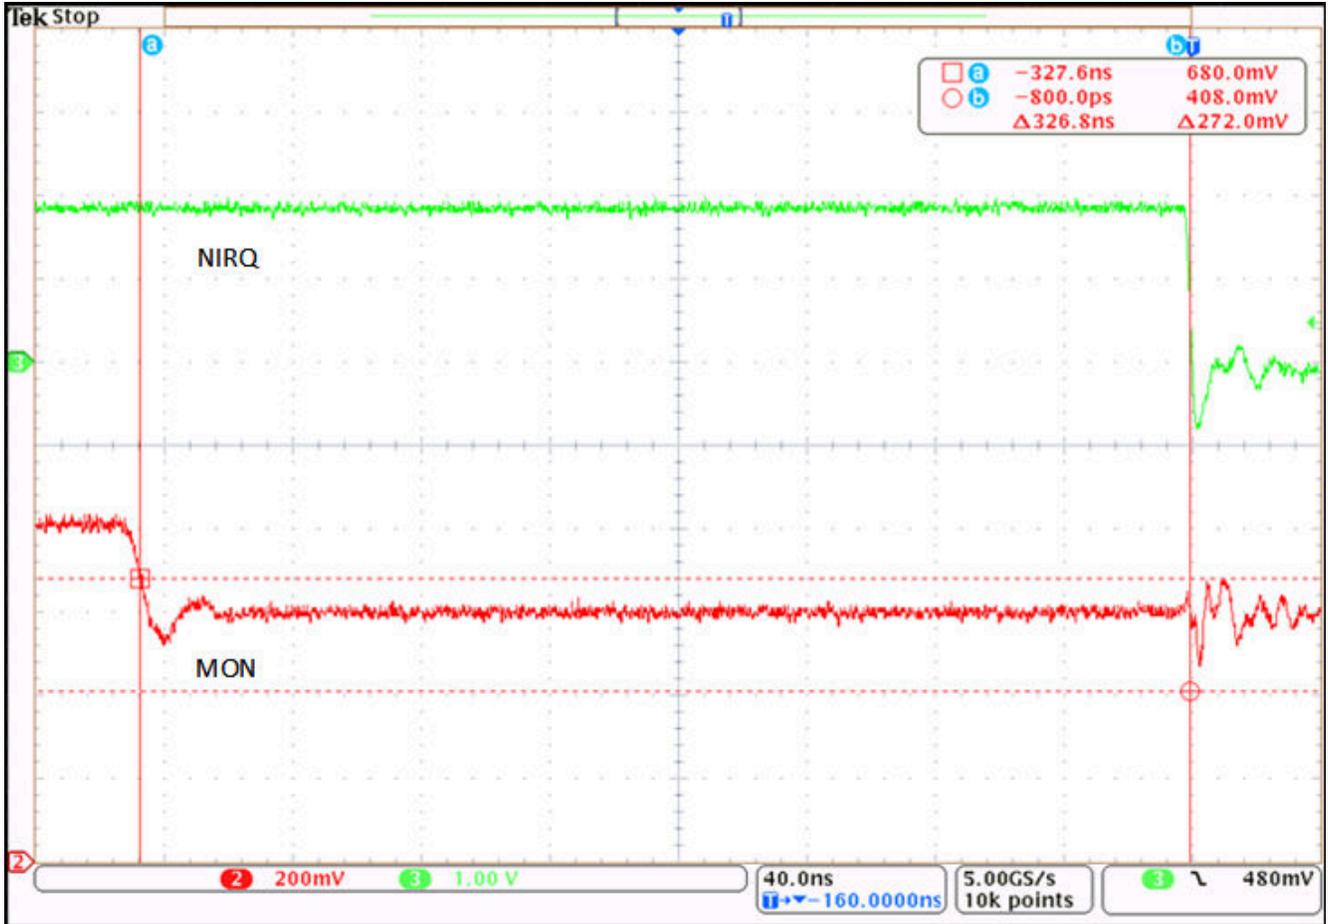


图 9-9. NIRQ Propogation Delay Resulting from Undervoltage Fault

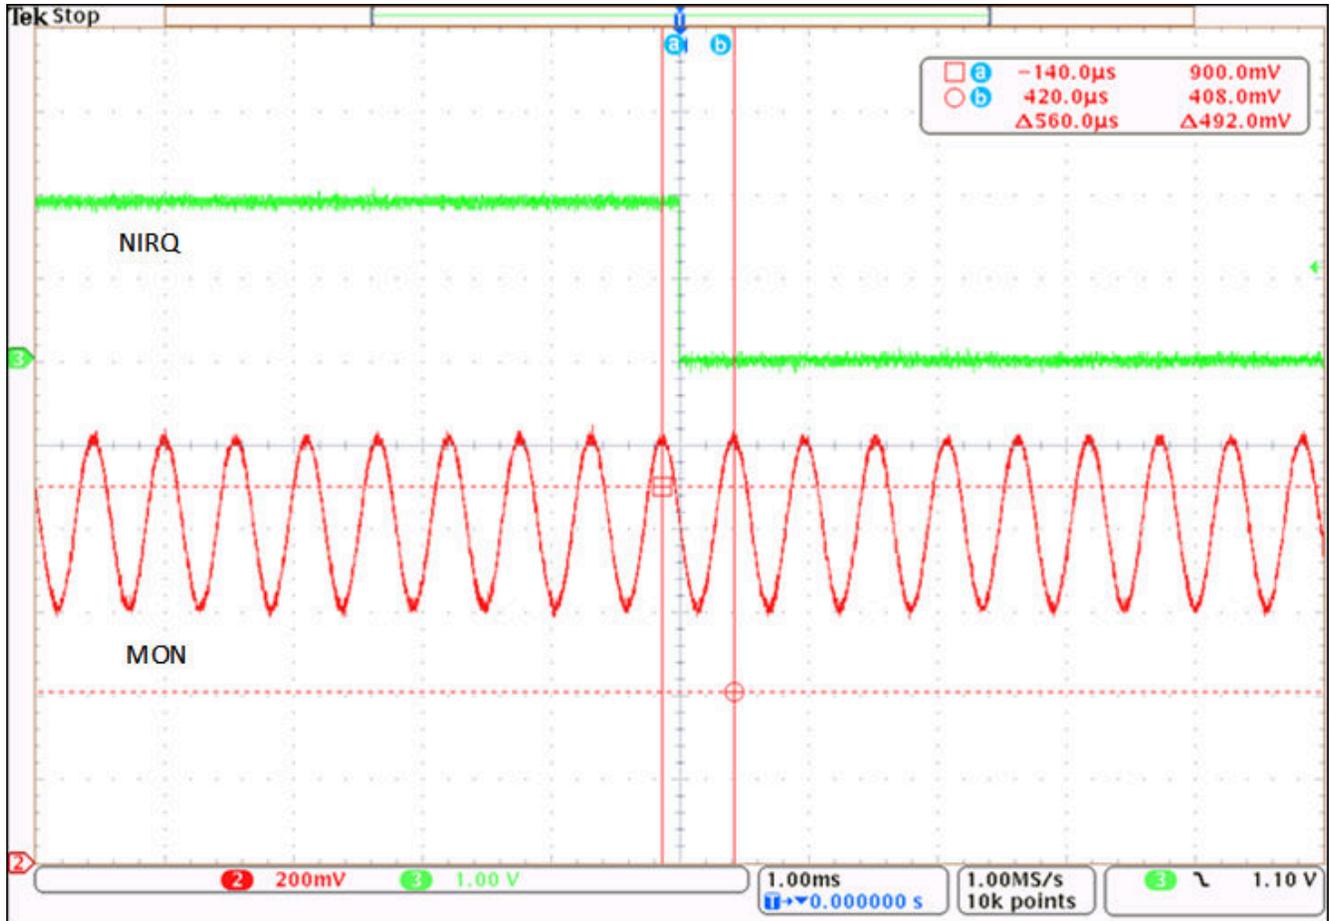


图 9-10. 1kHz Low Pass Filter Setting. NIRQ Triggered at 1.8kHz Signal with a 0.8V DC Component and 200mVp-p AC Signal. OV and UV Thresholds Set to 0.9V and 0.7V. Reduced the Frequency From 2kHz Until the NIRQ Pin Went Low.

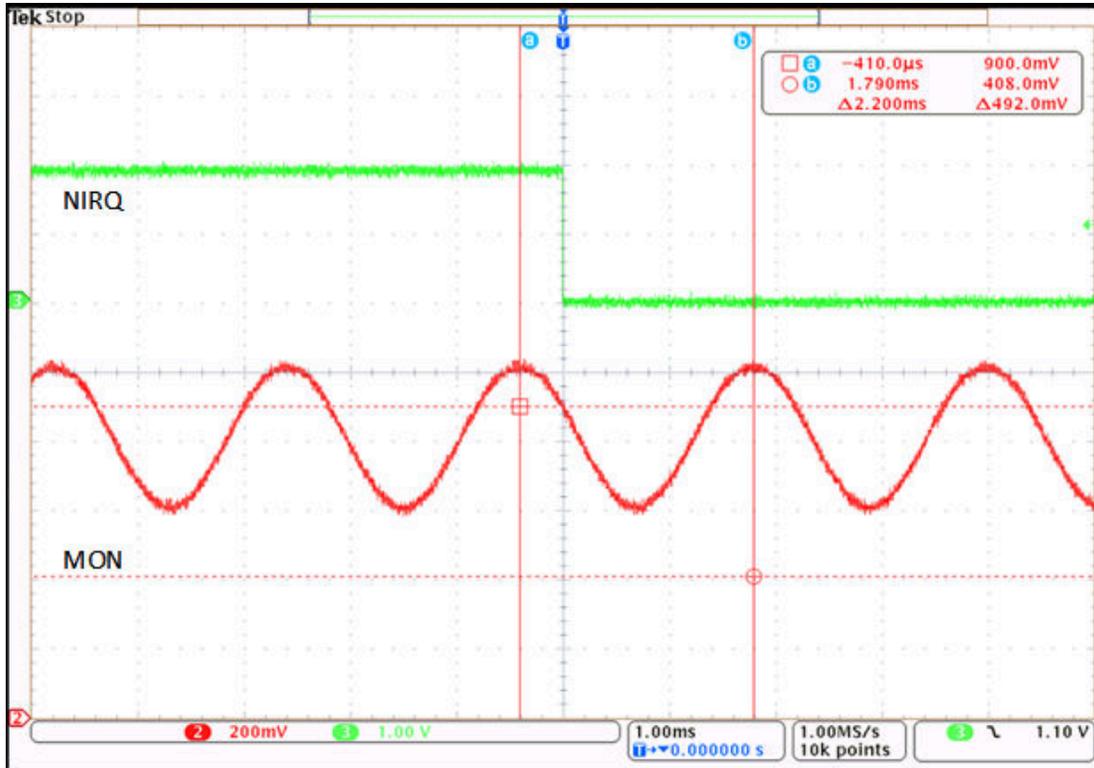


图 9-11. 250Hz Low Pass Filter setting. NIRQ Triggered at 455Hz Signal With a 0.8V DC Component and 200mVp-p AC Signal. OV and UV Thresholds Set to 0.9V and 0.7V. Reduced the Frequency From 500Hz Until the NIRQ Pin Went Low.

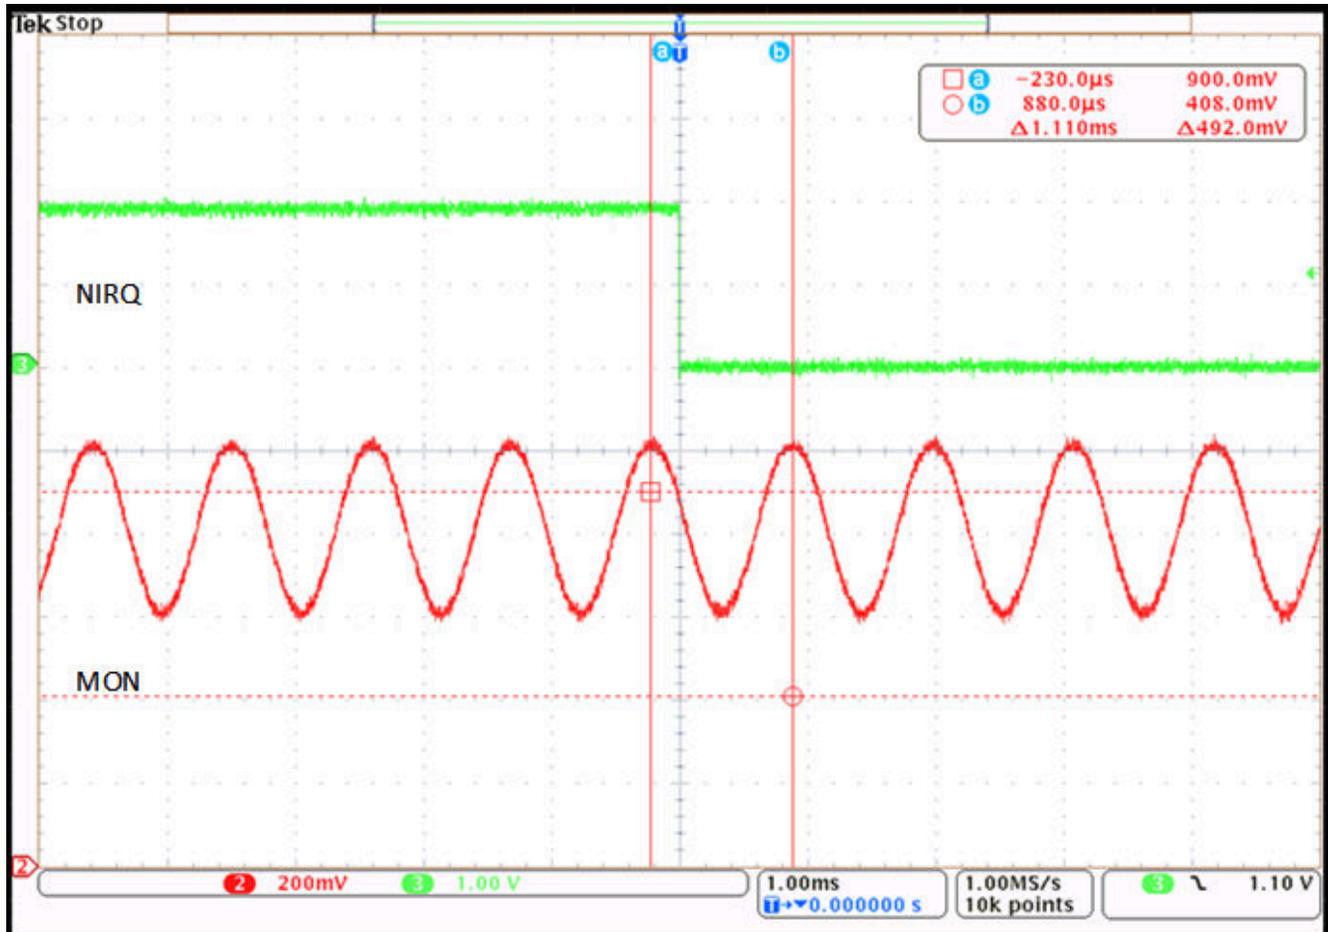


图 9-12. 500Hz Low Pass Filter Setting. NIRQ Triggered at 0.9kHz Signal With a 0.8V DC Component and 200mVp-p AC Signal. OV and UV Thresholds Set to 0.9V and 0.7V. Reduced the Frequency From 1kHz Until the NIRQ Pin Went Low.

9.3 Power Supply Recommendations

9.3.1 Power Supply Guidelines

This device is designed to operate from an input supply with a voltage range between 2.6V to 5.5V. This device has a 6V absolute maximum rating on the VDD pin. Good analog practice is to place a 0.1μF to 1μF capacitor between the VDD pin and the GND pin depending on the input voltage supply noise. If the voltage supply providing power to VDD is susceptible to any large voltage transient that exceed maximum specifications, additional precautions must be taken. See [SNVA849](#) for more information.

9.4 Layout

9.4.1 Layout Guidelines

- Place the external components as close to the device as possible. This configuration prevents parasitic errors from occurring.
- Avoid using long traces for the VDD supply node. The VDD capacitor, along with parasitic inductance from the supply to the capacitor, can form an LC circuit and create ringing with peak voltages above the maximum VDD voltage.
- Avoid using long traces of voltage to the MON pin. Long traces increase parasitic inductance and cause inaccurate monitoring and diagnostics.

- If differential voltage sensing is required for MON2 and/or MON3 and/or MON4 route RS_2,3,4 pin to the point of measurement. If RS_2,3,4 are not routed to the point of measurement, then route RS_2,3,4 to the GND pin of the device.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when absolutely necessary.
- For logic pins such as WD_EN and ESM, make sure the correct pull-up/down voltage is applied as per device logic levels for the associated functionality.
- For open-drain outputs like WDO, NIRQ, and NRST, select a pull-up resistor value such that the absolute maximum ratings of the device are not violated.

9.4.2 Layout Example

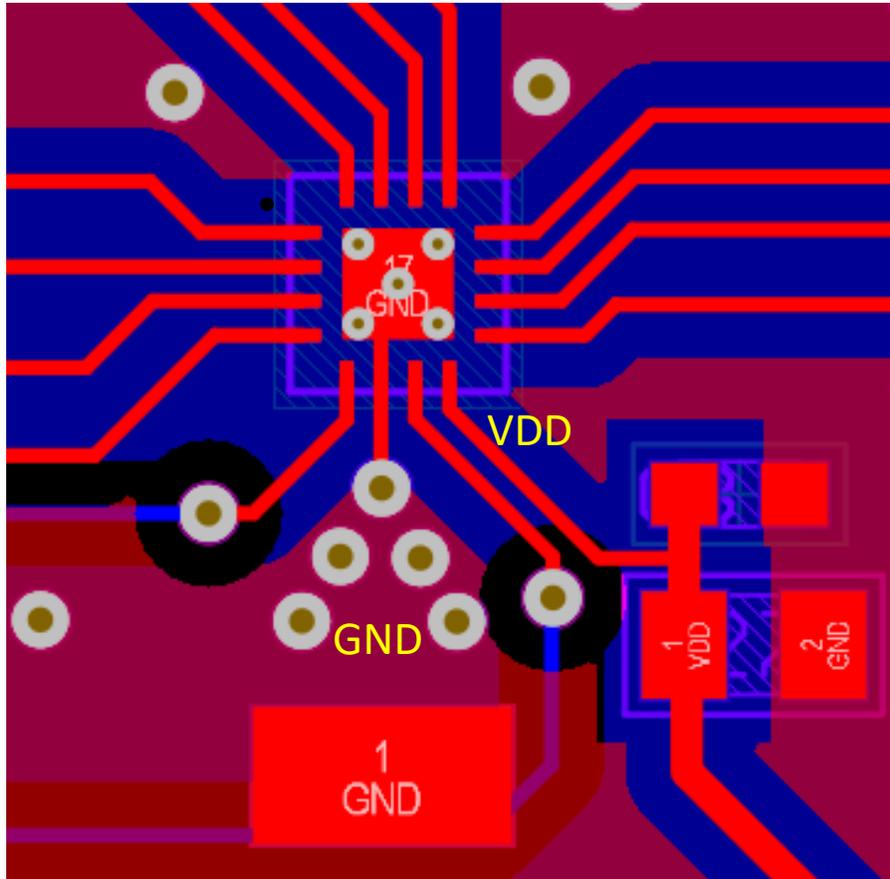


图 9-13. Recommended Layout

10 Device and Documentation Support

10.1 Device Nomenclature

表 10-1 shows how to decode the function of the device based on the part number.

表 10-1. Device Thresholds

ORDERING CODE	Description
TPS389C0300CRTERQ1	3 Monitors, Q&A Watchdog, ESM

表 10-2. TPS389C0300CRTERQ1 OTP Configuration

ADDR	DATA	Configuration Description
0x00	0x28	DEVICE_MODEL[7:3] and VENDOR_ID[2:0]
0x01	0x43	SILICON_REV[7:6] and OTP_REV[5:0]
0x02	0xF1	Channels disabled. MON2, 3, 4 enabled.
0x11	0x0C	WDO_DLY not applicable for latched WDO configuration
0x12	0x03	BIST at POR
0x13	0x06	Enable UVHF Mon2,3
0x14	0x06	Enable UVLF Mon2,3
0x15	0x06	Enable OVHF Mon2,3
0x16	0x06	Enable OVLF Mon2,3
0x1B	0x04	Thermal Shut Down Interrupt Enable
0x1C	0x01	Bist Fail Interrupt
0x1D	0x25	NRST MISMATCH, WDT → NIRQ, WDT → NRST, ESM → WDO not Mapped, ESM → NIRQ not Mapped, ESM → NRST not Mapped
0x1E	0x06	Enable Mon2,3
0x1F	0x06	Mon2,3 x4 Scaling
0x30	0xBC	4.56V UVHF Threshold Mon2
0x31	0xE8	5.44V OVHF Threshold Mon2
0x32	0xBC	4.56V UVLF Threshold Mon2
0x33	0xE8	5.44V OVLF Threshold Mon2
0x34	0xAA	102.4μs De-Bounce
0x35	0x1C	O VHF → NRST, UVHF → NRST, 1kHz LF Cutoff
0x40	0x6F	3.02V UVHF Threshold Mon3
0x41	0x8C	3.6V OVHF Threshold Mon3
0x42	0x6F	3.02V UVLF Threshold Mon3
0x43	0x8C	3.6V OVLF Threshold Mon3
0x44	0xAA	102.4μs De-bounce
0x45	0x1C	O VHF → NRST, UVHF → NRST, 1kHz LF Cutoff
0X9E	0x01	ESM Threshold = 2ms
0X9F	0x59	Reset Delay 1ms, WD EN
0xA1	0x06	AMSK ON MON2,3
0xA2	0x06	AMSK OFF MON2,3
0xA5,6	0x00	SEQ Timeout = 1ms
0xA8	0x06	SEQ UP Mon2,3 UVLF

表 10-2. TPS389C0300CRTERQ1 OTP Configuration (续)

ADDR	DATA	Configuration Description
0xA9	0x06	SEQ DOWN Mon2,3 UVLF
0xAA	0x27	WD Violation Count = 2, WD Delay = 7
0xAB	0x1D	WD Close = 30ms
0xAC	0x1D	WD Open = 30ms
0xFA	0x00	3.3V I2C interface

10.2 Documentation Support

10.3 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](https://www.ti.com) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

10.4 支持资源

[TI E2E™ 中文支持论坛](#) 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

10.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

10.6 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

10.7 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

11 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision F (June 2024) to Revision G (January 2025) Page

- Modified state diagram to reflect timing for OTP load and BIST..... [45](#)
- PROT1 and PROT2 registers bit 4 changed to reserved..... [47](#)

Changes from Revision E (February 2024) to Revision F (June 2024) Page

- Updated WDO delays typ..... [9](#)
- Removed $T_{HD;DAT}$ max limits to confirm to I²C standards..... [9](#)
- Modify Register Protection Feature Description to remove WRKS prot groups since they are not applicable to the device..... [44](#)
- Clarification of BIST ESM and Watchdog coverage [45](#)

Changes from Revision D (October 2023) to Revision E (February 2024) Page

- Addition of device summary tables [表 4-1](#), [表 4-2](#), and [表 4-3](#) [3](#)
- Specify device behavior when fault reporting output is un-mapped..... [18](#)
- Specify device behavior when fault reporting output is un-mapped..... [19](#)
- Additional clarification regarding the operation of PEC..... [21](#)

• Clarify watchdog window delay accuracy.....	28
• Clarification of WDO signal timing.....	29
• Specify device behavior when fault reporting output is un-mapped.....	37
• Clarification of WDO signal timing.....	40
• Clarification of WDO timing.....	46
• Clarification of mapped error reporting.....	134

Changes from Revision C (May 2023) to Revision D (October 2023)	Page
• 量产数据发布.....	1

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.




RTE0016K

PACKAGE OUTLINE

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

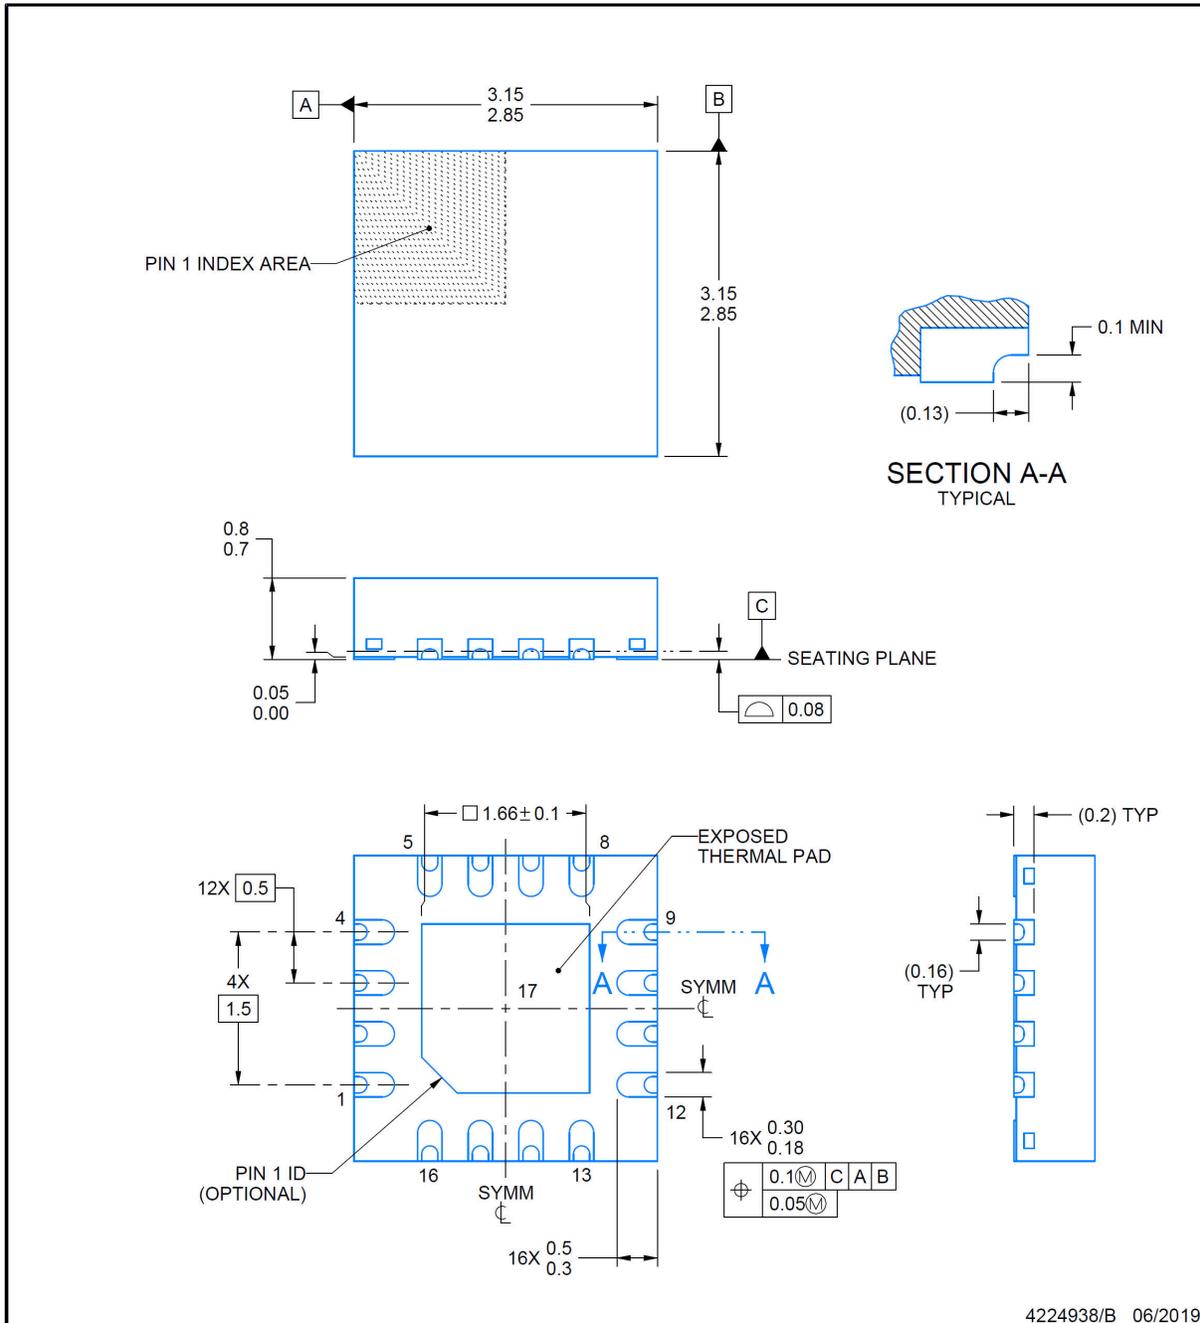

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT


RTE0016K

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

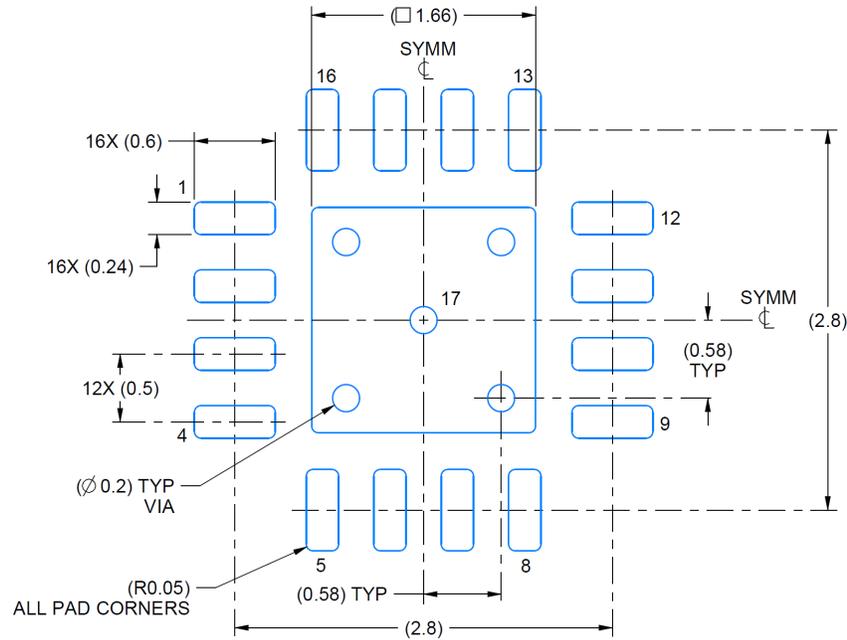

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

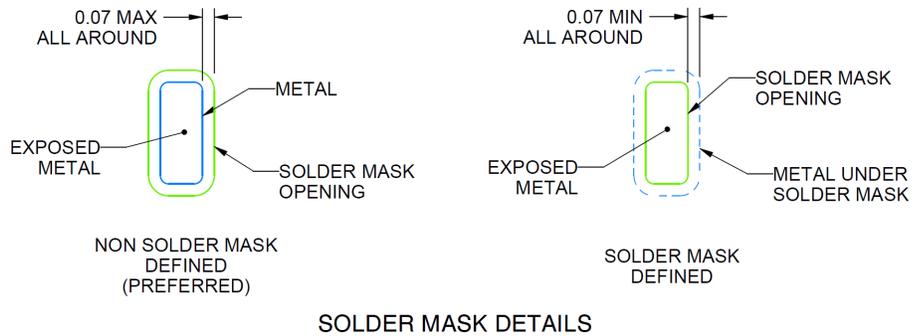

4224938/B 06/2019

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RTE0016K

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

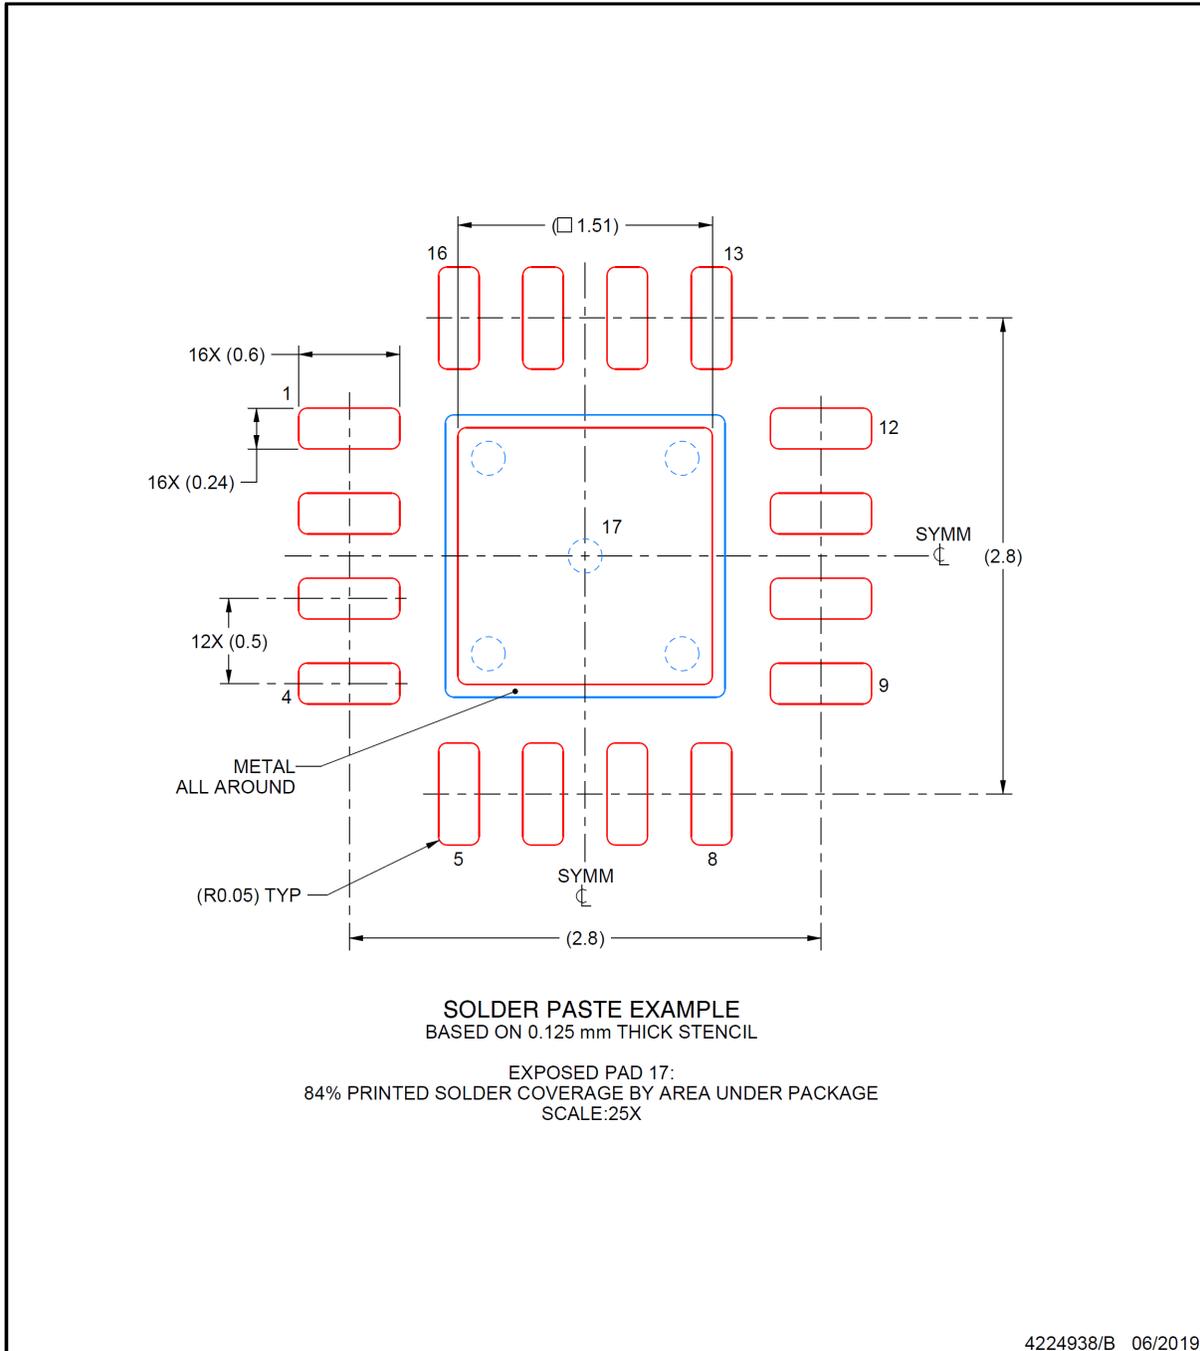

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS389C0300CRTERQ1	ACTIVE	WQFN	RTE	16	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	C030Q	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.



(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

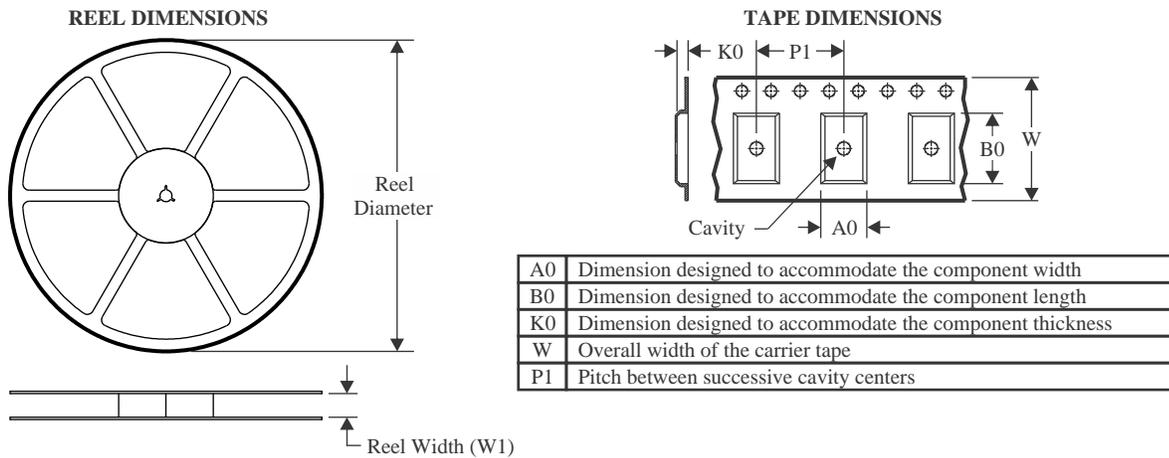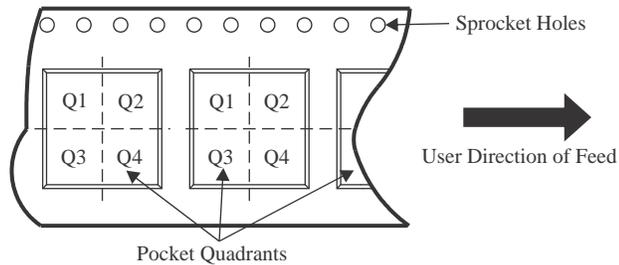TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

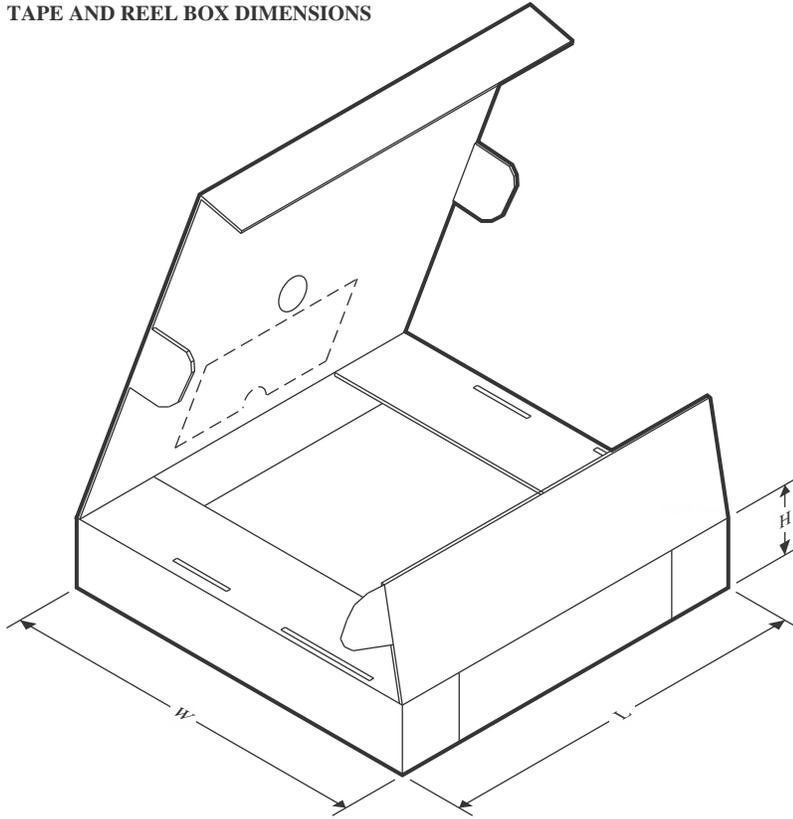Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS389C0300CRTERQ1	WQFN	RTE	16	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS389C0300CRTERQ1	WQFN	RTE	16	3000	367.0	367.0	35.0

GENERIC PACKAGE VIEW


RTE 16

WQFN - 0.8 mm max height



3 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

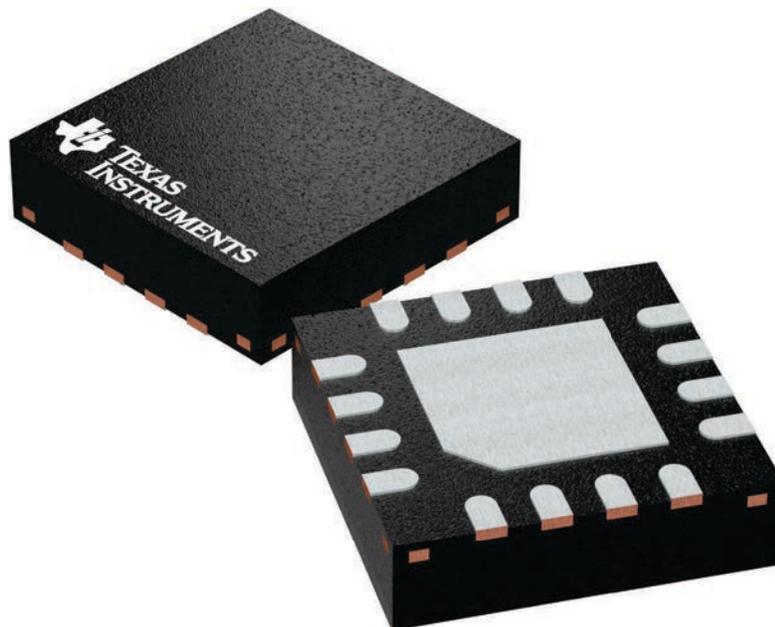

4225944/A

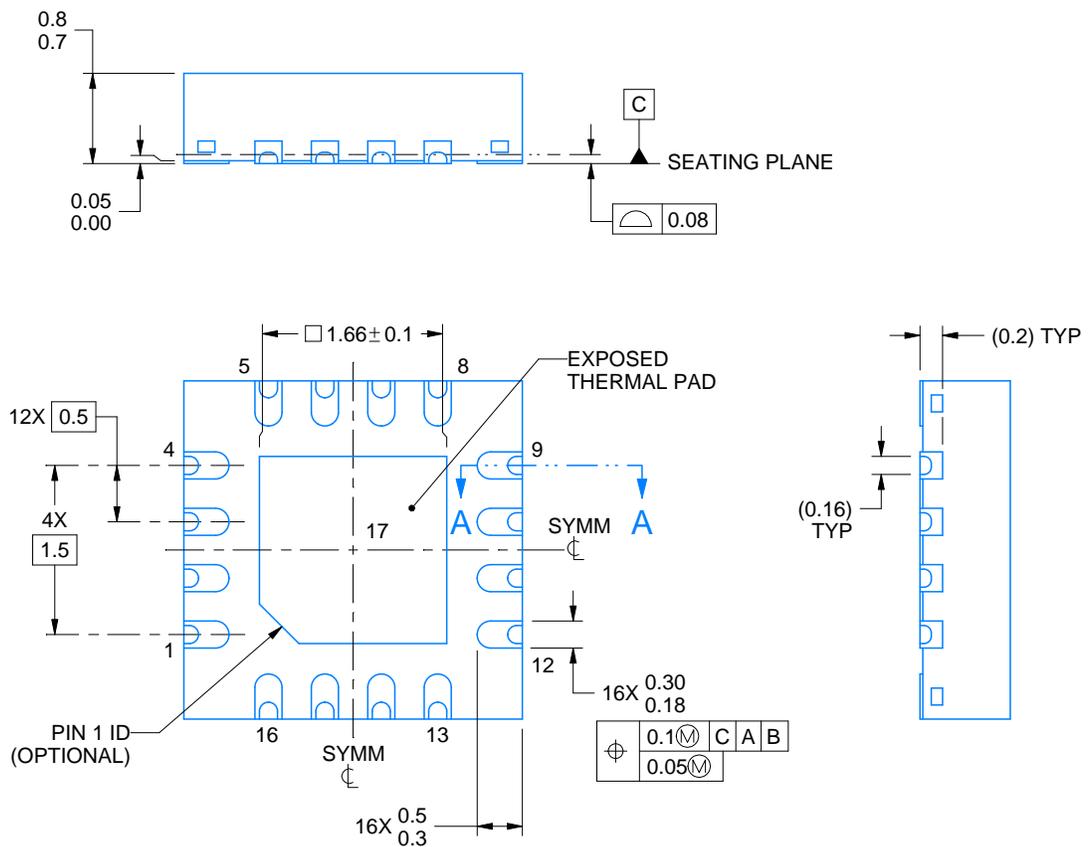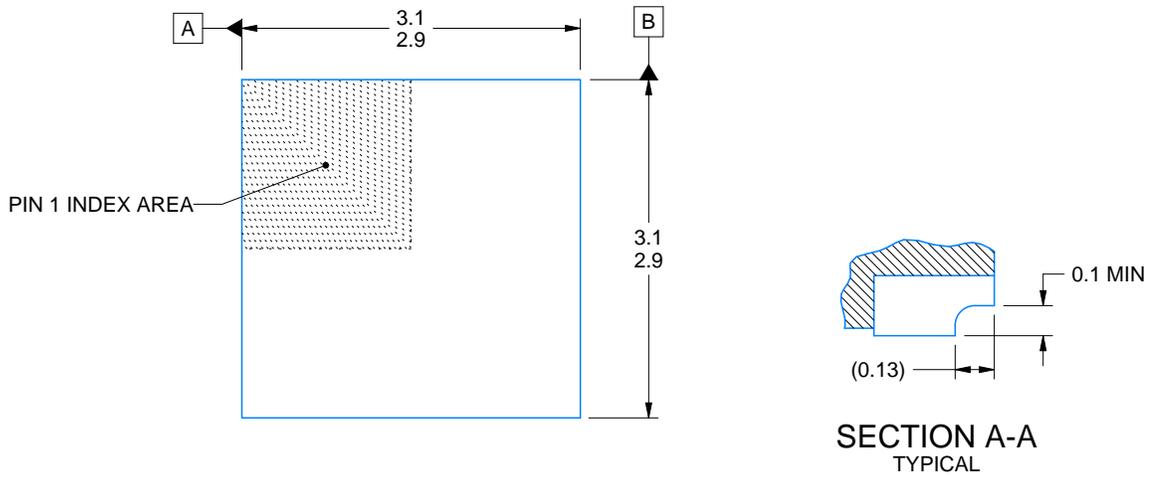

4224938/C 03/2022

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT


RTE0016K

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

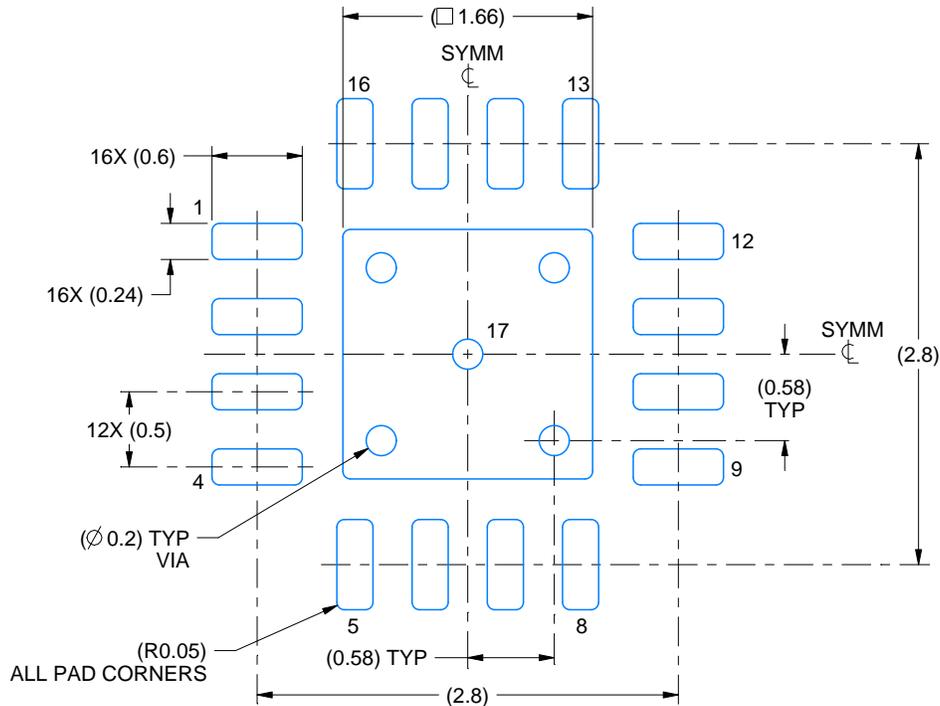

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

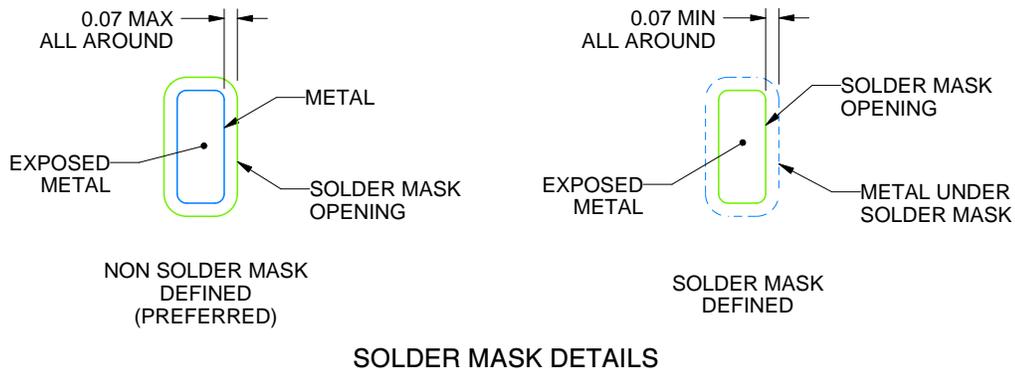

SOLDER MASK DETAILS

4224938/C 03/2022

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RTE0016K

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

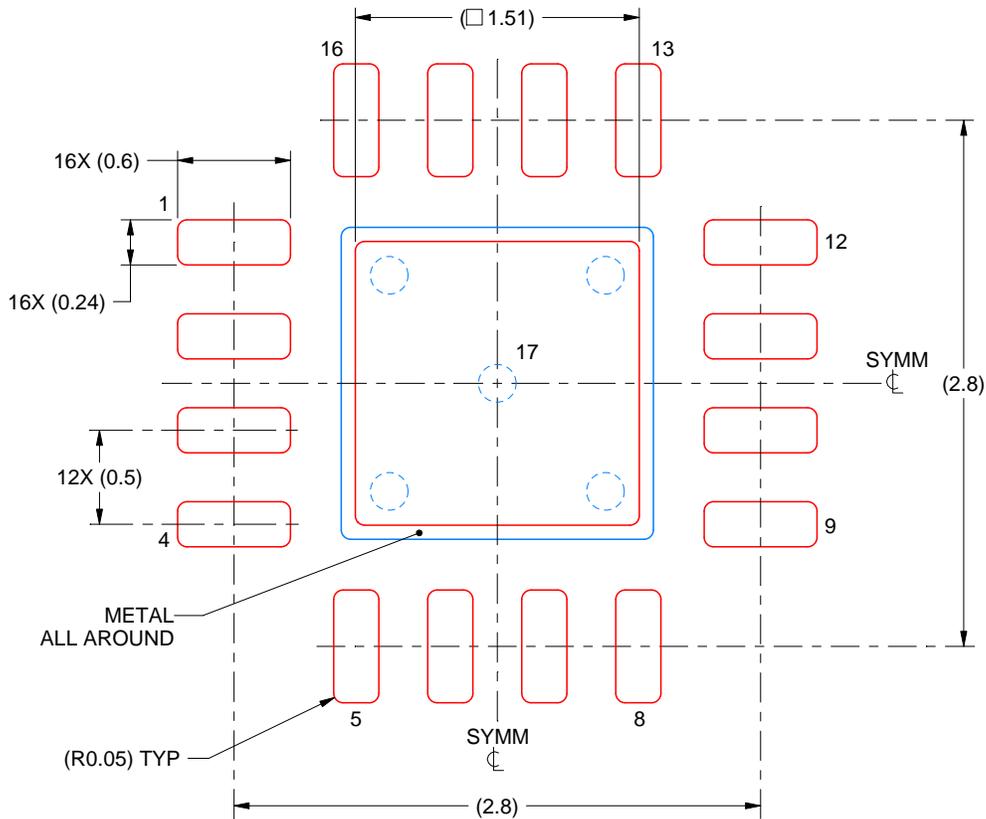

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 17:
84% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:25X

4224938/C 03/2022

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
版权所有 © 2025，德州仪器 (TI) 公司