


## TPS3430 ウィンドウ・ウォッチドッグ・タイマ、プログラム可能なりセット遅延付き

## 1 特長


- 出荷時にプログラム可能な高精度ウォッチドッグ・タイマ
  - ウォッチドッグ・タイムアウトおよびウォッチドッグ・リセット遅延の 25°Cでの標準値の精度： $\pm 2.5\%$
- ウォッチドッグのディスエーブル機能
- ウォッチドッグのタイムアウトをユーザーがプログラム可能
- ウォッチドッグ・リセット遅延をユーザーがプログラム可能
- 入力電圧範囲： $VDD = 1.6V \sim 6.5V$
- 低消費電流： $I_{DD} = 10\mu A$  (標準値)
- オープン・ドレイン出力
- 小型の  $3mm \times 3mm$ 、10 ピン VSON パッケージ
- 動作時の接合部温度範囲： $-40^\circ C \sim +125^\circ C$

## 2 アプリケーション

- スマート・ディスプレイ
- バッテリ・パック：電動自転車 / 電動スクーター / 軽電気自動車 (LEV)
- サーモット・ブレーカ (ACB, MCCB, VCB)
- 電動自転車 / 電動アシスト自転車
- AC 充電 (バッテリ) ステーション
- マルチファンクション・リレー
- ビジョン・コンピュータ

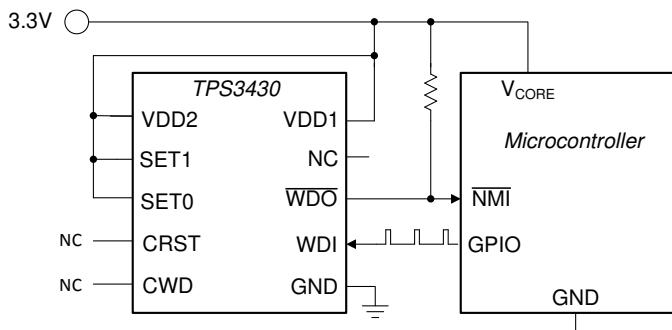

ウィンドウ・ウォッチドッグ・タイマの回路

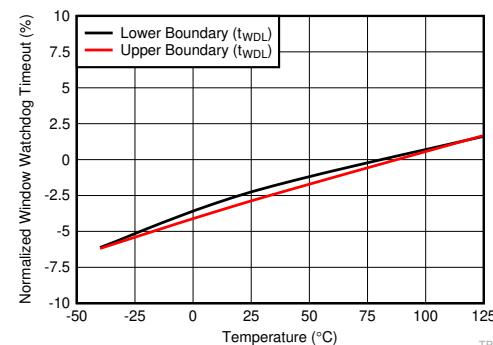

温度範囲にわたる正規化されたウォッチドッグ・タイマアウト精度 (SET0 = 1, SET1 = 1, CWD = NC)



英語版の TI 製品についての情報を翻訳したこの資料は、製品の概要を確認する目的で便宜的に提供しているものです。該当する正式な英語版の最新情報は、[www.ti.com](http://www.ti.com) で閲覧でき、その内容が常に優先されます。TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、必ず最新版の英語版をご参照くださいますようお願いいたします。

## Table of Contents


1 特長.....	1	7.4 Device Functional Modes.....	15
2 アプリケーション.....	1	8 Application and Implementation.....	16
3 概要.....	1	8.1 Application Information.....	16
4 Revision History.....	2	8.2 Typical Applications.....	19
5 Pin Configuration and Functions.....	3	9 Power Supply Recommendations.....	26
6 Specifications.....	4	10 Layout.....	27
6.1 Absolute Maximum Ratings.....	4	10.1 Layout Guidelines.....	27
6.2 ESD Ratings.....	4	10.2 Layout Example.....	27
6.3 Recommended Operating Conditions.....	4	11 Device and Documentation Support.....	28
6.4 Thermal Information.....	5	11.1 Device Support.....	28
6.5 Electrical Characteristics.....	5	11.2 Documentation Support.....	28
6.6 Timing Requirements.....	6	11.3 Receiving Notification of Documentation Updates.....	28
6.7 Timing Diagrams .....	7	11.4 サポート・リソース.....	28
6.8 Typical Characteristics.....	9	11.5 Trademarks.....	28
7 Detailed Description.....	10	11.6 Electrostatic Discharge Caution.....	28
7.1 Overview.....	10	11.7 Glossary.....	28
7.2 Functional Block Diagrams.....	10	12 Mechanical, Packaging, and Orderable	
7.3 Feature Description.....	10	Information.....	28

## 4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision * (July 2018) to Revision A (October 2021)	Page
• 文書全体にわたって表、図、相互参照の採番方法を更新.....	1
• 「ウォッチドッグ・タイムアウトおよびウォッチドッグ・リセット遅延の温度範囲全体にわたる精度： $\pm 15\%$ 」を削除 .....	1
• 「 $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ で 15%、」を削除.....	1
• Updated ESD Ratings.....	4
• Updated $I_{\text{CWD}}$ min and max spec.....	5
• Updated $V_{\text{CWD}}$ min and max spec.....	5
• Added a footnote to for $t_{\text{INIT}}$ .....	6
• Changed minimum and maximum specifications of 2nd, 5th, 6th, and 8th rows of $t_{\text{WDL}}$ parameter .....	6
• Changed minimum and maximum specifications of 2nd and last rows of $t_{\text{WDU}}$ parameter .....	6
• Updated $\overline{\text{WDO}}$ delay time values for various capacitors in <i>Watchdog Reset Delay Time for Common Ideal Capacitor Values</i> table.....	16
• Changed minimum and maximum specifications for NC SETx 01 setting for both upper and lower watchdog boundaries, 10 k $\Omega$ to VDD SETx 00 and 01 settings for lower watchdog boundary, and 10 k $\Omega$ to VDD SETx 11 setting for both upper and lower watchdog boundaries in <i>Factory-Programmed Watchdog Timing</i> table...	18
• Updated $t_{\text{WDU}}$ min and max values for all capacitors.....	18
• Updated $t_{\text{WDU}}$ min and max boundary values from 0.85 and 1.15 to 0.905 and 1.095 respectively.....	18

## 5 Pin Configuration and Functions

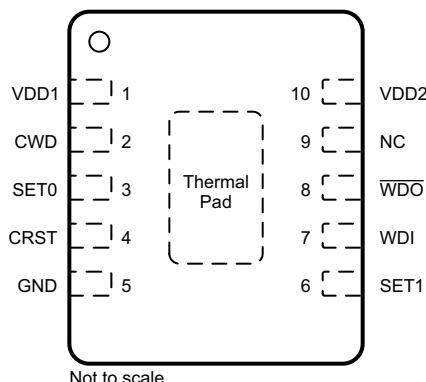

**図 5-1. DRC Package  
3-mm × 3-mm VSON-10  
Top View**

**表 5-1. Pin Functions**

PIN		I/O	DESCRIPTION
NAME	NO.		
VDD1	1	I	Supply voltage pin. For noisy systems, connecting a 0.1- $\mu$ F bypass capacitor is recommended.
CWD	2	I	Programmable watchdog timeout input. Watchdog timeout is set by connecting a capacitor between this pin and ground. Furthermore, this pin can also be connected by a 10-k $\Omega$ resistor to VDD, or leaving unconnected (NC) further enables the selection of the preset watchdog timeouts; see the <a href="#">セクション 6.6</a> table. When using a capacitor, the TPS3430 determines the window watchdog upper boundary with <a href="#">式 4</a> . The lower watchdog boundary is set by the SET pins, see and <a href="#">表 8-5</a> the <a href="#">セクション 8.1.2</a> section for additional information.
SET0	3	I	Logic input. SET0, SET1, and CWD select the watchdog window ratios, timeouts, and disable the watchdog; see the <a href="#">セクション 6.6</a> table.
CRST	4	I	Programmable watchdog reset delay pin. Connect a capacitor between this pin and GND to program the watchdog reset delay period. This pin can also be connected by a 10-k $\Omega$ pull-up resistor to VDD, or left unconnected (NC) for various factory programmed watchdog reset delay options; see the <a href="#">セクション 8.1.1</a> section. When using an external capacitor, use <a href="#">式 1</a> to determine the watchdog reset delay.
GND	5	—	Ground pin
SET1	6	I	Logic input. SET0, SET1, and CWD select the watchdog window ratios, timeouts, and disable the watchdog; see the <a href="#">セクション 6.6</a> table.
WDI	7	I	Watchdog input. A falling transition (edge) must occur at this pin within the watchdog timeout between the lower ( $t_{WDL(max)}$ ) and upper ( $t_{WDU(min)}$ ) window boundaries in order for WD0 to not assert. During power up, all pulses to WDI are ignored before $t_{RST}$ expires and the watchdog is disabled. When the watchdog is not in use, the SET pins can be used to disable the watchdog. The input at WDI is ignored when WD0 is low (asserted) and also when the watchdog is disabled. If the watchdog is disabled, then WDI cannot be left unconnected and must be driven to either VDD or GND.
WD0	8	O	Watchdog open-drain active-low output. Connect WD0 with a 1-k $\Omega$ to 100-k $\Omega$ resistor to VDD or another power supply. WD0 goes low (asserts) when a watchdog timeout occurs. When a watchdog timeout occurs, WD0 goes low (asserts) for the set WD0 reset delay ( $t_{RST}$ ). When the watchdog is disabled, WD0 remains logic high regardless of WDI.
NC	9	NC	This pin is no-connect and must be left floating.
VDD2	10	I	Connect this pin to VDD1. The device will not function properly if VDD1 and VDD2 are not externally connected.
Thermal pad	—	—	Connect the thermal pad to a large-area ground plane. The thermal pad is internally connected to GND.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
Supply voltage range	VDD1, VDD2	-0.3	7	V
Output voltage range	WDO	-0.3	7	V
Voltage ranges	SET0, SET1, WDI,	-0.3	7	V
	CWD, CRST	-0.3	VDD + 0.3 <sup>(3)</sup>	
Output pin current	WDO		±20	mA
Input current (all pins)			±20	mA
Continuous total power dissipation		See セクション 6.4		
Temperature	Operating junction, $T_J$ <sup>(2)</sup>	-40	150	°C
	Operating free-air temperature, $T_A$ <sup>(2)</sup>	-40	150	
	Storage, $T_{stg}$	-65	150	

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2)  $T_J = T_A$  as a result of the low dissipated power in this device.

(3) The absolute maximum rating is  $V_{DD} + 0.3$  V or 7.0 V, whichever is smaller.

### 6.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±4000
		Charged-device model (CDM), per JEDEC specification JEDEC22-C101 <sup>(2)</sup>	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible with the necessary precautions.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible with the necessary precautions.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	NOM	MAX	UNIT
VDD1, VDD2 Supply pin voltage	1.6		6.5	V
$V_{SET0}$ SET0 pin voltage	0		6.5	V
$V_{SET1}$ SET1 pin voltage	0		6.5	V
$C_{CRST}$ WD reset delay capacitor	0.1 <sup>(1)</sup>		1000 <sup>(1)</sup>	nF
$R_{CRST}$ Pull-up resistor to VDD	9	10	11	kΩ
$C_{CWD}$ Watchdog timing capacitor	0.1 <sup>(2)</sup>		1000 <sup>(2)</sup>	nF
CWD Pull-up resistor to VDD	9	10	11	kΩ
$R_{PU}$ Pull-up resistor, WDO	1	10	100	kΩ
$I_{WDO}$ Watchdog output current			10	mA
$T_J$ Junction Temperature	-40		125	°C

(1) Using a  $C_{CRST}$  capacitor of 0.1 nF or 1000 nF gives a reset delay of 703 μs or 3.22 seconds, respectively.

(2) Using a  $C_{CWD}$  capacitor of 0.1 nF or 1000 nF gives a  $t_{WDO(typ)}$  of 62.74 ms or 77.45 seconds, respectively.

## 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TPS3430	UNIT
		DRC (VSON)	
		10 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	50.9	°C/W
$R_{\theta JC(\text{top})}$	Junction-to-case (top) thermal resistance	50.6	
$R_{\theta JB}$	Junction-to-board thermal resistance	25.4	
$\Psi_{JT}$	Junction-to-top characterization parameter	1.2	
$\Psi_{JB}$	Junction-to-board characterization parameter	25.5	
$R_{\theta JC(\text{bot})}$	Junction-to-case (bottom) thermal resistance	7.3	

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 6.5 Electrical Characteristics

at  $1.6 \text{ V} \leq V_{DD} \leq 6.5 \text{ V}$  over the operating temperature range of  $-40^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$  (unless otherwise noted); typical values are at  $T_J = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
<b>GENERAL CHARACTERISTICS</b>						
$V_{DD1, VDD2}$ <sup>(1) (3)</sup>	Supply voltage		1.6	6.5	V	
$I_{DD}$	Supply current		10	19	$\mu\text{A}$	
$V_{POR}$ <sup>(2)</sup>	Power-on reset voltage	$V_{OL(\text{MAX})} = 0.25 \text{ V}$		0.8	V	
$I_{CRST}$	CRST pin charge current	$CRST = 0.5 \text{ V}$	337	375	413	nA
$V_{CRST}$	CRST pin threshold voltage		1.192	1.21	1.228	V
<b>WINDOW WATCHDOG FUNCTION</b>						
$I_{CWD}$	CWD pin charge current	$CWD = 0.5 \text{ V}$	347	375	403	nA
$V_{CWD}$	CWD pin threshold voltage		1.196	1.21	1.224	V
$V_{OL}$	WDO output low	$VDD = 5 \text{ V}$ , $I_{SINK} = 3 \text{ mA}$		0.4	V	
$I_D$	WDO output leakage current	$VDD = 1.6 \text{ V}$ , $V_{WDO} = 6.5 \text{ V}$		1	$\mu\text{A}$	
$V_{IL}$	Low-level input voltage (SET0, SET1)			0.25	V	
$V_{IH}$	High-level input voltage (SET0, SET1)		0.8		V	
$V_{IL(WDI)}$	WDO output low			$0.3 \times V_{DD}$	V	
$V_{IH(WDI)}$	WDO output leakage current		$0.8 \times V_{DD}$		V	

(1) When  $V_{DD}$  falls below  $V_{UVLO}$ , WDI is ignored.  
 (2) When  $V_{DD}$  falls below  $V_{POR}$ ,  $\overline{WDO}$  is undefined.  
 (3) During power-on,  $V_{DD}$  must be a minimum 1.6 V for at least 300  $\mu\text{s}$ .

## 6.6 Timing Requirements

at  $1.6 \text{ V} \leq V_{DD} \leq 6.5 \text{ V}$  over the operating temperature range of  $-40^\circ\text{C} \leq T_A, T_J \leq +125^\circ\text{C}$  (unless otherwise noted); the open-drain pullup resistors are  $10 \text{ k}\Omega$  for each output; typical values are at  $T_J = 25^\circ\text{C}$

			MIN	TYP	MAX	UNIT
<b>GENERAL</b>						
$t_{INIT}$	CWD, CRST pin evaluation period <sup>(1)</sup>			381		$\mu\text{s}$
$t_{SET}$	Time required between changing SET0 and SET1 pins			500		$\mu\text{s}$
	SET0, SET1 pin setup time			1		$\mu\text{s}$
	Startup delay <sup>(3)</sup>			300		$\mu\text{s}$
<b>DELAY FUNCTION</b>						
$t_{RST}$	Watchdog reset delay	CRST = NC	170	200	230	ms
		CRST = $10 \text{ k}\Omega$ to VDD	8.5	10	11.5	ms
<b>WINDOW WATCHDOG FUNCTION</b>						
WD ratio	Window watchdog ratio of lower boundary to upper boundary	CWD = programmable, SET0 = 0, SET1 = 0 <sup>(2)</sup>		1/8		
		CWD = programmable, SET0 = 1, SET1 = 1 <sup>(2)</sup>		1/2		
		CWD = programmable, SET0 = 0, SET1 = 1 <sup>(2) (4)</sup>		3/4		
$t_{WDL}$	Window watchdog lower boundary	CWD = NC, SET0 = 0, SET1 = 0	19.1	22.5	25.9	ms
		CWD = NC, SET0 = 0, SET1 = 1	1.48	1.85	2.22	ms
		CWD = NC, SET0 = 1, SET1 = 0		Watchdog disabled		
		CWD = NC, SET0 = 1, SET1 = 1	680	800	920	ms
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 0, SET1 = 0	7.65	9.0	10.35	ms
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 0, SET1 = 1	7.65	9.0	10.35	ms
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 1, SET1 = 0		Watchdog disabled		
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 1, SET1 = 1	1.48	1.85	2.22	ms
$t_{WDU}$	Window watchdog upper boundary	CWD = NC, SET0 = 0, SET1 = 0	46.8	55.0	63.3	ms
		CWD = NC, SET0 = 0, SET1 = 1	23.375	27.5	31.625	ms
		CWD = NC, SET0 = 1, SET1 = 0		Watchdog disabled		
		CWD = NC, SET0 = 1, SET1 = 1	1360	1600	1840	ms
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 0, SET1 = 0	92.7	109.0	125.4	ms
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 0, SET1 = 1	165.8	195.0	224.3	ms
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 1, SET1 = 0		Watchdog disabled		
		CWD = $10 \text{ k}\Omega$ to VDD, SET0 = 1, SET1 = 1	9.35	11.0	12.65	ms
$t_{WD-setup}$	Setup time required for device to respond to changes on WDI after being enabled			150		$\mu\text{s}$
	Minimum WDI pulse duration			50		ns
$t_{WD-del}$	WDI to $\overline{WDO}$ delay			50		ns


(1) Refer to [セクション 8.1.2.2](#).

(2) 0 refers to  $VSET \leq VIL$ , 1 refers to  $VSET \geq VIH$ .

(3) During power-on, VDD must be a minimum 1.6 V for at least 300  $\mu\text{s}$ .

(4) If this watchdog ratio is used, then  $t_{WDL}(\text{max})$  can overlap  $t_{WDU}(\text{min})$ .

## 6.7 Timing Diagrams

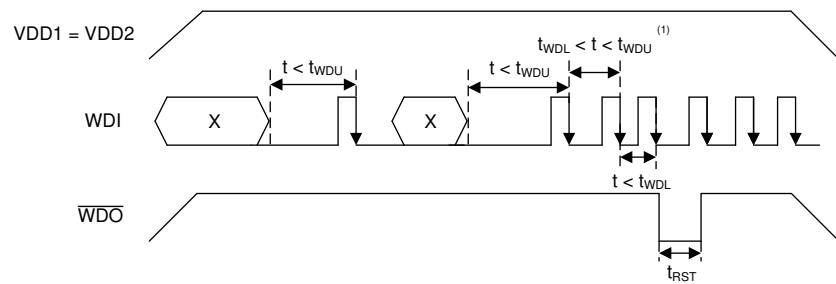

A. See [图 6-2](#) for WDI timing requirements.

图 6-1. Timing Diagram

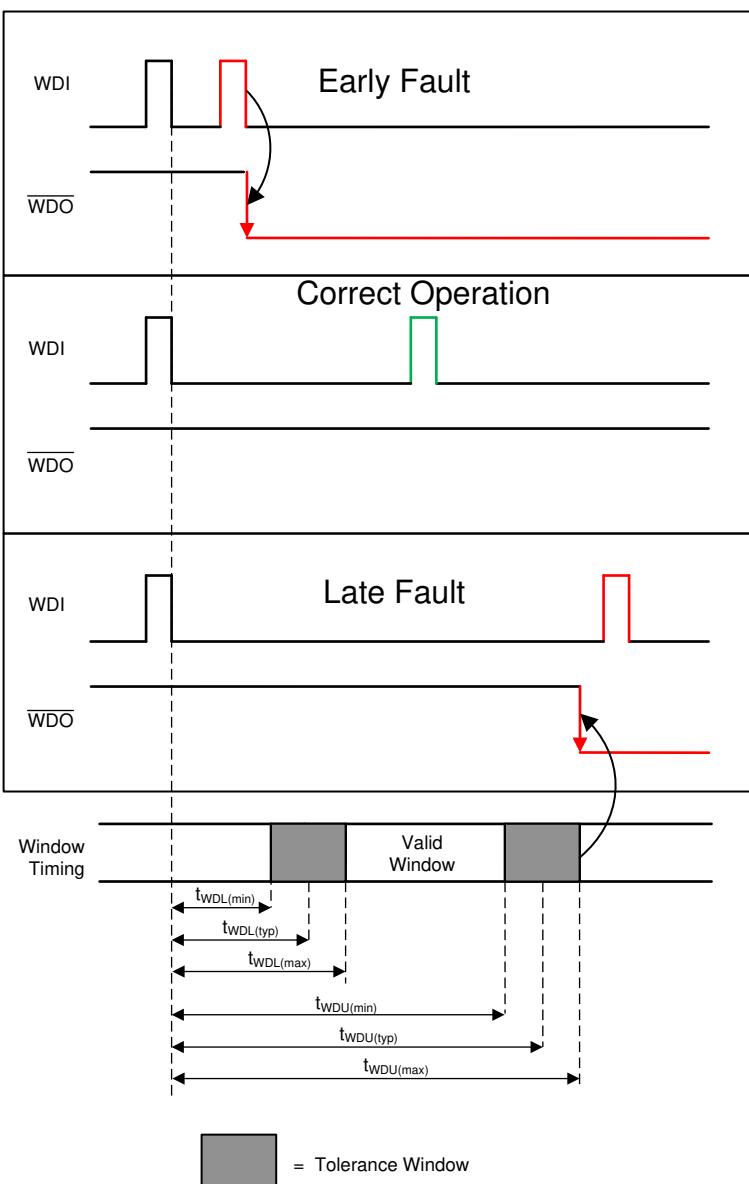


图 6-2. TPS3430 Window Watchdog Timing

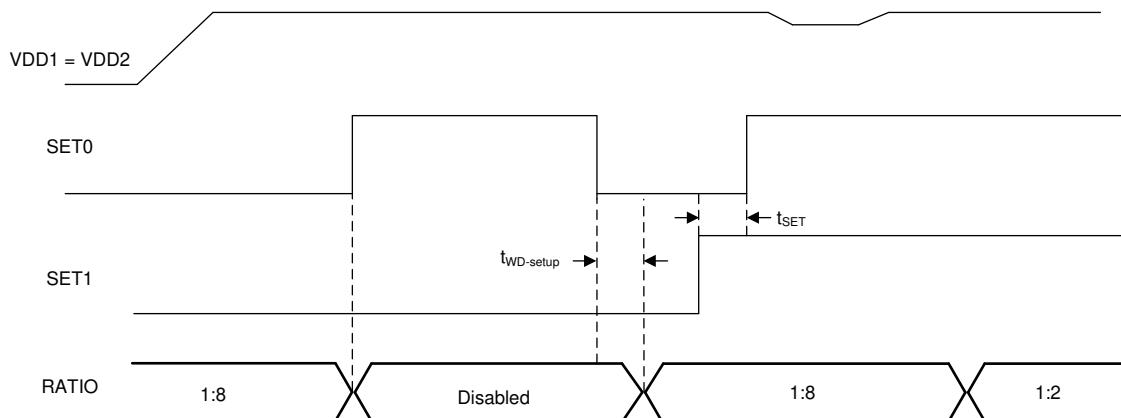


図 6-3. Changing SET0 and SET1 Pins

## 6.8 Typical Characteristics

all curves are taken at  $T_A = 25^\circ\text{C}$  with  $1.6 \text{ V} \leq V_{DD} \leq 6.5 \text{ V}$  (unless otherwise noted)

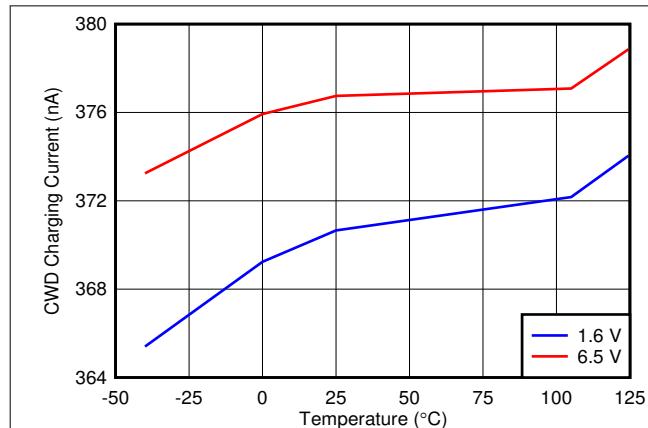


図 6-4. CWD Charging Current vs Temperature

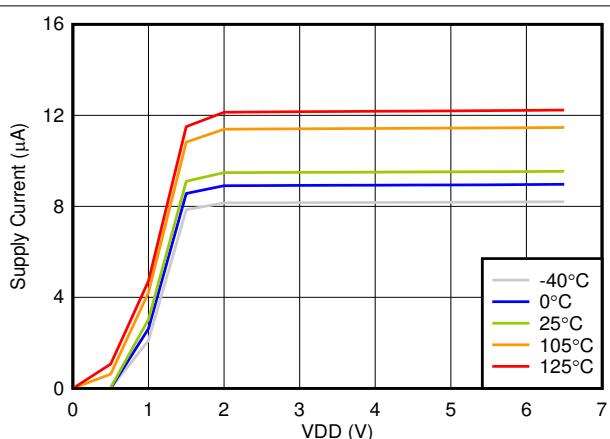


図 6-5. Supply Current vs Power-Supply Voltage

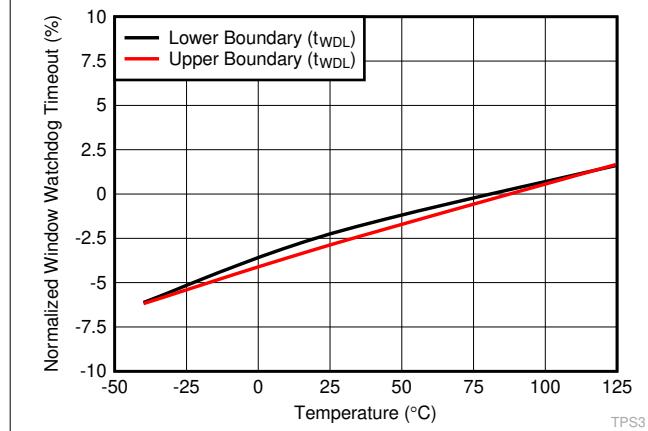


図 6-6. Normalized Watchdog Timeout Accuracy Over Temperature (SET0 = 1, SET1 = 1, CWD = NC)

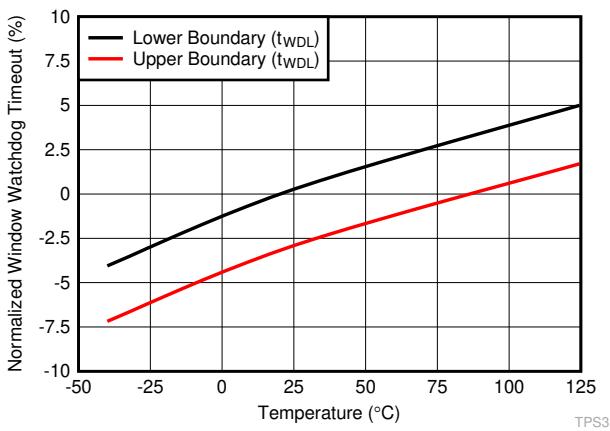



図 6-7. Normalized Watchdog Timeout Accuracy Over Temperature (SET0 = 1, SET1 = 1, CWD = 10kΩ to VDD)

## 7 Detailed Description

### 7.1 Overview

The TPS3430 is a high-accuracy programmable window watchdog timer with watchdog disable feature that achieves 15% watchdog timing accuracy over the specified temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

### 7.2 Functional Block Diagrams

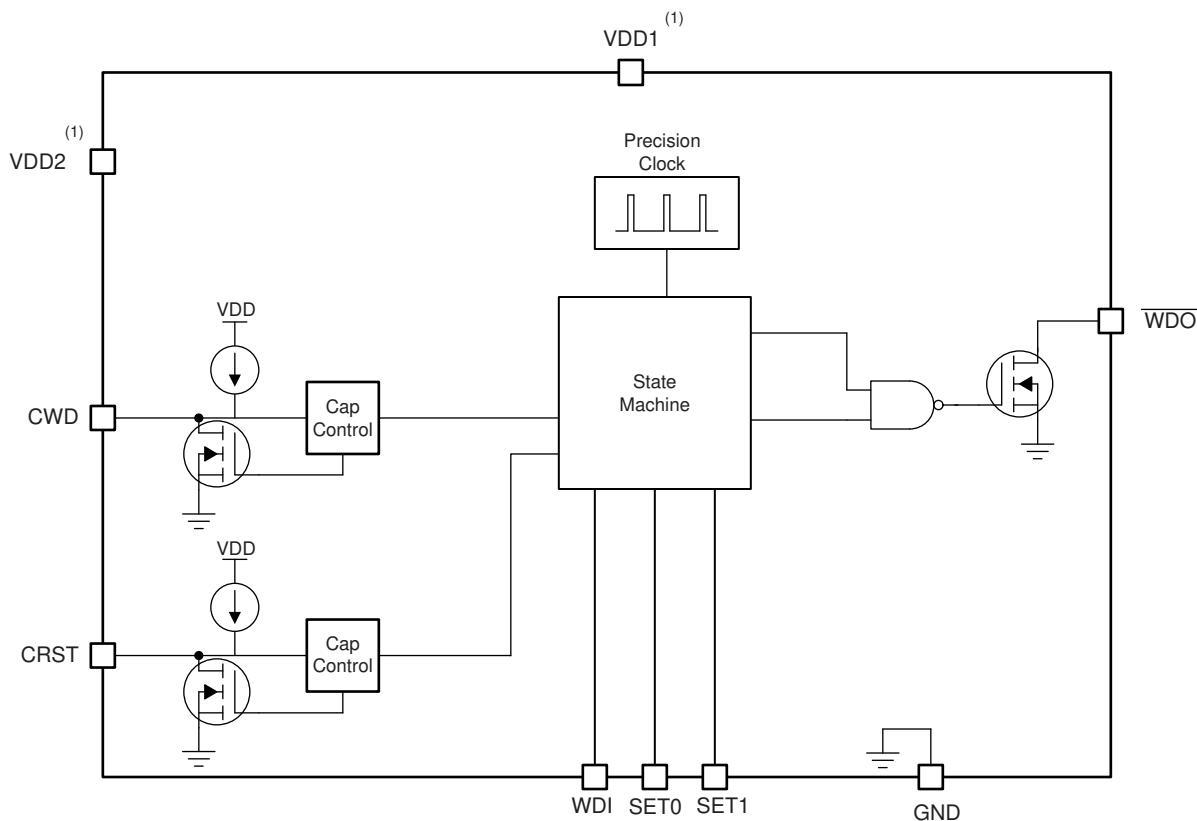

A. VDD1 and VDD2 are not internally connected and must be connected externally for the device to function.

**图 7-1. TPS3430 Block Diagram**

### 7.3 Feature Description

#### 7.3.1 CRST

The CRST pin provides the user the functionality of both high-precision, factory-programmed watchdog reset delay timing options and user-programmable watchdog reset delay timing. The CRST pin can be pulled up to VDD through a resistor, have an external capacitor to ground, or can be left unconnected. The configuration of the CRST pin is re-evaluated by the device every time the voltage on VDD comes up. The pin evaluation is controlled by an internal state machine that determines which option is connected to the CRST pin. The sequence of events takes  $381\ \mu\text{s}$  ( $t_{\text{INIT}}$ ) to determine if the CRST pin is left unconnected, pulled up through a resistor, or connected to a capacitor. If the CRST pin is being pulled up to VDD, then a  $10\text{-k}\Omega$  pull-up resistor is required.

#### 7.3.2 Window Watchdog

##### 7.3.2.1 SET0 and SET1

When changing the SET0 or SET1 pins, there are two cases to consider: enabling and disabling the watchdog, and changing the SET0 or SET1 pins when the watchdog is enabled. In case 1 where the watchdog is being enabled or disabled, the changes take effect immediately. However, in case 2, a WDO fault event must occur in order for the changes to take place.

### 7.3.2.1.1 Enabling the Window Watchdog

The TPS3430 features the ability to enable and disable the watchdog timer. This feature allows the user to start with the watchdog timer disabled and then enable the watchdog timer using the SET0 and SET1 pins. The ability to enable and disable the watchdog is useful to avoid undesired watchdog trips during initialization and shutdown. When the SETx pins are changed to disable the watchdog timer, changes on the pins are responded to immediately (as shown in [図 7-2](#)). When the watchdog goes from disabled to enabled, there is a 150  $\mu$ s ( $t_{WD\text{-setup}}$ ) transition period where the device does not respond to changes on WDI. After this 150- $\mu$ s period, the device begins to respond to changes on WDI again.


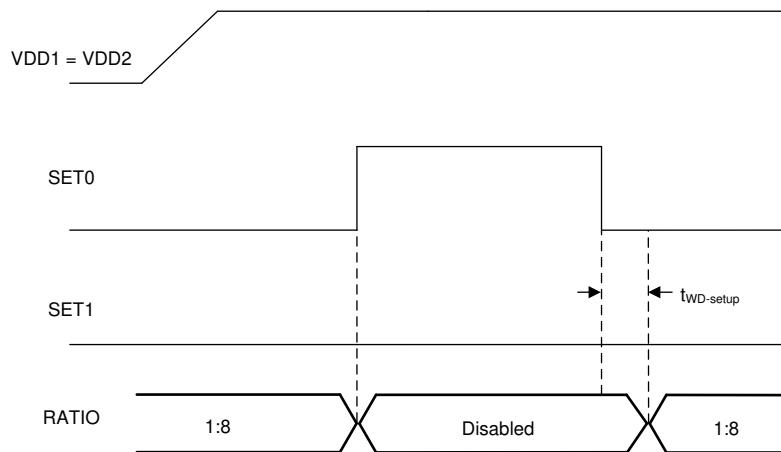


図 7-2. Enabling the Watchdog Timer

### 7.3.2.1.2 Disabling the Watchdog Timer When Using the CRST Capacitor

When using the TPS3430 with fixed timing options, if the watchdog is disabled and reenabled while  $\overline{WDO}$  is asserted (logic low) the watchdog performs as described in the [セクション 7.3.2.1.1](#) section. However, if there is a capacitor on the CRST pin, and the watchdog is disabled and reenabled when  $\overline{WDO}$  is asserted (logic low), then the watchdog behaves as shown in [図 7-3](#). When the watchdog is disabled,  $\overline{WDO}$  goes high impedance (logic high). However, when the watchdog is enabled again, the  $t_{RST}$  period must expire before the watchdog resumes normal operation.

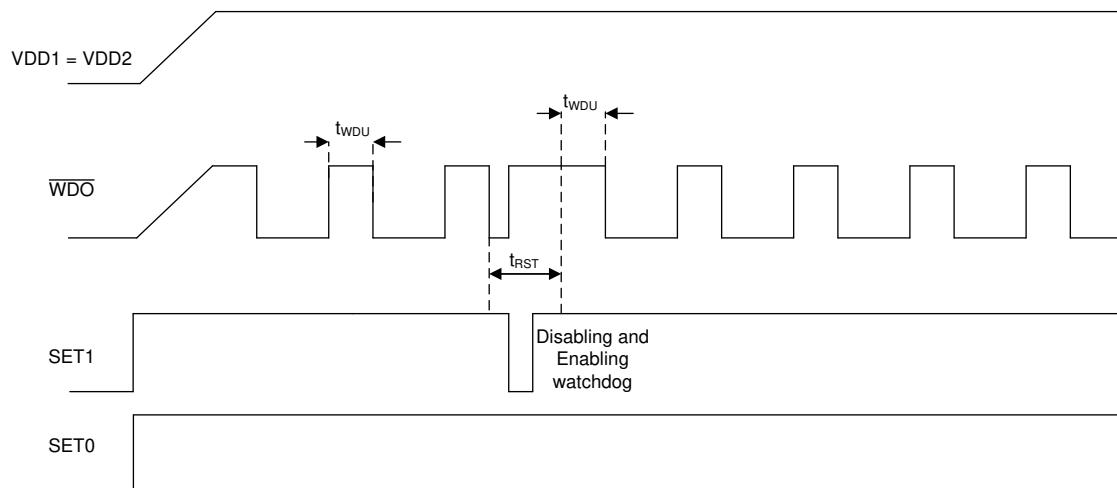

There is no WDI signal in this figure, WDI is always at GND.

図 7-3. Enabling and Disabling the Watchdog Timer During a WDO Reset Event

### 7.3.2.1.3 SET0 and SET1 During Normal Watchdog Operation

The SET0 and SET1 pins can be used to control the window watchdog ratio of the lower boundary to the upper boundary. There are four possible modes for the watchdog (see 表 8-5): disabled, 1:8 ratio, 3:4 ratio, and 1:2 ratio. If SET0 = 1 and SET1 = 0, then the watchdog is disabled. When the watchdog is disabled  $\overline{WDO}$  does not assert, and the TPS3430 ignores all inputs to WDI. The SET0 and SET1 pins can be changed when the device is operational, but cannot be changed at the same time. If these pins are changed when the device is operational, then there must be a 500- $\mu$ s ( $t_{SET}$ ) delay between switching the two pins. If the SET0 and SET1 are used to change the reset timing, then a reset event must occur before the new timing condition is latched. This reset can be triggered by bringing VDD below  $V_{UVLO}$ . 図 7-4 shows how the SET0 and SET1 pins do not change the watchdog timing option until a reset event has occurred.

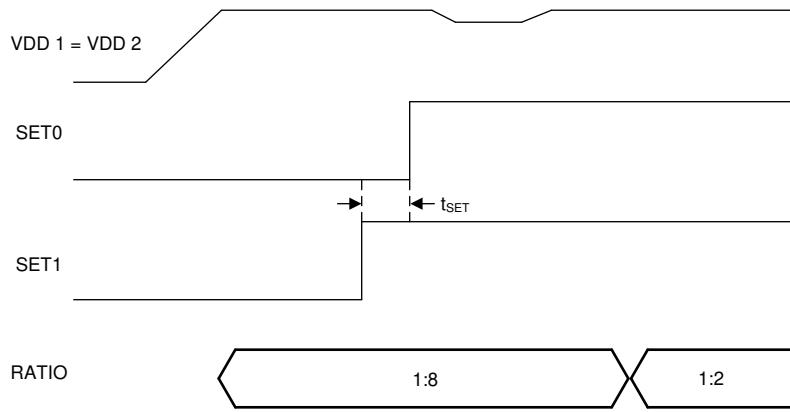


図 7-4. Changing SET0 and SET1 Pins

### 7.3.3 Window Watchdog Timer

This section provides information for the window watchdog modes of operation. A window watchdog is typically employed in safety critical applications where a traditional watchdog timer is inadequate. In a traditional watchdog, there is a maximum time in which a pulse must be issued to prevent the reset from occurring. However, in a window watchdog the pulse must be issued between a maximum lower window time ( $t_{WDL(max)}$ ) and the minimum upper window time ( $t_{WDL(min)}$ ) set by the CWD pin and the SET0 and SET1 pins. 表 8-5 describes how  $t_{WDL}$  can be used to calculate the timing of  $t_{WDL}$ . The  $t_{WDL}$  timing can also be changed by adjusting the SET0 and SET1 pins. 図 7-5 shows the valid region for a WDI pulse to be issued to prevent the WDO from being triggered and being pulled low.

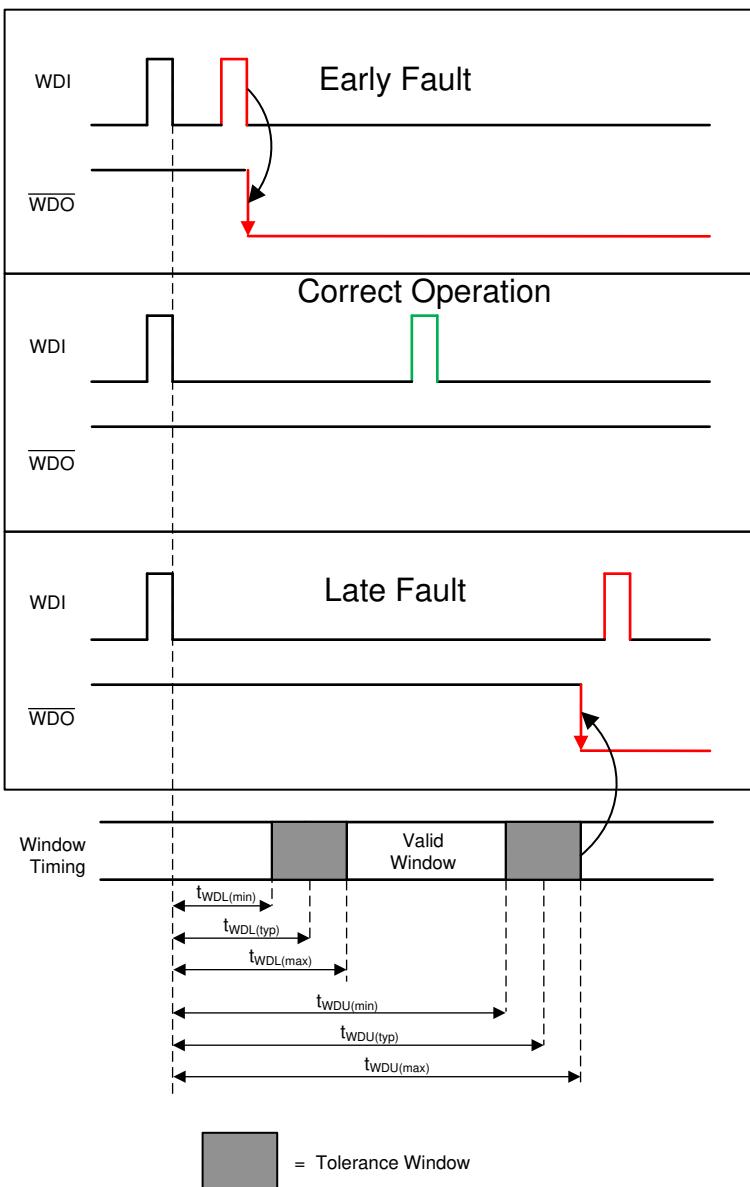


図 7-5. TPS3430 Window Watchdog Timing

### 7.3.3.1 CWD

The CWD pin provides the user the functionality of both high-precision, factory-programmed watchdog timeout options and user-programmable watchdog timeout. The TPS3430 features three options for setting the watchdog window: connecting a capacitor to the CWD pin, connecting CWD to a pull-up resistor to VDD, and leaving the CWD pin unconnected. The configuration of the CWD pin is evaluated by the device every time the voltage on VDD rises above  $V_{DD(\min)}$ . The pin evaluation is controlled by an internal state machine that determines which option is connected to the CWD pin. The sequence of events takes 381  $\mu$ s ( $t_{INIT}$ ) to determine if the CWD pin is left unconnected, pulled up through a resistor, or connected to a capacitor. If the CWD pin is being pulled up to VDD using a pull-up resistor, then a 10-k $\Omega$  resistor is required.

### 7.3.3.2 WDI Functionality

WDI is the watchdog timer input that controls the  $\overline{WDO}$  output. The WDI input is triggered by the falling edge of the input signal. For the first pulse, the watchdog acts as a traditional watchdog timer; thus, the first pulse must be issued before  $t_{WDL(\min)}$ . After the first pulse, to ensure proper functionality of the watchdog timer, always issue the WDI pulse within the window of  $t_{WDL(\max)}$  and  $t_{WDL(\min)}$ . If the pulse is issued in this region, then  $\overline{WDO}$  remains unasserted. Otherwise, the device asserts  $\overline{WDO}$ , putting the  $\overline{WDO}$  pin into a low-impedance state.

The watchdog input (WDI) is a digital pin. To ensure there is no increase in  $I_{DD}$ , drive the WDI pin to either VDD or GND at all times. Putting the pin to an intermediate voltage can cause an increase in supply current ( $I_{DD}$ ) because of the architecture of the digital logic gates. When  $\overline{WDO}$  is asserted, the watchdog is disabled and all signals input to WDI are ignored until the  $\overline{WDO}$  reset delay expires. When  $\overline{WDO}$  is no longer asserted, the device resumes normal operation and no longer ignores the signal on WDI. If the watchdog is disabled, drive the WDI pin to either VDD or GND.

### 7.3.3.3 WDO Functionality

The TPS3430 features a programmable window watchdog timer with an programmable watchdog output ( $\overline{WDO}$ ). The watchdog output can flag a fault whenever the watchdog input is outside of the watchdog window. When  $\overline{WDO}$  is not asserted (high), the  $\overline{WDO}$  signal maintains normal operation. When asserted,  $\overline{WDO}$  remains down for  $t_{RST}$  and WDI is ignored during the watchdog reset delay. When the watchdog is disabled,  $\overline{WDO}$  remains high regardless of WDI.

## 7.4 Device Functional Modes

表 7-1 summarizes the functional modes of the TPS3430.

**表 7-1. Device Functional Modes**

VDD	WDI	WDO
$V_{DD} < V_{POR}$	—	—
$V_{POR} < V_{DD} < V_{DD\ (min)}$	Ignored	High
$V_{DD} \geq V_{DD\ (min)}$	$t_{WDL(max)} \leq t_{pulse\ (1)} \leq t_{WDU(min)}$	High
	$t_{WDL(max)} > t_{pulse\ (1)}$	Low
	$t_{WDU(min)} < t_{pulse\ (1)}$	Low

(1) Where  $t_{pulse}$  is the time between falling edges on WDI.

### 7.4.1 $V_{DD}$ is Below $V_{POR}$ ( $V_{DD} < V_{POR}$ )

When  $V_{DD}$  is less than  $V_{POR}$ ,  $\overline{WDO}$  is undefined and can be either high or low. The state of  $\overline{WDO}$  largely depends on the load that the WDO pin is experiencing.

### 7.4.2 $V_{DD}$ is Above $V_{POR}$ And Below $V_{DD\ (min)}$ ( $V_{POR} < V_{DD} < V_{DD\ (min)}$ )

When  $V_{DD}$  is above  $V_{POR}$  and below  $V_{DD\ (min)}$ , the watchdog is disabled,  $\overline{WDO}$  is logic high and WDI is ignored.

### 7.4.3 Normal Operation ( $V_{DD} \geq V_{DD\ (min)}$ )

When  $V_{DD}$  is greater than or equal to  $V_{DD\ (min)}$ , the  $\overline{WDO}$  signal is determined by WDI if the watchdog is enabled. During power up, the watchdog is disabled until  $t_{RST}$  expires. While the watchdog is enabled, the first falling edge on WDI must occur before  $t_{WDU(max)}$  to prevent  $\overline{WDO}$  from asserting. If the first falling edge on WDI occurs after  $t_{WDU(max)}$ ,  $\overline{WDO}$  is asserted (active and low) for  $t_{RST}$ . If any falling edge after the first falling edge occurs on WDI before  $t_{WDU(min)}$  or after  $t_{WDU(max)}$ ,  $\overline{WDO}$  is asserted (active and low) for  $t_{RST}$ .

## 8 Application and Implementation

### Note

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

### 8.1 Application Information

The following sections describe in detail proper device implementation, depending on the final application requirements.

#### 8.1.1 CRST Delay

The TPS3430 features three options for setting the reset delay ( $t_{RST}$ ): connecting a capacitor to the CRST pin, connecting a pull-up resistor to VDD, and leaving the CRST pin unconnected. 図 8-1 shows a schematic drawing of all three options. To determine which option is connected to the CRST pin, an internal state machine controls the internal pulldown device and measures the pin voltage. This sequence of events takes 381  $\mu$ s ( $t_{INIT}$ ) to determine which timing option is used. Every time  $\overline{WDO}$  is asserted, the state machine determines what is connected to the pin.

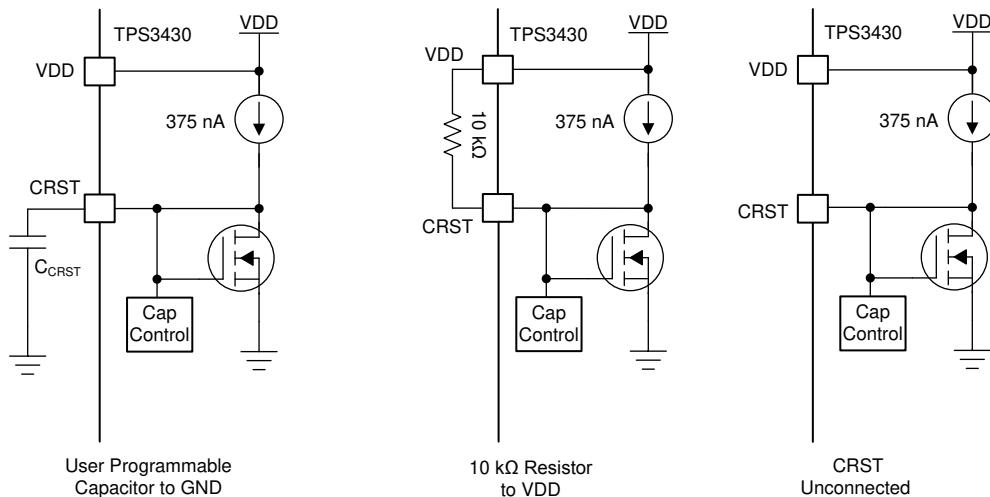


図 8-1. CRST Charging Circuit

#### 8.1.1.1 Factory-Programmed Watchdog Reset Delay Timing

To use the factory-programmed timing options, the CRST pin must either be left unconnected or pulled up to VDD through a 10-k $\Omega$  pull-up resistor. Using these options enables a high-precision, 15% accurate reset delay timing, as shown in 表 8-1.

表 8-1. Watchdog Reset Delay Time for Factory-Programmed Timing

CRST	WDO DELAY TIME ( $t_{RST}$ )			UNIT
	MIN	TYP	MAX	
NC	170	200	230	ms
10 k $\Omega$ to VDD	8.5	10	11.5	ms

#### 8.1.1.2 CRST Programmable Watchdog Reset Delay

The TPS3430 uses a CRST pin charging current ( $I_{CRST}$ ) of 375 nA. When using an external capacitor, the rising WDO delay time can be set to any value between 700  $\mu$ s ( $C_{CRST} = 100$  pF) and 3.2 seconds ( $C_{CRST} = 1$   $\mu$ F).

The typical ideal capacitor value needed for a given delay time can be calculated using 式 1, where  $C_{CRST}$  is in microfarads and  $t_{RST}$  is in seconds:

$$t_{RST} = 3.22 \times C_{CRST} + 0.000381 \quad (1)$$

To calculate the minimum and maximum watchdog reset delay time use 式 2 and 式 3, respectively.

$$t_{RST(\min)} = 2.8862 \times C_{CRST} + 0.000324 \quad (2)$$

$$t_{RST(\max)} = 3.64392 \times C_{CRST} + 0.000438 \quad (3)$$

The slope of 式 1 is determined by the time the CRST charging current ( $I_{CRST}$ ) takes to charge the external capacitor up to the CRST comparator threshold voltage ( $V_{CRST}$ ). When  $\overline{WDO}$  is asserted, the capacitor is discharged through the internal CRST pulldown resistor. When the  $\overline{WDO}$  conditions are cleared, the internal precision current source is enabled and begins to charge the external capacitor; when  $V_{CRST} = 1.21$  V,  $\overline{WDO}$  is unasserted. Note to minimize the difference between the calculated  $\overline{WDO}$  delay time and the actual  $\overline{WDO}$  delay time, use a use a high-quality ceramic dielectric COG, X5R, or X7R capacitor and minimize parasitic board capacitance around this pin. 表 8-2 lists the watchdog reset delay time ideal capacitor values for  $C_{CRST}$ .


**表 8-2. Watchdog Reset Delay Time for Common Ideal Capacitor Values**

$C_{CRST}$	WDO DELAY TIME ( $t_{RST}$ )			UNIT
	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	
100 pF	0.61	0.70	0.80	ms
1 nF	3.21	3.61	4.08	ms
10 nF	29.2	32.6	36.8	ms
100 nF	289	323	364	ms
1 $\mu$ F	2886	3227	3644	ms

(1) Minimum and maximum values are calculated using ideal capacitors.

### 8.1.2 CWD Functionality

The TPS3430 features three options for setting the watchdog window: connecting a capacitor to the CWD pin, connecting a pull-up resistor to VDD, and leaving the CWD pin unconnected. 図 8-2 shows a schematic drawing of all three options. If this pin is connected to VDD through a 10-k $\Omega$  pull-up resistor or left unconnected (high impedance), then the factory-programmed watchdog timeouts are enabled; see the セクション 6.6 table. Otherwise, the watchdog timeout can be adjusted by placing a capacitor from the CWD pin to ground.

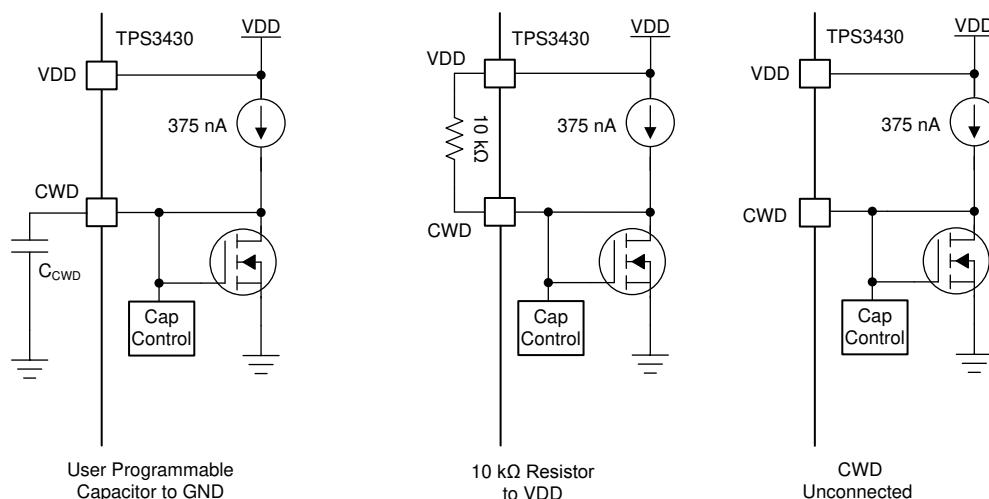

**図 8-2. CWD Charging Circuit**

### 8.1.2.1 Factory-Programmed Timing Options

If using the factory-programmed timing options (listed in 表 8-3), the CWD pin must either be unconnected or pulled up to VDD through a 10-k $\Omega$  pull-up resistor. Using these options enables high-precision, factory-programmed watchdog timing.

**表 8-3. Factory-Programmed Watchdog Timing**

INPUT			WATCHDOG LOWER BOUNDARY (t <sub>WDL</sub> )			WATCHDOG UPPER BOUNDARY (t <sub>WDU</sub> )			UNIT
CWD	SET0	SET1	MIN	TYP	MAX	MIN	TYP	MAX	
NC	0	0	19.1	22.5	25.9	46.8	55.0	63.3	ms
	0	1	1.48	1.85	2.22	23.375	27.5	31.625	ms
	1	0	Watchdog disabled			Watchdog disabled			
	1	1	680	800	920	1360	1600	1840	ms
10 k $\Omega$ to VDD	0	0	7.65	9.0	10.35	92.7	109.0	125.4	ms
	0	1	7.65	9.0	10.35	165.8	195.0	224.3	ms
	1	0	Watchdog disabled			Watchdog disabled			
	1	1	1.48	1.85	2.22	9.35	11.0	12.65	ms

### 8.1.2.2 CWD Adjustable Capacitor Watchdog Timeout

Adjustable capacitor timing is achievable by connecting a capacitor to the CWD pin. If a capacitor is connected to CWD, then a 375-nA constant-current source charges C<sub>CWD</sub> until V<sub>CWD</sub> = 1.21 V. The TPS3430 determines the window watchdog upper boundary with the formula given in 式 4, where C<sub>CWD</sub> is in microfarads and t<sub>WDU</sub> is in seconds.

$$t_{WDU(\text{typ})} = 77.4 \times C_{CWD} + 0.055 \quad (4)$$

The TPS3430 is designed and tested using C<sub>CWD</sub> capacitors between 100 pF and 1  $\mu$ F. Note that 式 4 is for ideal capacitors, capacitor tolerances cause the actual device timing to vary. For the most accurate timing, use ceramic capacitors with COG dielectric material. As shown in 表 8-4, when using the minimum capacitor of 100 pF, the watchdog upper boundary is 62.74 ms; whereas with a 1- $\mu$ F capacitor, the watchdog upper boundary is 77.455 seconds. If a C<sub>CWD</sub> capacitor is used, 式 4 can be used to set t<sub>WDU</sub> the window watchdog upper boundary. The window watchdog lower boundary is dependent on the SET0 and SET1 pins because these pins set the window watchdog ratio of the lower boundary to upper boundary; 表 8-5 shows how t<sub>WDU</sub> can be used to calculate t<sub>WDL</sub> based on the SET0 and SET1 pins.

**表 8-4. t<sub>WDU</sub> Values for Common Ideal Capacitor Values**

C <sub>CWD</sub>	WATCHDOG UPPER BOUNDARY (t <sub>WDU</sub> )			UNIT
	MIN <sup>(1)</sup>	TYP	MAX <sup>(1)</sup>	
100 pF	56.77	62.74	68.7	ms
1 nF	119.82	132.4	144.98	ms
10 nF	750	829	908	ms
100 nF	7054	7795	8536	ms
1 $\mu$ F	70096	77455	84814	ms

(1) Minimum and maximum values are calculated using ideal capacitors.

**表 8-5. Programmable CWD Timing**


INPUT			WATCHDOG LOWER BOUNDARY (t <sub>WDL</sub> )			WATCHDOG UPPER BOUNDARY (t <sub>WDU</sub> )			UNIT
CWD	SET0	SET1	MIN	TYP	MAX	MIN	TYP	MAX	
C <sub>CWD</sub>	0	0	t <sub>WDU(min)</sub> x 0.125	t <sub>WDU</sub> x 0.125	t <sub>WDU(max)</sub> x 0.125	0.905 x t <sub>WDU(typ)</sub>	t <sub>WDU(typ)</sub> <sup>(1)</sup>	1.095 x t <sub>WDU(typ)</sub>	s
	0	1	t <sub>WDU(min)</sub> x 0.75	t <sub>WDU</sub> x 0.75	t <sub>WDU(max)</sub> x 0.75	0.905 x t <sub>WDU(typ)</sub>	t <sub>WDU(typ)</sub> <sup>(1)</sup>	1.095 x t <sub>WDU(typ)</sub>	s
	1	0	Watchdog disabled			Watchdog disabled			
	1	1	t <sub>WDU(min)</sub> x 0.5	t <sub>WDU</sub> x 0.5	t <sub>WDU(max)</sub> x 0.5	0.905 x t <sub>WDU(typ)</sub>	t <sub>WDU(typ)</sub> <sup>(1)</sup>	1.095 x t <sub>WDU(typ)</sub>	s

(1) Calculated from 式 4 using ideal capacitors.

## 8.2 Typical Applications

### 8.2.1 Monitoring Microcontroller with Watchdog Timer - Design 1

A basic application for the TPS3430 is shown in [图 8-8](#). The TPS3430 is used to monitor the activity of the microcontroller via the WDI pin. Design 1 utilizes the simplest TPS3430 configuration with factory-programmed timing options by leaving the CRST and CWD timing pins floating (NC - no connect)

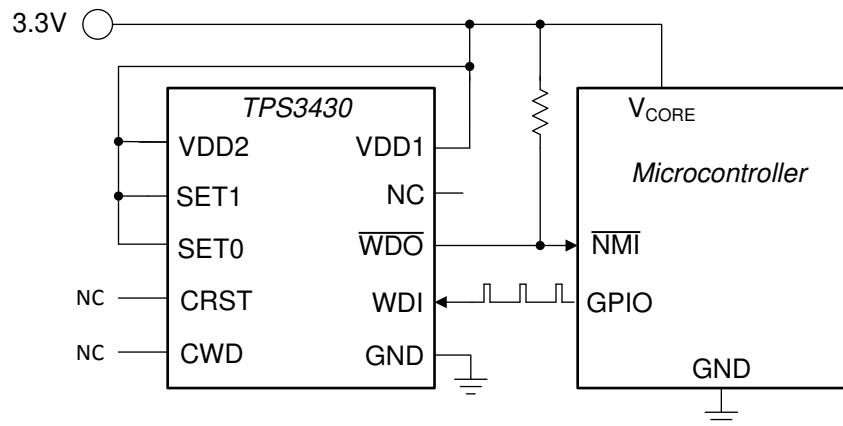

**图 8-3. Monitoring Microcontroller using a Window Watchdog Timer**

#### 8.2.1.1 Design Requirements - Design 1


PARAMETER	DESIGN REQUIREMENT	DESIGN RESULT
Watchdog Reset delay	Reset delay of 200 ms	Use factory-programmed timing option by leaving CRST as NC. Watchdog reset delay: 170 ms (min), 200 ms (typ), 230 ms (max)
Watchdog window	Functions with a 1-Hz pulse-width modulation (PWM) signal with a 20% duty cycle	Leaving the CWD pin unconnected with SET0 = 1 and SET1 = 1 produces a window with a $t_{WDL(max)}$ of 920 ms and a $t_{WDL(min)}$ of 1360 ms
Output logic voltage	3.3-V Open-Drain	3.3-V Open-Drain
Maximum device current consumption	200 $\mu$ A	10 $\mu$ A of current consumption, typical worst-case of 199 $\mu$ A when $\overline{WDO}$ is asserted

#### 8.2.1.2 Detailed Design Procedure - Design 1

##### 8.2.1.2.1 Meeting the Minimum Watchdog Reset Delay - Design 1

To achieve the 200 ms Watchdog Reset Delay requirement, this design simply leaves CRST pin floating (NC - No Connect) to set the Watchdog Reset Delay ( $t_{RST}$ ) to the factory-programmed delay of 200 ms. Refer to section 8.1.1 CRST Delay to learn more about the factory-programmed timing options and how to program the Watchdog Reset Delay using an external capacitor.

In [图 8-4](#) below, the Watchdog Reset Delay of 200 ms is shown by causing a watchdog timing fault. No watchdog pulse comes on WDI within the Watchdog Timeout so  $\overline{WDO}$  activates for  $t_{RST}$  of 200 ms. Then after three watchdog faults, a watchdog pulse at 1Hz and 20% duty cycle arrives on WDI causing  $\overline{WDO}$  to deactivate and remain high.

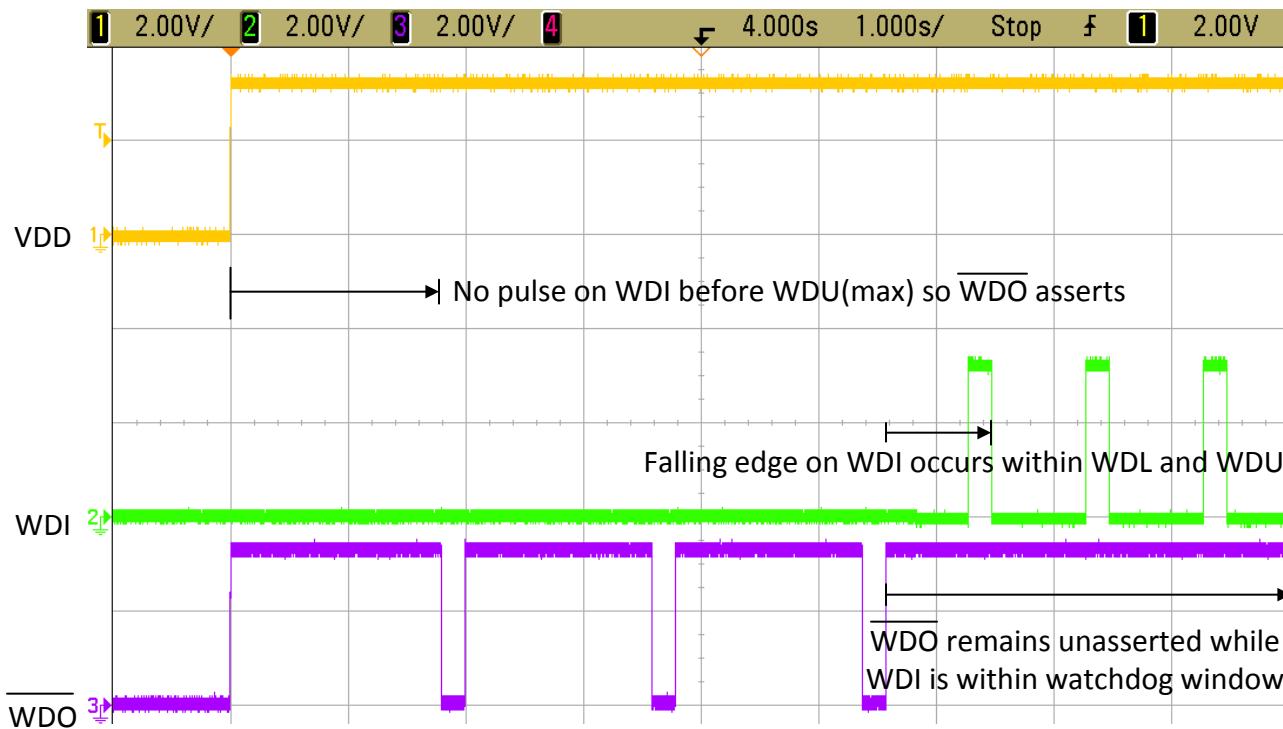

**FIGURE 8-4. Watchdog Fault Caused by Missing WDI Pulse Until WDI pulses Arrive Within Watchdog Window to Deactivate WDO Fault**

#### 8.2.1.2.2 Setting the Watchdog Window - Design 1

The Watchdog Window is set via the CWD, SET0, and SET1 pin configurations. To achieve a Watchdog Timeout of 1 second, this design simply leaves CWD pin floating (NC - No Connect) and ties SET0 and SET1 to VDD to set these SET pins to logic high. With this configuration, the Watchdog Lower Boundary  $t_{WDL}(\text{typ})$  is set for 800ms and the Watchdog Upper Boundary  $t_{WDU}(\text{typ})$  is set for 1.6 seconds. Refer to Table 6.6 Timing Requirements to see the factory-programmed window watchdog timing configurations.

In [FIGURE 8-5](#) and [FIGURE 8-6](#) below, the watchdog window timing is shown by causing watchdog faults from pulses on WDI arriving too early and too late, respectively. When a pulse on WDI arrives too early, that is before  $t_{WDL}(\text{min})$  or too late, that is after  $t_{WDU}(\text{max})$ , a watchdog fault occurs and WDO activates to logic low.

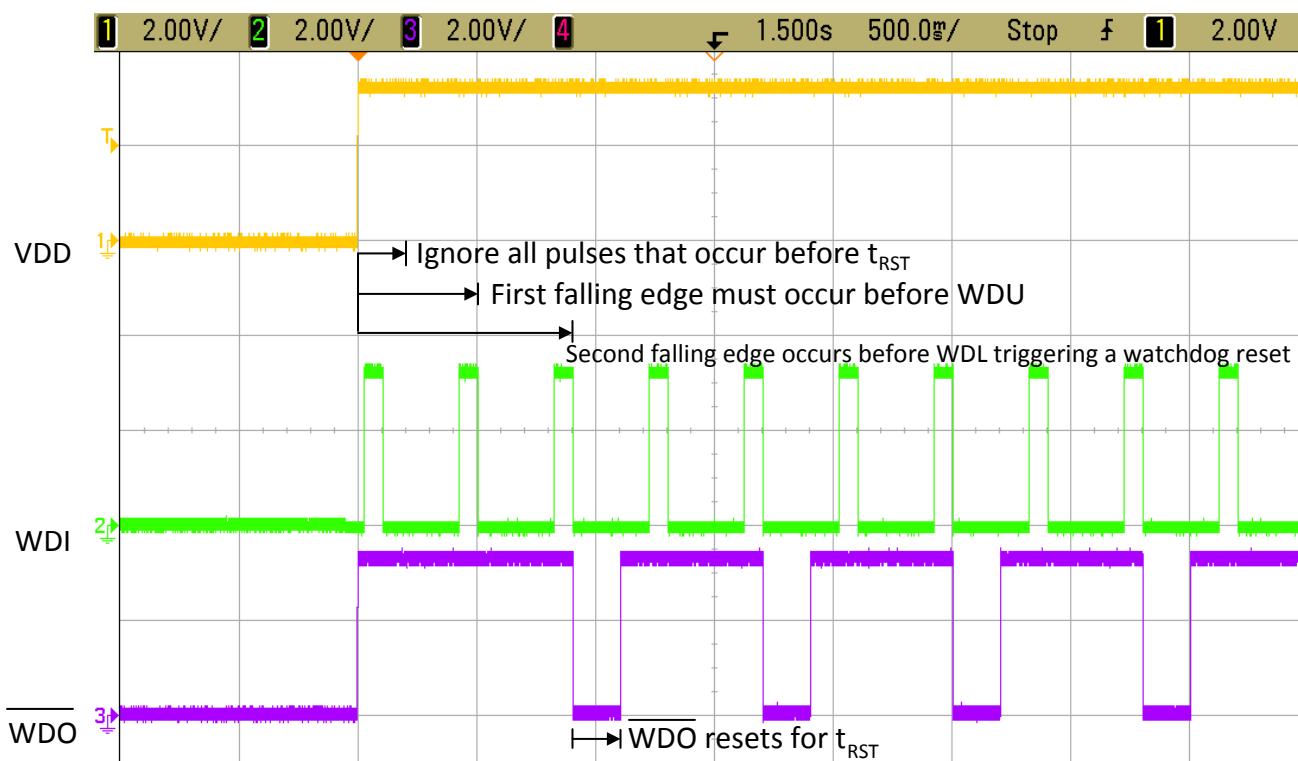


図 8-5. Watchdog Fault Caused by WDI Pulse Arriving Too Early (Before  $t_{WDL}$  (min))

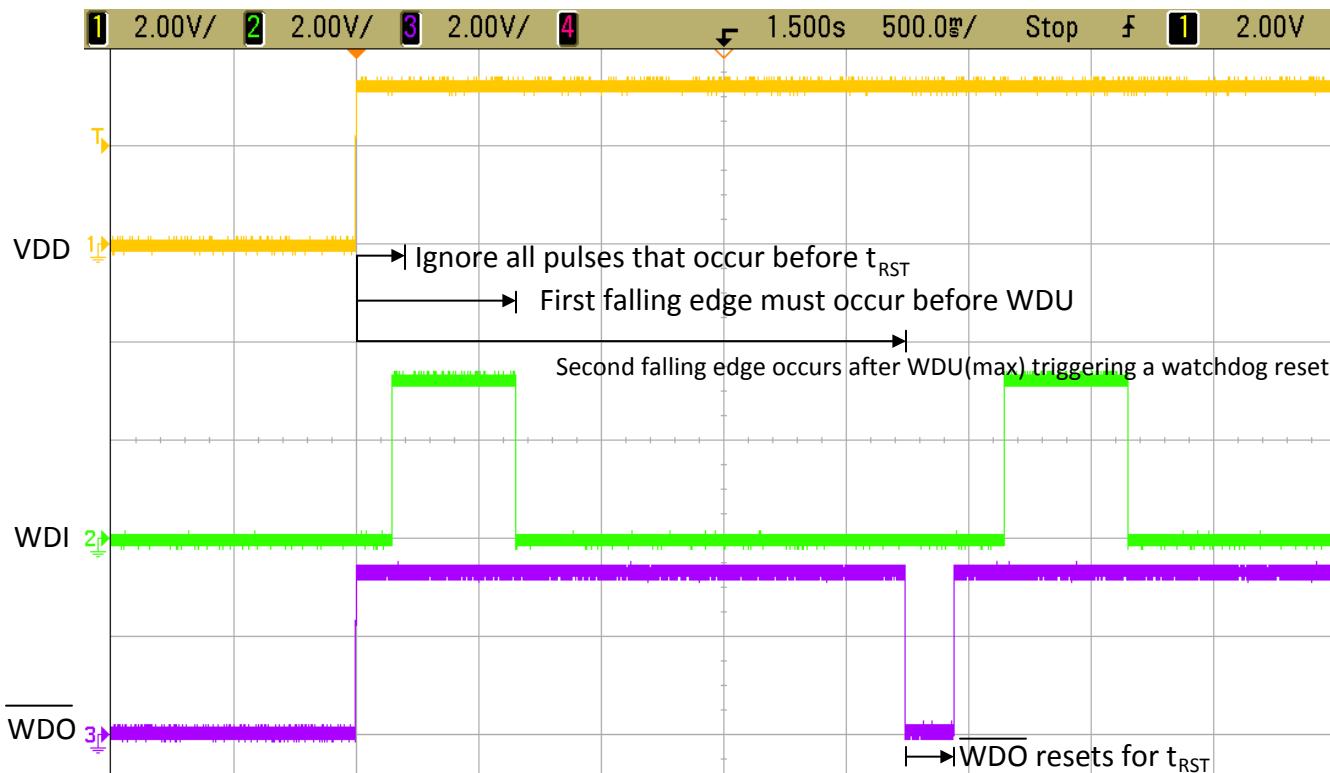


図 8-6. Watchdog Fault Caused by WDI Pulse Arriving Too Late (After  $t_{WDU}$  (max))

### 8.2.1.2.3 Calculating the $\overline{WDO}$ Pull-up Resistor - Design 1

图 8-7 shows the TPS3430 uses an open-drain configuration for the  $\overline{WDO}$  circuit. When the FET is off, the resistor pulls the drain of the transistor to VDD and when the FET is turned on, the FET attempts to pull the drain to ground, thus creating an effective resistor divider. The resistors in this divider must be chosen to ensure that  $V_{OL}$  is below its maximum value. To choose the proper pull-up resistor, there are three key specifications to keep in mind: the pull-up voltage ( $V_{PU}$ ), the recommended maximum  $\overline{WDO}$  pin current ( $I_{WDO}$ ), and  $V_{OL}$ . The maximum  $V_{OL}$  is 0.4 V, meaning that the effective resistor divider created must be able to bring the voltage on the reset pin below 0.4 V with  $I_{WDO}$  kept below 10 mA. For this example, with a  $V_{PU}$  of 3.3 V, a resistor must be chosen to keep  $I_{WDO}$  below 200  $\mu$ A because this value is the maximum consumption current allowed. To ensure this specification is met, a pull-up resistor value of 16.5 k $\Omega$  is selected, which sinks a maximum of 200  $\mu$ A when  $\overline{WDO}$  is asserted.  $\overline{WDO}$  current is at 200  $\mu$ A and the low-level output voltage is approximately zero.




图 8-7. Open-Drain  $\overline{WDO}$  Configuration

### 8.2.2 Monitoring Microcontroller with a Programmed Window Watchdog Timer - Design 2

A typical application for the TPS3430 is shown in 图 8-8. The TPS3430 is used to monitor the activity of the microcontroller via the WDI pin.

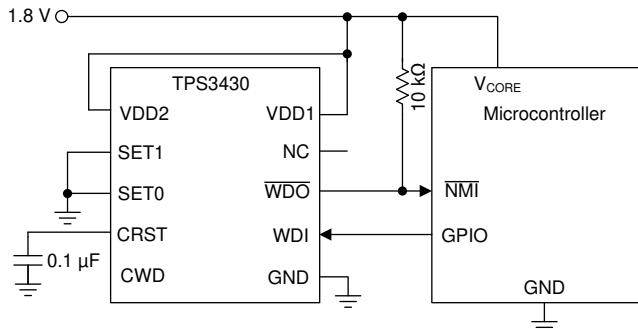


图 8-8. Monitoring Microcontroller Using a Window Watchdog Timer with Programmable Watchdog Reset Delay

#### 8.2.2.1 Design Requirements - Design 2

PARAMETER	DESIGN REQUIREMENT	DESIGN RESULT
Watchdog Reset delay	Minimum reset delay of 250 ms	Minimum reset delay of 260 ms, reset delay of 322 ms (typical)
Watchdog window	Functions with a 30-Hz pulse-width modulation (PWM) signal with a 50% duty cycle	Leaving the CWD pin unconnected with SET0 = 0 and SET1 = 0 produces a window with a $t_{WDL(max)}$ of 25.9 ms and a $t_{WDL(min)}$ of 46.8 ms
Output logic voltage	1.8-V CMOS	1.8-V CMOS
Maximum device current consumption	200 $\mu$ A	10 $\mu$ A of current consumption, typical worst-case of 199 $\mu$ A when $\overline{WDO}$ is asserted

### 8.2.2.2 Detailed Design Procedure - Design 2

#### 8.2.2.2.1 Meeting the Minimum Watchdog Reset Delay - Design 2

The TPS3430 features three options for setting the watchdog reset delay: connecting a capacitor to the CRST pin, connecting a pull-up resistor, and leaving the CRST pin unconnected. If the CRST pin is either unconnected or pulled up the minimum timing requirement cannot be met, thus an external capacitor must be connected to the CRST pin. Because a minimum time is required, the worst-case scenario is a supervisor with a high CRST charging current ( $I_{CRST}$ ) and a low CRST comparator threshold ( $V_{CRST}$ ). For applications with ambient temperatures ranging from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $C_{CRST}$  can be calculated using  $I_{CRST(\text{MAX})}$ ,  $V_{CRST(\text{MIN})}$ , and solving for  $C_{CRST}$  in 式 5:

$$C_{RST(\text{MIN})} = \frac{I_{CRST(\text{MAX})}}{V_{CRST(\text{MIN})}} \times (t_{RST} - t_{INIT}) \quad (5)$$

When solving 式 5, the minimum capacitance required at the CRST pin is  $0.086 \mu\text{F}$ . If standard capacitors with  $\pm 10\%$  tolerances are used, then the minimum CRST capacitor required can be found in 式 6:

$$C_{RST(\text{min})} = \frac{C_{RST(\text{min})\_ideal}}{1 - C_{tolerance}} = \frac{0.086 \mu\text{F}}{1 - 0.1} \quad (6)$$

Solving 式 6 where  $C_{tolerance}$  is 0.1 or 10%, the minimum  $C_{CRST}$  capacitor is  $0.096 \mu\text{F}$ . This value is then rounded up to the nearest standard capacitor value, so a  $0.1\text{-}\mu\text{F}$  capacitor must be used to achieve this reset delay timing. If voltage and temperature derating are being considered, then also include these values in  $C_{tolerance}$ .

#### 8.2.2.2.2 Setting the Watchdog Window - Design 2


In this application, the window watchdog timing options are based on the PWM signal that is provided to the TPS3430. A window watchdog setting must be chosen such that the falling edge of the PWM signal always falls within the window. A nominal window must be designed with  $t_{WDL(\text{max})}$  less than  $33.33 \text{ ms}$  and  $t_{WDU(\text{min})}$  greater than  $33.33 \text{ ms}$ . There are several options that satisfy this window option. An external capacitor can be placed on the CWD pin and calculated to have a sufficient window. Another option is to use one of the factory-programmed timing options. An additional advantage of choosing one of the factory-programmed options is the ability to reduce the number of components required, thus reducing overall BOM cost. Leaving the CWD pin unconnected (NC) with SET0 = 0 and SET1 = 0 produces a  $t_{WDL(\text{max})}$  of  $25.9 \text{ ms}$  and a  $t_{WDU(\text{min})}$  of  $46.8 \text{ ms}$ ; see セクション 8.1.2.

#### 8.2.2.2.3 Calculating the WDO Pull-up Resistor - Design 2

The TPS3430 uses an open-drain configuration for the  $\overline{WDO}$  circuit, as shown in 図 8-7. When the FET is off, the resistor pulls the drain of the transistor to VDD and when the FET is turned on, the FET attempts to pull the drain to ground, thus creating an effective resistor divider. The resistors in this divider must be chosen to ensure that  $V_{OL}$  is below its maximum value. To choose the proper pull-up resistor, there are three key specifications to keep in mind: the pull-up voltage ( $V_{PU}$ ), the recommended maximum  $\overline{WDO}$  pin current ( $I_{WDO}$ ), and  $V_{OL}$ . The maximum  $V_{OL}$  is  $0.4 \text{ V}$ , meaning that the effective resistor divider created must be able to bring the voltage on the reset pin below  $0.4 \text{ V}$  with  $I_{WDO}$  kept below  $10 \text{ mA}$ . For this example, with a  $V_{PU}$  of  $1.8 \text{ V}$ , a resistor must be chosen to keep  $I_{WDO}$  below  $200 \mu\text{A}$  because this value is the maximum consumption current allowed. To ensure this specification is met, a pull-up resistor value of  $10 \text{ k}\Omega$  was selected, which sinks a maximum of  $180 \mu\text{A}$  when  $\overline{WDO}$  is asserted.

### 8.2.3 Monitoring Microcontroller with a Latching Window Watchdog Timer - Design 3

A safety critical application for the TPS3430 is shown in 図 8-9. The TPS3430 is used to monitor the activity of the microcontroller via the WDI pin and upon a watchdog fault, this design latches the  $\overline{WDO}$  pin until the device VDD drops below  $V_{DD(\text{min})}$ .

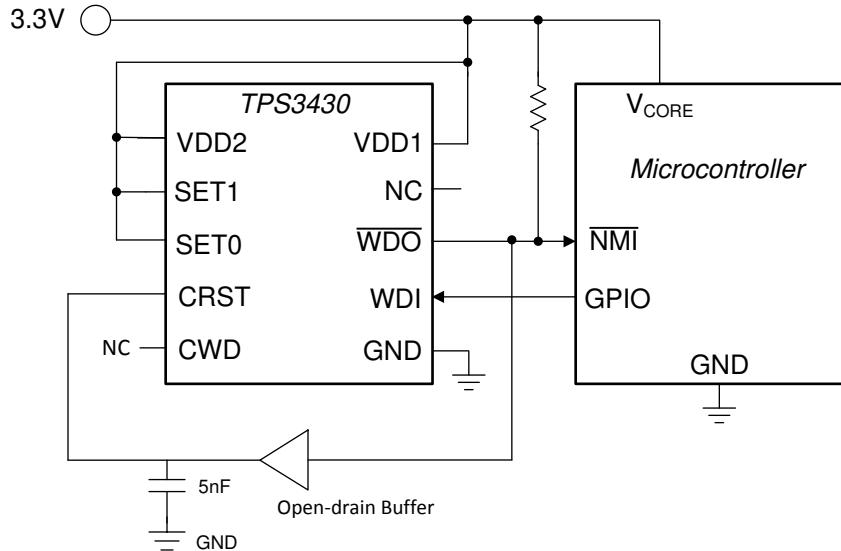

#### FIG 8-9. Monitoring Microcontroller Using a Latching Window Watchdog Timer

### **8.2.3.1 Design Requirements - Design 3**

Parameter	Design Requirement	Design Result
Watchdog Reset delay	Latch $\overline{WDO}$ upon watchdog fault	Latching watchdog functionality that keeps $\overline{WDO}$ logic low when fault occurs
Watchdog window	Functions with a 1-Hz pulse-width modulation (PWM) signal with a 50% duty cycle	Leaving the CWD pin unconnected with SET0 = 1 and SET1 = 1 produces a window with a $t_{WDL(max)}$ of 920 ms and a $t_{WDU(min)}$ of 1360 ms
Output logic voltage	3.3-V Open-Drain	3.3-V Open-Drain
Maximum device current consumption	200 $\mu$ A	10 $\mu$ A of current consumption, typical worst-case of 199 $\mu$ A when $\overline{WDO}$ is asserted

### **8.2.3.2 Detailed Design Procedure - Design 3**

### 8.2.3.2.1 Meeting the Latching Output Requirement - Design 3

To achieve the latching watchdog feature, an open-drain buffer is connected from WDO to CRST with a small value capacitor connected from the Anode of the buffer connected to CRST to GND. The capacitor must be a small value to prevent additional delay when triggering WDO to active low during watchdog fault. A capacitor between 150 pF and 5 nF is recommended.

In [图 8-10](#) below, the latching watchdog feature is shown by causing a watchdog fault and observing  $\overline{WDO}$ . Because no pulse arrived on WDI within the Watchdog Timeout,  $\overline{WDO}$  activates and goes logic low and remains low. To reset the watchdog, the device must be restarted by dropping VDD below  $V_{DD(\min)}$ .

### 8.2.3.2.2 Setting the Watchdog Window - Design 3

The Watchdog Window is set via the CWD, SET0, and SET1 pin configurations. To achieve a Watchdog Timeout of 1 second corresponding to a 1-Hz WDI signal, this design simply leaves CWD pin floating (NC - No Connect) and ties SET0 and SET1 to VDD to set the SET pins to logic high. With this configuration, the Watchdog Lower Boundary  $t_{WDL\ (typ)}$  is set for 800 ms and the Watchdog Upper Boundary  $t_{WDU\ (typ)}$  is set for 1.6 seconds. Refer to Table 6.6 Timing Requirements to see the factory-programmed window watchdog timing configurations.

### 8.2.3.3 Application Curve - Design 3

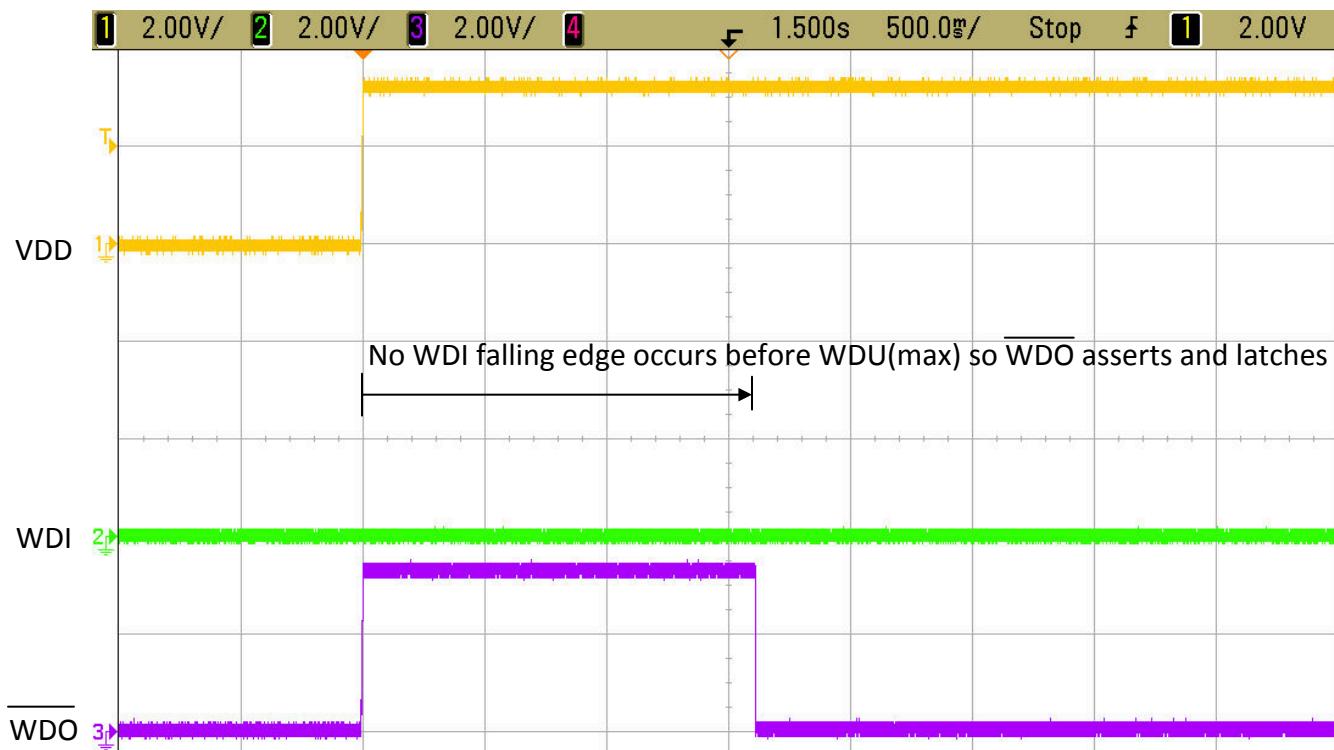


図 8-10. Watchdog Fault Caused by Missing WDI Pulse Shows WDO Latching

## 9 Power Supply Recommendations

This device is designed to operate from an input supply with a voltage range between 1.6 V and 6.5 V. An input supply capacitor is not required for this device; however, if the input supply is noisy, then good analog practice is to place a 0.1- $\mu$ F capacitor between the VDD pin and the GND pin. Please be sure to externally connect VDD1 to VDD2 as the device will not function if these pins are not connected.


## 10 Layout

### 10.1 Layout Guidelines

Make sure that the connection to the VDD pin is low impedance. Good analog design practice recommends placing a  $0.1\text{-}\mu\text{F}$  ceramic capacitor as near as possible to the VDD pin. If a capacitor is not connected to the CRST pin, then minimize parasitic capacitance on this pin so the WDO delay time is not adversely affected.

- Make sure that the connection to the VDD pin is low impedance. Good analog design practice is to place a  $0.1\text{-}\mu\text{F}$  ceramic capacitor as near as possible to the VDD pin.
- If a  $C_{CRST}$  capacitor or pull-up resistor is used, place these components as close as possible to the CRST pin. If the CRST pin is left unconnected, make sure to minimize the amount of parasitic capacitance on the pin.
- If a  $C_{CWD}$  capacitor or pull-up resistor is used, place these components as close as possible to the CWD pin. If the CWD pin is left unconnected, make sure to minimize the amount of parasitic capacitance on the pin.
- Place the pull-up resistor on  $\overline{WDO}$  as close to the pin as possible.

### 10.2 Layout Example

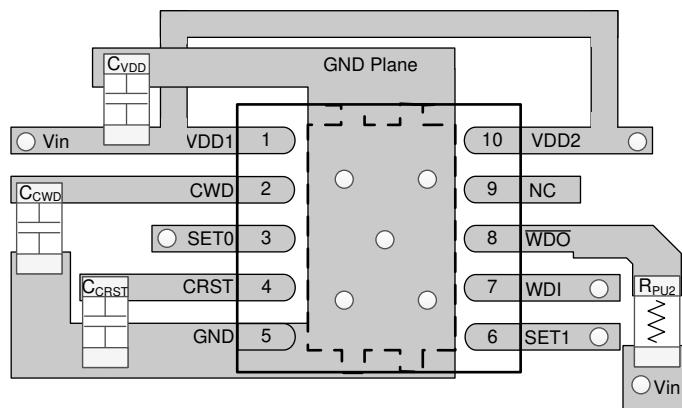

○ Denotes a via.

図 10-1. Typical Layout for the TPS3430

## 11 Device and Documentation Support

### 11.1 Device Support

### 11.2 Documentation Support

#### 11.2.1 Related Documentation

For related documentation see the following:

- [TPS3430EVM Window Watchdog Timer with Programmable Timeout Delay User Guide](#)

### 11.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 11.4 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の[使用条件](#)を参照してください。

### 11.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

### 11.6 Electrostatic Discharge Caution

 This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 11.7 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS3430WDRCR	Active	Production	VSON (DRC)   10	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	430AA
TPS3430WDRCR.A	Active	Production	VSON (DRC)   10	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	430AA
TPS3430WDRCRG4	Active	Production	VSON (DRC)   10	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	430AA
TPS3430WDRCRG4.A	Active	Production	VSON (DRC)   10	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	430AA

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF TPS3430 :**

---


- Automotive : [TPS3430-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

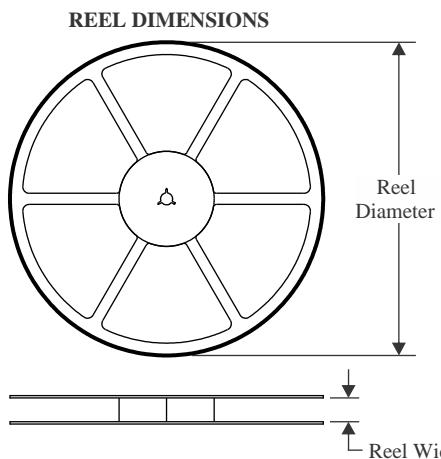**TAPE AND REEL INFORMATION**


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

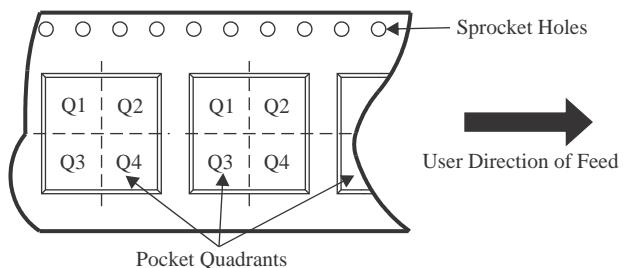**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS3430WDRCR	VSON	DRC	10	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
TPS3430WDRCRG4	VSON	DRC	10	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS3430WDRCR	VSON	DRC	10	3000	367.0	367.0	35.0
TPS3430WDRCRG4	VSON	DRC	10	3000	367.0	367.0	35.0

# GENERIC PACKAGE VIEW


## DRC 10

## VSON - 1 mm max height

3 x 3, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

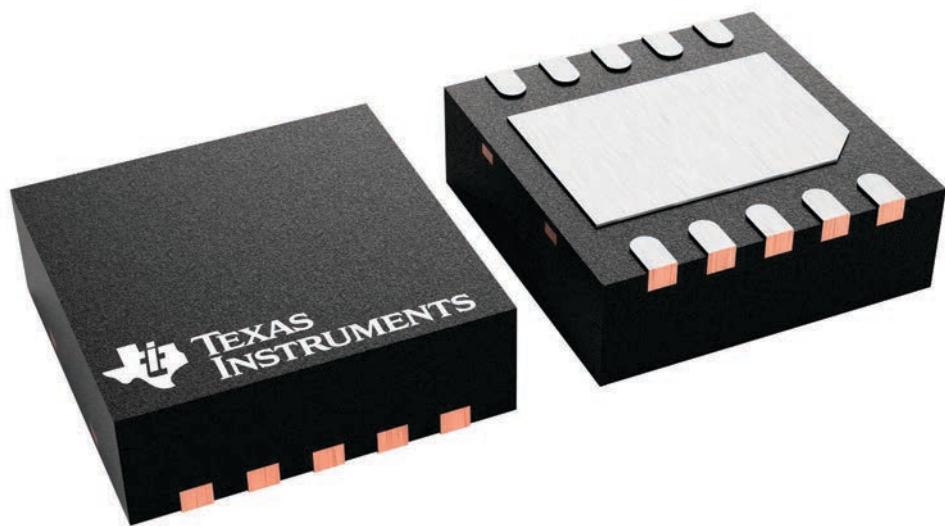

4226193/A


DRC0010J



# PACKAGE OUTLINE

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

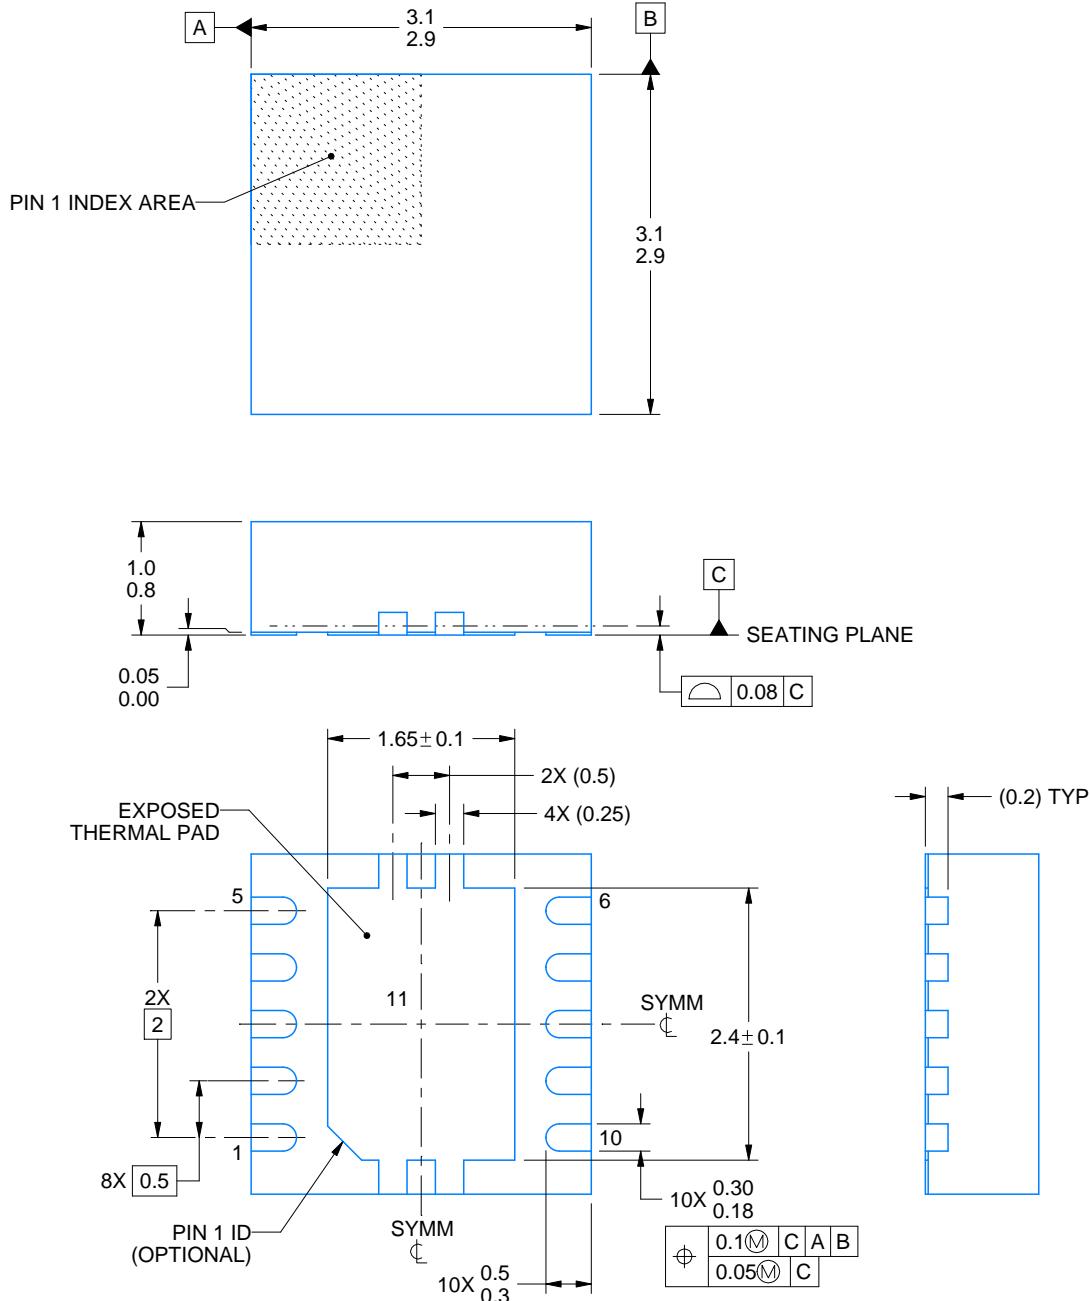

4218878/B 07/2018

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT



DRC0010J

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

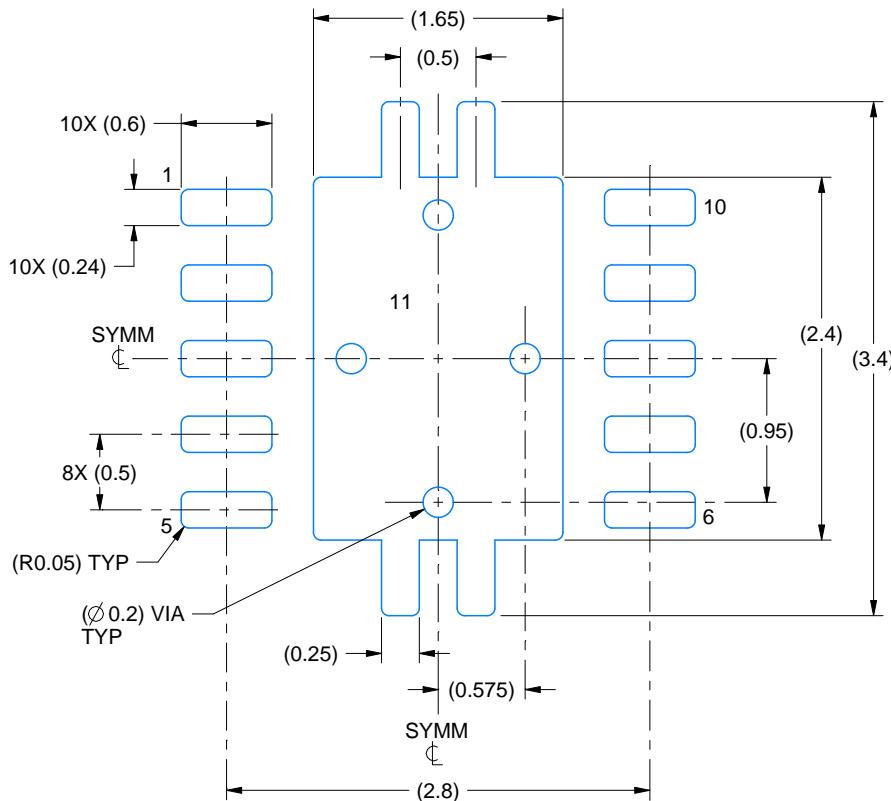

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:20X

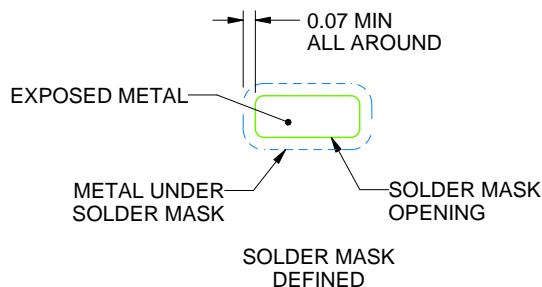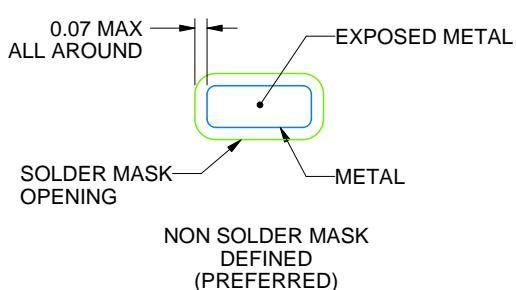

SOLDER MASK DETAILS

4218878/B 07/2018

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

DRC0010J

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

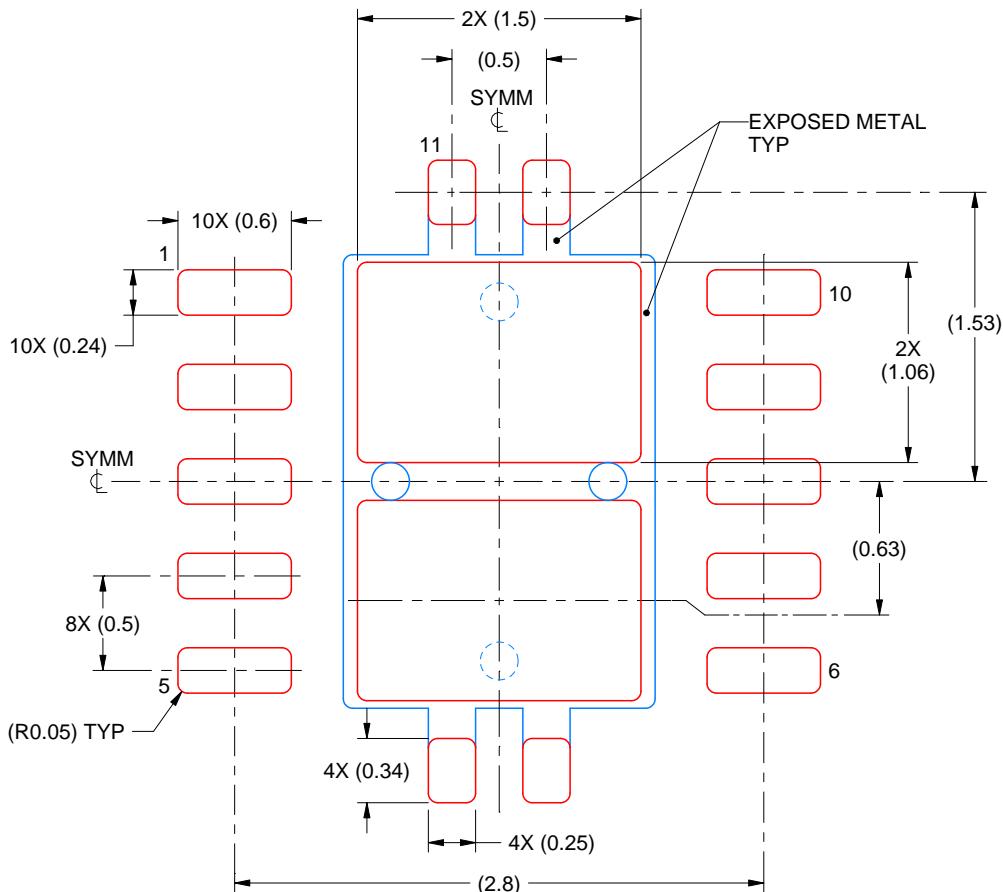

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 11:  
80% PRINTED SOLDER COVERAGE BY AREA  
SCALE:25X

4218878/B 07/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の默示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または默示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したもので、(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](#) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月