


TPS36-Q1 具有精密窗口看门狗计时器的汽车类毫微级 IQ 精密电压监控器

1 特性

- 具有符合 AEC-Q100 标准的下列特性：
 - 器件温度等级 1：-40°C 至 125°C 的环境工作温度范围
- 出厂编程或用户可编程的看门狗超时
 - ±10% 精确计时器（最大值）
 - 出厂编程的关闭窗口：1 毫秒至 100 秒
- 出厂编程或用户可编程的复位延迟
 - ±10% 精确计时器（最大值）
 - 出厂编程选项：2 毫秒至 10 秒
- 输入电压范围：V_{DD} = 1.04 V 至 6.0 V
- 固定阈值电压 (V_{IT})：1.05 V 至 5.4 V
 - 步长为 50mV 的阈值电压
 - 1.2% 电压阈值精度（最大值）
 - 内置迟滞 (V_{HYS})：5%（典型值）
- 超低电源电流：I_{DD} = 250nA（典型值）
- 开漏、推挽；低电平有效输出
- 各种可编程选项：
 - 看门狗启用/禁用
 - 看门狗启动延迟：无延迟至 10 秒
 - 打开窗口与关闭窗口比率选项：1X 至 511X
 - 锁存输出选项
- MR 功能支持

2 应用

- 车载充电器 (OBC) 和无线充电器
- 驾驶员监控
- 电池管理系统 (BMS)
- 前置摄像头
- 环视系统 ECU

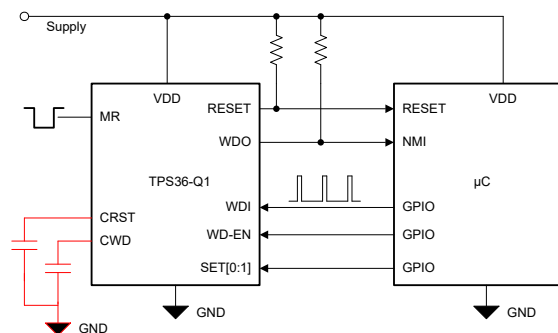

TPS36-Q1 offers various pinout options to support different features.
Choose suitable pinout based on application needs

典型应用电路

3 说明

TPS36-Q1 是一款超低功耗（典型值为 250nA）器件，可提供具有可编程窗口看门狗计时器的精密电压监控器。TPS36-Q1 支持用于欠压监控的宽阈值电平，在额定温度范围内的精度为 1.2%。

TPS36-Q1 可提供具有多种功能的高精度窗口看门狗计时器，广泛适用于各种应用。关闭窗口计时器可以由工厂编程或用户使用外部电容器进行编程。可以使用逻辑引脚的组合来动态更改打开窗口与关闭窗口的比率。看门狗还提供独特的功能，例如启用/禁用、启动延迟、独立的 WDO 引脚选项。

RESET 或 WDO 延迟可设定为出厂编程的默认延迟设置或通过外部电容器进行编程。该器件还提供锁存输出操作，监控器或看门狗故障清除之前会锁存输出。

TPS36-Q1 提供了 TPS3852-Q1 器件系列的性能升级替代产品。TPS36-Q1 采用小型 8 引脚 SOT-23 封装。

器件信息

| 器件型号 | 封装 (1) | 封装尺寸 (标称值) |
|----------|---------|-----------------|
| TPS36-Q1 | DDF (8) | 2.90mm × 1.60mm |

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

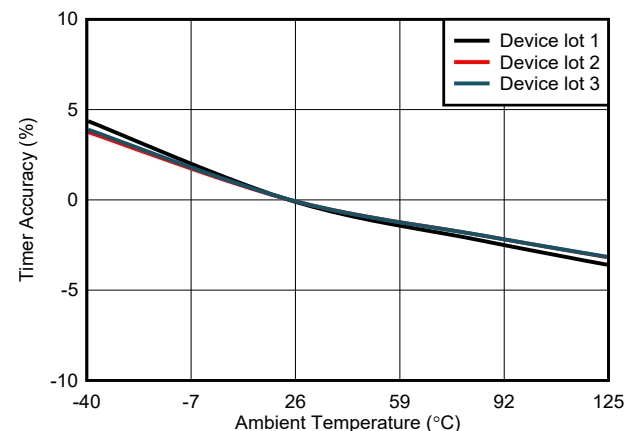


Table of Contents

| | | | |
|--|-----------|--|-----------|
| 1 特性 | 1 | 8.1 Overview..... | 15 |
| 2 应用 | 1 | 8.2 Functional Block Diagrams..... | 15 |
| 3 说明 | 1 | 8.3 Feature Description..... | 16 |
| 4 Revision History | 2 | 8.4 Device Functional Modes..... | 25 |
| 5 器件比较 | 3 | 9 Application and Implementation | 26 |
| 6 Pin Configuration and Functions | 4 | 9.1 Application Information..... | 26 |
| 7 Specifications | 6 | 9.2 Typical Applications..... | 27 |
| 7.1 Absolute Maximum Ratings..... | 6 | 9.3 Power Supply Recommendations..... | 29 |
| 7.2 ESD Ratings | 6 | 9.4 Layout..... | 29 |
| 7.3 Recommended Operating Conditions..... | 6 | 10 Device and Documentation Support | 30 |
| 7.4 Thermal Information..... | 7 | 10.1 接收文档更新通知..... | 30 |
| 7.5 Electrical Characteristics | 8 | 10.2 支持资源..... | 30 |
| 7.6 Timing Requirements | 9 | 10.3 Trademarks..... | 31 |
| 7.7 Switching Characteristics | 10 | 10.4 静电放电警告..... | 31 |
| 7.8 Timing Diagrams..... | 11 | 10.5 术语表..... | 31 |
| 7.9 Typical Characteristics..... | 12 | 11 Mechanical, Packaging, and Orderable Information | 31 |
| 8 Detailed Description | 15 | | |


4 Revision History

注：以前版本的页码可能与当前版本的页码不同

| Changes from Revision * (November 2022) to Revision A (December 2022) | Page |
|---|----------|
| • 将“预告信息”更改为“量产数据发布” | 1 |

5 器件比较

图 5-1 显示了 TPS36-Q1 的器件命名规则。对于所有可能的输出类型、阈值电压选项、看门狗时间选项和输出断言延迟选项，请参阅节 8 了解更多详细信息。有关其他选项的详细信息和可用性，请联系 TI 销售代码或访问 TI 的 E2E 论坛。

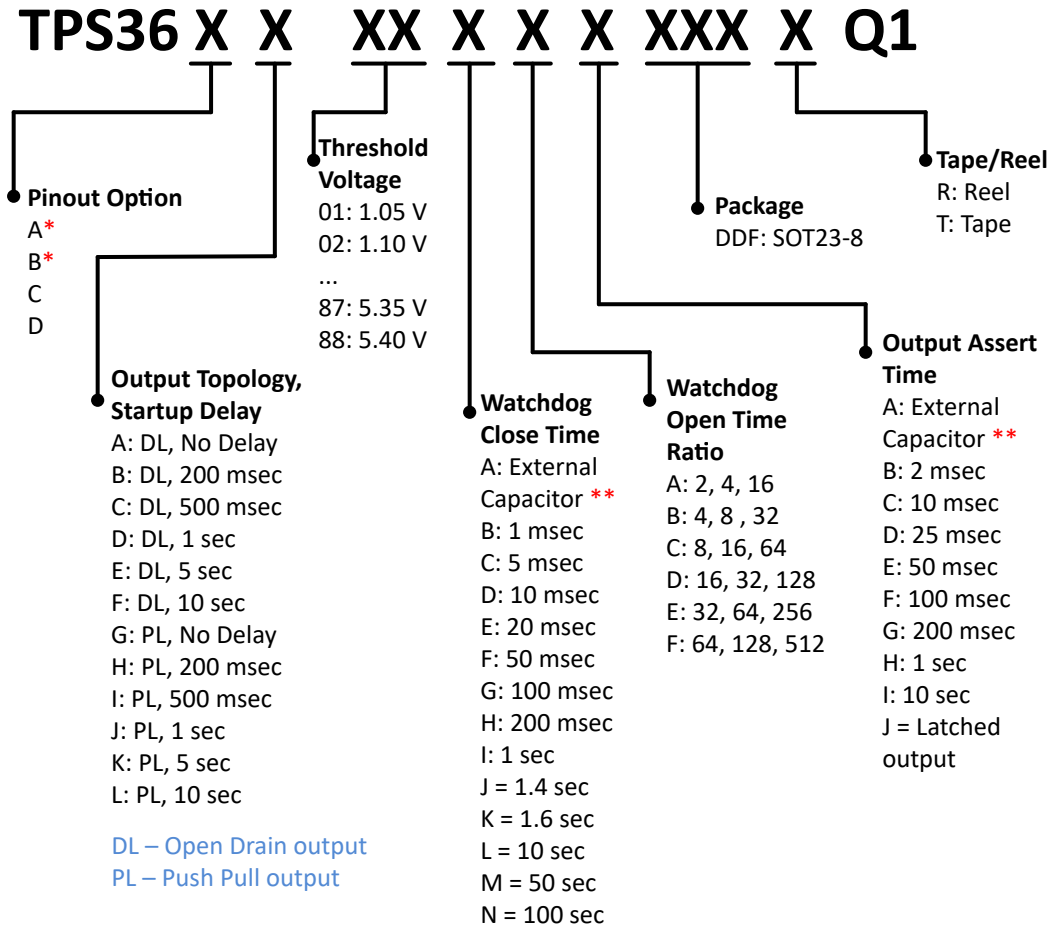

* Pinout option supports Start up Delay settings of “No Delay” and “10 sec” only.

** Capacitor programmable time feature available with pinout options A & B. For fixed time and latched output features use pinout options C & D.

Refer ‘Mechanical, Packaging and Orderable Information’ section for list of released orderable. For any other orderable, contact local TI support.

图 5-1. 器件命名规则

TPS36-Q1 属于引脚兼容的器件系列，提供了不同的功能集，详见表 5-1。

表 5-1. 引脚兼容的器件系列

| 器件 | 电压监控器 | 看门狗类型 |
|------------|-------|---------|
| TPS35-Q1 | 是 | Timeout |
| TPS36-Q1 | 是 | 窗口 |
| TPS3435-Q1 | 否 | Timeout |
| TPS3436-Q1 | 否 | 窗口 |

6 Pin Configuration and Functions

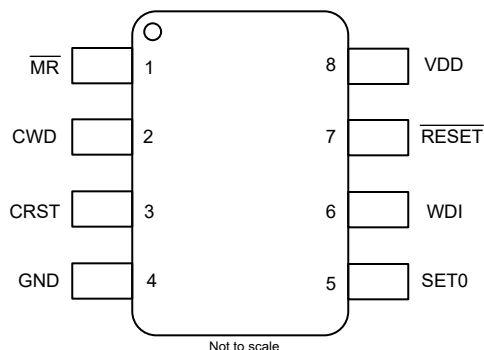


图 6-1. Pin Configuration Option A
DDF Package, 8-Pin SOT-23,
TPS36-Q1 Top View

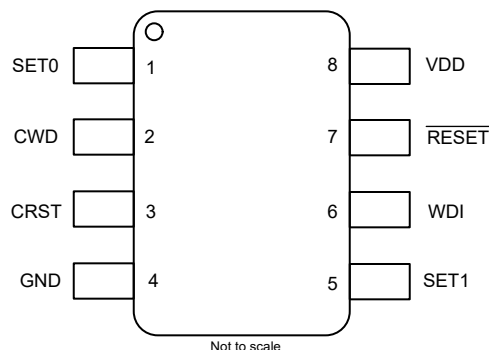


图 6-2. Pin Configuration Option B
DDF Package, 8-Pin SOT-23,
TPS36-Q1 Top View

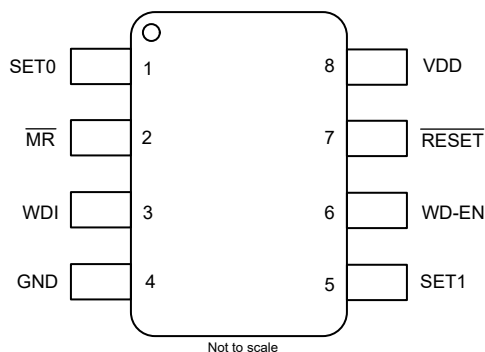


图 6-3. Pin Configuration Option C
DDF Package, 8-Pin SOT-23,
TPS36-Q1 Top View

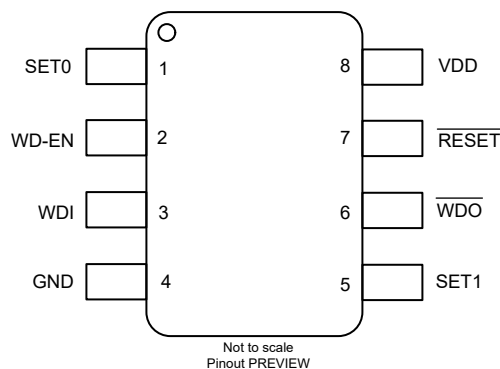


图 6-4. Pin Configuration Option D
DDF Package, 8-Pin SOT-23,
TPS36-Q1 Top View

表 6-1. Pin Functions

| PIN NAME | PIN NUMBER | | | | I/O | DESCRIPTION |
|-------------------------|------------|----------|----------|----------|-----|--|
| | PINOUT A | PINOUT B | PINOUT C | PINOUT D | | |
| CRST | 3 | 3 | — | — | I | Programmable reset timeout pin. Connect a capacitor between this pin and GND to program the reset timeout period. See § 8.3.4 for more details. |
| CWD | 2 | 2 | — | — | I | Programmable watchdog timeout input. Watchdog close time is set by connecting a capacitor between this pin and ground. See § 8.3.2.1 for more details. |
| GND | 4 | 4 | 4 | 4 | — | Ground pin |
| MR | 1 | — | 2 | — | I | Manual reset pin. A logic low on this pin asserts the $\overline{\text{RESET}}$. See § 8.3.3 for more details. |
| RESET | 7 | 7 | 7 | 7 | O | Reset output. Connect $\overline{\text{RESET}}$ to VDD using a pull up resistance when using open drain output. $\overline{\text{RESET}}$ is asserted when the voltage at the VDD pin goes below the undervoltage threshold (V_{IT}) or MR pin is driven LOW. For pinout options which do not support independent $\overline{\text{WDO}}$ pin, $\overline{\text{RESET}}$ is also asserted for watchdog error. See § 8.3.4 for more details. |
| SET0 | 5 | 1 | 1 | 1 | I | Logic input. SET0, SET1, and WD-EN pins select the watchdog window ratios and enable-disable the watchdog; see § 8.3.2.5 for more details. |
| SET1 | — | 5 | 5 | 5 | I | Logic input. SET0, SET1, and WD-EN pins select the watchdog window ratios and enable-disable the watchdog; see § 8.3.2.5 for more details. |
| VDD | 8 | 8 | 8 | 8 | I | Supply voltage pin. For noisy systems, connecting a 0.1- μF bypass capacitor is recommended. |
| WD-EN | — | — | 6 | 2 | I | Logic input. Logic high input enables the watchdog monitoring feature. See § 8.3.2.3 for more details. |
| WDI | 6 | 6 | 3 | 3 | I | Watchdog input. A falling transition (edge) must occur at this pin during the open window in order for $\overline{\text{RESET}}$ / $\overline{\text{WDO}}$ to not assert. See § 8.3.2 for more details. |
| $\overline{\text{WDO}}$ | — | — | — | 6 | O | Watchdog output. Connect $\overline{\text{WDO}}$ to VDD using pull up resistance when using open drain output. $\overline{\text{WDO}}$ asserts when a watchdog error occurs. $\overline{\text{WDO}}$ only asserts when $\overline{\text{RESET}}$ is high. When a watchdog error occurs, $\overline{\text{WDO}}$ asserts for the set $\overline{\text{RESET}}$ timeout delay (t_D). When $\overline{\text{RESET}}$ is asserted, $\overline{\text{WDO}}$ is deasserted and watchdog functionality is disabled. See § 8.3.4 for more details. |

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range, unless otherwise noted⁽¹⁾

| | | MIN | MAX | UNIT |
|----------------------------|---|-------|-------------------------------------|------|
| Voltage | VDD | – 0.3 | 6.5 | V |
| Voltage | C _{WD} , C _{RST} , WD – EN, SETx, WDI, $\overline{\text{MR}}$ ⁽²⁾ , $\overline{\text{RESET}}$ (Push Pull), $\overline{\text{WDO}}$ (Push Pull) | – 0.3 | V _{DD} +0.3 ⁽³⁾ | V |
| | $\overline{\text{RESET}}$ (Open Drain), $\overline{\text{WDO}}$ (Open Drain) | – 0.3 | 6.5 | |
| Current | $\overline{\text{RESET}}$, $\overline{\text{WDO}}$ pin | – 20 | 20 | mA |
| Temperature ⁽⁴⁾ | Operating ambient temperature, T _A | – 40 | 125 | °C |
| Temperature | Storage, T _{stg} | – 65 | 150 | |

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) If the logic signal driving $\overline{\text{MR}}$ is less than V_{DD}, then additional current flows into V_{DD} and out of $\overline{\text{MR}}$.
- (3) The absolute maximum rating is (V_{DD} + 0.3) V or 6.5 V, whichever is smaller
- (4) As a result of the low dissipated power in this device, it is assumed that T_J = T_A.

7.2 ESD Ratings

| | | | VALUE | UNIT |
|--------------------|-------------------------|---|-------|------|
| V _(ESD) | Electrostatic discharge | Human body model (HBM), per AEC Q100-002 ⁽¹⁾ | ±2000 | V |
| | | Charged device model (CDM), per AEC Q100-011 | ±750 | |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | | MIN | NOM | MAX | UNIT |
|------------------|--|------|-----|------|------|
| Voltage | VDD (Active Low output) | 0.9 | | 6 | V |
| | C _{WD} , C _{RST} , WD – EN, SETx, WDI, $\overline{\text{MR}}$ ⁽¹⁾ | 0 | | VDD | |
| | $\overline{\text{RESET}}$ (Open Drain), $\overline{\text{WDO}}$ (Open Drain) | 0 | | 6 | |
| | $\overline{\text{RESET}}$ (Open Drain), $\overline{\text{WDO}}$ (Push Pull) | 0 | | VDD | |
| Current | $\overline{\text{RESET}}$, $\overline{\text{WDO}}$ pin current | – 5 | | 5 | mA |
| C _{RST} | C _{RST} pin capacitor range | 1.5 | | 1800 | nF |
| C _{WD} | C _{WD} pin capacitor range | 1.5 | | 1000 | nF |
| T _A | Operating ambient temperature | – 40 | | 125 | °C |

- (1) If the logic signal driving $\overline{\text{MR}}$ is less than V_{DD}, then additional current flows into V_{DD} and out of $\overline{\text{MR}}$. V_{MR} should not be higher than V_{DD}.

7.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | TPS36-Q1 | UNIT |
|-------------------------------|--|---------------|------|
| | | DDF (SOT23-8) | |
| | | 8 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 175.3 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 94.7 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 92.4 | °C/W |
| ψ_{JT} | Junction-to-top characterization parameter | 8.4 | °C/W |
| ψ_{JB} | Junction-to-board characterization parameter | 91.9 | °C/W |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | N/A | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

7.5 Electrical Characteristics

At $1.04\text{ V} \leq V_{DD} \leq 6\text{ V}$, $\overline{\text{MR}} = \text{Open}$, $\overline{\text{RESET}}$ pull-up resistor ($R_{\text{pull-up}}$) = 100 k Ω to VDD, $\overline{\text{WDO}}$ pull-up resistor ($R_{\text{pull-up}}$) = 100 k Ω to VDD, output load (C_{LOAD}) = 10 pF and over operating free-air temperature range - 40°C to 125°C, unless otherwise noted. VDD ramp rate $\leq 1\text{ V}/\mu\text{s}$. Typical values are at $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|-------------------------------------|--|---|---------------------------------|--------------------|--------------------|-----|------|
| COMMON PARAMETERS | | | | | | | |
| V _{DD} | Input supply voltage | Active LOW output | | 1.04 | | 6 | V |
| V _{IT-} | Negative-going input threshold accuracy ⁽¹⁾ | V _{IT-} = 1.05 V to 1.95 V | | - 1.4 | ±0.5 | 1.4 | % |
| | | V _{IT-} = 2.0 V to 5.4 V | | - 1.2 | ±0.5 | 1.2 | |
| V _{HYS} | Hysteresis V _{IT-} pin | V _{IT-} = 1.05 V to 5.4 V | | 3 | 5 | 7 | % |
| I _{DD} | Supply current into VDD pin ⁽²⁾ | V _{DD} = 2 V V _{IT-} = 1.05 V to 1.95 V | T _A = - 40°C to 85°C | | 0.25 | 0.8 | µA |
| | | | | | 0.25 | 3 | |
| | | V _{DD} = 6 V V _{IT-} = 1.05 V to 5.4 V | T _A = - 40°C to 85°C | | 0.25 | 0.8 | |
| | | | | | 0.25 | 3 | |
| V _{IL} | Low level input voltage WD - EN, WDI, SETx, MR ⁽³⁾ | | | | 0.3V _{DD} | | V |
| V _{IH} | High level input voltage WD - EN, WDI, SETx, MR ⁽³⁾ | | | | 0.7V _{DD} | | V |
| R _{MR} | Manual reset internal pull-up resistance | | | | 100 | | k Ω |
| RESET / WDO (Open-drain active-low) | | | | | | | |
| V _{OL} | Low level output voltage | V _{DD} = 1.5 V, 1.55 V ≤ V _{IT-} ≤ 3.35 V I _{OUT(Sink)} = 500 µA | | | | 300 | mV |
| | | V _{DD} = 3.3 V, 3.4 V ≤ V _{IT-} ≤ 5.4 V I _{OUT(Sink)} = 2 mA | | | | 300 | |
| I _{lkg(OD)} | Open-Drain output leakage current | V _{DD} = V _{PULLUP} = 6V T _A = - 40°C to 85°C | | | 10 | 30 | nA |
| | | V _{DD} = V _{PULLUP} = 6V | | | 10 | 120 | nA |
| RESET / WDO (Push-pull active-low) | | | | | | | |
| V _{POR} | Power on RESET voltage ⁽⁵⁾ | V _{OL(max)} = 300 mV I _{OUT(Sink)} = 15 µA | | | | 900 | mV |
| V _{OL} | Low level output voltage | V _{DD} = 0.9 V, 1.05 V ≤ V _{IT-} ≤ 1.5 V I _{OUT(Sink)} = 15 µA | | | | 300 | mV |
| | | V _{DD} = 1.5 V, 1.55 V ≤ V _{IT-} ≤ 3.35 V I _{OUT(Sink)} = 500 µA | | | | 300 | |
| | | V _{DD} = 3.3 V, 3.4 V ≤ V _{IT-} ≤ 5.4 V I _{OUT(Sink)} = 2 mA | | | | 300 | |
| V _{OH} | High level output voltage | V _{DD} = 1.8 V, 1.05 V ≤ V _{IT-} ≤ 1.4 V I _{OUT(Source)} = 500 µA | | 0.8V _{DD} | | | V |
| | | V _{DD} = 3.3 V, 1.45 V ≤ V _{IT-} ≤ 3.0 V I _{OUT(Source)} = 500 µA | | 0.8V _{DD} | | | |
| | | V _{DD} = 6 V, 3.05 V ≤ V _{IT-} ≤ 5.4 V I _{OUT(Source)} = 2 mA | | 0.8V _{DD} | | | |

(1) V_{IT-} threshold voltage range from 1.05 V to 5.4 V in 50 mV steps.

(2) If the logic signal driving MR is less than V_{DD} , then additional current flows into V_{DD} and out of MR.

(3) V_{POR} is the minimum V_{DD} voltage level for a controlled output state

7.6 Timing Requirements

At $1.04\text{ V} \leq V_{DD} \leq 6\text{ V}$, $\overline{\text{MR}} = \text{Open}$, $\overline{\text{RESET}}$ pull-up resistor ($R_{\text{pull-up}}$) = $100\text{ k}\Omega$ to V_{DD} , $\overline{\text{WDO}}$ pull-up resistor ($R_{\text{pull-up}}$) = $100\text{ k}\Omega$ to V_{DD} , output RESET / WDO load (C_{LOAD}) = 10 pF and over operating free-air temperature range -40°C to 125°C , unless otherwise noted. VDD ramp rate $\leq 1\text{ V}/\mu\text{s}$. Typical values are at $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------------------|--|---|------|------------------------------|------|---------------|
| $t_{\text{GL_VIT-}}$ | Glitch immunity $V_{\text{IT-}}$ | $5\% V_{\text{IT-}}$ overdrive ⁽¹⁾ | | 15 | | μs |
| $t_{\text{MR_PW}}$ | MR pin pulse duration to assert reset | | | 100 | | ns |
| $t_{\text{P-WD}}$ | WDI pulse duration to start next frame ⁽²⁾ | $V_{DD} > V_{\text{IT-}}$ | 500 | | | ns |
| $t_{\text{HD-WDEN}}$ | WD-EN hold time to enable or disable WD operation ⁽²⁾ | $V_{DD} > V_{\text{IT-}}$ | 200 | | | μs |
| $t_{\text{HD-SETx}}$ | SETx hold time to change WD timer setting ⁽²⁾ | $V_{DD} > V_{\text{IT-}}$ | 150 | | | μs |
| t_{WC} | Watchdog close window time period | Orderable Option TPS36xxxxB | 0.8 | 1 | 1.2 | ms |
| | | Orderable Option TPS36xxxxC | 4 | 5 | 6 | |
| | | Orderable Option TPS36xxxxD | 9 | 10 | 11 | |
| | | Orderable Option TPS36xxxxE | 18 | 20 | 22 | |
| | | Orderable Option TPS36xxxxF | 45 | 50 | 55 | |
| | | Orderable Option TPS36xxxxG | 90 | 100 | 110 | |
| | | Orderable Option TPS36xxxxH | 180 | 200 | 220 | s |
| | | Orderable Option TPS36xxxxI | 0.9 | 1 | 1.1 | |
| | | Orderable Option TPS36xxxxJ | 1.26 | 1.4 | 1.54 | |
| | | Orderable Option TPS36xxxxK | 1.44 | 1.6 | 1.76 | |
| | | Orderable Option TPS36xxxxL | 9 | 10 | 11 | |
| | | Orderable Option TPS36xxxxM | 45 | 50 | 55 | |
| | | Orderable Option TPS36xxxxN | 90 | 100 | 110 | |
| t_{WO} | Watchdog open window time period | SETx pin decide multiplier n | | $(n-1) \times t_{\text{WC}}$ | | ms |

(1) Overdrive % = $[(V_{DD}/V_{\text{IT-}}) - 1] \times 100\%$

(2) Not production tested

7.7 Switching Characteristics

At $1.04\text{ V} \leq V_{DD} \leq 6\text{ V}$, \overline{MR} = Open, \overline{RESET} pull-up resistor ($R_{pull-up}$) = $100\text{ k}\Omega$ to V_{DD} , \overline{WDO} pull-up resistor ($R_{pull-up}$) = $100\text{ k}\Omega$ to V_{DD} , output \overline{RESET} / \overline{WDO} load (C_{LOAD}) = 10 pF and over operating free-air temperature range -40°C to 125°C , unless otherwise noted. V_{DD} ramp rate $\leq 1\text{ V}/\mu\text{s}$. Typical values are at $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------|---|---|------|-------|------|---------------|
| t_{STRT} | Startup delay ⁽⁴⁾ | | | | 500 | μs |
| t_{P_HL} | RESET detect delay for V_{DD} falling below V_{IT-} | $V_{DD} : (V_{IT+} + 10\%) \text{ to } (V_{IT-} - 10\%)^{(1)}$ | | 30 | 50 | μs |
| t_{SD} | Watchdog startup delay | Orderable part number TPS36xA, TPS36xG | | 0 | | ms |
| | | Orderable part number TPS36xB, TPS36xH | 180 | 200 | 220 | |
| | | Orderable part number TPS36xC, TPS36xI | 450 | 500 | 550 | |
| | | Orderable part number TPS36xD, TPS36xJ | 0.9 | 1 | 1.1 | s |
| | | Orderable part number TPS36xE, TPS36xK | 4.5 | 5 | 5.5 | |
| | | Orderable part number TPS36xF, TPS36xL | 9 | 10 | 11 | |
| t_D | Reset time delay ⁽³⁾ | Orderable part number TPS36xxxxxB | 1.6 | 2 | 2.4 | ms |
| | | Orderable part number TPS36xxxxxC | 9 | 10 | 11 | ms |
| | | Orderable part number TPS36xxxxxD | 22.5 | 25 | 27.5 | ms |
| | | Orderable part number TPS36xxxxxE | 45 | 50 | 55 | ms |
| | | Orderable part number TPS36xxxxxF | 90 | 100 | 110 | ms |
| | | Orderable part number TPS36xxxxxG | 180 | 200 | 220 | ms |
| | | Orderable part number TPS36xxxxxH | 0.9 | 1 | 1.1 | s |
| | | Orderable part number TPS36xxxxxI | 9 | 10 | 11 | s |
| t_{WDO} | Watchdog timeout delay | | | t_D | | s |
| t_{MR_RES} | Propagation delay from \overline{MR} low to reset assertion | $V_{DD} \geq V_{IT-} + 0.2\text{ V}$, $\overline{MR} = V_{MR_H} \text{ to } V_{MR_L}$ | | 100 | | ns |
| t_{MR_ID} | Delay from \overline{MR} release to reset deassert | $V_{DD} = 3.3\text{ V}$, $\overline{MR} = V_{MR_L} \text{ to } V_{MR_H}$ | | t_D | | s |

(1) t_{P_HL} measured from threshold trip point (V_{IT-}) to \overline{RESET} assert. $V_{IT+} = V_{IT-} + V_{HYS}$

(2) Specified by design parameter. When V_{DD} starts from less than the specified minimum V_{DD} and then exceeds V_{IT+} , reset is deasserted after the startup delay (t_{STRT}) + t_D delay.

(3) V_{DD} voltage transitions from ($V_{IT-} - 10\%$) to ($V_{IT-} + 10\%$)

7.8 Timing Diagrams

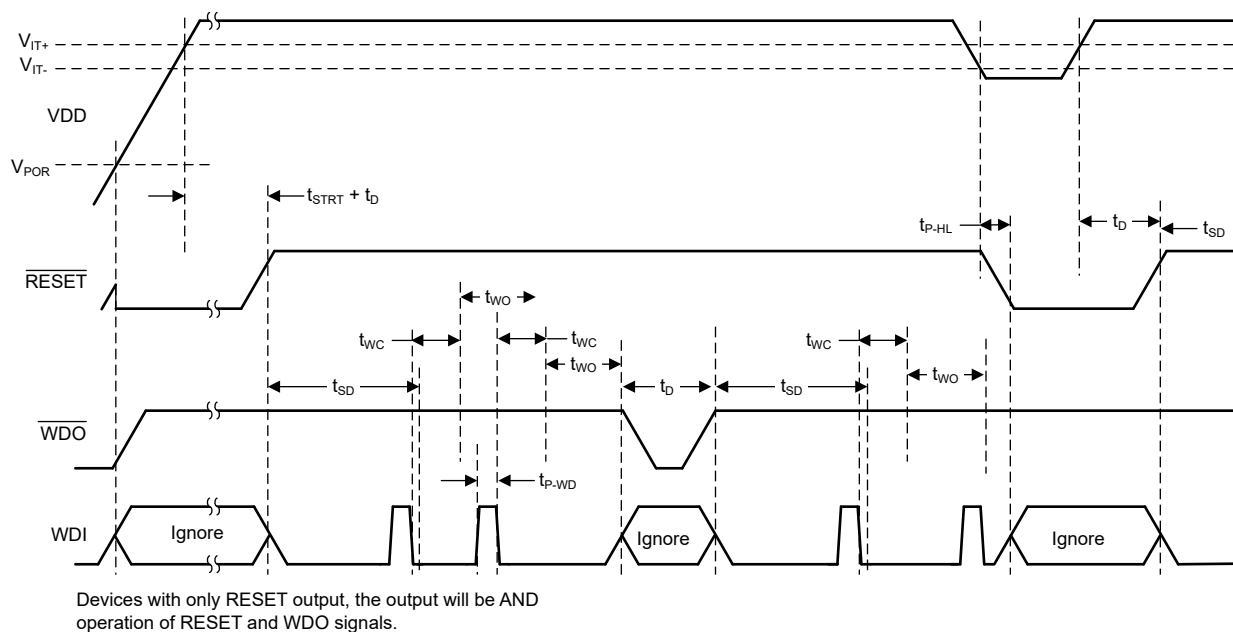


图 7-1. Functional Timing Diagram

7.9 Typical Characteristics

all curves are taken at $T_A = 25^\circ\text{C}$ (unless otherwise noted)

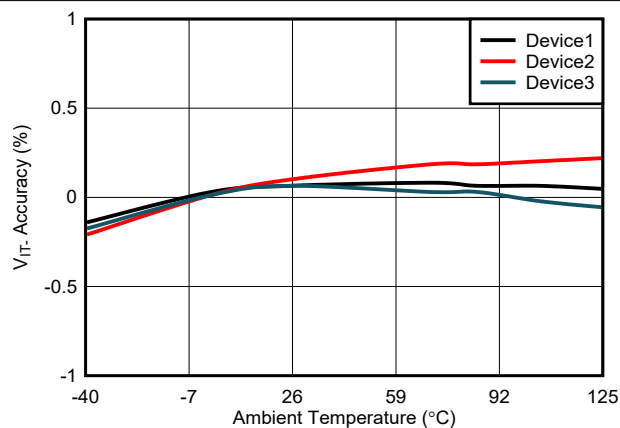


图 7-2. V_{IT} Accuracy vs Temperature

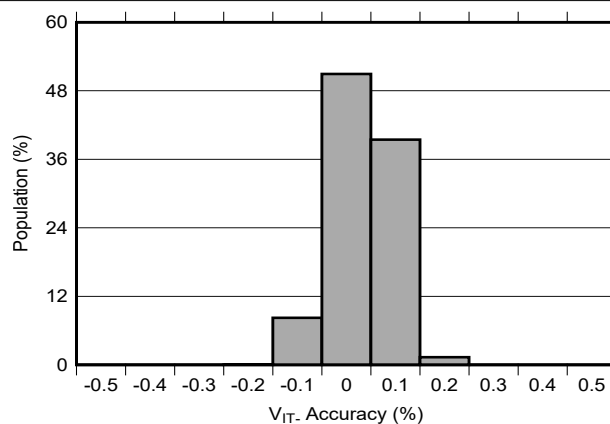


图 7-3. V_{IT} Accuracy Histogram

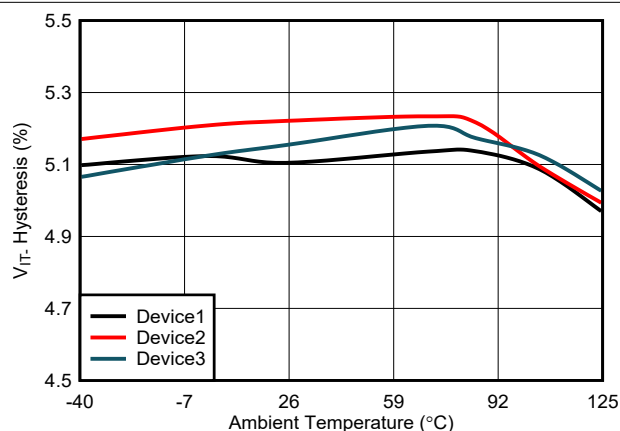


图 7-4. V_{IT} Hysteresis vs Temperature

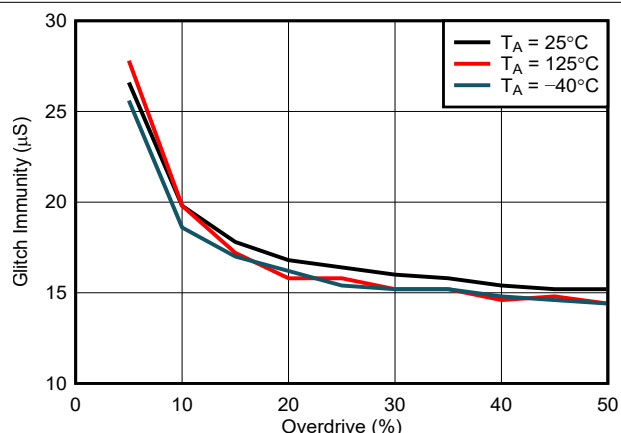


图 7-5. Supply Glitch Immunity vs Overdrive

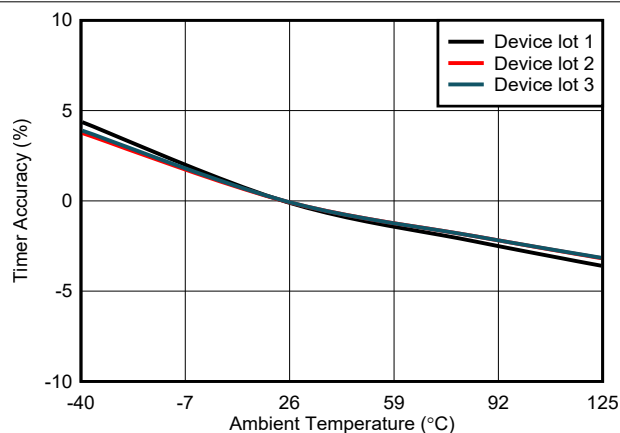


图 7-6. Timer Accuracy vs Temperature

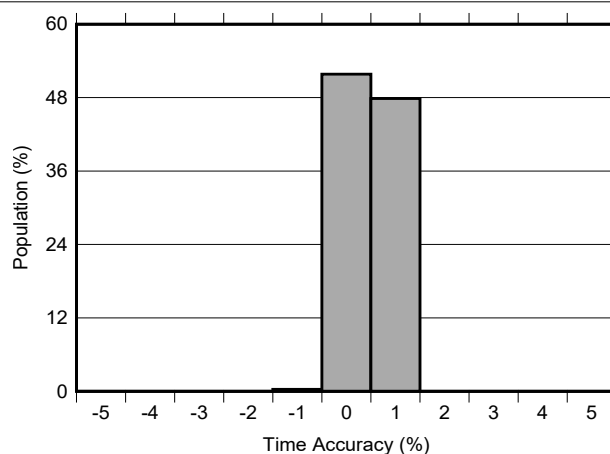


图 7-7. Timer Accuracy Histogram

7.9 Typical Characteristics (continued)

all curves are taken at $T_A = 25^\circ\text{C}$ (unless otherwise noted)

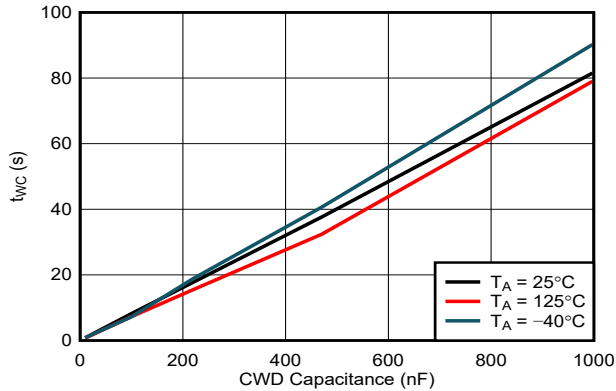


图 7-8. t_{WC} vs Capacitance

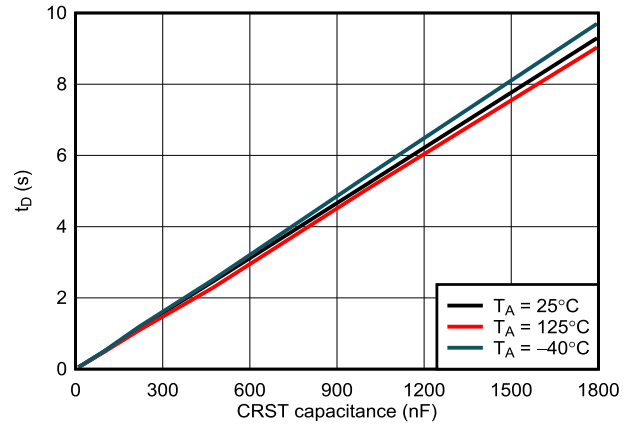


图 7-9. t_D vs Capacitance

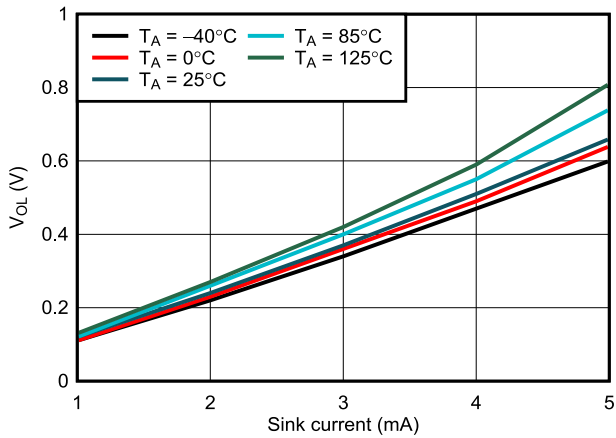


图 7-10. RESET V_{OL} vs I_{sink} , $V_{DD} = 1.5\text{ V}$

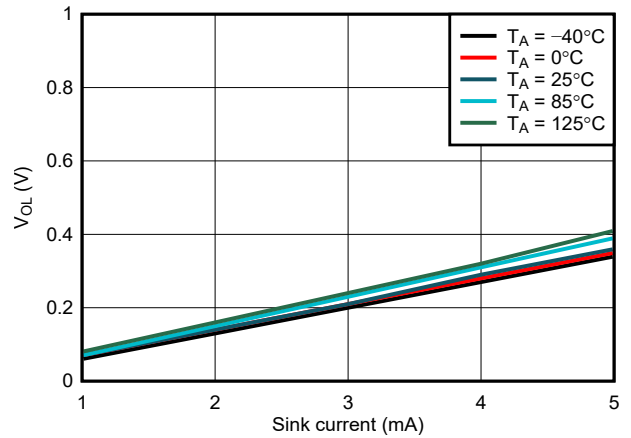


图 7-11. WDO V_{OL} vs I_{sink} , $V_{DD} = 1.5\text{ V}$

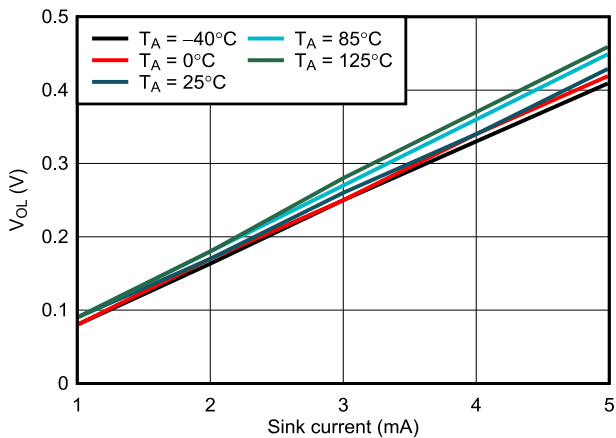


图 7-12. RESET V_{OL} vs I_{sink} , $V_{DD} = 3.3\text{ V}$

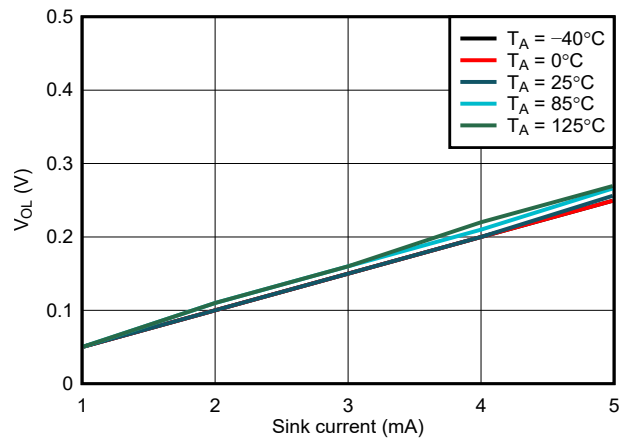


图 7-13. WDO V_{OL} vs I_{sink} , $V_{DD} = 3.3\text{ V}$

7.9 Typical Characteristics (continued)

all curves are taken at $T_A = 25^\circ\text{C}$ (unless otherwise noted)

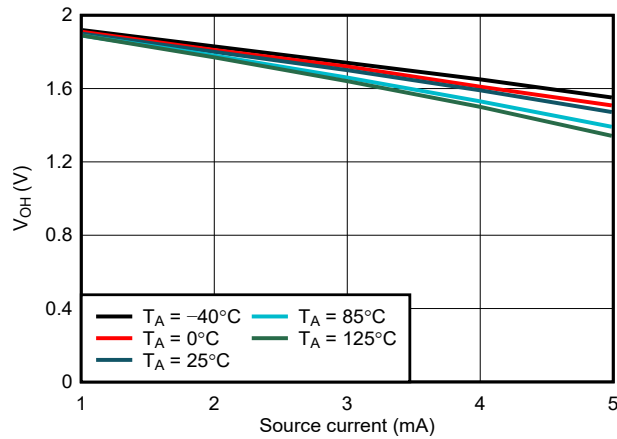


图 7-14. RESET V_{OH} vs I_{source} , $V_{DD} = 2.0\text{ V}$

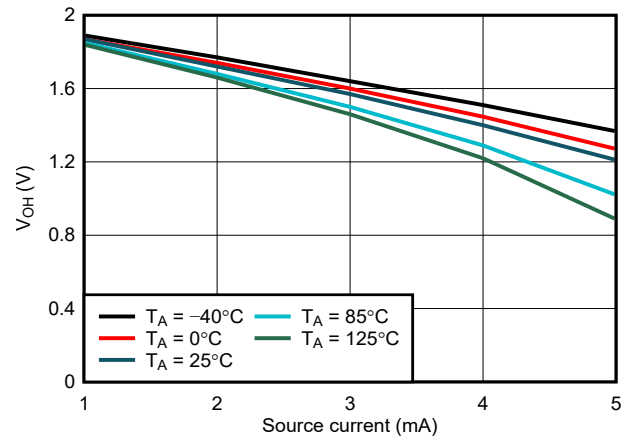


图 7-15. WDO V_{OH} vs I_{source} , $V_{DD} = 2.0\text{ V}$

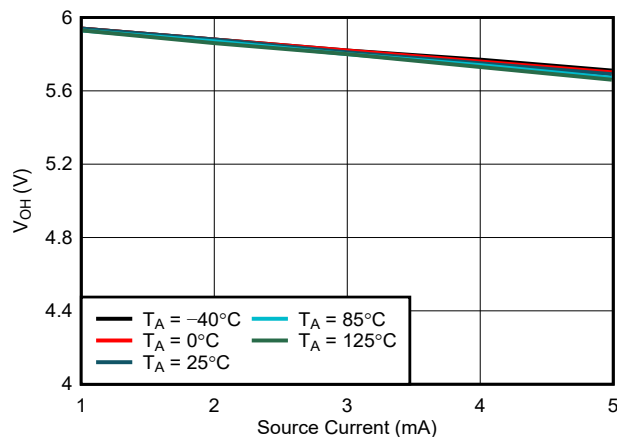


图 7-16. RESET V_{OH} vs I_{source} , $V_{DD} = 6.0\text{ V}$

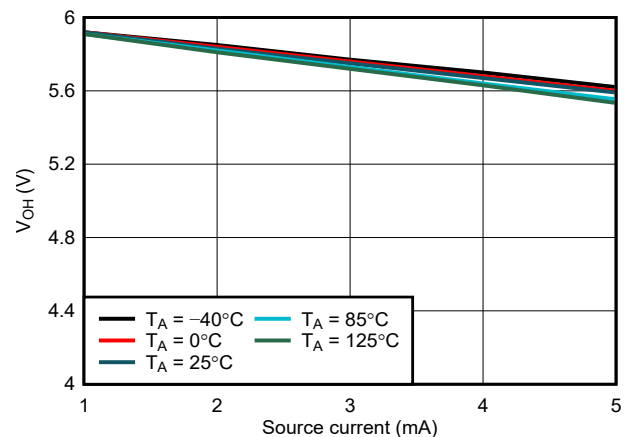


图 7-17. WDO V_{OH} vs I_{source} , $V_{DD} = 6.0\text{ V}$

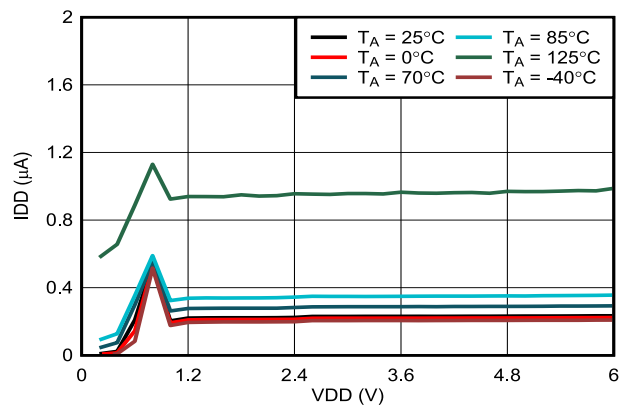


图 7-18. Supply Current vs Power-Supply Voltage

8 Detailed Description

8.1 Overview

The TPS36-Q1 is a high-accuracy under voltage supervisor with an integrated window watchdog timer device. The device family supports multiple features related to watchdog operation in a compact 8 pin SOT23 package. The devices are available in 4 different pinout configurations. Each pinout offers access to different features to meet the various application requirements. The device family is rated for -Q100 applications.

8.2 Functional Block Diagrams

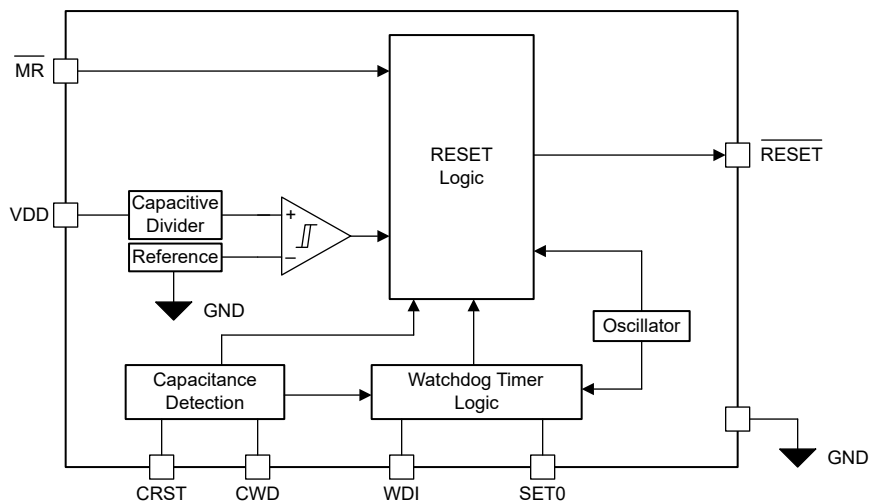


图 8-1. Pinout Option A

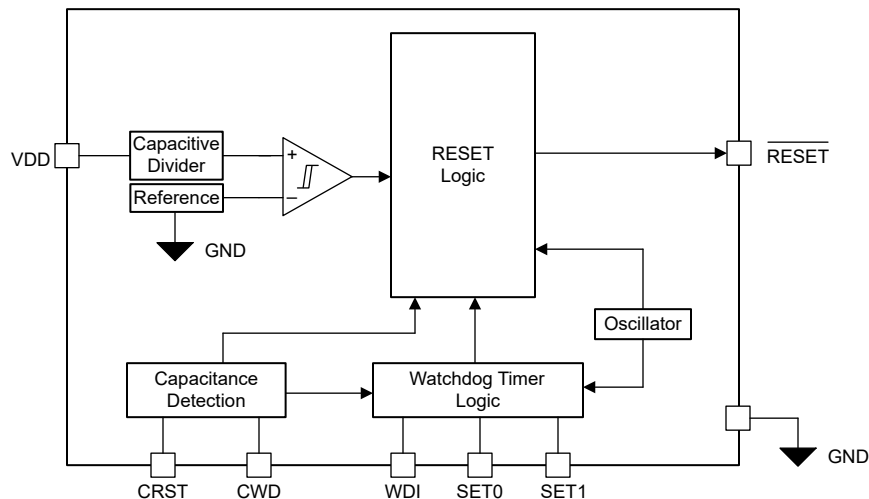


图 8-2. Pinout Option B

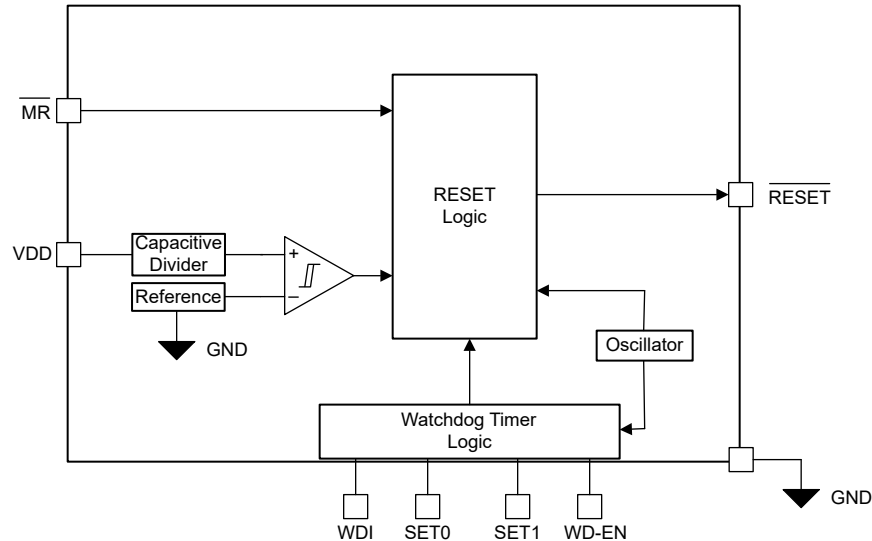


图 8-3. Pinout Option C

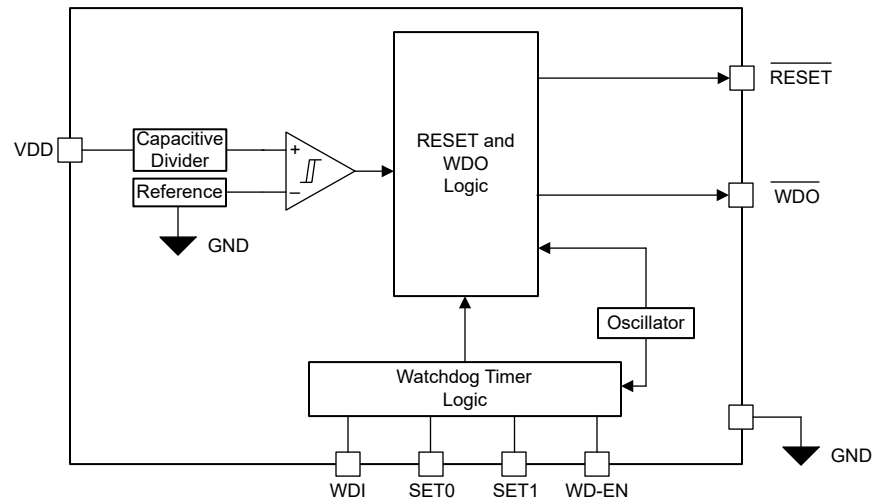


图 8-4. Pinout Option D

8.3 Feature Description

8.3.1 Voltage Supervisor

The TPS36-Q1 offers high accuracy under voltage supervisor function at very low quiescent current. The voltage supervisor function is always active. After the device powers up from $V_{DD} < V_{POR}$, the RESET and WDO outputs will be actively driven when V_{DD} is greater than V_{POR} . The device starts monitoring the supply level when the V_{DD} voltage is greater than 1.04 V. The device will hold the RESET pin asserted for $t_{STRT} + t_D$ time after the $V_{DD} > V_{IT+}$ ($V_{IT+} = V_{IT-} + V_{HYS}$). Refer [节 8.3.4](#) for the t_D value computation. For a capacitor based t_D delay option, the RESET will be asserted for $t_{STRT} + 2 \text{ msec}$ time if the CRST pin is open.

Device pinout options A to C offer only RESET output. In these devices the internal RESET output from supervisor and WDO output from watchdog timer are ANDed together to drive the external RESET output.

The supervisor offers wide range of fixed monitoring thresholds (V_{IT-}) from 1.05 V to 5.40 V in steps of 50 mV. The device asserts the RESET output when the V_{DD} signal falls below V_{IT-} threshold. The device offers hysteresis functionality for voltage supervision. This ensures the supply has recovered above the monitoring threshold before the RESET output is deasserted. The TPS36-Q1 typical voltage hysteresis (V_{HYS}) is 5%. Along with the voltage hysteresis, the device keeps the RESET output asserted for time duration t_D after the supply has

risen above V_{IT+} . The RESET output assert duration changes from t_D to $t_{STRT} + t_D$ if the VDD signal is ramping from voltage $< V_{POR}$. The t_D time duration can be programmable using an external capacitor or fixed time options offered by the device.

The typical timing behavior for a voltage supervisor and the RESET output is showcased in 图 8-5. The voltage supervisor monitoring output has higher priority over watchdog functionality. If the device voltage supervisor output is asserted, the watchdog functionality will be disabled including WDO assert control. The device resumes watchdog related functionality only after the supply is stable and the t_D time duration has elapsed.

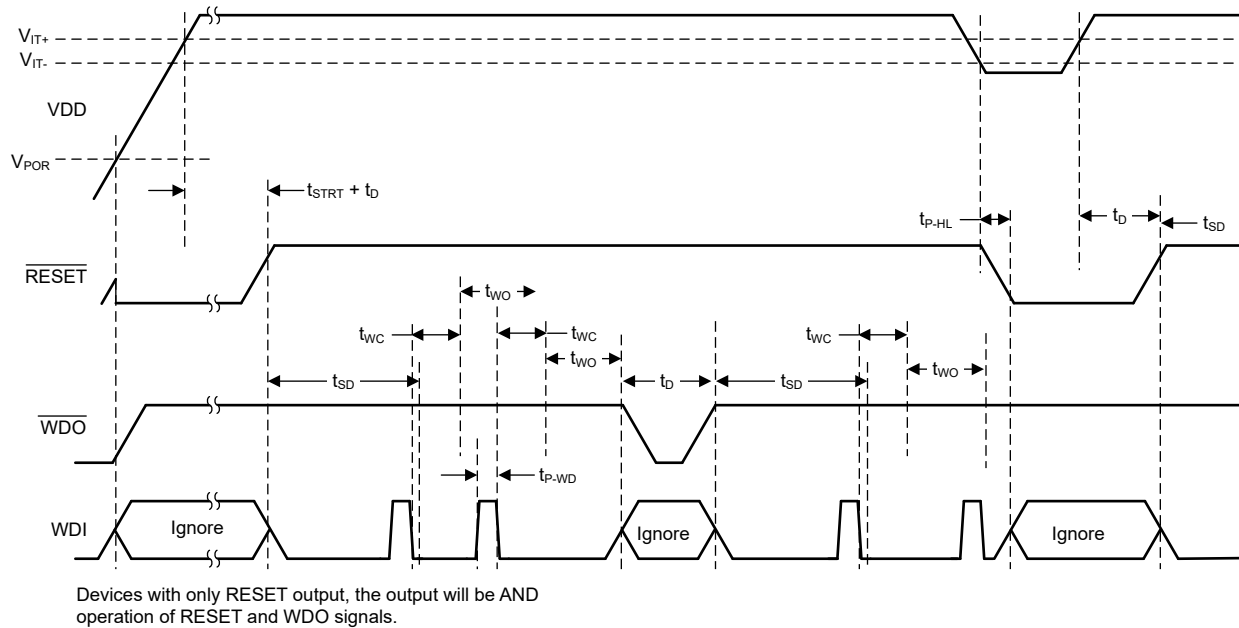


图 8-5. Voltage Supervisor Timing Diagram

8.3.2 Window Watchdog Timer

The TPS36-Q1 offers high precision window watchdog timer monitoring. The device is available in multiple pinout options A to D which support multiple features to meet ever expanding needs of various applications. Ensure a correct pinout is selected to meet the application needs.

The window watchdog is active when the VDD voltage is higher than the $V_{IT-} + V_{HYS}$ and the RESET is deasserted after the t_D time. The watchdog stays active as long as $VDD > V_{IT-}$ and watchdog is enabled. TPS36-Q1 family offers various startup time delay options to ensure enough time is available for the host to complete boot operation. Please refer 节 8.3.2.4 section for additional details.

The window watchdog timer frame consists of two windows namely close window (t_{WC}) followed by open window (t_{WO}). The device monitors the WDI pin for falling edge. User is expected to provide a valid falling edge on WDI pin in the open window. Refer 节 5 to arrive at the relevant close window and open window values needed for application. The timer value is reset when a valid falling edge is detected on WDI pin in the t_{WO} time duration. An early fault is reported if a WDI falling edge is detected in close window. A late fault is reported if WDI falling edge is not detected in both close and open window. The device asserts RESET output for pinout options A, B and C or WDO output for pinout D for time t_D in event of watchdog fault. Refer 节 8.3.4 to arrive at the relevant t_D value needed for application.

图 8-6 shows the basic operation for window watchdog timer operation. The TPS36-Q1 watchdog functionality supports multiple features. Details are available in following sub sections.

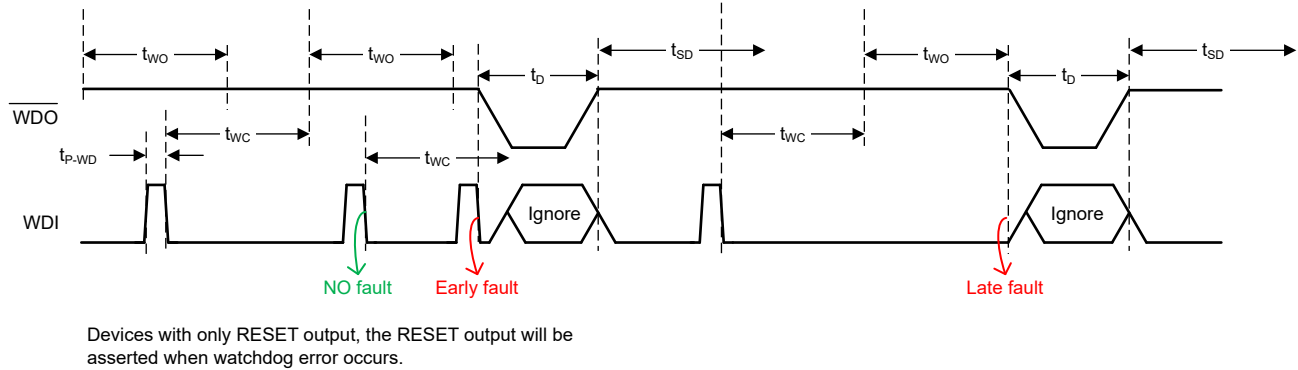


图 8-6. Window Watchdog Timer Operation

8.3.2.1 t_{WC} (Close Window) Timer

The window watchdog frame consists of two sub frames t_{WC} followed by t_{WO} . The host is not expected to drive valid WDI transition during t_{WC} time. A valid WDI transition during t_{WC} frame results in early fault condition and the WDO output is asserted. RESET output is asserted if pinout does not offer independent WDO output. The t_{WC} timer for TPS36-Q1 can be set using an external capacitor connected between CWD pin and GND pin. This feature is available with pinout options A or B. Applications which are space constrained or need timer values which meet offered timer options, can benefit when using pinout options C or D. The TPS36-Q1 offers multiple fixed timer options ranging from 1 msec up-to 100 sec.

The TPS36-Q1 when using capacitance based timer, senses the capacitance value during the power up or after a RESET event. The capacitor is charged and discharged with known internal current source for one cycle to sense the capacitance value. The sensed value is used to arrive at t_{WC} timer for the watchdog operation. This unique implementation helps reduce the continuous charge and discharge current for the capacitor, thus reducing overall current consumption. Continuous charge and discharge of capacitance creates wider dead time (no watchdog monitor functionality) when capacitor is discharging. The dead time is higher for high value of capacitance. The unique implementation of TPS36-Q1 helps avoid the dead time as the capacitance is not continuously charging or discharging under normal operation. Ensure C_{CWD} is $< 200 \times C_{CRST}$ for accurate calibration of capacitance. The close time window is decided based on SETx pin combination and the CWD capacitance. 表 8-1 to 表 8-3 highlights the relationship between t_{WC} in second and CWD capacitance in farad. The t_{WC} timer is 20% accurate for an ideal capacitor. Accuracy of the capacitance will have additional impact on the t_{WC} time. Ensure the capacitance meets the recommended operating range. Capacitance outside the recommended range can lead to incorrect operation of the device.

表 8-1. t_{WC} Equation 1 SET Pin (Pin Configuration A)

| SET pin value | Equation |
|---------------|--|
| 0 | $t_{WC} \text{ (sec)} = 79.2 \times 10^6 \times C_{CWD} \text{ (F)}$ |
| 1 | $t_{WC} \text{ (sec)} = 39.6 \times 10^6 \times C_{CWD} \text{ (F)}$ |

表 8-2. t_{WC} Equation 2 SET Pin, WD-EN = 1 (Pin Configuration C, D)

| SET Pin Value | Equation |
|---------------|--|
| 00 | $t_{WC} \text{ (sec)} = 79.2 \times 10^6 \times C_{CWD} \text{ (F)}$ |
| 01 | $t_{WC} \text{ (sec)} = 79.2 \times 10^6 \times C_{CWD} \text{ (F)}$ |
| 10 | $t_{WC} \text{ (sec)} = 39.6 \times 10^6 \times C_{CWD} \text{ (F)}$ |
| 11 | $t_{WC} \text{ (sec)} = 9.9 \times 10^6 \times C_{CWD} \text{ (F)}$ |

表 8-3. t_{WC} Equation 2 SET Pin, WD-EN Not Available (Pin Configuration B)

| SET Pin Value | Equation |
|---------------|--|
| 00 | $t_{WC} \text{ (sec)} = 79.2 \times 10^6 \times C_{CWD} \text{ (F)}$ |
| 01 | Watchdog disabled |
| 10 | $t_{WC} \text{ (sec)} = 39.6 \times 10^6 \times C_{CWD} \text{ (F)}$ |
| 11 | $t_{WC} \text{ (sec)} = 9.9 \times 10^6 \times C_{CWD} \text{ (F)}$ |

The TPS36-Q1 also offers wide selection of high accuracy fixed t_{WC} timer options starting from 1 msec to 100 sec including various industry standard values. The TPS36-Q1 fixed time options are $\pm 10\%$ accurate for $t_{WC} \geq 10$ msec. For $t_{WC} < 10$ msec, the accuracy is $\pm 20\%$. t_{WC} value relevant to application can be identified from the orderable part number. Refer [节 5](#) to identify mapping of orderable part number to t_{WC} value.

8.3.2.2 t_{WO} (Open Window) Timer

The window watchdog frame consists of two sub frames t_{WC} followed by t_{WO} . The host is expected to drive valid WDI transition during t_{WO} time. A valid WDI transition before beginning of t_{WO} frame causes early fault condition. Failure to offer valid WDI transition during t_{WC} and t_{WO} frames results in late fault condition. When a fault condition is detected the WDO output is asserted. RESET output is asserted if pinout does not offer independent WDO output.

The t_{WO} value is derived using t_{WC} value and the window open time ratio value n . [Equation](#) highlights the relationship between t_{WO} and t_{WC} . Refer [节 5](#) to select available ratio options.

$$t_{WO} = (n - 1) \times t_{WC} \quad (1)$$

Each orderable can offer up to 3 ratio options based on the available SET pins. Refer [节 8.3.2.5](#) to identify mapping of ratio value to SET pin control. The maximum t_{WO} value is limited to 640 second. Ensure selected t_{WC} and ratio combination does not lead to t_{WO} value greater than 640 second.

8.3.2.3 Watchdog Enable Disable Operation

The TPS36-Q1 supports watchdog enable or disable functionality. This functionality is critical for different use cases as listed below.

- Disable watchdog during firmware update to avoid host RESET.
- Disable watchdog during software step-by-step debug operation.
- Disable watchdog when performing critical task to avoid watchdog error interrupt.
- Keep watchdog disabled until host boots up.

The TPS36-Q1 supports watchdog enable or disable functionality through either WD-EN pin (pin configuration C,D) or SET[1:0] = 0b'01 (pin configuration B) logic combination. For a given pinout only one of these two methods is available for the user to disable watchdog operation.

For a pinout which offers a WD-EN pin, the watchdog enable disable functionality is controlled by the logic state of WD-EN pin. Drive WD-EN = 1 to enable the watchdog operation or drive WD-EN = 0 to disable the watchdog operation. The WD-EN pin can be toggled any time during the device operation. The [图 8-7](#) diagram shows timing behavior with WD-EN pin control.

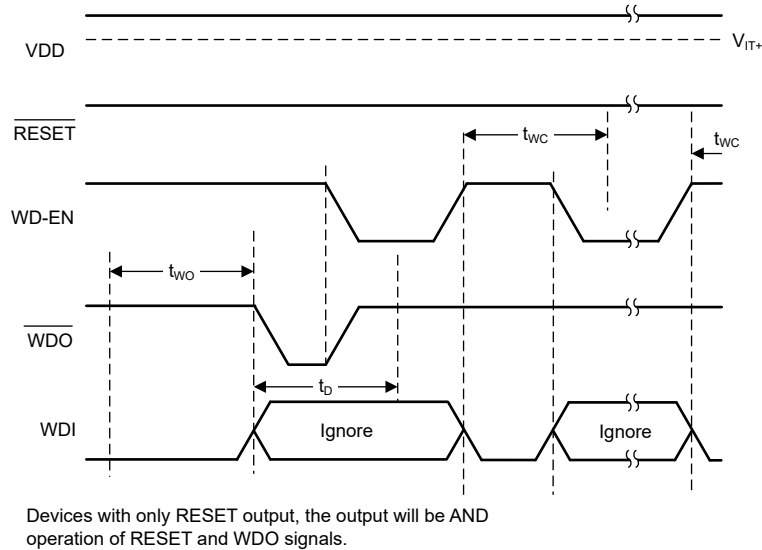


图 8-7. Watchdog Enable: WD-EN Pin Control

SET[1:0] = 0b'01 combination can be used to disable watchdog operation with a pinout which offers SET1 and SET0 pins, but does not include WD-EN pin. The SET pin logic states can be changed at any time during watchdog operation. Refer [节 8.3.2.5](#) section for additional details regarding SET[1:0] pin behavior.

Pinout options A, B offer watchdog timer control using a capacitance connected between CWD and GND pin. A capacitance value higher than recommended or connect to GND leads to watchdog functionality getting disabled. Capacitance based disable operation overrides the other two options mentioned above. Changing capacitance on the fly does not enable or disable watchdog operation. A power supply recycle or device recovery after UV fault, \overline{MR} low event is needed to detect change in capacitance.

Ongoing watchdog frame is terminated when watchdog is disabled. WDO stays deasserted when watchdog operation is disabled. For a pinout with only RESET output, the RESET can assert if supply supervisor error occurs. When enabled the device immediately enters t_{WC} frame and start watchdog monitoring operation.

8.3.2.4 t_{SD} Watchdog Start Up Delay

The TPS36-Q1 supports watchdog startup delay feature. This feature is activated after power up or after a RESET assert event or after WDO assert event. When t_{SD} frame is active, the device monitors the WDI pin but the WDO output is not asserted. This feature allows time for the host complete boot process before watchdog monitoring can take over. The start up delay helps avoid unexpected WDO or RESET assert events during boot. The t_{SD} time is predetermined based on the device part number selected. Refer [节 5](#) section for details to map the part number to t_{SD} time. Pinout option A, B are available only in no delay or 10 sec start up delay options.

The t_{SD} frame is complete when the time duration selected for t_{SD} is over or host provides a valid transition on the WDI pin. The host must provide a valid transition on the WDI pin during t_{SD} time. The device exits the t_{SD} frame and enters watchdog monitoring phase after valid WDI transition. Failure to provide valid transition on WDI pin triggers the watchdog error by asserting the WDO output pin. For devices with only RESET output, the RESET pin is asserted.

The t_{SD} frame is not initiated when the watchdog functionality is enabled using WD-EN pin or SET[1:0] pin or WDI float functionality as described in [节 8.3.2.3](#) section.

[图 8-8](#) shows the operation for t_{SD} time frame.

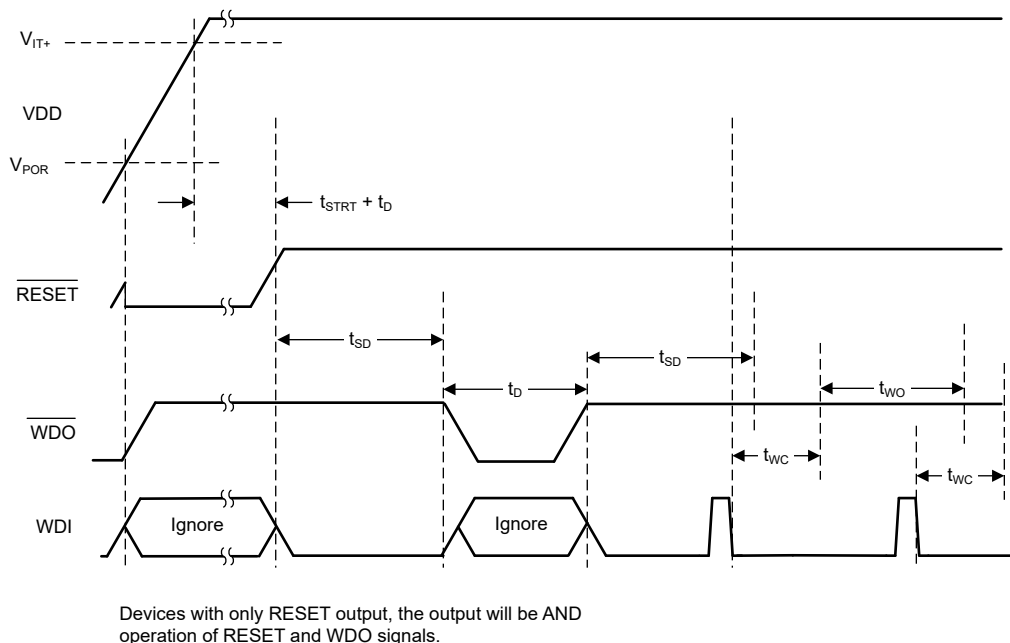


图 8-8. t_{SD} Frame Behavior

8.3.2.5 SET Pin Behavior

The TPS36-Q1 offers one or two SET pins based on the pinout option selected. SET pins offer flexibility to the user to program the t_{WO} timer on the fly to meet various application requirements. Typical use cases where SET pin can be used are

- Use wide open window timer when host is in sleep mode, change to small timeout operation when host is operational. Watchdog can be used to wake up the host after long duration to perform the application related activities before going back to sleep.
- Change to wide open window timer when performing system critical tasks to ensure watchdog does not interrupt the critical task. Change timer to application specified interval after the critical task is complete.

The t_{WO} timer value for the device is combination of t_{WC} timer selection based on the CWD pin or fixed timer value along with SET pin logic level. The t_{WC} timer value is decided based on the Watchdog Close Time selector in the 节 5 section. The SET pin logic level is decoded during the device power up. The SET pin value can be changed any time during the operation. SETx pin change which leads to change of watchdog timer value or enable/disable state, terminates the ongoing watchdog frame immediately. SETx pins can be updated when WDO or RESET output is asserted as well. The updated t_{WO} timer value will be applied after output is deasserted and the t_{SD} timer is over or terminated.

For a pinout which offers only SET0 pin to the user, the t_{WO} ratio value is decided based on the Watchdog Open Time Ratio selector field in the orderable part number. Refer 节 5 for available options. 表 8-4 showcases an example of the t_{WO} values for different SET0 logic levels when using Watchdog Close Time setting as option D = 10 msec.

表 8-4. t_{WO} Values with SET0 Pin Only (Pin Configuration A)

| Watchdog Open Time Ratio Selection | t_{WO} | |
|------------------------------------|----------|-----------|
| | SET0 = 0 | SET0 = 1 |
| A | 10 msec | 30 msec |
| B | 30 msec | 70 msec |
| C | 70 msec | 150 msec |
| D | 150 msec | 310 msec |
| E | 310 msec | 630 msec |
| F | 630 msec | 1270 msec |

Pinout which offer both SET0 & SET1 pins to the user, the t_{WO} ratio value is decided based on the Watchdog Open Time Ratio selector field in the orderable part number. Refer 节 5 for available options. Two SETx pins offer 3 different time scaling options. The SET[1:0] = 0b'01 combination disables the watchdog operation. 表 8-5 showcases an example of the t_{WO} values for different SET[1:0] logic levels when using Watchdog Close Time setting as option G = 100 msec. The package pin out selected does not offer WD-EN pin.

表 8-5. t_{WO} Values with SET0 & SET1 Pins, WD-EN Pin Not Available (Pin Configuration B)

| Watchdog Open Time Ratio selection | t_{WO} | | | |
|------------------------------------|------------------|------------------|------------------|------------------|
| | SET[1:0] = 0b'00 | SET[1:0] = 0b'01 | SET[1:0] = 0b'10 | SET[1:0] = 0b'11 |
| A | 100 msec | Watchdog disable | 300 msec | 1500 msec |
| B | 300 msec | Watchdog disable | 700 msec | 3100 msec |
| C | 700 msec | Watchdog disable | 1500 msec | 6300 msec |
| D | 1500 msec | Watchdog disable | 3100 msec | 12700 msec |
| E | 3100 msec | Watchdog disable | 6300 msec | 25500 msec |
| F | 6300 msec | Watchdog disable | 12700 msec | 51100 msec |

1. Example for Watchdog Close Time setting = 100 msec.

Selected pinout option can offer WD-EN pin along with SET[1:0] pins (Pin Configuration C, D). With this pinout, the WD-EN pin controls watchdog enable and disable operation. The SET[1:0] = 0b'01 combination operates as SET[1:0] = 0b'00.

Ensure the t_{WO} value with SETx ratio does not exceed 640 sec. If a selection of close window timer and ratio results in $t_{WO} > 640$ sec, the timer value will be restricted to 640 sec.

图 8-9 到 图 8-11 show the timing behavior with respect to SETx status changes.



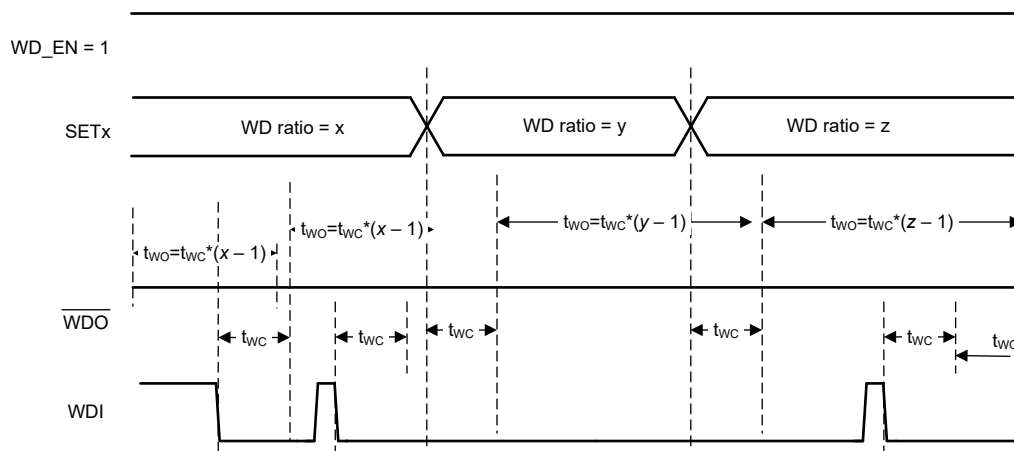


图 8-9. Watchdog Behavior with SETx Pin Status

SET Pin (2 Pins) Operation; WD_EN Pin Not Available

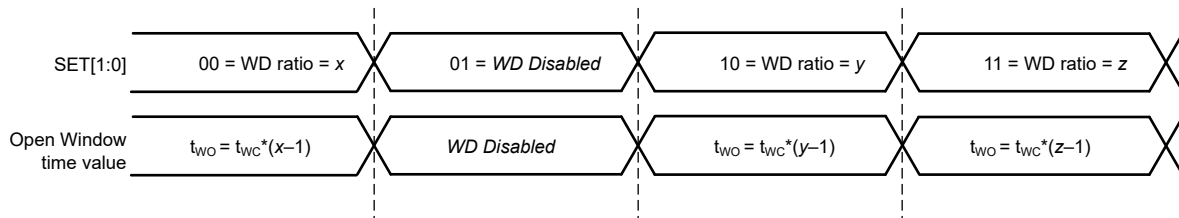


SET Pin (2 Pins) Operation; WD_EN Available = 1

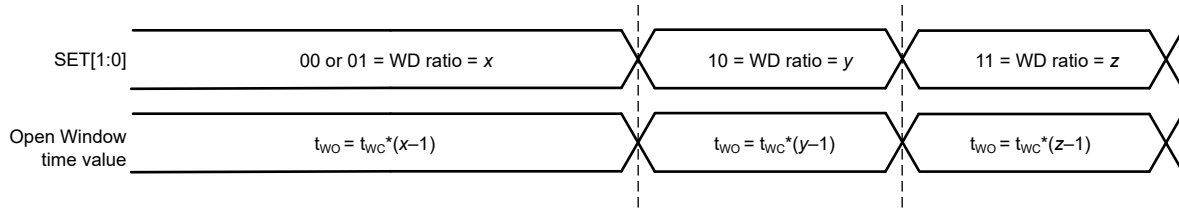

t_{WC} = Fixed based on OPN or programmable using capacitor
x, y, z = Fixed based on ratio chosen

图 8-10. Watchdog Operation with 2 SET Pins

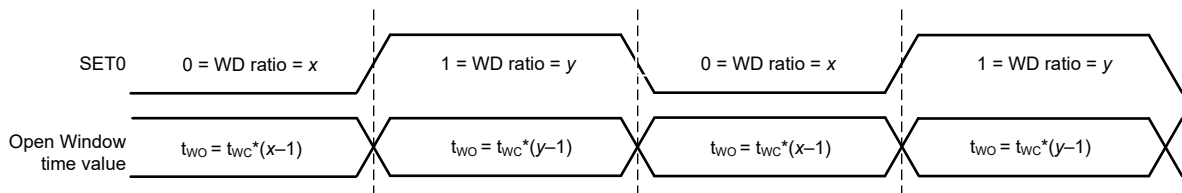

t_{WC} = Fixed based on OPN or programmable using capacitor
x, y = Fixed based on ratio chosen

图 8-11. Watchdog Operation with 1 SET Pin

8.3.3 Manual RESET

The TPS36-Q1 supports manual reset functionality using \overline{MR} pin. \overline{MR} pin when driven with voltage lower than $0.3 \times V_{DD}$, asserts the RESET output. The \overline{MR} pin has $100 \text{ k}\Omega$ pull up to V_{DD} . The \overline{MR} pin can be left floating. The internal pull up will ensure the output is not asserted due to \overline{MR} pin trigger.

The output is deasserted after \overline{MR} pin voltage rises above $0.7 \times V_{DD}$ voltage and time t_D is elapsed. Refer 图 8-12 for more details.

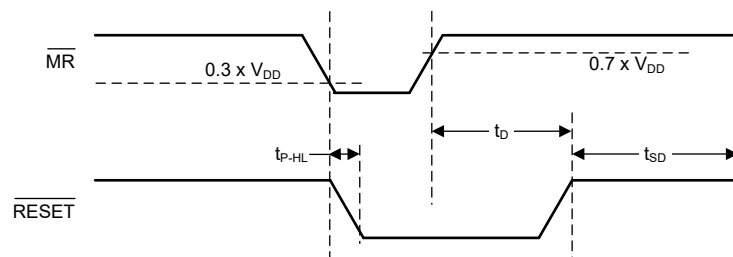


图 8-12. \overline{MR} Pin Response

8.3.4 RESET and WDO Output

The TPS36-Q1 device can offer RESET or RESET with independent WDO output pin. The output configuration is dependent on the pinout variant selected. For a pinout which has only RESET output, the RESET output is asserted when VDD voltage is below the monitored threshold or \overline{MR} pin voltage is lower than threshold or watchdog timer error is detected. For a pinout which has independent RESET and WDO output pins, the RESET output is asserted when VDD voltage is below the monitored threshold or \overline{MR} pin voltage is lower than threshold. WDO output is asserted only when watchdog timer error is detected. RESET error has higher priority than WDO error. If RESET is asserted when WDO is asserted, the device deasserts the WDO pin and watchdog is disabled until RESET pin is deasserted and startup delay frame is terminated.

The output will be asserted for t_D time when any relevant events described above are detected. The time t_D can be programmed by connecting a capacitor between CRST pin and GND or device will assert t_D for fixed time duration as selected by orderable part number. Refer [节 5](#) section for all available options.

[方程式 2](#) describes the relationship between capacitor value and the time t_D . Ensure the capacitance meets the recommended operating range. Capacitance outside the recommended range can lead to incorrect operation of the device.

$$t_D (\text{sec}) = 4.95 \times 10^6 \times C_{\text{CRST}} (\text{F}) \quad (2)$$

TPS36-Q1 also offers a unique option of latched output. An orderable with latched output will hold the output in asserted state indefinitely until the device is power cycled or the error condition is addressed. If the output is latched due to voltage supervisor undervoltage detection, the output latch will be released when VDD voltage rises above the $V_{IT+} + V_{HYS}$ level. If the output is latched due to \overline{MR} pin low voltage, the output latch will be released when \overline{MR} pin voltage rises above $0.7 \times V_{DD}$ level. If the output is latched due to watchdog timer error, the output latch will be released when a WDI negative edge is detected or the device is shutdown and powered up again. [图 8-13](#) shows timing behavior of the device with latched output configuration.

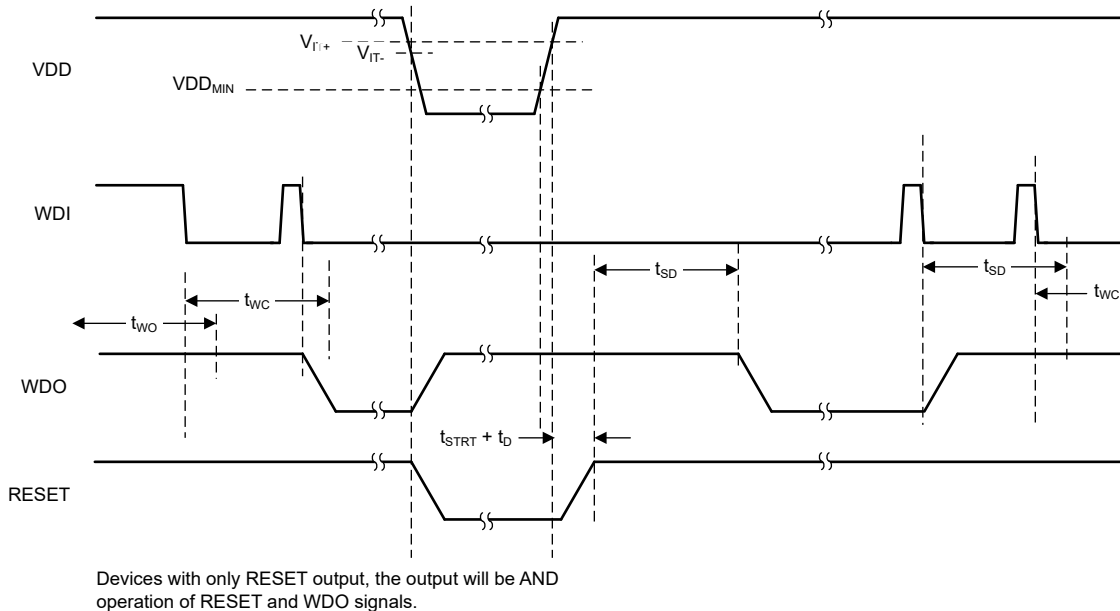


图 8-13. Output Latch Timing Behavior

8.4 Device Functional Modes

表 8-6 summarizes the functional modes of the TPS36-Q1.

表 8-6. Device Functional Modes

| VDD | WATCHDOG STATUS | WDI | WDO | RESET |
|---------------------------------|-----------------|---|-----------|-----------|
| $V_{DD} < V_{POR}$ | Not Applicable | — | Undefined | Undefined |
| $V_{POR} \leq V_{DD} < V_{IT-}$ | Not Applicable | Ignored | High | Low |
| $V_{DD} \geq V_{IT+}$ | Disabled | Ignored | High | High |
| | Enabled | $t_{WC(max)} \leq t_{pulse}^1 \leq t_{WC(max)} + t_{WO(min)}$ | High | High |
| | Enabled | $t_{WC(max)} > t_{pulse}^1$ | Low | High |
| | Enabled | $t_{WC(max)} + t_{WO(max)} < t_{pulse}^1$ | Low | High |

(1) Where t_{pulse} is the time between falling edges on WDI.

9 Application and Implementation

备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The following sections describe in detail proper device implementation, depending on the final application requirements.

9.1.1 CRST Delay

The TPS36-Q1 features two options for setting the reset delay (t_D): using a fixed timing and programming the timing through an external capacitor.

9.1.1.1 Factory-Programmed Reset Delay Timing

Fixed reset delay timings are available using pinouts C and D. Using these timings enables a high-precision, 10% accurate reset delay timing.

9.1.1.2 Adjustable Capacitor Timing

The TPS36-Q1 also offers programmable reset delay option when using pinout A and B. The TPS36-Q1 can be programmed to have a desired reset delay by connecting a capacitor between CRST pin and GND. The typical delay time resulting from a given external capacitance on the CRST pin can be calculated by [方程式 3](#), where t_D is the reset delay time in seconds and C_{CRST} is the capacitance in farads.

$$t_D (\text{sec}) = 4.95 \times 10^6 \times C_{CRST} (\text{F}) \quad (3)$$

To minimize the difference between the calculated reset delay time and the actual reset delay time, use a high-quality ceramic dielectric COG capacitor and minimize parasitic board capacitance around this pin. [表 9-1](#) lists the reset delay time ideal capacitor values for C_{CRST} .

表 9-1. Reset Delay Time for Common Ideal Capacitor Values

| C_{CRST} | RESET DELAY TIME (t_D) | | | UNIT |
|------------|-------------------------------|------|--------------------|------|
| | MIN ⁽¹⁾ | TYP | MAX ⁽¹⁾ | |
| 10 nF | 39.6 | 49.5 | 59.4 | ms |
| 100 nF | 396 | 495 | 594 | ms |
| 1 μ F | 3960 | 4950 | 5940 | ms |

(1) Minimum and maximum values are calculated using ideal capacitors.

9.1.2 Watchdog Window Functionality

The TPS36-Q1 features two options for setting the close window watchdog timer (t_{WC}): using a fixed timing and programming the timing through an external capacitor.

9.1.2.1 Factory-Programmed watchdog Timing

Fixed watchdog window close timings are available using pinout C and D. Using these timings enables a high-precision, 10% accurate watchdog timer t_{WC} .


9.1.2.2 Adjustable Capacitor Timing

Pinout options A and B support adjustable t_{WC} timing. This is achievable by connecting a capacitor between CWD and GND pin. Consult 表 8-1, 表 8-2, and 表 8-3 for calculating typical t_{WC} values using ideal capacitors. Capacitor tolerances will cause additional deviation. For the most accurate timing, use ceramic capacitors with COG dielectric material.

9.2 Typical Applications

9.2.1 Design 1: Monitoring Microcontroller Supply and Watchdog During Operational and Sleep Modes

The TPS36-Q1 can utilize high-accuracy voltage monitoring and on-the-fly SETx assigning to monitor a microcontroller that has both an operational and sleep mode.

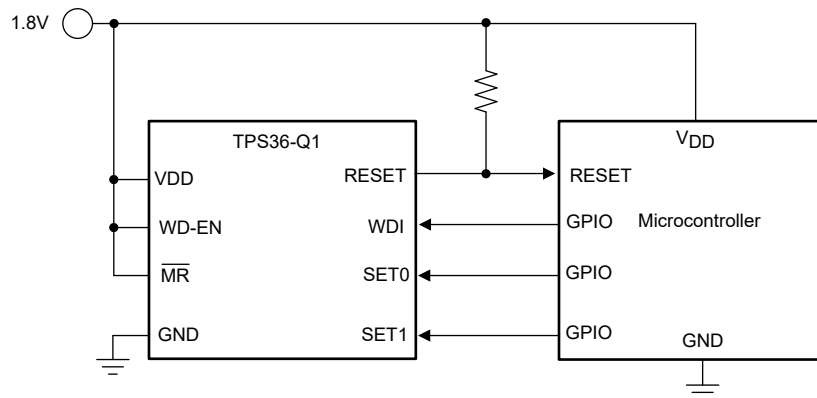

Copyright © 2023, Texas Instruments Incorporated

图 9-1. Monitoring Microcontroller Supply and Watchdog During Operation and Sleep

9.2.1.1 Design Requirements

表 9-2. Design Parameters

| PARAMETER | DESIGN REQUIREMENT | DESIGN RESULT |
|------------------------------------|--|-------------------------------------|
| Voltage Threshold | Typical Voltage Threshold of 1.65 V | Typical Voltage Threshold of 1.65 V |
| Window Close Time During Operation | Typical t_{WC} of 50 ms during operation | Typical t_{WC} of 50 ms |
| Window Open Time During Operation | Typical t_{WO} of 1.4 s during operation | Typical t_{WO} of 1.55 s |
| Window Close Time During Sleep | Typical t_{WC} of 50 ms during sleep | Typical t_{WC} of 50 ms |
| Window Open Time During Sleep | Typical t_{WO} of 12 s during operation | Typical t_{WO} of 12.75 s |
| RESET Delay | 200 ms | 200 ms |
| Output Logic | Open-drain | Open-drain |
| Maximum Device Current Consumption | 20 μ A | 250 nA typical, 3 μ A maximum |

9.2.1.2 Detailed Design Procedure

9.2.1.2.1 Setting Voltage Threshold

The negative-going threshold voltage, V_{IT-} , is set by the device variant. 方程式 4 shows how to calculate the "Threshold Voltage" section of the orderable part number.

$$\text{OPN "Threshold Voltage" number} = (V_{IT-} - 1) / 0.05 \quad (4)$$

In this example, the nominal supply voltage for the microcontroller is 1.8 V. The minimum supply voltage is 10% lower than the nominal supply voltage, or 1.62 V. Setting a 1.65 V threshold ensures that the device is reset just before the supply voltage reaches the minimum allowed. Thus a 1.65 V threshold is chosen and, using 方程式 4, the part number is reduced to TPS36xx13xxxxxxQ1. The hysteresis is 5% typical, resulting in a positive-going threshold voltage, V_{IT+} , of 1.73 V.

9.2.1.2.2 Determining Window Timings During Operation and Sleep Modes

The TPS36-Q1 allows for precise 10% accurate watchdog timings. This application requires two different window timings in order to maximize power efficiency: one for the microcontroller's operational state and one for its sleep state. To achieve this, the host can reassign the SETx pins when it transitions between states. A window close time, t_{WC} , of 50 ms typical is chosen because of the application's 50 ms typical t_{WC} requirement. The application requires a minimum watchdog open time, t_{WO} , of 1.4 s during operation and a t_{WO} of 12 s during sleep. Thus, the possible variant options are narrowed to TPS36xx13FExDDFRQ1.

9.2.1.2.3 Meeting the Minimum Reset Delay

The TPS36-Q1 features two options for selecting reset delays: fixed delays and capacitor-programmable delays. The TPS36-Q1 supports only fixed watchdog timings and fixed reset delays or programmable watchdog timings and programmable reset delays. The application requires a 200 ms minimum reset delay, thus reset delay option G is used. Because of these requirements and no need for a startup delay, the TPS36CA13FEGDDFRQ1 is used.

9.2.1.2.4 Setting the Watchdog Window

In this application, the watchdog timing options are based on the WDI signal that is provided to the TPS36-Q1. A watchdog WDI setting must be chosen such that a transition must always occur within the open watchdog window. There are several ways to achieve these window parameters. An external capacitor can be placed on the CWD pin and calculated to have a sufficient window close time. Another option is to use one of the factory-programmed timing options. An additional advantage of choosing one of the factory-programmed options is the ability to reduce the number of components required, thus reducing overall BOM cost.

9.2.1.2.5 Calculating the $\overline{\text{RESET}}$ Pullup Resistor

The TPS36-Q1 uses an open-drain configuration for the $\overline{\text{RESET}}$ output, as shown in 图 9-2. When the FET is off, the resistor pulls the drain of the transistor to VDD and when the FET is turned on, the FET pulls the output to ground, thus creating an effective resistor divider. The resistors in this divider must be chosen to ensure that V_{OL} is below its maximum value. To choose the proper pullup resistor, there are three key specifications to keep in mind: the pullup voltage (V_{PU}), the recommended maximum $\overline{\text{RESET}}$ pin current (I_{RST}), and V_{OL} . The maximum V_{OL} is 0.3 V, meaning that the effective resistor divider created must be able to bring the voltage on the reset pin below 0.3 V with I_{RST} kept below 2 mA for $V_{DD} \geq 3$ V and 500 μA for $V_{DD} = 1.5$ V. For this example, with a $V_{PU} = V_{DD} = 1.5$ V, a resistor must be chosen to keep I_{RST} below 500 μA because this value is the maximum consumption current allowed. To ensure this specification is met, a pullup resistor value of 10 k Ω was selected, which sinks a maximum of 180 μA when $\overline{\text{RESET}}$ is asserted.




图 9-2. Open-Drain $\overline{\text{RESET}}$ Configuration

9.3 Power Supply Recommendations

This device is designed to operate from an input supply with a voltage range between 1.04 V and 6 V. An input supply capacitor is not required for this device; however, if the input supply is noisy, then good analog practice is to place a 0.1-μF capacitor between the VDD pin and the GND pin.


9.4 Layout

9.4.1 Layout Guidelines

Make sure that the connection to the VDD pin is low impedance. Good analog design practice recommends placing a 0.1-μF ceramic capacitor as near as possible to the VDD pin. If a capacitor is not connected to the CRST pin, then minimize parasitic capacitance on this pin so the RESET delay time is not adversely affected.

- Make sure that the connection to the VDD pin is low impedance. Good analog design practice is to place a 0.1-μF ceramic capacitor as near as possible to the VDD pin.
- Place C_{CRST} capacitor as close as possible to the CRST pin.
- Place C_{CWD} capacitor as close as possible to the CWD pin.
- Place the pullup resistor on the RESET pin as close to the pin as possible.

9.4.2 Layout Example

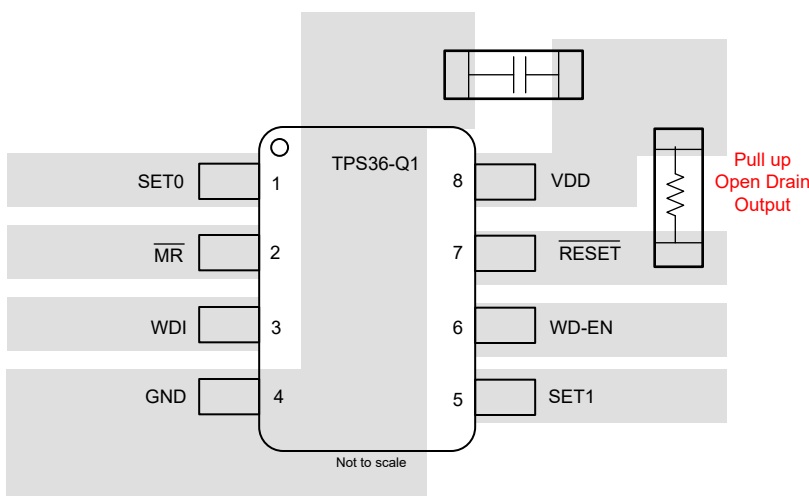

Copyright © 2023, Texas Instruments Incorporated

图 9-3. Typical Layout for the pinout C of TPS36-Q1

10 Device and Documentation Support

10.1 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

10.2 支持资源

[TI E2E™ 支持论坛](#) 是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《[使用条款](#)》。

10.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.
所有商标均为其各自所有者的财产。

10.4 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

10.5 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|------------------------------------|---------------|----------------------|-----------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS36BA12ACADDFRQ1 | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLLOA |
| TPS36BA12ACADDFRQ1.A | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLLOA |
| TPS36BA38ACADDFRQ1 | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLHOB |
| TPS36BA38ACADDFRQ1.A | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLHOB |
| TPS36CA39EACDDFRQ1 | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLHOO |
| TPS36CA39EACDDFRQ1.A | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLHOO |
| TPS36CA66BECDDFRQ1 | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLHOD |
| TPS36CA66BECDDFRQ1.A | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLHOD |
| TPS36CD40EACDDFRQ1 | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLHOV |
| TPS36CD40EACDDFRQ1.A | Active | Production | SOT-23-THIN (DDF) 8 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | NLHOV |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION



*All dimensions are nominal


| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS36BA12ACADDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS36BA38ACADDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS36CA39EACDDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS36CA66BECDDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS36CD40EACDDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |

TAPE AND REEL BOX DIMENSIONS

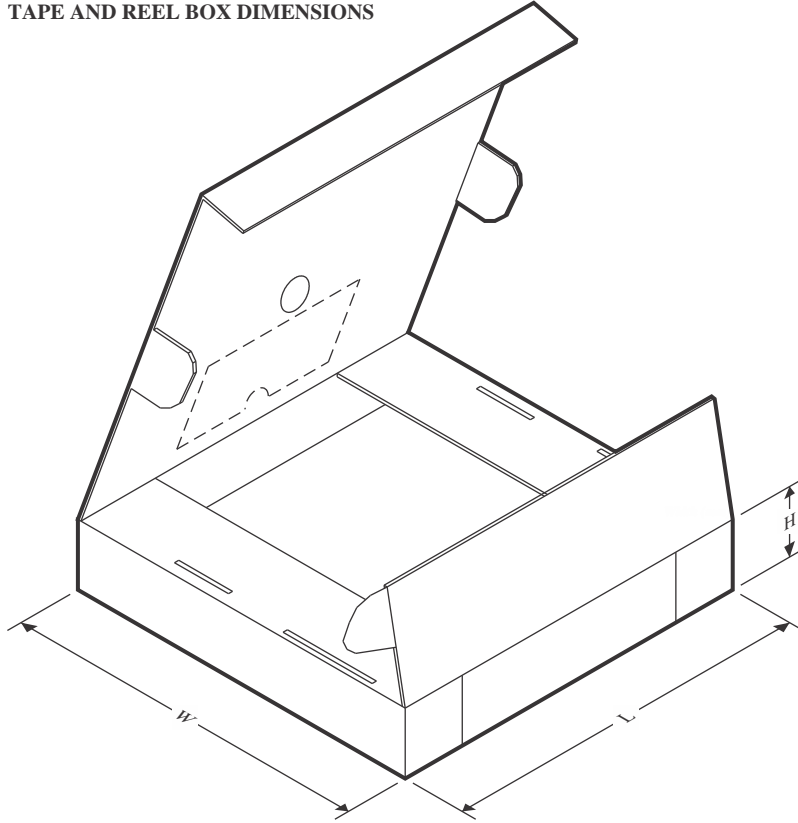


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS36BA12ACADDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 210.0 | 185.0 | 35.0 |
| TPS36BA38ACADDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 210.0 | 185.0 | 35.0 |
| TPS36CA39EACDDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 210.0 | 185.0 | 35.0 |
| TPS36CA66BECDDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 210.0 | 185.0 | 35.0 |
| TPS36CD40EACDDFRQ1 | SOT-23-THIN | DDF | 8 | 3000 | 210.0 | 185.0 | 35.0 |

DDF0008A**PACKAGE OUTLINE****SOT-23-THIN - 1.1 mm max height**

PLASTIC SMALL OUTLINE

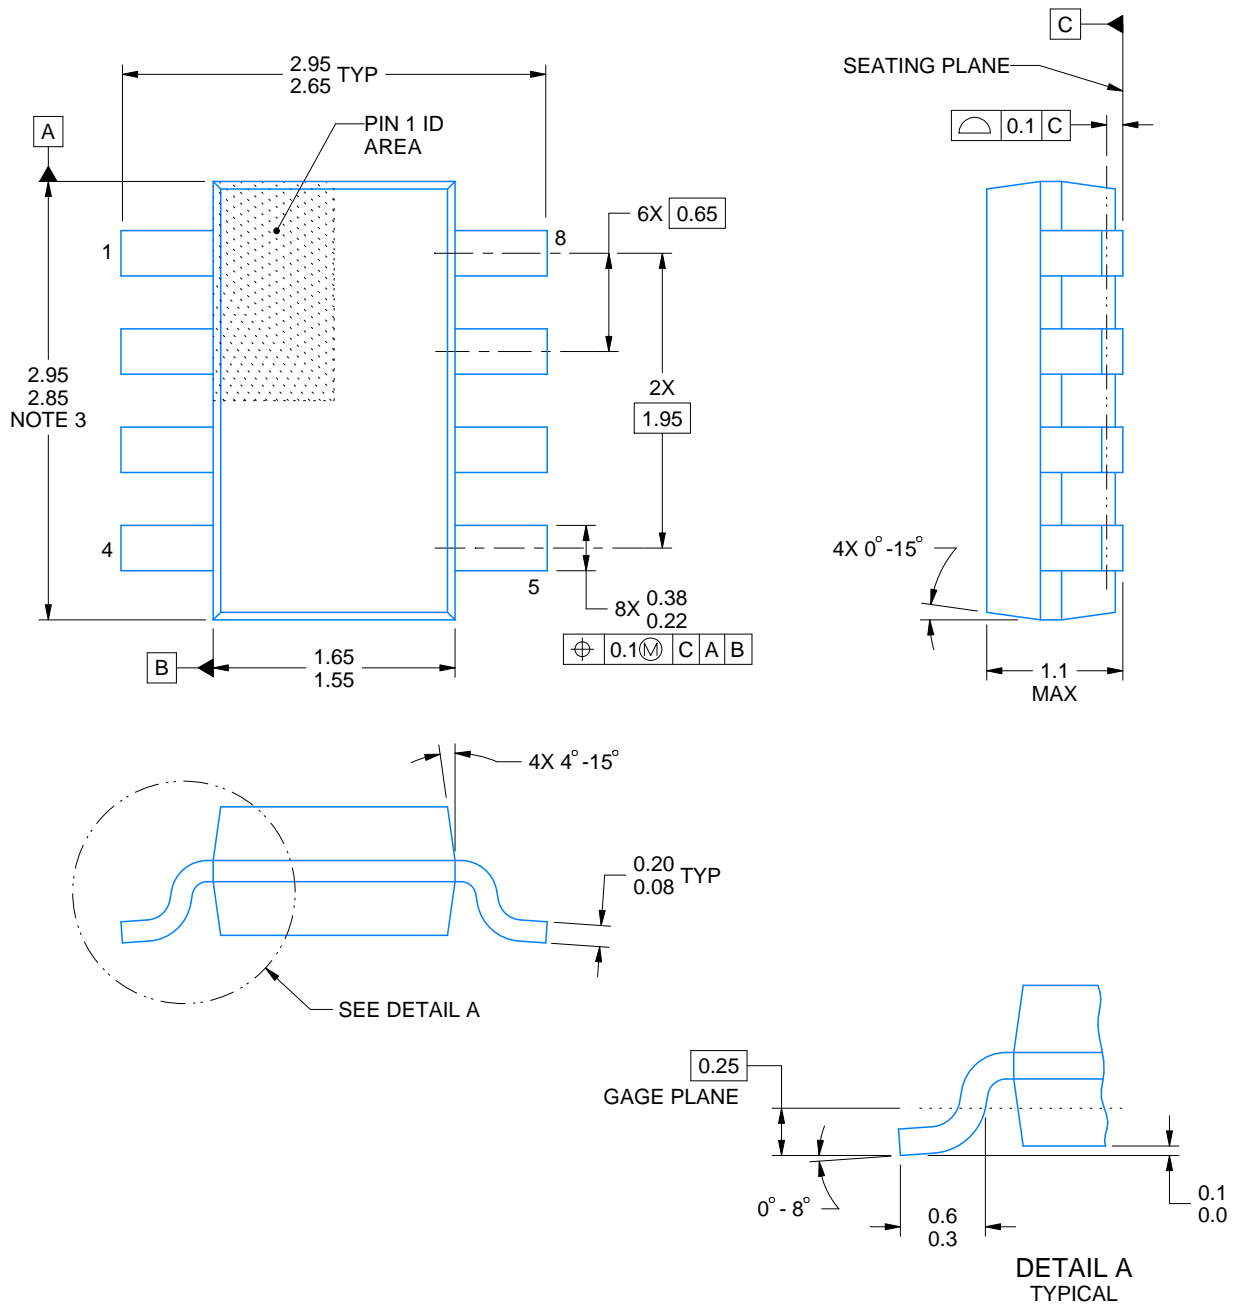

4222047/E 07/2024

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.

EXAMPLE BOARD LAYOUT


DDF0008A

SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

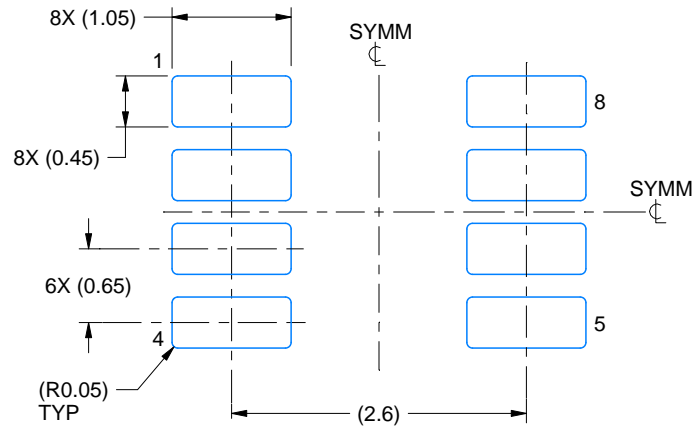

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

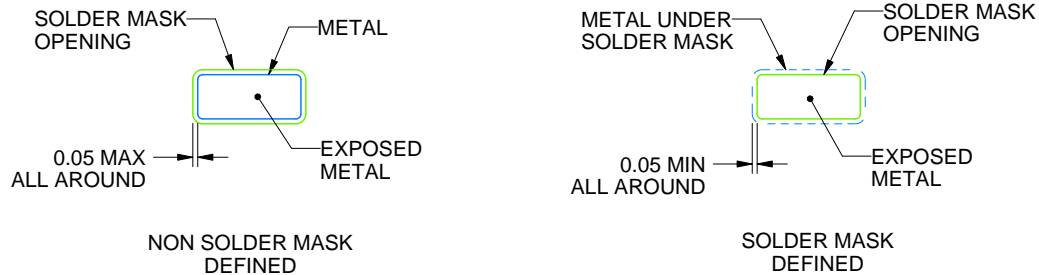

SOLDER MASK DETAILS

4222047/E 07/2024

NOTES: (continued)


4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DDF0008A

SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

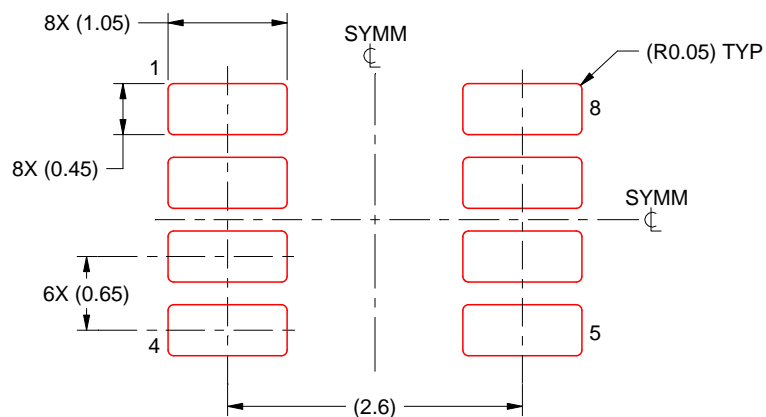

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4222047/E 07/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月