

# TPS544E27 4V to 18V Input, 40A Buck Converter With SVID and PMBus®

## 1 Features

- Single chip power supply for SVID rails
- Intel® VR14 and VR13 compliant
- VR14.Cloud compliant with telemetry level 1 and security level 2
- PMBus® 1.5 interface with NVM for configuration, telemetry (V/I/T), and fault reporting
- Input voltage: 4V to 18V
- Output voltage: 0.25V to 5.5V
- Supports external 5V bias improving efficiency and enabling 2.7V minimum input voltage
- Output current: 40A continuous and 50A peak
- Cycle-by-cycle valley I<sub>OUT</sub> OCF limit programmable up to 50A
- Input power monitoring (PIN sense)
- Programmable DCM or FCCM operation
- Switching frequency: 400kHz to 2MHz
- Programmable internal loop compensation including droop (DC load line)
- Programmable soft-start time from 0.5ms to 16ms
- Programmable soft-stop time from 0.5ms to 4ms
- Programmable output voltage slew rate: 0.625mV/μs to 25mV/μs
- Programmable V<sub>IN</sub> UVLO, V<sub>OUT</sub> OVF/UVF, and OTF
- Safe start-up into prebiased outputs
- Precision voltage reference and differential remote sense for high output accuracy
  - ±0.5% tolerance from 0°C to 85°C junction
  - ±1% tolerance from –40°C to 125°C junction
- Analog output current output pin (IMON)
- D-CAP+™ control topology with fast transient response
- Open-drain power-good output (VRRDY)

## 2 Applications

- [Server and cloud-computing POLs](#)
- Hardware accelerator
- Network interface card
- [Broadband, networking](#), and [optical](#)
- [Wireless infrastructure](#)

## 3 Description

The TPS544E27 is a highly-integrated buck converter with D-CAP+ control topology for fast transient response. All programmable parameters can be configured by the PMBus interface and stored in non-volatile memory (NVM) as the new default values to minimize the external component count. These features make the device well-designed for space-constrained applications.

The TPS544E27 device is designed to work with Intel CPUs and fits well for single-phase, low-to-mid current SVID rails in the Intel server and SoC platforms requiring VR13, VR14, or VR14.Cloud compliance.

Fault management and status reports for the overcurrent fault (OCF), V<sub>OUT</sub> overvoltage fault (OVF), undervoltage fault (UVF), and overtemperature fault are provided on the device. The TPS544E27 device provides a full set of telemetry, including output voltage, output current, and device temperature. Additionally, input power monitoring through an external sensing resistor is provided for board-level power management.

TPS544E27 is a lead-free device and is RoHS compliant without exemption.


### Package Information

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>
TPS544E27	RXX (WQFN-FCRLF, 37)	6mm × 5mm


(1) For more information, see [Section 7](#).

(2) The package size (length × width) is a nominal value and includes pins, where applicable.



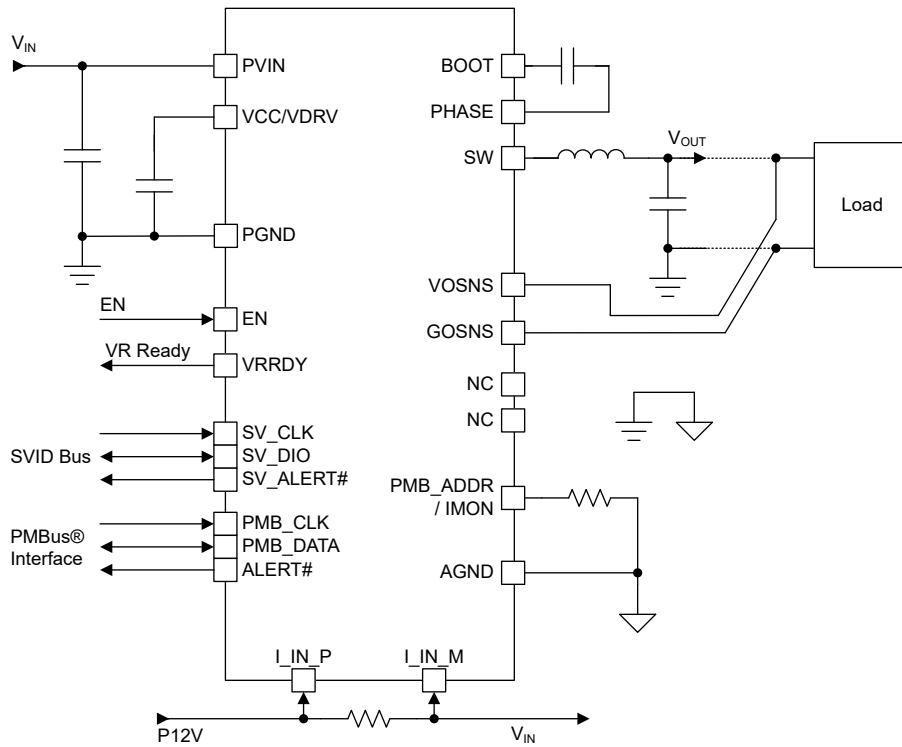

**Simplified Schematic**

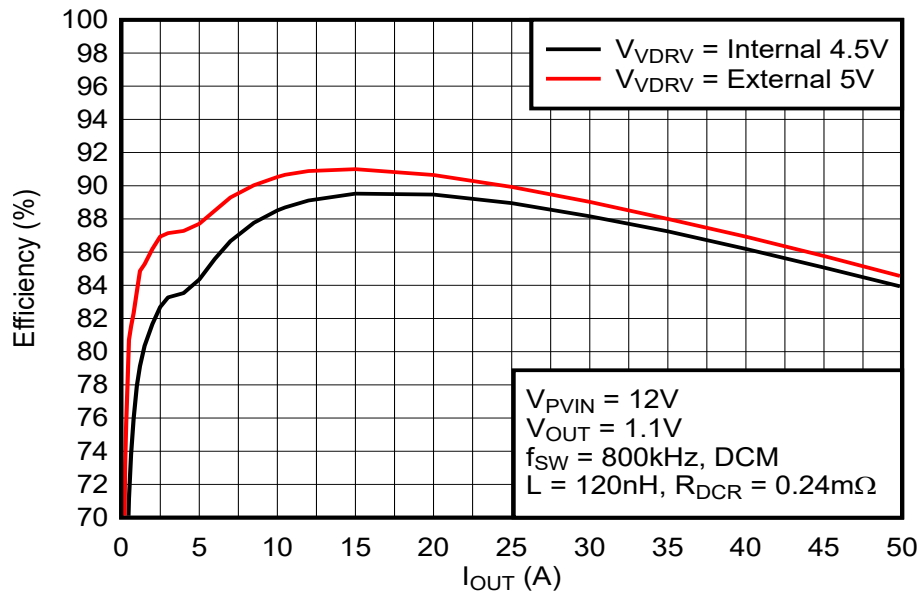

**Typical Efficiency**

## Table of Contents

<b>1 Features</b> .....	<b>1</b>	5.2 Support Resources.....	<b>6</b>
<b>2 Applications</b> .....	<b>1</b>	5.3 Trademarks.....	<b>6</b>
<b>3 Description</b> .....	<b>1</b>	5.4 Electrostatic Discharge Caution.....	<b>6</b>
<b>4 Pin Configuration and Functions</b> .....	<b>4</b>	5.5 Glossary.....	<b>6</b>
<b>5 Device and Documentation Support</b> .....	<b>6</b>	<b>6 Revision History</b> .....	<b>6</b>
5.1 Receiving Notification of Documentation Updates.....	<b>6</b>	<b>7 Mechanical, Packaging, and Orderable Information</b> ....	<b>7</b>

---

## 4 Pin Configuration and Functions

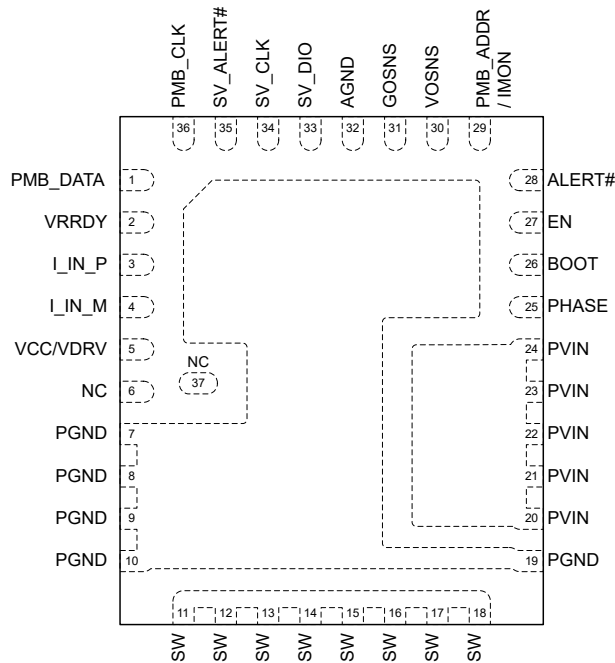


Figure 4-1. RXX 37-Pin WQFN-FCRLF Package (Top View)

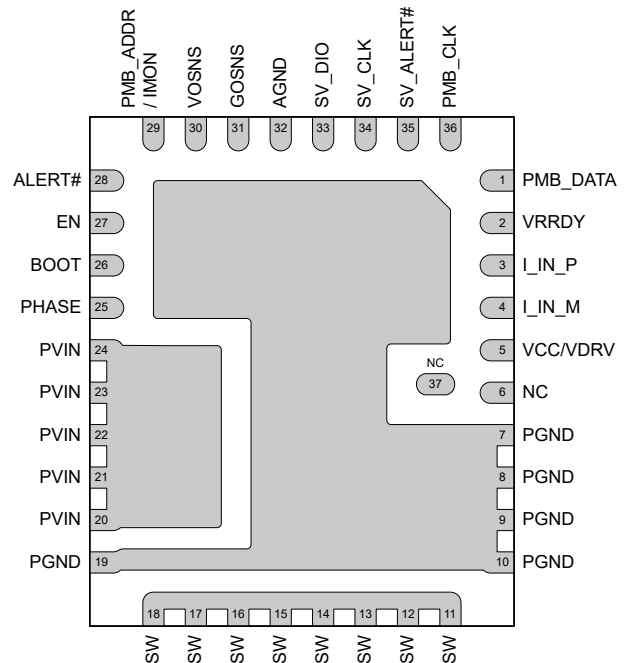


Figure 4-2. RXX 37-Pin WQFN-FCRLF Package (Bottom View)

Table 4-1. Pin Functions

PIN		TYPE <sup>(1)</sup>	DESCRIPTION
NAME	NO.		
AGND	32	G	Ground pin, reference point for internal control circuitry
ALERT#	28	O	Multi-purpose active low open-drain pin. The functionality can be selected through the SEL_ALERT_FN field in the PMBus (D0h) SYS_CFG_USER1 command. 1. SMB_ALERT# 2. PINALRT# 3. CAT_FAULT# 4. VR_HOT#
BOOT	26	P	Supply rail for the high-side gate driver (boost terminal). Connect the bootstrap capacitor from this pin to PHASE pin. A high temperature (X7R) 0.1µF or greater value ceramic capacitor is recommended.
EN	27	I	Enable pin, an active-high input pin that, when asserted high, causes the VR to begin the soft-start sequence for the output voltage rail. When deasserted low, the VR deasserts VRRDY and begins the shutdown sequence of the output voltage rail and continue to completion.
GOSNS	31	I	Negative input of the differential remote sense circuit, connect to the ground sense point on the load side.
I_IN_M	4	I	Connect to the negative side of the local input power sense resistor. Input voltage for VIN telemetry is also sensed at this pin. If input power sensing is not being used then connect I_IN_P and I_IN_M together, and connect both to PVIN for VIN telemetry. The pins can also be connected to ground or another voltage if VIN telemetry is not needed.
I_IN_P	3	I	Connect to the positive side of a local input power sense resistor. If input power sensing is not being used then connect I_IN_P to I_IN_M.
NC	6, 37	—	Not connected. These pins are floating internally.
PGND	7 – 10, 19	G	Power ground for the internal power stage

**Table 4-1. Pin Functions (continued)**

PIN		TYPE <sup>(1)</sup>	DESCRIPTION
NAME	NO.		
PHASE	25	O	Return for high-side MOSFET driver. Shorted to SW internally. Connect the BOOT pin bypass capacitor to this pin.
PMB_ADDR / IMON	29	I/O	Multipurpose pin. During the device initialization, the PMBus address of the controller is set by tying an external resistor between this pin and AGND. For proper resistor detection, do not load this pin with more than 20pF during the device initialization at VCC power-up. DC_LL, VBOOT, and OFFSET source 0 or 1 are selected as well. After device initialization, this pin can be used as an analog current monitor output. This pin is a current sense of low-side MOSFET. The analog IMON feature is enabled via the EN_AIMON bit in the PMBus (DAh) SVID_IMAX command. When using the IMON feature, do not load this pin with more than 50pF.
PMB_CLK	36	I	PMBus serial clock pin
PMB_DATA	1	I/O	PMBus bi-directional serial data pin
PVIN	20 – 24	P	Power input for both the power stage and the analog circuit. PVIN is the input of the internal VCC LDO.
SV_ALERT#	35	O	SVID active low ALERT# signal. This output is asserted to indicate the status of the VR has changed.
SV_CLK	34	I	SVID clock pin
SV_DIO	33	I/O	SVID bi-directional data pin
SW	11 – 18	O	Output switching terminal of the power converter. Connect these pins to the output inductor.
VCC/VDRV	5	P	Internal LDO output and also input for gate driver circuit. An external 5V bias can be connected to this pin to save the power losses on the internal LDO. The voltage source on this pin powers both the internal control circuitry and gate driver.
VOSNS	30	I	Positive input of the differential remote sense circuit, connect to the V <sub>OUT</sub> sense point on the load side
VRRDY	2	O	Voltage regulator “Ready” output signal. The VRRDY indicator is asserted when the controller is ready to accept SVID commands after EN is asserted. VRRDY is also deasserted low when a shutdown fault occurs. This open-drain output requires an external pullup resistor.

(1) I = Input, O = Output, I/O = Input or Output, G = Ground, P = Power.

## 5 Device and Documentation Support

### 5.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 5.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 5.3 Trademarks

D-CAP+™ and TI E2E™ are trademarks of Texas Instruments.

Intel® is a registered trademark of Intel.

PMBus® is a registered trademark of System Management Interface Forum, Inc..

All trademarks are the property of their respective owners.

### 5.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 5.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 6 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision * (August 2024) to Revision A (June 2026)	Page
• Changed the document status from Advance Information to Production Data.....	1
• Changed advanced telemetry from level 2 to level 1 in the <i>Features</i> .....	1
• Deleted the VORST# feature from pin 29.....	4
• Updated pin 28 name by simplifying to ALERT# and adding VR_HOT# functionality.....	4

## 7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">PTPS544E27RXXR</a>	Active	Preproduction	WQFN-FCRLF (RXX)   37	3000   LARGE T&R	-	Call TI	Call TI	-40 to 125	
PTPS544E27RXXR.A	Active	Preproduction	WQFN-FCRLF (RXX)   37	3000   LARGE T&R	-	Call TI	Call TI	-40 to 125	

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## GENERIC PACKAGE VIEW


**RXX 37**

**VQFN-FCRLF - 1.05 mm max height**

5 x 6, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

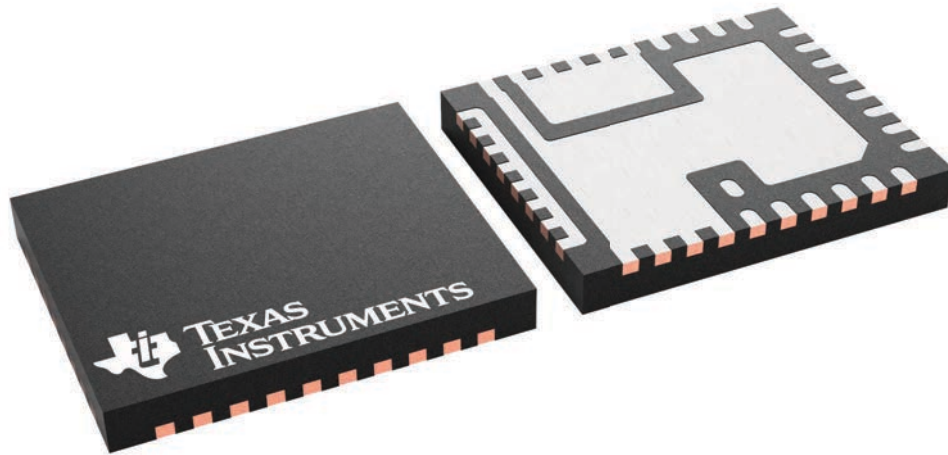

4228557/A

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025