

# TPS65917-Q1 适用于处理器的电源管理单元 (PMU)

## 1 器件概述

### 1.1 特性

- 符合汽车应用 应用
- 具有符合 AEC-Q100 标准的下列结果：
  - 器件温度 2 级：-40°C 至 +105°C 的环境运行温度范围
  - 器件人体放电模型 (HBM) 分类等级 2
  - 器件充电器件模型 (CDM) 分类等级 C4B
- 系统电压范围为 3.135V 至 5.25V
- 低功耗
  - 断电模式下为 20μA
  - 休眠模式下（两个 SMPS 处于激活状态）为 90μA
- 五个降压开关模式电源 (SMPS) 稳压器：
  - 输出电压范围为 0.7V 至 3.3V（步长为 10mV 或 20mV）
  - 其中两个 SMPS 稳压器具备 3.5A 电流性能、在双相配置中结合 7A 输出的能力以及差分远程感测（输出和接地）
  - 其他三个 SMPS 稳压器分别具有 3A、2A 和 1.5A 电流性能
  - 3.5A 和 3A SMPS 稳压器具备动态电压调节 (DVS) 控制和输出电流测量功能
  - 硬件和软件受控的 Eco-mode™ 最高可提供 5mA 电流
  - 短路保护功能
  - 电源正常指示（电压和过流指示）
  - 用于限制浪涌电流的内部软启动
  - 能够与频率介于 1.7MHz 至 2.7MHz 范围内的外部时钟保持同步
- 五个低压降 (LDO) 线性稳压器：
  - 输出电压范围为 0.9V 至 3.3V（步长为 50mV）
  - 其中两个稳压器具备 300mA 电流性能以及旁路模式
  - 一个稳压器具备 100mA 电流性能以及最高可达 50mA 的低噪声性能
  - 其他两个 LDO 具有 200mA 电流性能
  - 短路保护功能
- 具有 8 条输入通道（2 条为外部通道）的 12 位  $\Sigma\Delta$  通用模数转换器 (ADC) (GPADC)
- 具有高温报警和热关断功能的温度监控
- 电源序列控制：
  - 可配置加电和断电序列 (OTP)
  - 休眠和激活状态转换之间的可配置序列 (OTP)
  - 三个数字输出信号可添加至启动序列
- 可选控制接口：
  - 一个用于资源配置和 DVS 控制的串行外设接口 (SPI)
  - 两个 I<sup>2</sup>C 接口。
    - 其中一个专用于 DVS 控制
    - 另一个用作资源配置和 DVS 控制的通用 I<sup>2</sup>C 接口
- 带有运行或保持加电序列以及 RESET\_OUT 释放选项的 OTP 位完整性错误检测
- 封装选项：
  - 7mm × 7mm 48 引脚 VQFN，间距为 0.5mm

### 1.2 应用

- 汽车数字集群
- 汽车高级驾驶员辅助系统 (ADAS)
- 汽车导航系统

### 1.3 说明

该 TPS65917-Q1 PMIC 将五个可配置降压转换器与高达 3.5A 的输出电流相集成，从而为 LDO 的处理器内核、存储器、I/O 以及预稳压电路供电。该器件符合 AEC-Q100 标准。降压转换器与 2.2MHz 内部时钟同步，可提升器件的 EMC 性能。GPIO\_3 引脚允许降压转换器与外部时钟同步，支持多个器件与同一时钟同步，从而提升系统级 EMC 性能。该器件还包含五个 LDO，用于为低电流或低噪声域供电。

电源序列控制器采用一次性可编程 (OTP) 存储器控制电源序列，同时采用默认配置，例如输出电压和通用输入/输出 (GPIO) 配置。OTP 经过出厂编程，无需使用软件即可启动。多数默认静态设置可通过 SPI 或 I<sup>2</sup>C 进行更改，从而根据多种不同系统需求配置器件。例如，电压调节寄存器用于支持处理器的动态电压调节要求。对于另一项安全功能，OTP 还具备比特完整性错误检测功能，可在检测到错误时停止上电序列，防止系统在未知状态下启动。

TPS65917-Q1 器件还具有一个监控系统状态的模数转换器 (ADC)。GPADC 包括两条监控所有外部电压的外部通道，以及多条测量电源电压、输出电流和芯片温度的内部通道，允许处理器监控系统健康状况。该器件提供看门狗监控软件锁定情况并提供保护和诊断机制，例如短路保护、热监控、关断和自动 ADC 转换，以便检测电压是否低于预定义阈值。PMIC 可通过中断处理程序向处理器报告这些事件，以便处理器采取相关措施进行响应。

器件信息<sup>(1)</sup>

| 器件型号        | 封装        | 封装尺寸（标称值）       |
|-------------|-----------|-----------------|
| TPS65917-Q1 | VQFN (48) | 7.00mm × 7.00mm |

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

## 1.4 功能图

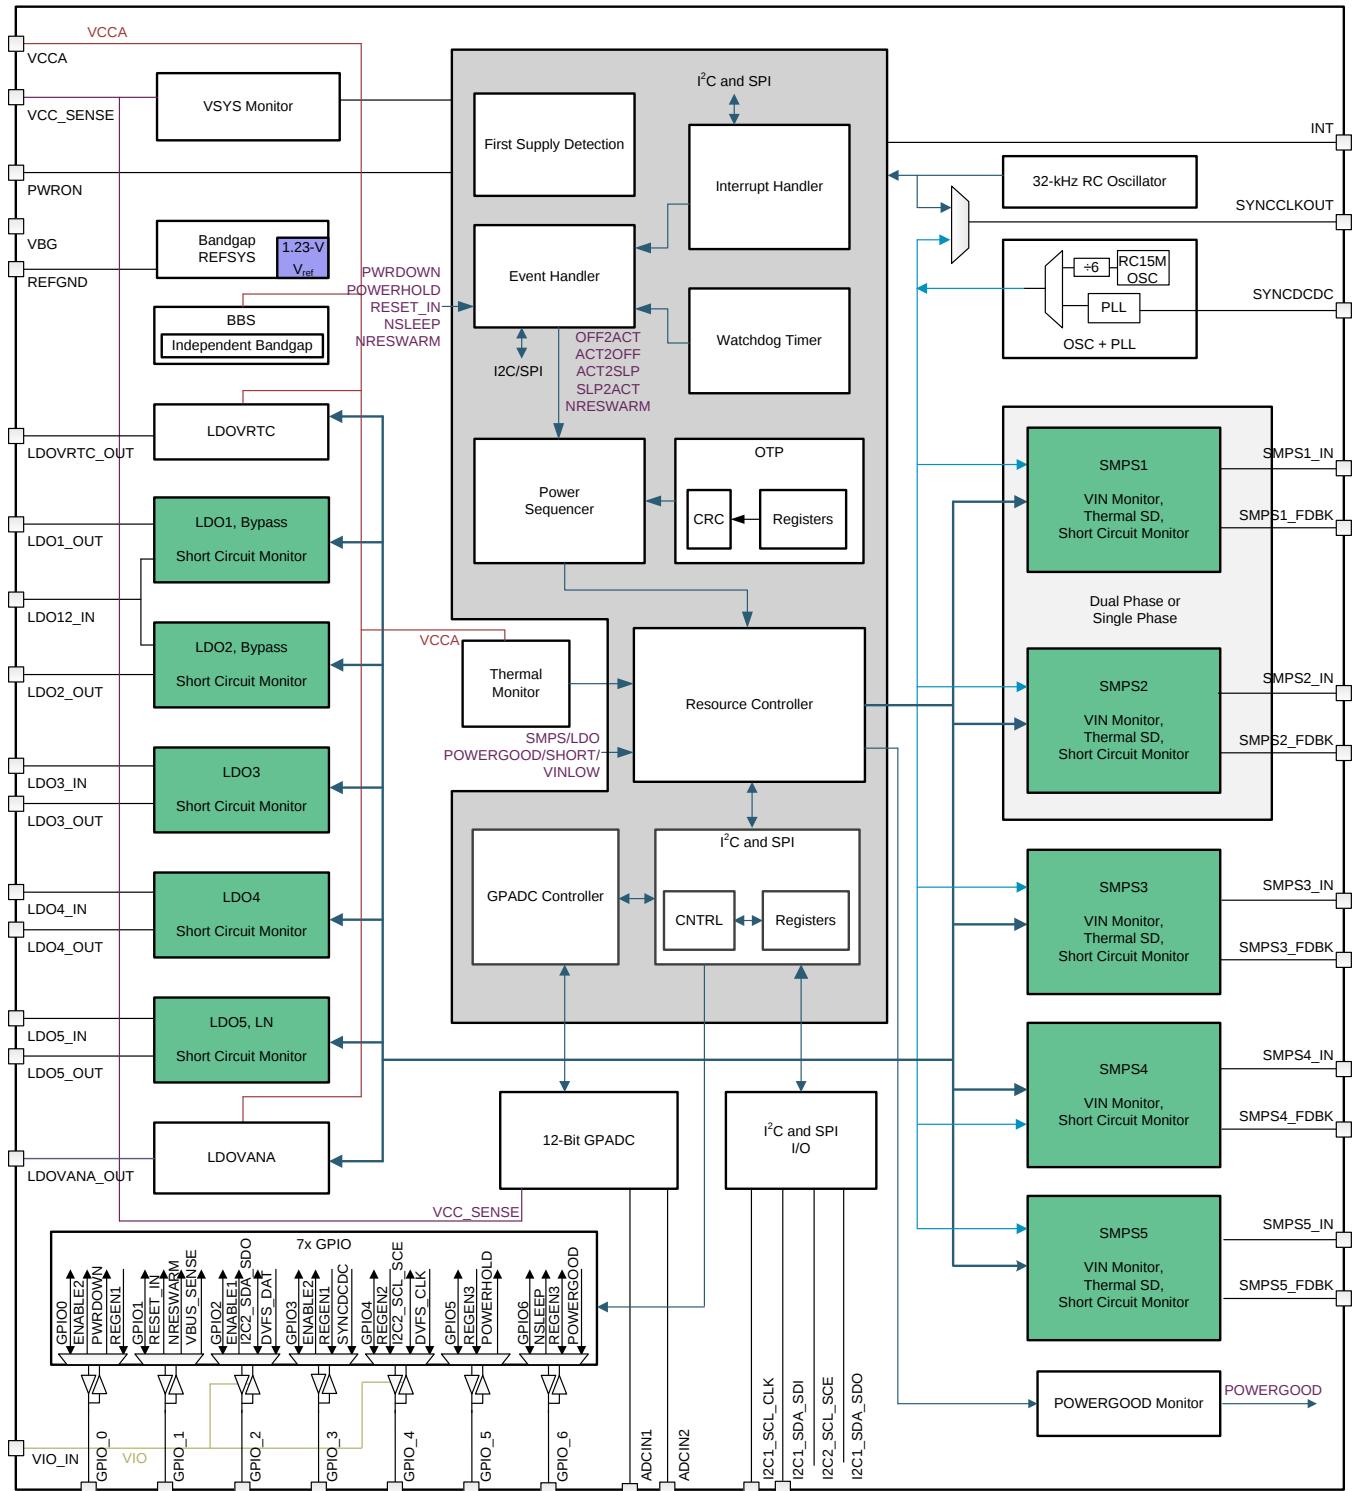


图 1-1. 功能图

## 内容

|          |                                                                                                 |                           |          |                                                                                       |                           |
|----------|-------------------------------------------------------------------------------------------------|---------------------------|----------|---------------------------------------------------------------------------------------|---------------------------|
| <b>1</b> | <b>器件概述 .....</b>                                                                               | <b><a href="#">1</a></b>  | 4.23     | Switching Characteristics — Reference Generator (Bandgap) .....                       | <a href="#">23</a>        |
| 1.1      | 特性 .....                                                                                        | <a href="#">1</a>         | 4.24     | Switching Characteristics — PLL for SMPS Clock Generation .....                       | <a href="#">23</a>        |
| 1.2      | 应用 .....                                                                                        | <a href="#">1</a>         | 4.25     | Switching Characteristics — 32-kHz RC Oscillators and SYNCCLKOUT Output Buffers ..... | <a href="#">23</a>        |
| 1.3      | 说明 .....                                                                                        | <a href="#">1</a>         | 4.26     | Switching Characteristics — 12-Bit Sigma-Delta ADC .....                              | <a href="#">24</a>        |
| 1.4      | 功能图 .....                                                                                       | <a href="#">3</a>         | 4.27     | Typical Characteristics .....                                                         | <a href="#">26</a>        |
| <b>2</b> | <b>修订历史记录 .....</b>                                                                             | <b><a href="#">5</a></b>  | <b>5</b> | <b>Detailed Description .....</b>                                                     | <b><a href="#">29</a></b> |
| <b>3</b> | <b>Pin Configuration and Functions .....</b>                                                    | <b><a href="#">6</a></b>  | 5.1      | Overview .....                                                                        | <a href="#">29</a>        |
| 3.1      | Pin Attributes .....                                                                            | <a href="#">6</a>         | 5.2      | Functional Block Diagram .....                                                        | <a href="#">30</a>        |
| 3.2      | Signal Descriptions .....                                                                       | <a href="#">9</a>         | 5.3      | Device State Machine .....                                                            | <a href="#">31</a>        |
| <b>4</b> | <b>Specifications .....</b>                                                                     | <b><a href="#">12</a></b> | 5.4      | Power Resources (Step-Down and Step-Up SMPS Regulators, LDOs) .....                   | <a href="#">41</a>        |
| 4.1      | Absolute Maximum Ratings .....                                                                  | <a href="#">12</a>        | 5.5      | SMPS and LDO Input Supply Connections .....                                           | <a href="#">50</a>        |
| 4.2      | ESD Ratings .....                                                                               | <a href="#">12</a>        | 5.6      | First Supply Detection .....                                                          | <a href="#">50</a>        |
| 4.3      | Recommended Operating Conditions .....                                                          | <a href="#">12</a>        | 5.7      | Long-Press Key Detection .....                                                        | <a href="#">51</a>        |
| 4.4      | Thermal Information .....                                                                       | <a href="#">13</a>        | 5.8      | 12-Bit Sigma-Delta General-Purpose ADC (GPADC) .....                                  | <a href="#">51</a>        |
| 4.5      | Electrical Characteristics — LDO Regulators .....                                               | <a href="#">13</a>        | 5.9      | General-Purpose I/Os (GPIO Pins) .....                                                | <a href="#">55</a>        |
| 4.6      | Electrical Characteristics — SMPS1&2 in Dual-Phase Configuration .....                          | <a href="#">15</a>        | 5.10     | Thermal Monitoring .....                                                              | <a href="#">56</a>        |
| 4.7      | Electrical Characteristics — SMPS1, SMPS2, SMPS3, SMPS4, and SMPS5 Stand-Alone Regulators ..... | <a href="#">16</a>        | 5.11     | Interrupts .....                                                                      | <a href="#">57</a>        |
| 4.8      | Electrical Characteristics — Reference Generator (Bandgap) .....                                | <a href="#">17</a>        | 5.12     | Control Interfaces .....                                                              | <a href="#">60</a>        |
| 4.9      | Electrical Characteristics — 32-kHz RC Oscillators and SYNCCLKOUT Output Buffers .....          | <a href="#">17</a>        | 5.13     | OTP Configuration Memory .....                                                        | <a href="#">65</a>        |
| 4.10     | Electrical Characteristics — 12-Bit Sigma-Delta ADC .....                                       | <a href="#">18</a>        | 5.14     | Watchdog Timer (WDT) .....                                                            | <a href="#">65</a>        |
| 4.11     | Electrical Characteristics — Thermal Monitoring and Shutdown .....                              | <a href="#">18</a>        | 5.15     | System Voltage Monitoring .....                                                       | <a href="#">66</a>        |
| 4.12     | Electrical Characteristics — System Control Thresholds .....                                    | <a href="#">19</a>        | 5.16     | Register Map .....                                                                    | <a href="#">69</a>        |
| 4.13     | Electrical Characteristics — Current Consumption .....                                          | <a href="#">19</a>        | 5.17     | Device Identification .....                                                           | <a href="#">69</a>        |
| 4.14     | Electrical Characteristics — Digital Input Signal Parameters .....                              | <a href="#">19</a>        | <b>6</b> | <b>Applications, Implementation, and Layout .....</b>                                 | <b><a href="#">70</a></b> |
| 4.15     | Electrical Characteristics — Digital Output Signal Parameters .....                             | <a href="#">20</a>        | 6.1      | Application Information .....                                                         | <a href="#">70</a>        |
| 4.16     | I/O Pullup and Pulldown Characteristics .....                                                   | <a href="#">20</a>        | 6.2      | Typical Application .....                                                             | <a href="#">71</a>        |
| 4.17     | Electrical Characteristics — I <sup>2</sup> C Interface .....                                   | <a href="#">20</a>        | 6.3      | Layout .....                                                                          | <a href="#">79</a>        |
| 4.18     | Timing Requirements — I <sup>2</sup> C Interface .....                                          | <a href="#">21</a>        | 6.4      | Power Supply Coupling and Bulk Capacitors .....                                       | <a href="#">82</a>        |
| 4.19     | Timing Requirements — SPI .....                                                                 | <a href="#">22</a>        | <b>7</b> | <b>器件和文档支持 .....</b>                                                                  | <b><a href="#">83</a></b> |
| 4.20     | Switching Characteristics — LDO Regulators .....                                                | <a href="#">22</a>        | 7.1      | 器件支持 .....                                                                            | <a href="#">83</a>        |
| 4.21     | Switching Characteristics — SMPS1&2 in Dual-Phase Configuration .....                           | <a href="#">22</a>        | 7.2      | 文档支持 .....                                                                            | <a href="#">83</a>        |
| 4.22     | Switching Characteristics — SMPS1, SMPS2, SMPS3, SMPS4, and SMPS5 Stand-Alone Regulators .....  | <a href="#">23</a>        | 7.3      | 接收文档更新通知 .....                                                                        | <a href="#">84</a>        |
|          |                                                                                                 |                           | 7.4      | 社区资源 .....                                                                            | <a href="#">84</a>        |
|          |                                                                                                 |                           | 7.5      | 商标 .....                                                                              | <a href="#">84</a>        |
|          |                                                                                                 |                           | 7.6      | 静电放电警告 .....                                                                          | <a href="#">84</a>        |
|          |                                                                                                 |                           | 7.7      | Glossary .....                                                                        | <a href="#">84</a>        |
|          |                                                                                                 |                           | <b>8</b> | <b>机械、封装和可订购信息 .....</b>                                                              | <b><a href="#">84</a></b> |

## 2 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

| Changes from Revision C (March 2017) to Revision D                                                                                                                                         | Page               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| • Added footnote recommending not to pull open-drain GPIOs up to an always-on voltage domain .....                                                                                         | <a href="#">9</a>  |
| • Clarified that LDO1 and LDO2 input pins are not included in this minimum recommended operating voltage. See <i>Electrical Characteristics: LDO Regulators</i> for more information. .... | <a href="#">12</a> |
| • Added LDO and SMPS output capacitance footnote .....                                                                                                                                     | <a href="#">13</a> |
| • Added SMPS Output voltage slew rate description .....                                                                                                                                    | <a href="#">15</a> |
| • 已更改 the comparison condition from VCCA to VCC_SENSE in the <i>Embedded Power Controller</i> section .....                                                                                | <a href="#">32</a> |
| • Added typical debounce time from POWERHOLD to the enable of the first rail in the power sequence. ....                                                                                   | <a href="#">33</a> |
| • Changed discharge resistance to match electrical characteristics table .....                                                                                                             | <a href="#">42</a> |
| • Changed description of clock dithering from internal to external only .....                                                                                                              | <a href="#">44</a> |
| • Added information about shutdown timing during short circuit detection .....                                                                                                             | <a href="#">45</a> |
| • Updated POWERGOOD block diagram and description to clarify dual phase operation. ....                                                                                                    | <a href="#">46</a> |
| • 已添加 notes to the <i>SMPS Controls for DVS</i> image .....                                                                                                                                | <a href="#">48</a> |
| • 已添加 the equation to convert GPADC code to internal die temperature in the <i>12-Bit Sigma-Delta General-Purpose ADC (GPADC)</i> section .....                                            | <a href="#">52</a> |
| • Additional description of VSYS_LO functionality .....                                                                                                                                    | <a href="#">66</a> |
| • Added details on identifying device version. ....                                                                                                                                        | <a href="#">69</a> |
| • SMPS and LDO output capacitance specification further explained .....                                                                                                                    | <a href="#">74</a> |
| • Added design considerations for VCCA capacitance to support loss of power .....                                                                                                          | <a href="#">74</a> |
| • Corrected 9-Vpp with 7V absolute maximum specification in the <i>Layout Guidelines</i> section .....                                                                                     | <a href="#">79</a> |
| • Updated requirements relating to measurement of high-side and low-side FETs in the <i>Layout Guidelines</i> section...                                                                   | <a href="#">80</a> |
| • Updated images and description on differential measurements across high-side and low-side FETs .....                                                                                     | <a href="#">81</a> |


| Changes from Revision B (November 2015) to Revision C                                                                                                                                                                          | Page               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| • 首次公开发布的完整数据表 .....                                                                                                                                                                                                           | <a href="#">1</a>  |
| • Added recommendation for external pulldown resistor on the LDOVRTC_OUT pin in the <i>Pin Attributes</i> table .....                                                                                                          | <a href="#">7</a>  |
| • Added OTP to the PU/PD selection for GPIO_1 as NRESWARM in the <i>Signal Descriptions</i> table .....                                                                                                                        | <a href="#">9</a>  |
| • 已更改 the caption of the <i>SMPS Efficiency For SMPS1 and SMPS 2 in Dual-Phase PWM Mode</i> graph to <i>SMPS Load Regulation for SMPS1 and SMPS2 Single-Phase PWM Mode</i> in the <i>Typical Characteristics</i> section ..... | <a href="#">26</a> |
| • 已添加 the <i>SMPS Load regulation for SMPS3, PWM Mode</i> graph to the <i>Typical Characteristics</i> section .....                                                                                                            | <a href="#">26</a> |
| • 已更改 single-phase to dual-phase and increased the output current to 7 A in the <i>SMPS Load Regulation for SMPS12</i> graph in the <i>Typical Characteristics</i> section .....                                               | <a href="#">26</a> |
| • 已更改 the debounce for PWRON to N/A in the <i>ON Requests</i> table .....                                                                                                                                                      | <a href="#">33</a> |
| • 已添加 description of VIO power-up timing in the <i>Device Power Up Timing</i> section .....                                                                                                                                    | <a href="#">37</a> |
| • 已更改 the description of the LDOVRTC when in the BACKUP and OFF states and added a note in the <i>LDOVRTC</i> section .....                                                                                                    | <a href="#">50</a> |
| • 已添加 the note and pulldown equations to the <i>System Voltage Monitoring</i> section .....                                                                                                                                    | <a href="#">67</a> |
| • 已更改 the SMPS1 voltage, SMPS2 voltage, and LDO2 voltage in the <i>Design Parameters</i> table .....                                                                                                                           | <a href="#">72</a> |
| • 已更改 静电放电注意事项声明 .....                                                                                                                                                                                                         | <a href="#">84</a> |

| Changes from Revision A (November 2015) to Revision B                                                                                                                    | Page               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| • 已添加 statement to the <i>Current Monitoring and Short Circuit Detection</i> section that the SMPS_SHORT_REGISTER bit will keep a resource off until it is cleared ..... | <a href="#">45</a> |

| Changes from Original (July 2015) to Revision A                                                                                                                     | Page               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| • Deleted the PPU type and changed the connection from floating to VRTC for the GPIO_1 pin when used only as an input with the secondary function as NRESWARM ..... | <a href="#">7</a>  |
| • Updated Max value of Device Off Mode Current Consumption from 45 $\mu$ A to 55 $\mu$ A .....                                                                      | <a href="#">19</a> |
| • 已更改 the units for the x axis from mA to A in graphs D002 to D008 in the <i>Typical Characteristics</i> section .....                                              | <a href="#">26</a> |
| • Added register names for the GPADC channel 3 D1 & D2 trim when HIGH_VCC_SENSE = 1 .....                                                                           | <a href="#">55</a> |

### 3 Pin Configuration and Functions

Figure 3-1 shows the 48-pin RGZ plastic quad-flatpack no-lead (VQFN) pin assignments and thermal pad.

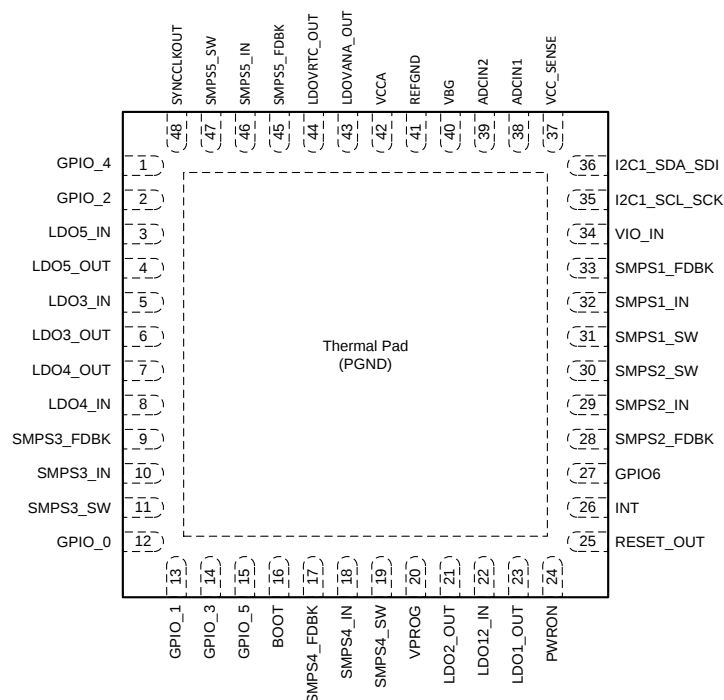

**Figure 3-1. 48-Pin RGZ (VQFN) Package, 0.5-mm Pitch, With Thermal Pad (Top View)**

#### 3.1 Pin Attributes

##### Pin Attributes

| PIN                          |     | I/O | DESCRIPTION                                                                                                                                    | CONNECTION<br>IF NOT USED | PU/PD <sup>(1)</sup> |
|------------------------------|-----|-----|------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------------|
| NAME                         | NO. |     |                                                                                                                                                |                           |                      |
| REFERENCE                    |     |     |                                                                                                                                                |                           |                      |
| REFGND                       | 41  | —   | System reference ground                                                                                                                        | Ground                    | —                    |
| VBG                          | 40  | O   | Bandgap reference voltage                                                                                                                      | —                         | —                    |
| STEP-DOWN CONVERTERS (SMPSs) |     |     |                                                                                                                                                |                           |                      |
| SMPS1_IN                     | 32  | I   | Power input for SMPS1                                                                                                                          | System supply             | —                    |
| SMPS1_FDBK                   | 33  | I   | Output voltage-sense (feedback) input for SMPS1 or differential voltage-sense (feedback) positive input for SMPS12 in dual-phase configuration | Ground                    | —                    |
| SMPS1_SW                     | 31  | O   | Switch node of SMPS1; connect output inductor                                                                                                  | Floating                  | —                    |
| SMPS2_IN                     | 29  | I   | Power input for SMPS2                                                                                                                          | System supply             | —                    |
| SMPS2_FDBK                   | 28  | I   | Output voltage-sense (feedback) input for SMPS2 or differential voltage-sense (feedback) negative input for SMPS12 in dual-phase configuration | Ground                    | —                    |
| SMPS2_SW                     | 30  | O   | Switch node of SMPS2; connect output inductor                                                                                                  | Floating                  | —                    |
| SMPS3_IN                     | 10  | I   | Power input for SMPS3                                                                                                                          | System supply             | —                    |
| SMPS3_FDBK                   | 9   | I   | Output voltage-sense (feedback) input for SMPS3                                                                                                | Floating                  | —                    |
| SMPS3_SW                     | 11  | O   | Switch node of SMPS3; connect output inductor                                                                                                  | Floating                  | —                    |
| SMPS4_IN                     | 18  | I   | Power input for SMPS4                                                                                                                          | System supply             | —                    |

(1) The PU/PD column shows the pullup and pulldown resistors on the digital input lines. Pullup and pulldown resistors: PU = Pullup, PD = Pulldown, PPU = Software-programmable pullup, PPD = Software-programmable pulldown.

### Pin Attributes (continued)

| PIN                                      |     | I/O | DESCRIPTION                                                                                                                                                  | CONNECTION<br>IF NOT USED | PU/PD <sup>(1)</sup>      |
|------------------------------------------|-----|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------|
| NAME                                     | NO. |     |                                                                                                                                                              |                           |                           |
| SMPS4_FDBK                               | 17  | I   | Output voltage-sense (feedback) input for SMPS4                                                                                                              | Ground                    | —                         |
| SMPS4_SW                                 | 19  | O   | Switch node of SMPS4; connect output inductor                                                                                                                | Floating                  | —                         |
| SMPS5_IN                                 | 46  | I   | Power input for SMPS5                                                                                                                                        | System supply             | —                         |
| SMPS5_FDBK                               | 45  | I   | Output voltage-sense (feedback) input for SMPS5                                                                                                              | Ground                    | —                         |
| SMPS5_SW                                 | 47  | O   | Switch node of SMPS5; connect output inductor                                                                                                                | Floating                  | —                         |
| <b>LOW-DROPOUT REGULATORS</b>            |     |     |                                                                                                                                                              |                           |                           |
| LDO12_IN                                 | 22  | I   | Power input voltage for LDO1 and LDO2 regulators                                                                                                             | System supply             | —                         |
| LDO1_OUT                                 | 23  | O   | LDO1 output voltage                                                                                                                                          | Floating                  | —                         |
| LDO2_OUT                                 | 21  | O   | LDO2 output voltage                                                                                                                                          | Floating                  | —                         |
| LDO3_IN                                  | 5   | I   | Power input voltage for LDO3 regulator                                                                                                                       | System supply             | —                         |
| LDO3_OUT                                 | 6   | O   | LDO3 output voltage                                                                                                                                          | Floating                  | —                         |
| LDO4_IN                                  | 8   | I   | Power input voltage for LDO4 regulator                                                                                                                       | System supply             | —                         |
| LDO4_OUT                                 | 7   | O   | LDO4 output voltage                                                                                                                                          | Floating                  | —                         |
| LDO5_IN                                  | 3   | I   | Power input voltage for LDO5 regulator                                                                                                                       | System supply             | —                         |
| LDO5_OUT                                 | 4   | O   | LDO5 output voltage                                                                                                                                          | Floating                  | —                         |
| <b>LOW-DROPOUT REGULATORS (INTERNAL)</b> |     |     |                                                                                                                                                              |                           |                           |
| LDOVRTC_OUT                              | 44  | O   | LDOVRTC output voltage. To support rapid power off and on, connect a pulldown resistor on the LDOVRTC_OUT pin. See <a href="#">§ 5.15</a> for more details.  | —                         | —                         |
| LDOVANA_OUT                              | 43  | O   | LDOVANA output voltage                                                                                                                                       | —                         | —                         |
| <b>GPADC</b>                             |     |     |                                                                                                                                                              |                           |                           |
| ADCIN1                                   | 38  | I   | GPADC input 1                                                                                                                                                | Ground                    | —                         |
| ADCIN2                                   | 39  | I   | GPADC input 2                                                                                                                                                | Ground                    | —                         |
| <b>CLOCKING</b>                          |     |     |                                                                                                                                                              |                           |                           |
| SYNCLKOUT                                | 48  | O   | Primary function: 2.2-MHz fallback switching frequency for SMPS<br>Secondary function: 32-kHz digital-gated output clock when VIO_IN input supply is present | Floating                  | —                         |
| <b>SYSTEM CONTROL</b>                    |     |     |                                                                                                                                                              |                           |                           |
| BOOT                                     | 16  | I   | Boot ball for power-up sequence selection                                                                                                                    | Ground or VRTC            | —                         |
| GPIO_0                                   | 12  | I/O | Primary function: General-purpose input <sup>(2)</sup> and output                                                                                            | Ground or VRTC            | PPD                       |
|                                          |     | I   | Secondary function: ENABLE2 which is the peripheral power request input 2                                                                                    | Floating                  | PPD <sup>(2)</sup>        |
|                                          |     |     | Secondary function: PWRDOWN input                                                                                                                            | Ground or VIO             | PPD                       |
|                                          |     | O   | Secondary function: REGEN1 which is the external regulator enable output 1                                                                                   | Floating                  | —                         |
| GPIO_1                                   | 13  | I/O | Primary function: General-purpose input <sup>(2)</sup> and output                                                                                            | Floating                  | PPD                       |
|                                          |     | I   | Secondary function: RESET_IN which is the reset input                                                                                                        | Floating                  | PPD                       |
|                                          |     |     | Secondary function: VBUS_SENSE input                                                                                                                         | Ground or VIO             | —                         |
|                                          |     |     | Secondary function: NRESWARM which is the warm reset input                                                                                                   | VRTC                      | PPD                       |
| GPIO_2                                   | 2   | I/O | Primary function: General-purpose input <sup>(2)</sup> and output                                                                                            | Floating                  | PPU<br>PPD                |
|                                          |     | I   | Secondary function: ENABLE1 which is the peripheral power request input 1                                                                                    | Floating                  | PPU<br>PPD <sup>(2)</sup> |
|                                          |     | I/O | Secondary function: I2C2_SDA_SDO which is the DVS I <sup>2</sup> C serial bidirectional data (external pullup) and the SPI output data signal                | Floating                  | —                         |

(2) Default option.

## Pin Attributes (continued)

| PIN                         |     | I/O | DESCRIPTION                                                                                                                      | CONNECTION<br>IF NOT USED | PU/PD <sup>(1)</sup>      |
|-----------------------------|-----|-----|----------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------|
| NAME                        | NO. |     |                                                                                                                                  |                           |                           |
| GPIO_3                      | 14  | I/O | Primary function: General-purpose input <sup>(2)</sup> and output                                                                | Floating                  | PPD                       |
|                             |     | O   | Secondary function: REGEN1 which is the external regulator enable output 1                                                       | Floating                  | —                         |
|                             |     | I   | Secondary function: ENABLE2 which is the peripheral power request input 2                                                        |                           | PPD <sup>(2)</sup>        |
|                             |     | I   | Secondary function: SYNCDCDC which is the synchronization signal for SMPS switching                                              | Floating                  | PPD <sup>(2)</sup>        |
| GPIO_4                      | 1   | I/O | Primary function: General-purpose input <sup>(2)</sup> and output                                                                | Floating                  | PPU<br>PPD                |
|                             |     | O   | Secondary function: REGEN2 which is the external regulator enable output 2                                                       | Floating                  | —                         |
|                             |     | I   | Secondary function: I2C2_SCL_SCE which is the DVS I <sup>2</sup> C serial clock (external pullup) and the SPI chip enable signal | Floating                  | —                         |
| GPIO_5                      | 15  | I/O | Primary function: General-purpose input <sup>(2)</sup> and output                                                                | Ground                    | PPD                       |
|                             |     | I   | Secondary function: POWERHOLD input                                                                                              | Ground or VIO             | PPD                       |
|                             |     | O   | Secondary function: REGEN3 which is the external regulator enable output 3                                                       | Floating                  | —                         |
| GPIO_6                      | 27  | I/O | Primary function: General-purpose input <sup>(2)</sup> and output                                                                | Ground                    | PPD                       |
|                             |     | I   | Secondary function: NSLEEP request signal                                                                                        | Floating                  | PPU <sup>(2)</sup><br>PPD |
|                             |     | O   | Secondary function: POWERGOOD which is the indication signal for valid regulator output voltages                                 | Floating                  | —                         |
|                             |     | O   | Secondary function: REGEN3 which is the external regulator enable output 3                                                       | Floating                  | —                         |
| I2C1_SCL_SCK                | 35  | I   | Control I <sup>2</sup> C serial clock (external pullup) and SPI clock signal                                                     | —                         | —                         |
| I2C1_SDA_SDI                | 36  | I/O | Control I <sup>2</sup> C serial bidirectional data (external pullup) and SPI input data signal                                   | —                         | —                         |
| INT                         | 26  | O   | Maskable interrupt output request to the host processor                                                                          | —                         | —                         |
| PWRON                       | 24  | I   | External power-on event (on-button switch-on event)                                                                              | Floating                  | PU                        |
| RESET_OUT                   | 25  | O   | System reset or power on output (low = reset, high = active or sleep)                                                            | Floating                  | —                         |
| <b>PROGRAMMING, TESTING</b> |     |     |                                                                                                                                  |                           |                           |
| VPROG                       | 20  | I   | Primary function: OTP programming voltage                                                                                        | Ground or floating        | —                         |
|                             |     | O   | Secondary function: TESTV                                                                                                        | Floating                  | —                         |
| <b>POWER SUPPLIES</b>       |     |     |                                                                                                                                  |                           |                           |
| VCCA                        | 42  | I   | Analog input voltage for internal LDOs                                                                                           | System supply             | —                         |
| VCC_SENSE                   | 37  | I   | System supply sense line                                                                                                         | System supply             | —                         |
| VIO_IN                      | 34  | I   | Digital supply input for GPIOs and I/O supply voltage                                                                            | N/A                       | —                         |

## 3.2 Signal Descriptions

**Table 3-1. Signal Descriptions**

| SIGNAL NAME                                               | LEVEL                                 | I/O <sup>(1)</sup>           | INPUT PU/PD <sup>(2)</sup> | PU/PD SELECTION | OUTPUT TYPE SELECTION | ACTIVITY    | OTP POLARITY SELECTION    |
|-----------------------------------------------------------|---------------------------------------|------------------------------|----------------------------|-----------------|-----------------------|-------------|---------------------------|
| PWRON                                                     | VSYS (VCCA)                           | Input                        | PU fixed                   | N/A (fixed)     | N/A (input)           | Low         | No                        |
| BOOT                                                      | VRTC                                  | Tri-level input              | N/A (input)                | N/A (input)     | N/A (input)           | Boot conf.  | No                        |
| GPIO_0<br>(primary function)                              | VRTC, fail-safe<br>(5.25-V tolerance) | Input <sup>(1)</sup> /output | PPD                        | OTP/SW          | Open-drain            | Low or high | Yes                       |
| GPIO_0<br>secondary<br>function:<br>PWRDOWN               |                                       | Input                        | PPD (Opt. Ext. PU)         | OTP/SW          | N/A (input)           | High        | Yes                       |
| GPIO_0<br>secondary<br>function:<br>ENABLE2               |                                       | Input                        | PPD <sup>(1)</sup>         | SW              | N/A (input)           | High        | No, but software possible |
| GPIO_0<br>secondary<br>function:<br>REGEN1 <sup>(3)</sup> |                                       | Output                       | N/A (output)               | N/A (output)    | Open-drain            | High        | No                        |
| GPIO_1<br>(primary function)                              | VRTC, fail-safe<br>(5.25-V tolerance) | Input <sup>(1)</sup> /output | PPD                        | OTP/SW          | Open-drain            | Low or high | Yes                       |
| GPIO_1<br>secondary<br>function:<br>RESET_IN              |                                       | Input                        | PPD                        | OTP/SW          | N/A (input)           | Low         | Yes                       |
| GPIO_1<br>secondary<br>function:<br>NRESWARM              |                                       | Input                        | PPD                        | OTP/SW          | N/A (input)           | Low or high | Yes                       |
| GPIO_1<br>secondary<br>function:<br>VBUS_SENSE            |                                       | Input                        | No                         | No              | N/A (input)           | High        | No                        |

(1) Default option.

(2) Pullup and pulldown resistors: PU = Pullup, PD = Pulldown, PPU = Software-programmable pullup, PPD = Software-programmable pulldown.

(3) This pin should not be pulled up to an always-on voltage domain. Before OTP is loaded, this will be configured as an input, and an active pull-up domain will pull this pin to a high level.

**Table 3-1. Signal Descriptions (continued)**

| SIGNAL NAME                                               | LEVEL                                 | I/O <sup>(1)</sup>           | INPUT PU/PD <sup>(2)</sup> | PU/PD SELECTION | OUTPUT TYPE SELECTION                  | ACTIVITY    | OTP POLARITY SELECTION    |
|-----------------------------------------------------------|---------------------------------------|------------------------------|----------------------------|-----------------|----------------------------------------|-------------|---------------------------|
| GPIO_2<br>(primary function)                              | VIO (VIO_IN)                          | Input <sup>(1)</sup> /output | PPU/PPD                    | OTP/SW          | Push-pull <sup>(1)</sup> or open-drain | Low or high | Yes                       |
| GPIO_2<br>secondary<br>function:<br>ENABLE1               |                                       | Input                        | PPU/PPD <sup>(1)</sup>     | SW              | N/A (input)                            | High        | No, but software possible |
| GPIO_2<br>secondary<br>function:<br>I2C2_SDA_SDO          |                                       | Input/output                 | No                         | No              | Open-drain                             | High        | No                        |
| GPIO_3<br>(primary function)                              | VRTC, fail-safe<br>(5.25-V tolerance) | Input <sup>(1)</sup> /output | PPD                        | OTP/SW          | Open-drain                             | Low or high | Yes                       |
| GPIO_3<br>secondary<br>function:<br>ENABLE2               |                                       | Input                        | PPD <sup>(1)</sup>         | SW              | N/A (input)                            | High        | No, but software possible |
| GPIO_3<br>secondary<br>function:<br>REGEN1 <sup>(3)</sup> |                                       | Output                       | N/A (output)               | N/A (output)    | Open-drain                             | High        | No                        |
| GPIO_3<br>secondary<br>function:<br>SYNCD CDC             |                                       | Input                        | PPD <sup>(1)</sup>         | SW              | N/A (input)                            | Toggling    | No                        |
| GPIO_4<br>(primary function)                              | VIO (VIO_IN)                          | Input <sup>(1)</sup> /output | PPU/PPD                    | OTP/SW          | Push-pull <sup>(1)</sup> or open-drain | Low or high | Yes                       |
| GPIO_4<br>secondary<br>function: REGEN2                   |                                       | Output                       | N/A (output)               | N/A (output)    | Push-pull <sup>(1)</sup> or open-drain | High        | No                        |
| GPIO_4<br>secondary<br>function:<br>I2C2_SCL_SCE          |                                       | Input                        | No                         | No              | N/A (input)                            | High        | No                        |

Table 3-1. Signal Descriptions (continued)

| SIGNAL NAME                                                  | LEVEL                                 | I/O <sup>(1)</sup>           | INPUT PU/PD <sup>(2)</sup> | PU/PD SELECTION | OUTPUT TYPE SELECTION                  | ACTIVITY    | OTP POLARITY SELECTION    |
|--------------------------------------------------------------|---------------------------------------|------------------------------|----------------------------|-----------------|----------------------------------------|-------------|---------------------------|
| GPIO_5<br>(primary function)                                 | VRTC, fail-safe<br>(5.25-V tolerance) | Input <sup>(1)</sup> /output | PPD                        | OTP/SW          | Open-drain                             | Low or high | Yes                       |
| GPIO_5<br>secondary<br>function:<br>POWERHOLD                |                                       | Input                        | PPD <sup>(1)</sup>         | SW              | N/A (input)                            | High        | Yes                       |
| GPIO_5<br>secondary<br>function:<br>REGEN3 <sup>(3)</sup>    |                                       | Output                       | N/A (output)               | N/A (output)    | Open-drain                             | High        | No                        |
| GPIO_6<br>(primary function)                                 | VRTC                                  | Input <sup>(1)</sup> /output | PPD                        | OTP/SW          | Open-drain                             | Low or high | Yes                       |
| GPIO_6<br>secondary<br>function: NSLEEP                      |                                       | Input                        | PPU <sup>(1)</sup> /PPD    | SW              | N/A (input)                            | Low         | Yes                       |
| GPIO_6<br>secondary<br>function:<br>POWERGOOD <sup>(3)</sup> |                                       | Output                       | N/A (output)               | N/A (output)    | Open-drain                             | Low or high | Yes                       |
| GPIO_6<br>secondary<br>function:<br>REGEN3 <sup>(3)</sup>    |                                       | Output                       | N/A (output)               | N/A (output)    | Open-drain                             | High        | No                        |
| RESET_OUT                                                    | VIO (VIO_IN)                          | Output                       | N/A (output)               | N/A (output)    | Push-pull <sup>(1)</sup> or open-drain | Low         | No                        |
| INT                                                          | VIO (VIO_IN)                          | Output                       | N/A (output)               | N/A (output)    | Push-pull <sup>(1)</sup> or open-drain | Low         | No, but software possible |
| SYNCLKOUT                                                    | VRTC                                  | Output                       | N/A (output)               | N/A (output)    | Push-pull                              | Toggling    | No                        |
| I2C1_SDA_SDI                                                 | VIO (VIO_IN)                          | Input/output                 | No                         | No              | Open-drain                             | High        | No                        |
| I2C1_SCL_CLK                                                 | VIO (VIO_IN)                          | Input                        | No                         | No              | N/A (input)                            | High        | No                        |
| VCC_SENSE                                                    | VSYS (VCCA)                           | Input                        | No                         | No              | N/A (analog)                           | Analog      | No                        |

## 4 Specifications

### 4.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                       |                                                              | MIN                           | MAX                      | UNIT |
|---------------------------------------|--------------------------------------------------------------|-------------------------------|--------------------------|------|
| Voltage                               | VCCA                                                         | −0.3                          | 6                        | V    |
|                                       | VCC_SENSE                                                    | −0.3                          | 7                        |      |
|                                       | All LDOs and SMPS supply voltage input pins                  | −0.3                          | 6                        |      |
|                                       | SMPSx_SW pins, 10-ns transient                               | −2                            | 7                        |      |
|                                       | All SMPS-related input pins _FDBK                            | −0.3                          | 3.6                      |      |
|                                       | I/O digital supply voltage (VIO_IN with respect to VIO_GND)  | −0.3 VIO <sub>max</sub> + 0.3 | VIO <sub>max</sub> + 0.3 |      |
|                                       | VBUS                                                         | −0.3                          | 6                        |      |
|                                       | GPADC pins: ADCIN1 and ADCIN2                                | −0.3                          | 2.4                      |      |
|                                       | OTP supply voltage VPROG                                     | −0.3                          | 7                        |      |
|                                       | VRTC digital input pins, without fail-safe                   | −0.3                          | 2.15                     |      |
|                                       | VRTC digital input pins, with fail-Safe                      | −0.3                          | 5.25                     |      |
|                                       | VIO digital input pins (VIO_IN pin reference)                | −0.3                          | VIO <sub>max</sub> + 0.3 |      |
|                                       | VSYS digital input pins (VCCA pin reference)                 | −0.3                          | 6                        |      |
| Current                               | Peak output current on all pins other than power resources   | −5                            | 5                        | mA   |
|                                       | Buck SMPS, SMPSx_IN, SMPSx_SW, and SMPSx_OUT total per phase |                               | 4                        | A    |
|                                       | LDOs                                                         |                               | 1                        |      |
| Junction temperature, T <sub>J</sub>  |                                                              | −45                           | 150                      | °C   |
| Storage temperature, T <sub>stg</sub> |                                                              | −65                           | 150                      | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 4.2 ESD Ratings

|                                            |                                                         |                                                 | VALUE | UNIT |
|--------------------------------------------|---------------------------------------------------------|-------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup> |                                                 | ±2000 | V    |
|                                            | Charged-device model (CDM), per AEC Q100-011            | All pins                                        | ±500  |      |
|                                            |                                                         | Corner pins (1, 12, 13, 24, 25, 36, 37, and 48) | ±750  |      |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 4.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted).

|                                                                        |             | MIN   | NOM | MAX                       | UNIT |
|------------------------------------------------------------------------|-------------|-------|-----|---------------------------|------|
| <b>ELECTRICAL</b>                                                      |             |       |     |                           |      |
| System voltage input pin VCCA (named VSYS in the specification)        |             | 3.135 | 3.8 | 5.25                      | V    |
| VCC_SENSE, HIGH_VCC_SENSE = 0 (if measured with GPADC, see also 表 5-9) |             | 3.135 |     | VCCA                      | V    |
| VCC_SENSE, HIGH_VCC_SENSE = 1 (if measured with GPADC, see also 表 5-9) |             | 3.135 |     | VCCA − 1                  | V    |
| All LDO-related input pins _IN <sup>(1)</sup>                          |             | 1.75  | 3.8 | 5.25                      | V    |
| All SMPS-related input pins _IN                                        |             | 3.135 | 3.8 | 5.25                      | V    |
| All SMPS-related input pins _FDBK                                      |             | 0     |     | V <sub>OUTmax</sub> + 0.3 | V    |
| All SMPS-related input pins _FDBK_GND                                  |             | −0.3  |     | 0.3                       | V    |
| I/O digital supply voltage VIO_IN                                      | VIO = 1.8 V | 1.71  | 1.8 | 1.89                      | V    |
|                                                                        | VIO = 3.3 V | 3.135 | 3.3 | 3.465                     |      |

- (1) Does not include LDO1 and LDO2 minimum input voltages.

## Recommended Operating Conditions (continued)

Over operating free-air temperature range (unless otherwise noted).

|                                                                     |                       | MIN | NOM     | MAX                | UNIT |
|---------------------------------------------------------------------|-----------------------|-----|---------|--------------------|------|
| Voltage on the GPADC pins ADCIN1 (channel 0) and ADCIN2 (channel 1) |                       | 0   |         | 1.25               | V    |
| OTP supply voltage VPROG                                            |                       | 0   | 6       |                    | V    |
| Voltage on VRTC digital input pins                                  | without fail-safe     | 0   | LDOVRTC | 1.85               | V    |
|                                                                     | with fail-safe        | 0   | LDOVRTC | 5.25               |      |
| Voltage on VIO digital input pin (VIO_IN pin reference)             |                       | 0   | VIO     | VIO <sub>max</sub> | V    |
| Voltage on VSYS digital input pins (VCCA pin reference)             |                       | 0   | 3.8     | 5.25               | V    |
| <b>TEMPERATURE</b>                                                  |                       |     |         |                    |      |
| Operating free-air temperature range <sup>(2)</sup>                 |                       | –40 | 27      | 105                | °C   |
| Junction temperature, T <sub>J</sub>                                | Operational           | –40 | 27      | 150                | °C   |
|                                                                     | Parametric compliance | –40 | 27      | 125                |      |
| Storage temperature, T <sub>stg</sub>                               |                       | –65 | 27      | 150                | °C   |
| Lead temperature (soldering, 10 s)                                  |                       |     | 260     |                    | °C   |

(2) Additional cooling strategies may be necessary to maintain junction temperature at recommended limits.

## 4.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS65917-Q1 | UNIT |
|-------------------------------|----------------------------------------------|-------------|------|
|                               |                                              | RGZ (VQFN)  |      |
|                               |                                              | 48 PINS     |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 24.8        | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 5.6         | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 3.9         | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.1         | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 3.9         | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 0.1         | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics application report](#).

## 4.5 Electrical Characteristics — LDO Regulators

Over operating free-air temperature range, typical values are at T<sub>A</sub> = 27°C (unless otherwise noted).

| PARAMETER                                                             | TEST CONDITIONS                                                                                         | MIN                                         | TYP                                          | MAX  | UNIT |
|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------|----------------------------------------------|------|------|
| Input filtering capacitance (C18, C19)                                | Connected from LDOx_IN to GND<br>Shared input tank capacitance (depending on platform requirements)     | 0.6                                         | 2.2                                          |      | μF   |
| Output filtering capacitance (C20, C21, C22, C23, C24) <sup>(1)</sup> | Connected from LDOx_OUT to GND                                                                          | 0.6                                         | 2.2                                          | 2.7  | μF   |
| C <sub>ESR</sub>                                                      | Filtering capacitor ESR                                                                                 | < 100 kHz                                   | 20                                           | 100  | mΩ   |
|                                                                       |                                                                                                         | 1 to 10 MHz                                 | 1                                            | 10   |      |
| V <sub>IN(LDOx)</sub>                                                 | LDO1, LDO2 from LDO12_IN, Normal Mode                                                                   | 0.9 V ≤ V <sub>OUT</sub> < 2.2 V            | 1.2                                          | VCCA | V    |
|                                                                       |                                                                                                         | 2.2 V ≤ V <sub>OUT</sub> ≤ 3.3 V            | 1.2                                          | 5.25 |      |
|                                                                       | LDO1, LDO2 from LDO12_IN, Bypass Mode                                                                   | V <sub>OUT</sub> = V <sub>IN</sub>          | 1.2                                          | 3.6  |      |
|                                                                       |                                                                                                         |                                             |                                              |      |      |
| V <sub>OUT(LDOx)</sub>                                                | LDO3, LDO4, LDO5 from LDO3_IN, LDO4_IN and LDO5_IN                                                      | 0.9 V ≤ V <sub>OUT</sub> < 2.2 V            | 1.75                                         | VCCA | V    |
|                                                                       |                                                                                                         | 2.2 V ≤ V <sub>OUT</sub> ≤ 3.3 V            | 1.75                                         | 5.25 |      |
| V <sub>OUT(LDOx)</sub>                                                | LDO output voltage programmable <sup>(2)</sup> (except LDOVRTC and LDOVANA)                             | Range                                       | 0.9                                          | 3.3  | V    |
|                                                                       | Step size                                                                                               |                                             | 50                                           |      | mV   |
| T <sub>DCOV(LDOx)</sub>                                               | All LDOs except LDOVANA and LDOVRTC<br>V <sub>IN(LDOx)</sub> ≥ 2.5 V                                    | 0.99 ×<br>V <sub>OUT(LDOx)</sub> –<br>0.014 | 1.006 ×<br>V <sub>OUT(LDOx)</sub> +<br>0.014 |      | V    |
|                                                                       | All LDOs except LDOVANA and LDOVRTC<br>V <sub>IN(LDOx)</sub> < 2.5 V and V <sub>OUT(LDOx)</sub> < 1.5 V | 0.99 ×<br>V <sub>OUT(LDOx)</sub> –<br>0.014 | 1.006 ×<br>V <sub>OUT(LDOx)</sub> +<br>0.014 |      |      |

(1) Additional information about how this parameter is specified is located in [§ 6.2.2](#).

(2) LDO output voltages are programmed separately.

## Electrical Characteristics — LDO Regulators (continued)

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                                                                                                                            | TEST CONDITIONS                                                                                                                                                                                                                                                                                         | MIN   | TYP   | MAX   | UNIT          |
|------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------|---------------|
| $T_{\text{DCOV(LDOx)}}$ Total DC output voltage accuracy, including voltage references, DC load and line regulations, process and temperature        | LDOVRTC_OUT<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                                                                                                                                                                    | 1.726 | 1.8   | 1.85  | V             |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         | 1.726 | 1.8   | 1.85  |               |
| $T_{\text{DCOV(LDOx)}}$ Total DC output voltage accuracy, including voltage references, DC load and line regulations, process and temperature        | LDOVANA_OUT<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                                                                                                                                                                    | 2.002 | 2.093 | 2.14  | V             |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         | 2.002 | 2.093 | 2.14  |               |
| $D_{\text{V(LDOx)}}$ Dropout voltage<br>$D_{\text{V(LDOx)}} = V_{\text{IN}} - V_{\text{OUT}}$<br>where<br>$V_{\text{OUT}} = V_{\text{OUTnom}} - 2\%$ | LDO1, LDO2: $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                                        |       |       | 150   | mV            |
|                                                                                                                                                      | LDO3, LDO4: $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                                        |       |       | 290   |               |
|                                                                                                                                                      | LDO5: $I_{\text{OUT}} = 50 \text{ mA}$                                                                                                                                                                                                                                                                  |       |       | 150   |               |
|                                                                                                                                                      | LDO5: $I_{\text{OUT}} = I_{\text{OUTmax}}$ (not low-noise performance)                                                                                                                                                                                                                                  |       |       | 290   |               |
| $I_{\text{OUT(LDOx)}}$ Output current                                                                                                                | LDO1, LDO2                                                                                                                                                                                                                                                                                              |       |       | 300   | mA            |
|                                                                                                                                                      | LDO3, LDO4                                                                                                                                                                                                                                                                                              |       |       | 200   |               |
|                                                                                                                                                      | LDO5                                                                                                                                                                                                                                                                                                    |       |       | 100   |               |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       |       |       |               |
| $I_{\text{OUT(LDOx)}}$ Output current, internal LDOs                                                                                                 | LDOVANA in Active Mode                                                                                                                                                                                                                                                                                  |       |       | 10    | mA            |
| $I_{\text{OUT(LDOx)}}$ Output current, internal LDOs                                                                                                 | LDOVRTC in Active Mode                                                                                                                                                                                                                                                                                  |       |       | 25    | mA            |
| $I_{\text{SHORT(LDOx)}}$ LDO current limitation                                                                                                      | LDO1, LDO2                                                                                                                                                                                                                                                                                              | 380   | 600   | 1800  | mA            |
|                                                                                                                                                      | LDO3, LDO4                                                                                                                                                                                                                                                                                              | 340   | 650   | 1300  |               |
|                                                                                                                                                      | LDO5                                                                                                                                                                                                                                                                                                    | 135   | 325   | 740   |               |
| LDO inrush current                                                                                                                                   | LDO1, LDO2                                                                                                                                                                                                                                                                                              |       |       | 500   | mA            |
| $\text{DC}_{\text{LDR}}$ DC load regulation, $\Delta V_{\text{OUT}}$                                                                                 | $I_{\text{OUT}} = 0$ to $I_{\text{OUTmax}}$ at pin, LDO1, LDO2<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                                                                                                                 |       | 4     | 16    | mV            |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       | 4     | 16    |               |
|                                                                                                                                                      | $I_{\text{OUT}} = 0$ to $I_{\text{OUTmax}}$ at pin, all other LDOs<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                                                                                                             |       | 4     | 14    |               |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       | 4     | 14    |               |
| $\text{DC}_{\text{LNR}}$ DC line regulation, $\Delta V_{\text{OUT}} / V_{\text{OUT}}$                                                                | $V_{\text{IN}} = V_{\text{INmin}}$ to $V_{\text{INmax}}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                                                                                |       | 0.1%  | 0.2%  |               |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       | 0.1%  | 0.2%  |               |
|                                                                                                                                                      | $V_{\text{SYS}} = V_{\text{SYSmin}}$ to $V_{\text{SYSmax}}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$ , $V_{\text{IN}} = \text{Constant}$ (LDO preregulated), $V_{\text{OUT}} \leq 2.2 \text{ V}$<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$ |       | 0.3%  | 0.75% |               |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       | 0.3%  | 0.75% |               |
| $R_{\text{DIS}}$ Pulldown discharge resistance at LDO output, except LDOVRTC                                                                         | Off mode, pulldown enabled and LDO disabled. Applies to bypass mode also.                                                                                                                                                                                                                               | 30    |       | 125   | $\Omega$      |
| Power supply ripple rejection (PSRR), LDO1, LDO2                                                                                                     | $f = 217 \text{ Hz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                             | 55    | 90    |       | dB            |
|                                                                                                                                                      | $f = 50 \text{ kHz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                             | 35    | 45    |       |               |
|                                                                                                                                                      | $f = 1 \text{ MHz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                              | 25    | 35    |       |               |
| Power supply ripple rejection (PSRR), LDO3, LDO4                                                                                                     | $f = 217 \text{ Hz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                             | 55    | 90    |       |               |
|                                                                                                                                                      | $f = 50 \text{ kHz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                             | 25    | 45    |       |               |
|                                                                                                                                                      | $f = 1 \text{ MHz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                              | 20    | 35    |       |               |
| Power supply ripple rejection (PSRR), LDO5                                                                                                           | $f = 217 \text{ Hz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                             | 55    | 90    |       |               |
|                                                                                                                                                      | $f = 50 \text{ kHz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                             | 25    | 45    |       |               |
|                                                                                                                                                      | $f = 1 \text{ MHz}$ , $I_{\text{OUT}} = I_{\text{OUTmax}}$                                                                                                                                                                                                                                              | 25    | 35    |       |               |
| $I_{\text{Qoff}}$ Quiescent current – off mode                                                                                                       | For all LDOs, $V_{\text{CCA}} = V_{\text{IN(LDOx)}} = 3.8 \text{ V}$ , $T_A = 27^\circ\text{C}$                                                                                                                                                                                                         |       | 0.1   | 0.4   | $\mu\text{A}$ |
|                                                                                                                                                      | For all LDOs, $V_{\text{CCA}} = V_{\text{IN(LDOx)}} = 3.8 \text{ V}$ , $T_A = 85^\circ\text{C}$                                                                                                                                                                                                         |       | 0.2   | 1.3   |               |
|                                                                                                                                                      | For all LDOs, $V_{\text{CCA}} = V_{\text{IN(LDOx)}} = 3.8 \text{ V}$ , $T_A = 105^\circ\text{C}$                                                                                                                                                                                                        |       | 0.2   | 1.3   |               |
| $I_{\text{Qon(LDO)}}$ Quiescent current – LDO on mode                                                                                                | $I_{\text{LOAD}} = 0 \text{ mA}$ (LDO1, LDO2),<br>$V_{\text{IN(LDOx)}} > V_{\text{OUT(LDOx)}} + D_{\text{V(LDOx)}}$<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                                                            |       | 46    | 70    | $\mu\text{A}$ |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       | 46    | 70    |               |
|                                                                                                                                                      | $I_{\text{LOAD}} = 0 \text{ mA}$ (LDO3, LDO4),<br>$V_{\text{IN(LDOx)}} > V_{\text{OUT(LDOx)}} + D_{\text{V(LDOx)}}$<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                                                            |       | 36    | 47    |               |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       | 36    | 47    |               |
|                                                                                                                                                      | $I_{\text{LOAD}} = 0 \text{ mA}$ (LDO5),<br>$V_{\text{OUT}} \leq 1.8 \text{ V}$ , $V_{\text{IN(LDOx)}} > V_{\text{OUT(LDOx)}} + D_{\text{V(LDOx)}}$<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                            |       | 140   | 190   |               |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       | 140   | 190   |               |
|                                                                                                                                                      | $I_{\text{LOAD}} = 0 \text{ mA}$ (LDO5),<br>$V_{\text{OUT}} > 1.8 \text{ V}$ , $V_{\text{IN(LDOx)}} > V_{\text{OUT(LDOx)}} + D_{\text{V(LDOx)}}$<br>$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$<br>$85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                               |       | 180   | 210   |               |
|                                                                                                                                                      |                                                                                                                                                                                                                                                                                                         |       | 180   | 210   |               |
| $\alpha Q$ Quiescent current coefficient<br>LDO on mode, $I_{\text{Qout}} = I_{\text{Qon}} + \alpha Q \times I_{\text{OUT}}$                         | $I_{\text{OUT}} < 100 \mu\text{A}$                                                                                                                                                                                                                                                                      |       | 4%    |       |               |
|                                                                                                                                                      | $100 \mu\text{A} \leq I_{\text{OUT}} < 1 \text{ mA}$                                                                                                                                                                                                                                                    |       | 2%    |       |               |
|                                                                                                                                                      | $I_{\text{OUT}} \geq 1 \text{ mA}$                                                                                                                                                                                                                                                                      |       | 1%    |       |               |
| $T_{\text{LDR}}$ Transient load regulation, $\Delta V_{\text{OUT}}$                                                                                  | On mode, $I_{\text{OUT}} = 10 \text{ mA}$ to $I_{\text{OUTmax}} / 2$ , $T_R = T_F = 1 \mu\text{s}$ . All LDOs except LDO5                                                                                                                                                                               | -25   |       | 25    | mV            |
|                                                                                                                                                      | On mode, $I_{\text{OUT}} = 1 \text{ mA}$ to $I_{\text{OUTmax}} / 2$ , $T_R = T_F = 1 \mu\text{s}$ . LDO5                                                                                                                                                                                                | -25   |       | 25    |               |
|                                                                                                                                                      | On mode, $I_{\text{OUT}} = 100 \mu\text{A}$ to $I_{\text{OUTmax}} / 2$ , $T_R = T_F = 1 \mu\text{s}$                                                                                                                                                                                                    | -50   |       | 33    |               |

## Electrical Characteristics — LDO Regulators (continued)

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                                       | TEST CONDITIONS                                                                                                                   | MIN | TYP   | MAX  | UNIT             |
|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----|-------|------|------------------|
| $T_{LNR}$ Transient line regulation, $\Delta V_{OUT} / V_{OUT}$ | $V_{IN}$ step = 600 mVpp, $T_R = T_F = 10 \mu\text{s}$                                                                            |     | 0.25% | 0.5% |                  |
|                                                                 | $V_{SYS}$ step = 600 mVpp, $T_R = T_F = 10 \mu\text{s}$ , $V_{IN}$ constant (LDO preregulated), $V_{OUT} \leq 2.2 \text{ V}$      |     | 0.8%  | 1.6% |                  |
| Noise (except LDO5)                                             | 100 Hz < f ≤ 10 kHz                                                                                                               |     | 5000  | 8000 | nV/√Hz           |
|                                                                 | 10 kHz < f ≤ 100 kHz                                                                                                              |     | 1250  | 2500 |                  |
|                                                                 | 100 kHz < f ≤ 1 MHz                                                                                                               |     | 150   | 300  |                  |
|                                                                 | f > 1 MHz                                                                                                                         |     | 250   | 500  |                  |
| Noise (LDO5)                                                    | 100 Hz < f ≤ 5 kHz, $I_{OUT} = 50 \text{ mA}$ , $V_{OUT} \leq 1.8 \text{ V}$                                                      |     | 400   | 500  | nV/√Hz           |
|                                                                 | 5 kHz < f ≤ 400 kHz, $I_{OUT} = 50 \text{ mA}$ , $V_{OUT} \leq 1.8 \text{ V}$                                                     |     | 62    | 125  |                  |
|                                                                 | 400 kHz < f ≤ 10 MHz, $I_{OUT} = 50 \text{ mA}$ , $V_{OUT} \leq 1.8 \text{ V}$                                                    |     | 25    | 50   |                  |
| Ripple                                                          | LDO1, LDO2, ripple at 32 kHz (from the internal charge pump of 300 mA LDO)                                                        |     |       | 5    | mV <sub>pp</sub> |
| <b>LDO BYPASS MODE LDO1, LDO2</b>                               |                                                                                                                                   |     |       |      |                  |
| Bypass resistance of 300 mA LDO                                 | $2.9 \text{ V} \leq V_{IN} \leq 3.3 \text{ V}$ , $V_{SYS} \geq 3.4 \text{ V}$ , $I_{OUT} = 250 \text{ mA}$ , programmed to BYPASS |     |       | 0.22 | Ω                |
| Bypass resistance of 300 mA LDO                                 | $1.75 \text{ V} \leq V_{IN} \leq 1.9 \text{ V}$ , $I_{OUT} = 75 \text{ mA}$ , programmed to BYPASS                                |     |       | 0.24 | Ω                |
| Bypass resistance of 300 mA LDO                                 | $1.75 \text{ V} \leq V_{IN} \leq 1.9 \text{ V}$ , $I_{OUT} = 200 \text{ mA}$ , programmed to BYPASS                               |     |       | 0.24 | Ω                |
| Bypass mode inrush current                                      | Maximum 50 μF load connected to LDOx_OUT                                                                                          |     |       | 1100 | mA               |
| $I_{Qon(bypass)}$ Quiescent current – bypass mode               |                                                                                                                                   |     |       | 60   | μA               |
| Slew-rate                                                       |                                                                                                                                   |     |       | 60   | mV/μs            |

## 4.6 Electrical Characteristics — SMPS1&2 in Dual-Phase Configuration

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).<sup>(1)</sup>

| PARAMETER                                                                                                     | TEST CONDITIONS                                                                                                                                                                                                     | MIN   | TYP | MAX  | UNIT             |
|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----|------|------------------|
| Input capacitance (C8, C9)                                                                                    |                                                                                                                                                                                                                     |       | 4.7 |      | μF               |
| Output capacitance (C13, C14) <sup>(2)</sup>                                                                  | SMPS1&2 input dual phase operation, per phase                                                                                                                                                                       | 33    | 47  | 57   | μF               |
| $C_{ESR}$ Filtering capacitor ESR                                                                             | 1 to 10 MHz                                                                                                                                                                                                         |       | 2   | 10   | mΩ               |
| Output filter inductance (L1, L2)                                                                             | SMPSx_SW                                                                                                                                                                                                            | 0.7   | 1   | 1.3  | μH               |
| $DCR_L$ Filter inductor DC resistance                                                                         |                                                                                                                                                                                                                     |       | 50  | 100  | mΩ               |
| $V_{IN}$ (SMPSx) Input voltage range, SMPSx_IN                                                                | $V_{SYS}$ (VCCA)                                                                                                                                                                                                    | 3.135 |     | 5.25 | V                |
| $V_{OUT}$ (SMPSx) Output voltage, programmable, SMPSx                                                         | RANGE = 0 (value for RANGE must not be changed when SMPS is active). In ECO mode the output voltage values are fixed (defined before ECO mode is enabled). RANGE = 1 is not supported in Multi-phase configuration. | 0.7   |     | 1.65 | V                |
|                                                                                                               | Step size, $0.7 \text{ V} \leq V_{OUT} \leq 1.65 \text{ V}$ (RANGE = 0)                                                                                                                                             |       | 10  |      | mV               |
| DC output voltage accuracy, includes voltage references, DC load and line regulation, process and temperature | ECO mode                                                                                                                                                                                                            | –3%   |     | 4%   |                  |
|                                                                                                               | PWM mode                                                                                                                                                                                                            | –1%   |     | 2%   |                  |
| Ripple, dual phase                                                                                            | Max load, $V_{IN} = 3.8 \text{ V}$ , $V_{OUT} = 1.2 \text{ V}$ , $ESR_{COUT} = 2 \text{ m}\Omega$ , measure with 20-MHz LPF                                                                                         |       | 4   |      | mV <sub>pp</sub> |
| $DC_{LNR}$ DC line regulation, $\Delta V_{OUT} / V_{OUT}$                                                     | $V_{IN} = V_{INmin}$ to $V_{INmax}$                                                                                                                                                                                 |       | 0.1 |      | %/V              |
| $DC_{LDR}$ DC load regulation, $\Delta V_{OUT} / V_{OUT}$                                                     | $I_{OUT} = 0$ to $I_{OUTmax}$                                                                                                                                                                                       |       | 0.1 |      | %/A              |
| $T_{LDSR}$ Transient load step response, dual phase                                                           | $I_{OUT} = 0.8$ to $2 \text{ A}$ , $T_R = T_F = 400 \text{ ns}$ , $C_{OUT} = 47 \mu\text{F}$ , $L = 1 \mu\text{H}$                                                                                                  |       | 3%  |      |                  |
|                                                                                                               | $I_{OUT} = 0.5$ to $500 \text{ mA}$ , $T_R = T_F = 100 \text{ ns}$ , $C_{OUT} = 47 \mu\text{F}$ , $L = 1 \mu\text{H}$                                                                                               |       | 3%  |      |                  |
| $I_{OUTmax}$ Rated output current, SMPS1&2<br>Maximum output current, ECO mode                                | Advance thermal design is required to avoid thermal shut down                                                                                                                                                       |       |     | 7    | A                |
|                                                                                                               |                                                                                                                                                                                                                     |       |     | 5    | mA               |
| $I_{LIM HS FET}$ High-side MOSFET forward current limit                                                       | SMPS1&2, each phase                                                                                                                                                                                                 | 4.2   | 4.5 |      | A                |
| $I_{LIM LS FET}$ Low-side MOSFET forward current limit                                                        | SMPS1&2, each phase                                                                                                                                                                                                 |       | 4.2 |      | A                |
| $R_{DS(ON) HS FET}$ N-channel MOSFET on-resistance, high-side FET                                             | SMPS1&2, each phase                                                                                                                                                                                                 |       | 50  |      | mΩ               |
| $R_{DS(ON) LS FET}$ N-channel MOSFET on-resistance, low-side FET                                              | SMPS1&2, each phase                                                                                                                                                                                                 |       | 39  |      | mΩ               |
| Output voltage slew rate <sup>(3)</sup>                                                                       | RANGE = 1                                                                                                                                                                                                           |       | 2.5 |      | mV/μs            |

- (1) SMPS1 and SMPS2 can be used in parallel in dual-phase mode to be able to multiply the output current by 2, and the converter is named SMPS1&2. The naming SMPS1 and SMPS2 is used when the bucks are configured as a separate buck converters.
- (2) Additional information about how this parameter is specified is located in [§ 6.2.2](#).
- (3) This slew rate refers to the rate at which the output voltage changes from one voltage level to another voltage after startup is complete.

## Electrical Characteristics — SMPS1&2 in Dual-Phase Configuration (continued)

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).<sup>(1)</sup>

| PARAMETER                                                  | TEST CONDITIONS                                                                                                             | MIN | TYP                                 | MAX  | UNIT          |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----|-------------------------------------|------|---------------|
| $R_{DIS}$ Pulldown discharge resistance output             | SMPSx_FDBK, SMPS turned off<br>SMPSx_SW, SMPS turned off. Pulldown is at master phase output.                               |     | 375<br>9                            |      | $\Omega$      |
| $R_{SENSE}$ Input resistance for remote sense (sense line) | Between SMPS1_FDBK and SMPS2_FDBK                                                                                           | 260 |                                     | 2200 | k $\Omega$    |
| $I_{Qoff}$ Quiescent current – Off mode                    | $I_{LOAD} = 0\text{ mA}$                                                                                                    |     | 0.1                                 | 2.5  | $\mu\text{A}$ |
| $I_{Qon(ON)}$ Quiescent current – On mode, dual phase      | ECO mode, device not switching, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$                                          |     | 15                                  | 25   | $\mu\text{A}$ |
|                                                            | ECO mode, device not switching, $85^\circ\text{C} < T_A \leq 105^\circ\text{C}$                                             |     | 18                                  | 25.5 |               |
|                                                            | PWM mode, $I_{LOAD} = 0\text{ mA}$ , $V_{IN} = 3.8\text{ V}$ , $V_{OUT} = 1\text{ V}$ , device switching, 1-phase operation |     | 11                                  |      | $\text{mA}$   |
| $V_{SMPSPG}$ Powergood threshold SMPS1, SMPS2              | SMPS output voltage rising, referenced to programmed output voltage                                                         |     | -4%                                 |      |               |
|                                                            | SMPS output voltage falling, referenced to programmed output voltage                                                        |     | -16%                                |      |               |
| $I_{L\_AVG\_COMP}$ Powergood: GPADC monitoring SMPS1&2     | IL_AVG_COMP_rising                                                                                                          |     | 6                                   |      | A             |
|                                                            | IL_AVG_COMP_falling                                                                                                         |     | $I_{L\_AVG\_COMP\_P\_rising} - 5\%$ |      |               |

## 4.7 Electrical Characteristics — SMPS1, SMPS2, SMPS3, SMPS4, and SMPS5 Stand-Alone Regulators

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                                                                                     | TEST CONDITIONS                                                                                                                                               | MIN   | TYP | MAX  | UNIT             |
|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----|------|------------------|
| Input capacitance (C8, C9, C10, C11, C12)                                                                     |                                                                                                                                                               |       | 4.7 |      | $\mu\text{F}$    |
| Output capacitance (C13, C14, C15, C16, C17) <sup>(1)</sup>                                                   |                                                                                                                                                               | 33    | 47  | 57   | $\mu\text{F}$    |
| $C_{ESR}$ Filtering capacitor DC ESR                                                                          | 1 to 10 MHz                                                                                                                                                   |       | 2   | 10   | m $\Omega$       |
| Output filter inductance (L1, L2, L3, L4, L5)                                                                 | SMPSx_SW                                                                                                                                                      | 0.7   | 1   | 1.3  | $\mu\text{H}$    |
| $DCR_L$ Filter inductor DC resistance                                                                         |                                                                                                                                                               |       | 50  | 100  | m $\Omega$       |
| $V_{IN}$ (SMPSx) Input voltage range, SMPSx_IN                                                                | VSYS (VCCA)                                                                                                                                                   | 3.135 |     | 5.25 | V                |
| $V_{OUT}$ (SMPSx) Output voltage, programmable, SMPSx                                                         | RANGE = 0 (value for RANGE must not be changed when SMPS is active). In ECO mode the output voltage value is fixed (defined before ECO mode is enabled).      | 0.7   |     | 1.65 | V                |
|                                                                                                               | RANGE = 1 (value for RANGE must not be changed when SMPS is active). In ECO mode the output voltage value is fixed (defined before ECO mode is enabled).      | 1.0   |     | 3.3  |                  |
|                                                                                                               | Step size, $0.7\text{ V} \leq V_{OUT} \leq 1.65\text{ V}$                                                                                                     |       | 10  |      | mV               |
|                                                                                                               | Step size, $1\text{ V} \leq V_{OUT} \leq 3.3\text{ V}$                                                                                                        |       | 20  |      |                  |
| DC output voltage accuracy, includes voltage references, DC load and line regulation, process and temperature | ECO mode                                                                                                                                                      | -3%   |     | 4%   |                  |
|                                                                                                               | PWM mode                                                                                                                                                      | -1%   |     | 2%   |                  |
| Ripple                                                                                                        | Max load, $V_{IN} = 3.8\text{ V}$ , $V_{OUT} = 1.2\text{ V}$ , $ESR_{COUT} = 2\text{ m}\Omega$ , measured with 20-MHz LPF                                     |       | 8   |      | mV <sub>pp</sub> |
| $DC_{LNR}$ DC line regulation, $\Delta V_{OUT} / V_{OUT}$                                                     | $V_{IN} = V_{INmin}$ to $V_{INmax}$                                                                                                                           |       | 0.1 |      | %/V              |
| $DC_{LDR}$ DC load regulation, $\Delta V_{OUT} / V_{OUT}$                                                     | $I_{OUT} = 0$ to $I_{OUTmax}$                                                                                                                                 |       | 0.1 |      | %/A              |
| $T_{LDSR}$ Transient load step response                                                                       | SMPS1, SMPS2, SMPS3, SMPS5, $I_{OUT} = 0.5$ to $500\text{ mA}$ , $T_R = T_F = 100\text{ ns}$ , $C_{OUT} = 47\text{ }\mu\text{F}$ , $L = 1\text{ }\mu\text{H}$ |       | 3%  |      |                  |
| $T_{LDSR}$ Transient load step response                                                                       | SMPS4, $I_{OUT} = 0.5$ to $500\text{ mA}$ , $T_R = T_F = 1\text{ }\mu\text{s}$ , $C_{OUT} = 47\text{ }\mu\text{F}$ , $L = 1\text{ }\mu\text{H}$               |       | 3%  |      |                  |
| $I_{OUTmax(SMPS1,2)}$ Rated output current, SMPS1, SMPS2                                                      | Advance thermal design is required to avoid thermal shut down                                                                                                 |       |     | 3.5  | A                |
| $I_{OUTmax(SMPS3)}$ Rated output current, SMPS3                                                               | Advance thermal design is required to avoid thermal shut down                                                                                                 |       |     | 3    | A                |
| $I_{OUTmax(SMPS4)}$ Rated output current, SMPS4                                                               | Advance thermal design is required to avoid thermal shut down                                                                                                 |       |     | 1.5  | A                |
| $I_{OUTmax(SMPS5)}$ Rated output current, SMPS5                                                               | Advance thermal design is required to avoid thermal shut down                                                                                                 |       |     | 2    | A                |
| $I_{OUTmax(ECO)}$ Maximum output current, ECO mode                                                            | Advance thermal design is required to avoid thermal shut down                                                                                                 |       |     | 5    | $\text{mA}$      |
| $I_{LIM\ HS\ FET}$ High-side MOSFET forward current limit                                                     | SMPS1, SMPS2, SMPS3                                                                                                                                           | 4.2   | 4.5 |      | A                |
|                                                                                                               | SMPS4                                                                                                                                                         | 2.2   | 2.5 |      |                  |
|                                                                                                               | SMPS5                                                                                                                                                         | 2.7   | 3   |      |                  |
| $I_{LIM\ LS\ FET}$ Low-side MOSFET forward current limit                                                      | SMPS1, SMPS2, SMPS3                                                                                                                                           |       | 4.2 |      | A                |
|                                                                                                               | SMPS4                                                                                                                                                         |       | 2.2 |      |                  |
|                                                                                                               | SMPS5                                                                                                                                                         |       | 2.7 |      |                  |
| $R_{DS(ON)\ HS\ FET}$ N-channel MOSFET on-resistance (high-side FET)                                          | SMPS1, SMPS2, SMPS3, SMPS5                                                                                                                                    |       | 50  |      | $\text{m}\Omega$ |
|                                                                                                               | SMPS4                                                                                                                                                         |       | 110 |      | $\text{m}\Omega$ |

(1) Additional information about how this parameter is specified is located in [§ 6.2.2](#).

## Electrical Characteristics — SMPS1, SMPS2, SMPS3, SMPS4, and SMPS5 Stand-Alone Regulators (continued)

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER              | TEST CONDITIONS                                          | MIN                                                                                                      | TYP                               | MAX  | UNIT        |
|------------------------|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-----------------------------------|------|-------------|
| $R_{DS(ON)}$ LS FET    | N-channel MOSFET on-resistance (low-side FET)            | SMPS1, SMPS2, SMPS3, SMPS5                                                                               | 39                                |      | m $\Omega$  |
|                        |                                                          | SMPS4                                                                                                    | 79                                |      |             |
|                        | Overshoot during turn-on                                 |                                                                                                          |                                   | 5%   |             |
|                        | Output voltage slew rate <sup>(2)</sup>                  |                                                                                                          | 2.5                               |      | mV/ $\mu$ s |
| $R_{DIS}$              | Pulldown discharge resistance at SMPSx output            | SMPSx_FDBK, SMPS turned off                                                                              | 375                               |      | $\Omega$    |
|                        |                                                          | SMPSx_SW, SMPS turned off                                                                                | 9                                 | 22   |             |
| $I_{Qoff}$             | Quiescent current – Off mode                             | $I_{LOAD} = 0$ mA                                                                                        | 0.1                               | 2.5  | $\mu$ A     |
| $I_{Qon(SMPS1,2,3,5)}$ | Quiescent current – On mode - SMPS1, SMPS2, SMPS3, SMPS5 | ECO mode, device not switching, $V_{OUT} < 1.8$ V $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$     | 15                                | 25   | $\mu$ A     |
|                        |                                                          | ECO mode, device not switching, $V_{OUT} < 1.8$ V $85^\circ\text{C} < T_A \leq 105^\circ\text{C}$        | 18                                | 25.5 |             |
|                        |                                                          | ECO mode, device not switching, $V_{OUT} \geq 1.8$ V, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ | 16.5                              | 25   |             |
|                        |                                                          | ECO mode, device not switching, $V_{OUT} \geq 1.8$ V, $85^\circ\text{C} < T_A \leq 105^\circ\text{C}$    | 19.5                              | 25.5 |             |
|                        |                                                          | FORCED_PWM mode, $I_{LOAD} = 0$ mA, $V_{IN} = 3.8$ V, $V_{OUT} = 1$ V, device switching                  | 11                                |      | mA          |
| $I_{Qon(SMPS4)}$       | Quiescent current – On mode - SMPS4                      | ECO mode, device not switching, $V_{OUT} < 1.8$ V $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$     | 15                                | 24   | $\mu$ A     |
|                        |                                                          | ECO mode, device not switching, $V_{OUT} < 1.8$ V $85^\circ\text{C} < T_A \leq 105^\circ\text{C}$        | 18                                | 25   |             |
|                        |                                                          | ECO mode, device not switching, $V_{OUT} \geq 1.8$ V, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ | 16.5                              | 24   |             |
|                        |                                                          | ECO mode, device not switching, $V_{OUT} \geq 1.8$ V, $85^\circ\text{C} < T_A \leq 105^\circ\text{C}$    | 19.5                              | 25   |             |
|                        |                                                          | FORCED_PWM mode, $I_{LOAD} = 0$ mA, $V_{IN} = 3.8$ V, $V_{OUT} = 1$ V, device switching                  | 7                                 |      | mA          |
| $V_{SMPSPG}$           | Powergood threshold                                      | SMPS output voltage rising, referenced to programmed output voltage                                      | -4%                               |      |             |
|                        |                                                          | SMPS output voltage falling, referenced to programmed output voltage                                     | -16%                              |      |             |
| $I_{L\_AVG\_COMP}$     | Powergood: GPADC monitoring                              | $I_{L\_AVG\_COMP\_rising}$ - SMPS1, SMPS2                                                                | 3                                 |      | A           |
|                        |                                                          | $I_{L\_AVG\_COMP\_rising}$ - SMPS3                                                                       | 3                                 |      | A           |
|                        |                                                          | $I_{L\_AVG\_COMP\_rising}$ - SMPS5                                                                       | 2                                 |      | A           |
|                        |                                                          | $I_{L\_AVG\_COMP\_falling}$ - SMPS1, SMPS2, SMPS3                                                        | $I_{L\_AVG\_COMP\_P\_rising}$ -5% |      | A           |
|                        |                                                          | $I_{L\_AVG\_COMP\_falling}$ - SMPS5                                                                      | $I_{L\_AVG\_COMP\_P\_rising}$ -8% |      | A           |

(2) This slew rate refers to the rate at which the output voltage changes from one voltage level to another voltage after startup is complete.

## 4.8 Electrical Characteristics — Reference Generator (Bandgap)

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER           | TEST CONDITIONS              | MIN | TYP  | MAX | UNIT    |
|---------------------|------------------------------|-----|------|-----|---------|
| Filtering capacitor | Connected from VBG to REFGND | 30  | 100  | 150 | nF      |
| Output voltage      |                              |     | 0.85 |     | V       |
| Ground current      |                              |     | 20   | 40  | $\mu$ A |

## 4.9 Electrical Characteristics — 32-kHz RC Oscillators and SYNCCLKOUT Output Buffers

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                       | TEST CONDITIONS | MIN | TYP | MAX | UNIT    |
|---------------------------------|-----------------|-----|-----|-----|---------|
| <b>32-kHz RC OSCILLATOR</b>     |                 |     |     |     |         |
| Active current consumption      |                 |     | 4   | 8   | $\mu$ A |
| Power down current              |                 |     |     | 30  | nA      |
| <b>SYNCCLKOUT OUTPUT BUFFER</b> |                 |     |     |     |         |
| Logic output external load      |                 | 5   | 35  | 50  | pF      |

## 4.10 Electrical Characteristics — 12-Bit Sigma-Delta ADC

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                                |                                                                               | TEST CONDITIONS                                                                                                                        | MIN    | TYP   | MAX   | UNIT   |
|----------------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------|-------|-------|--------|
| I <sub>QON</sub>                                         | Current consumption                                                           | During conversion                                                                                                                      |        | 1500  | 1600  | μA     |
| I <sub>QOFF</sub>                                        | Off mode current                                                              | GPADC is not enabled (no conversion)                                                                                                   |        |       | 1     | μA     |
| Gain error                                               |                                                                               | Without calibration (inputs without scaler)                                                                                            | −3.5%  |       | 3.5%  |        |
|                                                          |                                                                               | Without calibration (inputs with scaler)                                                                                               | −4.5%  |       | 4.5%  |        |
|                                                          |                                                                               | With calibration, T <sub>A</sub> = 27°C, VCCA = 5.25V                                                                                  | −0.95% |       | 0.95% |        |
| Offset                                                   |                                                                               | Without calibration                                                                                                                    | −65    |       | 65    | LSB    |
|                                                          |                                                                               | With calibration, T <sub>A</sub> = 27°C, VCCA = 5.25V                                                                                  | −17    |       | 17    |        |
|                                                          | Gain error drift (after trimming, including reference voltage)                | Temperature and supply                                                                                                                 | −0.6%  |       | 0.6%  |        |
|                                                          | Offset drift after trimming                                                   | Temperature and supply                                                                                                                 | −2     |       | 2     | LSB    |
| INL                                                      | Integral nonlinearity                                                         | Best fitting                                                                                                                           | −3.5   |       | 3.5   | LSB    |
| DNL                                                      | Differential nonlinearity                                                     |                                                                                                                                        | −1     |       | 3.5   | LSB    |
|                                                          | Input capacitance                                                             | ADCIN1, ADCIN2                                                                                                                         |        | 0.5   |       | pF     |
| Source input impedance                                   |                                                                               | Source resistance without capacitance                                                                                                  |        |       | 20    | kΩ     |
|                                                          |                                                                               | Source capacitance with > 20-kΩ source resistance                                                                                      | 100    |       |       | nF     |
| Input range (sigma-delta ADC)                            |                                                                               | Typical range                                                                                                                          | 0      |       | 1.25  | V      |
|                                                          |                                                                               | Assured range without saturation                                                                                                       | 0.01   |       | 1.215 |        |
| SMPS CURRENT MONITORING (GPADC CHANNEL 4) <sup>(1)</sup> |                                                                               |                                                                                                                                        |        |       |       |        |
|                                                          | Channel 4 SMPS output current measurement gain factor, I <sub>FS0</sub>       |                                                                                                                                        |        | 3.958 |       | A      |
|                                                          | Channel 4 SMPS output current measurement current offset, I <sub>OS0</sub>    |                                                                                                                                        |        | 0.652 |       | A      |
|                                                          | Channel 4 SMPS output current measurement temperature coefficient, TC_R0      |                                                                                                                                        |        | −1090 |       | ppm/°C |
|                                                          | SMPS output current measurement accuracy, I <sub>err</sub> (%), GPADC trimmed | I <sub>LOAD_error</sub> (%) = I <sub>LOAD_meas</sub> / I <sub>LOAD</sub> × 100.<br>I <sub>LOAD</sub> = 3 A for SMPS1/SMPS2/SMPS3. 25°C | −8%    |       | 8%    |        |
|                                                          | SMPS output current measurement accuracy, I <sub>err</sub> (%), GPADC trimmed | I <sub>LOAD_error</sub> (%) = I <sub>LOAD_meas</sub> / I <sub>LOAD</sub> × 100.<br>I <sub>LOAD</sub> = 2 A for SMPS5. 25°C             | −10%   |       | 10%   |        |

- (1) **Basic equation for result:**  $I_{LOAD} = I_{FS} \times \text{GPADC code} / (2^{12} - 1) - I_{OS}$ , where K is the number of SMPS active phases,  $I_{FS} = I_{FS0} \times K$  and  $I_{OS} = I_{OS0} \times K$   
**Temperature compensated result:**  $I_{LOAD} = I_{FS} \times \text{GPADC code} / ((2^{12} - 1) \times (1 + TC_{R0} \times (TEMP - 25))) - I_{OS}$

## 4.11 Electrical Characteristics — Thermal Monitoring and Shutdown

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                     |                                                                           | TEST CONDITIONS                                |     | MIN | TYP | MAX | UNIT |
|-------------------------------|---------------------------------------------------------------------------|------------------------------------------------|-----|-----|-----|-----|------|
| Hot-die temperature threshold | HDSEL[1:0] = 00                                                           | Rising threshold                               | 104 | 117 | 127 | °C  |      |
|                               |                                                                           | Falling threshold                              | 95  | 108 | 119 |     |      |
|                               | HDSEL[1:0] = 01                                                           | Rising threshold                               | 109 | 121 | 132 |     |      |
|                               |                                                                           | Falling threshold                              | 99  | 112 | 123 |     |      |
|                               | HDSEL[1:0] = 10                                                           | Rising threshold                               | 113 | 125 | 136 |     |      |
|                               |                                                                           | Falling threshold                              | 104 | 116 | 128 |     |      |
|                               | HDSEL[1:0] = 11                                                           | Rising threshold                               | 117 | 130 | 143 |     |      |
|                               |                                                                           | Falling threshold                              | 108 | 120 | 132 |     |      |
| Thermal shutdown threshold    | Rising threshold                                                          |                                                | 133 | 148 | 163 | °C  |      |
|                               | Falling threshold                                                         |                                                | 111 | 123 | 135 |     |      |
| I <sub>QOFF</sub>             | Off ground current (two sensors on the die, specification for one sensor) | Device in OFF state, VCCA = 3.8 V, T = 25°C    |     |     | 0.1 | μA  |      |
|                               |                                                                           | Device in OFF state                            |     |     | 0.5 |     |      |
| I <sub>QON</sub>              | On ground current (two sensors on the die, specification for one sensor)  | Device in ACTIVE state, VCCA = 3.8 V, T = 25°C |     | 7   | 15  | μA  |      |
|                               |                                                                           | Device in ACTIVE state, GPADC measurement      |     | 25  | 40  |     |      |

## 4.12 Electrical Characteristics — System Control Thresholds

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                                        | TEST CONDITIONS             | MIN  | TYP  | MAX  | UNIT |
|------------------------------------------------------------------|-----------------------------|------|------|------|------|
| POR (power-on reset) rising-edge threshold                       | Measured on VCCA pin        | 2.0  | 2.15 | 2.5  | V    |
| POR falling-edge threshold                                       | Measured on VCCA pin        | 1.7  | 2    | 2.46 | V    |
| POR hysteresis                                                   | Rising edge to falling edge | 40   |      | 300  | mV   |
| VSYS_LO, falling threshold, measured on VCCA pin                 | Voltage range, 50-mV steps  | 2.75 |      | 3.1  | V    |
|                                                                  | Voltage accuracy            | –50  |      | 95   | mV   |
| VSYS_LO hysteresis                                               | Falling edge to rising edge | 75   |      | 460  | mV   |
| VSYS_HI, measured on VCC_SENSE pin                               | Voltage range, 50-mV steps  | 2.9  |      | 3.85 | V    |
|                                                                  | Voltage accuracy            | –70  |      | 140  | mV   |
| VSYS_MON, measured on VCC_SENSE pin                              | Voltage range, 50-mV steps  | 2.75 |      | 4.6  | V    |
|                                                                  | Voltage accuracy            | –70  |      | 140  | mV   |
| VBUS detection (VBUS wake-up comparator threshold [plug detect]) | Rising threshold            | 2.9  |      | 3.6  | V    |
|                                                                  | Falling threshold           | 2.8  |      | 3.3  | V    |

## 4.13 Electrical Characteristics — Current Consumption

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                                | TEST CONDITIONS                                                                                                                              | MIN | TYP | MAX | UNIT          |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|---------------|
| <b>OFF MODE</b>                                          |                                                                                                                                              |     |     |     |               |
| $I_{\text{OFF}}$ Device Off Mode Current Consumption     | VCCA = 3.8 V, Device in OFF mode.                                                                                                            |     | 20  | 55  | $\mu\text{A}$ |
| <b>SLEEP MODE</b>                                        |                                                                                                                                              |     |     |     |               |
| $I_{\text{SLEEP}}$ Device Sleep Mode Current Consumption | VCCA = 3.8 V, PLL disabled, Device in Sleep mode. SMPS4 and SMPS5 enabled in ECO mode, no load, all other external supply rails are disabled |     | 90  | 150 | $\mu\text{A}$ |

## 4.14 Electrical Characteristics — Digital Input Signal Parameters

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted). (VIO to refers to VIO\_IN pin, VSYS to refers to VCCA pin)

| PARAMETER                                                                                                              | TEST CONDITIONS | MIN                        | TYP  | MAX                           | UNIT |
|------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------|------|-------------------------------|------|
| <b>PWRON</b>                                                                                                           |                 |                            |      |                               |      |
| $V_{\text{IL(VSYS)}}$ Low-level input voltage related to VSYS (VCCA pin reference)                                     |                 | –0.3                       | 0    | $0.35 \times \text{VSYS}$     | V    |
| $V_{\text{IH(VSYS)}}$ High-level input voltage related to VSYS (VCCA pin reference)                                    |                 | $0.65 \times \text{VSYS}$  | VSYS | $\text{VSYS} + 0.3 \leq 5.25$ | V    |
| Hysteresis related to VSYS                                                                                             |                 | $0.025 \times \text{VSYS}$ |      |                               | V    |
| <b>GPIO_2, GPIO_4, ENABLE1, I2C2_SCL_SCE, I2C2_SDA_SDO, I2C1_SCL_SCK, I2C1_SDA_SDI</b>                                 |                 |                            |      |                               |      |
| $V_{\text{IL(VIO)}}$ Low-level input voltage related to VIO (VIO_IN pin reference)                                     |                 | –0.3                       | 0    | $0.3 \times \text{VIO}$       | V    |
| $V_{\text{IH(VIO)}}$ High-level input voltage related to VIO (VIO_IN pin reference)                                    |                 | $0.7 \times \text{VIO}$    | VIO  | $\text{VIO} + 0.3$            | V    |
| Hysteresis related to VIO                                                                                              |                 | $0.045 \times \text{VIO}$  |      |                               | V    |
| <b>BOOT, SYNCDCDC, ENABLE2, GPIO_0, GPIO_1, GPIO_3, GPIO_5, GPIO_6, NRESWARM, POWERHOLD, PWRDOWN, RESET_IN, NSLEEP</b> |                 |                            |      |                               |      |
| $V_{\text{IL(VRTC)}}$ Low-level input voltage related to VRTC                                                          |                 | –0.3                       | 0    | $0.3 \times \text{VRTC}$      | V    |
| $V_{\text{IH(VRTC)}}$ High-level input voltage related to VRTC                                                         |                 | $0.7 \times \text{VRTC}$   | VRTC | $\text{VRTC} + 0.3$           | V    |
| Hysteresis related to VRTC                                                                                             |                 | $0.05 \times \text{VRTC}$  |      |                               | V    |

## 4.15 Electrical Characteristics — Digital Output Signal Parameters

$T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , typical values are at  $T_A = 27^{\circ}\text{C}$  (unless otherwise noted). (VIO to refers to VIO\_IN pin, VSYS to refers to VCCA pin)

| PARAMETER                                                                            |                                                   | TEST CONDITIONS |           | MIN  | TYP       | MAX | UNIT |
|--------------------------------------------------------------------------------------|---------------------------------------------------|-----------------|-----------|------|-----------|-----|------|
| GPIO_2, GPIO_4, REGEN2, INT, RESET_OUT                                               |                                                   |                 |           |      |           |     |      |
| Low-level output voltage, push-pull and open-drain                                   | I <sub>OL</sub> = 2 mA                            |                 |           | 0.45 |           | V   |      |
|                                                                                      | I <sub>OL</sub> = 100 μA                          |                 |           | 0.2  |           |     |      |
| High-level output voltage, push-pull (VIO_IN pin reference)                          | I <sub>OH</sub> = 2 mA                            | VIO – 0.45      |           | VIO  |           | V   |      |
|                                                                                      | I <sub>OH</sub> = 100 μA                          | VIO – 0.2       |           | VIO  |           |     |      |
| Supply for external pullup resistor, open drain                                      |                                                   |                 |           | VIO  |           | V   |      |
| SYNCLKOUT                                                                            |                                                   |                 |           |      |           |     |      |
| V <sub>OL</sub> (SYNCLKOUT) Low-level output voltage, push-pull                      | I <sub>OL</sub> = 1 mA                            |                 |           | 0.45 |           | V   |      |
|                                                                                      | I <sub>OL</sub> = 100 μA                          |                 |           | 0.2  |           |     |      |
| V <sub>OH</sub> (SYNCLKOUT) High-level output voltage , push-pull                    | I <sub>OH</sub> = 1 mA                            | VRTC – 0.45     |           | VRTC |           | V   |      |
|                                                                                      | I <sub>OH</sub> = 100 μA                          | VRTC – 0.2      |           | VRTC |           |     |      |
| GPIO_0, GPIO_1, GPIO_3, GPIO_5, REGEN1                                               |                                                   |                 |           |      |           |     |      |
| Low-level output voltage, open-drain                                                 | External pullup to VRTC, I <sub>OL</sub> = 2 mA   |                 | 0.45      |      | V         |     |      |
|                                                                                      | External pullup to VRTC, I <sub>OL</sub> = 100 μA |                 | 0.2       |      |           |     |      |
| Supply for external pullup resistor, open-drain                                      |                                                   |                 |           | 5.25 |           | V   |      |
| GPIO_6, POWERGOOD, REGEN3                                                            |                                                   |                 |           |      |           |     |      |
| Low-level output voltage, open-drain                                                 | External pullup to VRTC, I <sub>OL</sub> = 2 mA   |                 | 0.45      |      | V         |     |      |
|                                                                                      | External pullup to VRTC, I <sub>OL</sub> = 100 μA |                 | 0.2       |      |           |     |      |
| Supply for external pullup resistor, open-drain                                      |                                                   |                 |           | VRTC |           | V   |      |
| I2C1_SDA_SDI, I2C2_SDA_SDO                                                           |                                                   |                 |           |      |           |     |      |
| V <sub>OL</sub> (VIO) Low-level output voltage related to VIO (VIO_IN pin reference) | 3-mA sink current                                 |                 | 0.1 × VIO |      | 0.2 × VIO | V   |      |
| C <sub>B</sub> Capacitive load for I2C2_SDA_SDO                                      | SPI Interface mode is selected                    |                 |           |      | 20        | pF  |      |

## 4.16 I/O Pullup and Pulldown Characteristics

Over operating free-air temperature range (unless otherwise noted). (VIO to refers to VIO\_IN pin, VSYS to refers to VCCA pin)

| PARAMETER                                | TEST CONDITIONS    |           | MIN | TYP | MAX  | UNIT       |
|------------------------------------------|--------------------|-----------|-----|-----|------|------------|
| PWRON signal, fixed pullup               | VSYS pullup supply | PULL UP   | 55  | 120 | 370  | k $\Omega$ |
| GPIO_0, GPIO_1, GPIO3, and GPIO5 signals | VRTC pullup supply | PULL DOWN | 180 | 400 | 900  | k $\Omega$ |
| GPIO_2 and GPIO_4 signals                | VIO pullup supply  | PULL UP   | 170 | 400 | 1200 | k $\Omega$ |
|                                          |                    | PULL DOWN | 170 | 400 | 950  |            |
| GPIO_6 signal                            | VRTC pullup supply | PULL UP   | 170 | 400 | 1200 | k $\Omega$ |
|                                          |                    | PULL DOWN | 180 | 400 | 900  |            |

## 4.17 Electrical Characteristics — I<sup>2</sup>C Interface

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                             | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------------------|-----------------|-----|-----|-----|------|
| $C_B$ Capacitive load for SDA and SCL |                 |     |     | 400 | pF   |

## 4.18 Timing Requirements — I<sup>2</sup>C Interface

Over operating free-air temperature range, typical values are at T<sub>A</sub> = 27°C (unless otherwise noted). <sup>(1)(2)(3)(4)</sup>

|                      |                                                                                           | MIN                                                            | MAX                     | UNIT |    |
|----------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------|-------------------------|------|----|
| f <sub>(SCL)</sub>   | SCL clock frequency                                                                       | Standard mode                                                  | 100                     | kHz  |    |
|                      |                                                                                           | Fast mode                                                      | 400                     | kHz  |    |
|                      |                                                                                           | High-speed mode (write operation), C <sub>B</sub> – 100 pF max | 3.4                     | MHz  |    |
|                      |                                                                                           | High-speed mode (read operation), C <sub>B</sub> – 100 pF max  | 3.4                     | MHz  |    |
|                      |                                                                                           | High-speed mode (write operation), C <sub>B</sub> – 400 pF max | 1.7                     | MHz  |    |
|                      |                                                                                           | High-speed mode (read operation), C <sub>B</sub> – 400 pF max  | 1.7                     | MHz  |    |
| t <sub>BUF</sub>     | Bus free time between a stop (P) and start (S) condition                                  | Standard mode                                                  | 4.7                     | μs   |    |
|                      |                                                                                           | Fast mode                                                      | 1.3                     | μs   |    |
| t <sub>HD(STA)</sub> | Hold time (Repeated) start condition                                                      | Standard mode                                                  | 4                       | μs   |    |
|                      |                                                                                           | Fast mode                                                      | 600                     | ns   |    |
|                      |                                                                                           | High-speed mode                                                | 160                     | ns   |    |
| t <sub>LOW</sub>     | Low period of the SCL clock                                                               | Standard mode                                                  | 4.7                     | μs   |    |
|                      |                                                                                           | Fast mode                                                      | 1.3                     | μs   |    |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 100 pF max                   | 160                     | ns   |    |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 400 pF max                   | 320                     | ns   |    |
| t <sub>HIGH</sub>    | High period of the SCL clock                                                              | Standard mode                                                  | 4                       | μs   |    |
|                      |                                                                                           | Fast mode                                                      | 600                     | ns   |    |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 100 pF max                   | 60                      | ns   |    |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 400 pF max                   | 120                     | ns   |    |
| t <sub>SU(STA)</sub> | Setup time for a repeated start (Sr) condition                                            | Standard mode                                                  | 4.7                     | μs   |    |
|                      |                                                                                           | Fast mode                                                      | 600                     | ns   |    |
|                      |                                                                                           | High-speed mode                                                | 160                     | ns   |    |
| t <sub>SU(DAT)</sub> | Data setup time                                                                           | Standard mode                                                  | 250                     | ns   |    |
|                      |                                                                                           | Fast mode                                                      | 100                     | ns   |    |
|                      |                                                                                           | High-speed mode                                                | 10                      | ns   |    |
| t <sub>HD(DAT)</sub> | Data hold time                                                                            | Standard mode                                                  | 0                       | 3.45 | μs |
|                      |                                                                                           | Fast mode                                                      | 0                       | 0.9  | μs |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 100 pF max                   | 0                       | 70   | ns |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 400 pF max                   | 0                       | 150  | ns |
| t <sub>RCL</sub>     | Rise time of the SCL signal                                                               | Standard mode                                                  | 20 + 0.1 C <sub>B</sub> | 1000 | ns |
|                      |                                                                                           | Fast mode                                                      | 20 + 0.1 C <sub>B</sub> | 300  | ns |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 100 pF max                   | 10                      | 40   | ns |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 400 pF max                   | 20                      | 80   | ns |
| t <sub>RCL1</sub>    | Rise time of the SCL signal after a Repeated Start condition and after an acknowledge bit | Standard mode                                                  | 20 + 0.1 C <sub>B</sub> | 1000 | ns |
|                      |                                                                                           | Fast mode                                                      | 20 + 0.1 C <sub>B</sub> | 300  | ns |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 100 pF max                   | 10                      | 80   | ns |
|                      |                                                                                           | High-speed mode, C <sub>B</sub> – 400 pF max                   | 20                      | 160  | ns |

(1) Specified by design. Not tested in production.

(2) All values referred to V<sub>IHmin</sub> and V<sub>IHmax</sub> levels.

(3) For bus line loads C<sub>B</sub> between 100 and 400 pF, the timing parameters must be linearly interpolated.

(4) A device must internally provide a data hold time to bridge the undefined part between V<sub>IH</sub> and V<sub>IL</sub> of the falling edge of the SCLH signal. An input circuit with a threshold as low as possible for the falling edge of the SCLH signal minimizes this hold time.

## Timing Requirements — I<sup>2</sup>C Interface (continued)

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted). (1)(2)(3)(4)

|                                               |                                            | MIN            | MAX  | UNIT          |
|-----------------------------------------------|--------------------------------------------|----------------|------|---------------|
| $t_{FCL}$ Fall time of the SCL signal         | Standard mode                              | $20 + 0.1 C_B$ | 300  | ns            |
|                                               | Fast mode                                  | $20 + 0.1 C_B$ | 300  | ns            |
|                                               | High-speed mode, $C_B - 100\text{ pF max}$ | 10             | 40   | ns            |
|                                               | High-speed mode, $C_B - 400\text{ pF max}$ | 20             | 80   | ns            |
| $t_{RDA}$ Rise time of the SDA signal         | Standard mode                              | $20 + 0.1 C_B$ | 1000 | ns            |
|                                               | Fast mode                                  | $20 + 0.1 C_B$ | 300  | ns            |
|                                               | High-speed mode, $C_B - 100\text{ pF max}$ | 10             | 80   | ns            |
|                                               | High-speed mode, $C_B - 400\text{ pF max}$ | 20             | 160  | ns            |
| $t_{FDA}$ Fall time of the SDA signal         | Standard mode                              | $20 + 0.1 C_B$ | 300  | ns            |
|                                               | Fast mode                                  | $20 + 0.1 C_B$ | 300  | ns            |
|                                               | High-speed mode, $C_B - 100\text{ pF max}$ | 10             | 80   | ns            |
|                                               | High-speed mode, $C_B - 400\text{ pF max}$ | 20             | 160  | ns            |
| $t_{SU(STO)}$ Setup time for a stop condition | Standard mode                              | 4              |      | $\mu\text{s}$ |
|                                               | Fast mode                                  | 600            |      | ns            |
|                                               | High-speed mode                            | 160            |      | ns            |

## 4.19 Timing Requirements — SPI

See [Figure 4-3](#) for the SPI timing diagram.

|              |                                                  | MIN | MAX | UNIT |
|--------------|--------------------------------------------------|-----|-----|------|
| $t_{cesu}$   | Chip-select set up time                          | 30  |     | ns   |
| $t_{cehld}$  | Chip-select hold time                            | 30  |     | ns   |
| $t_{ckper}$  | Clock cycle time                                 | 67  | 100 | ns   |
| $t_{ckhigh}$ | Clock high typical pulse duration                | 20  |     | ns   |
| $t_{cklow}$  | Clock low typical pulse duration                 | 20  |     | ns   |
| $t_{sisu}$   | Input data set up time, before clock active edge | 5   |     | ns   |
| $t_{sihld}$  | Input data hold time, after clock active edge    | 5   |     | ns   |
| $t_{dr}$     |                                                  |     | 15  | ns   |
| $t_{CE}$     | Time from CE going low to CE going high          | 67  |     | ns   |
|              | Capacitive load on pin SDO                       |     | 30  | pF   |

## 4.20 Switching Characteristics — LDO Regulators

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER | TEST CONDITIONS             | MIN                                                        | TYP | MAX | UNIT              |
|-----------|-----------------------------|------------------------------------------------------------|-----|-----|-------------------|
| $T_{on}$  | Turn-on time                | $I_{OUT} = 0$ , $V_{OUT} = 0.1\text{ V up to } V_{OUTmin}$ |     | 100 | 500 $\mu\text{s}$ |
| $T_{off}$ | Turn-off time (except VRTC) | $I_{OUT} = 0$ , $V_{OUT}$ down to $10\% \times V_{OUT}$    |     | 250 | 500 $\mu\text{s}$ |

## 4.21 Switching Characteristics — SMPS1&2 in Dual-Phase Configuration

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER   | TEST CONDITIONS                           | MIN                                                  | TYP | MAX | UNIT               |
|-------------|-------------------------------------------|------------------------------------------------------|-----|-----|--------------------|
| $f_{SW}$    | Switching frequency                       | PWM mode                                             |     | 1.7 | 2.2 2.7 MHz        |
| $T_{start}$ | Time from enable to the start of the ramp |                                                      | 240 |     | $\mu\text{s}$      |
| $T_{ramp}$  | Time from enable to 80% of $V_{OUT}$      | $C_{OUT} < 57\text{ }\mu\text{F per phase, no load}$ |     | 400 | 1000 $\mu\text{s}$ |

#### 4.22 Switching Characteristics — SMPS1, SMPS2, SMPS3, SMPS4, and SMPS5 Stand-Alone Regulators

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                                     | TEST CONDITIONS                                      | MIN | TYP | MAX  | UNIT          |
|---------------------------------------------------------------|------------------------------------------------------|-----|-----|------|---------------|
| $f_{\text{SW}}$ Switching frequency                           | In PWM mode                                          | 1.7 | 2.2 | 2.7  | MHz           |
| $T_{\text{start}}$ Time from enable to the start of the ramp  |                                                      |     | 150 |      | $\mu\text{s}$ |
| $T_{\text{ramp}}$ Time from enable to 80% of $V_{\text{OUT}}$ | $C_{\text{OUT}} < 57 \mu\text{F}$ per phase, no load |     | 400 | 1000 | $\mu\text{s}$ |

#### 4.23 Switching Characteristics — Reference Generator (Bandgap)

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER     | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------|-----------------|-----|-----|-----|------|
| Start-up time |                 |     | 1   | 3   | ms   |

#### 4.24 Switching Characteristics — PLL for SMPS Clock Generation

Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                                    | TEST CONDITIONS                                                                                              | MIN  | TYP | MAX  | UNIT               |
|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------|-----|------|--------------------|
| $f_{\text{SYNC}}$ Synchronization range of SYNCDCDC clock    |                                                                                                              | 1.7  | 2.2 | 2.7  | MHz                |
| $A_{\text{DITHER}}$ Dither amplitude of SYNCDCDC clock       |                                                                                                              |      |     | 128  | kHz                |
| $M_{\text{DITHER}}$ Dither slope of SYNCDCDC clock           |                                                                                                              |      |     | 1.35 | kHz/ $\mu\text{s}$ |
| $f_{\text{FALLBACK}}$ Fallback frequency                     | $V_{\text{CCA}} = 5.25 \text{ V}$                                                                            | 1.98 | 2.2 | 2.42 | MHz                |
|                                                              | $V_{\text{CCA}} = 3.8 \text{ V}$                                                                             | 1.9  | 2.2 | 2.42 |                    |
|                                                              | $V_{\text{CCA}} = 3.135 \text{ V}$                                                                           | 1.9  | 2.2 | 2.42 |                    |
| $f_{\text{SAT,LO}}$ The low saturation frequency of the PLL  |                                                                                                              | 1.35 |     | 1.68 | MHz                |
| $f_{\text{SAT,HI}}$ The high saturation frequency of the PLL |                                                                                                              | 2.8  |     | 3.8  | MHz                |
| $t_{\text{SETTLE}}$ Settling time                            | Time from initial application or removal of sync clock until PLL output has settled to 1% of the final value |      |     | 100  | $\mu\text{s}$      |
| $f_{\text{ERROR}}$ Frequency error                           | The steady-state percent of difference between $f_{\text{SYNC}}$ and the switching frequency                 | –1%  |     | 1%   |                    |

#### 4.25 Switching Characteristics — 32-kHz RC Oscillators and SYNCCLKOUT Output Buffers


Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                                 | TEST CONDITIONS                      | MIN  | TYP   | MAX | UNIT          |
|-------------------------------------------|--------------------------------------|------|-------|-----|---------------|
| <b>32-kHz RC OSCILLATOR</b>               |                                      |      |       |     |               |
| Output frequency low-level output voltage |                                      |      | 32768 |     | Hz            |
| Output frequency accuracy                 | After trimming at $27^\circ\text{C}$ | –10% | 0%    | 10% |               |
| Cycle jitter (RMS)                        |                                      |      |       | 10% |               |
| Output duty cycle                         |                                      | 40%  | 50%   | 60% |               |
| Settling time                             |                                      |      |       | 150 | $\mu\text{s}$ |
| <b>SYNCCLKOUT OUTPUT BUFFER</b>           |                                      |      |       |     |               |
| Rise and fall time                        | $C_L = 35 \text{ pF}$ , 10% to 90%   | 5    | 20    | 100 | ns            |
| Duty cycle                                | Logic output signal                  | 40%  | 50%   | 60% |               |

## 4.26 Switching Characteristics — 12-Bit Sigma-Delta ADC


Over operating free-air temperature range, typical values are at  $T_A = 27^\circ\text{C}$  (unless otherwise noted).

| PARAMETER       | TEST CONDITIONS                                                                        | MIN | TYP | MAX | UNIT          |
|-----------------|----------------------------------------------------------------------------------------|-----|-----|-----|---------------|
| Turn-on time    | Active or sleep with VANA ON and RC15MHZ_ON_IN_SLEEP = 1 or sleep with GPADC_FORCE = 1 |     | 0   |     | $\mu\text{s}$ |
|                 | Sleep or OFF                                                                           |     | 794 |     |               |
|                 | Sleep with VANA enabled                                                                |     | 282 |     |               |
| Conversion time | 1 channel, EXTEND_DELAY = 0                                                            |     | 113 |     | $\mu\text{s}$ |
|                 | 1 channel, EXTEND_DELAY = 1                                                            |     | 563 |     |               |
|                 | 2 channels                                                                             |     | 223 |     |               |

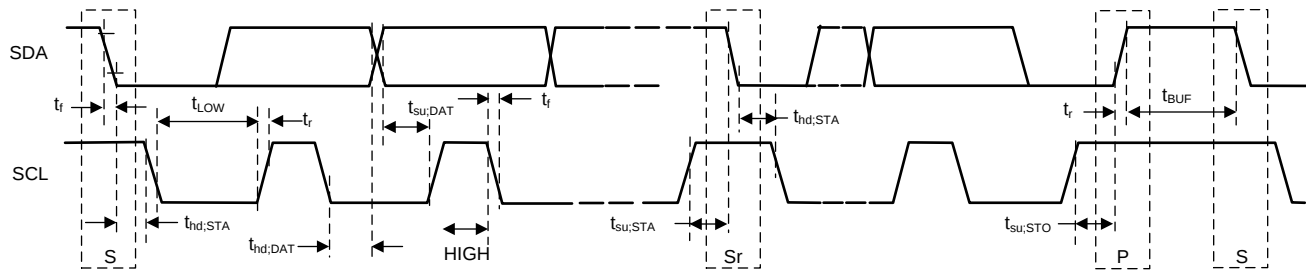

Note: S = Start; Sr = Repeated start; P = Stop

图 4-1. Serial Interface Timing Diagram For F/S Mode

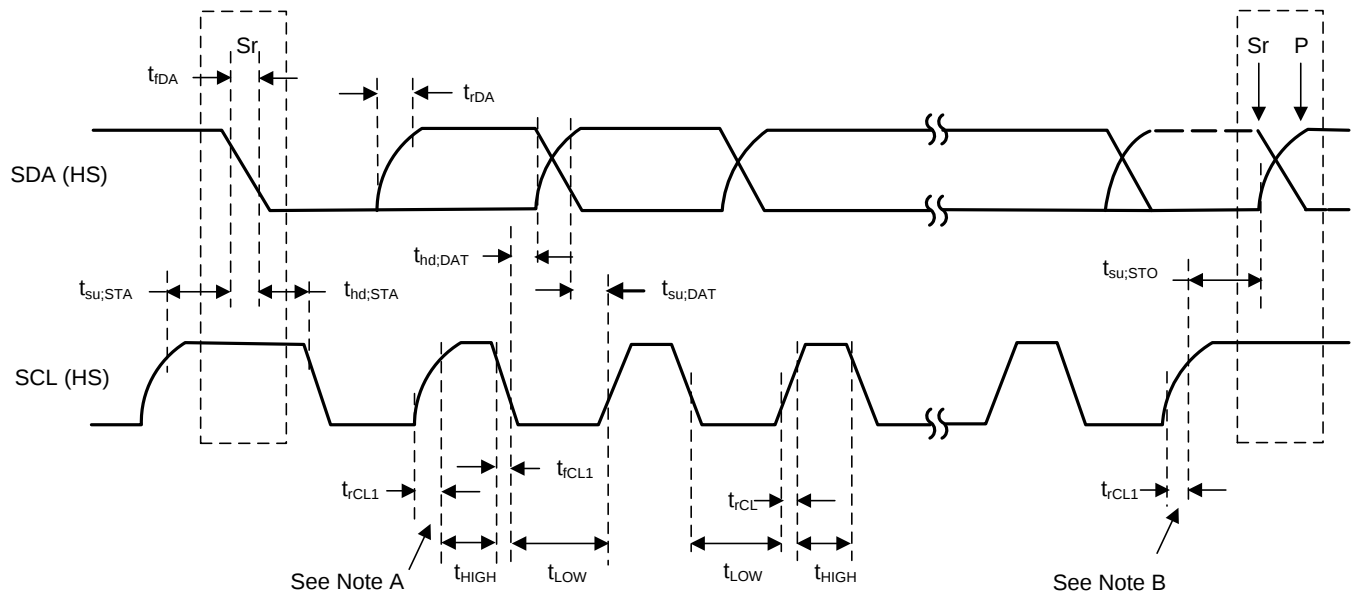

 = MCS Current Source Pullup

 =  $R_{(P)}$  Resistor Pullup

A. First rising edge of the SCL (HS) signal after Sr and after each acknowledge bit.

B. Sr = Repeated start; P = Stop

图 4-2. Serial Interface Timing Diagram For HS Mode

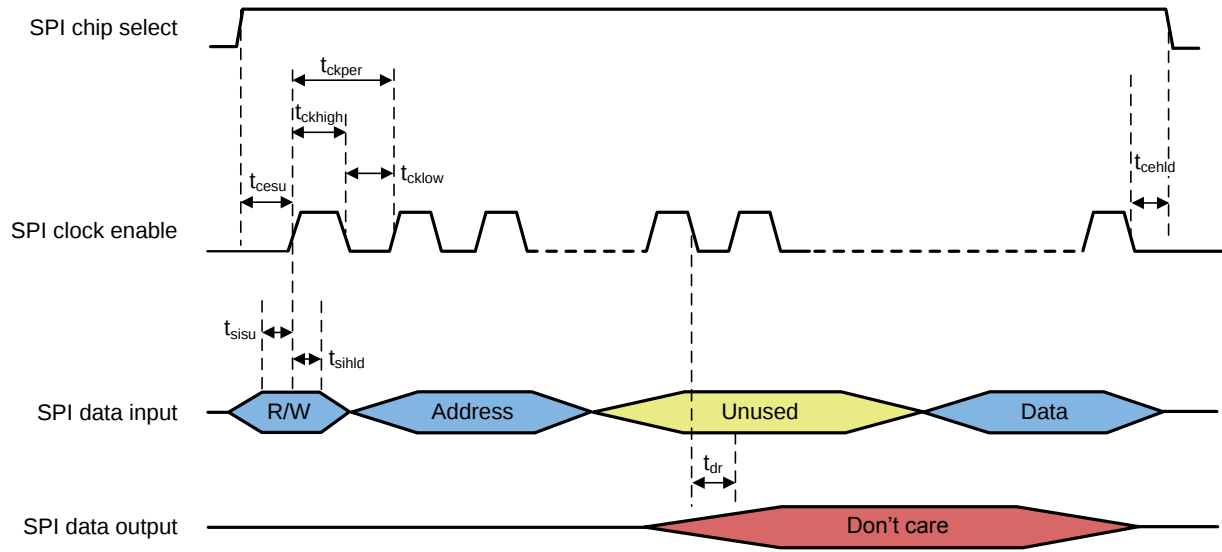


图 4-3. SPI Timings  
See [Section 4.19](#) for the Timing Parameters

## 4.27 Typical Characteristics

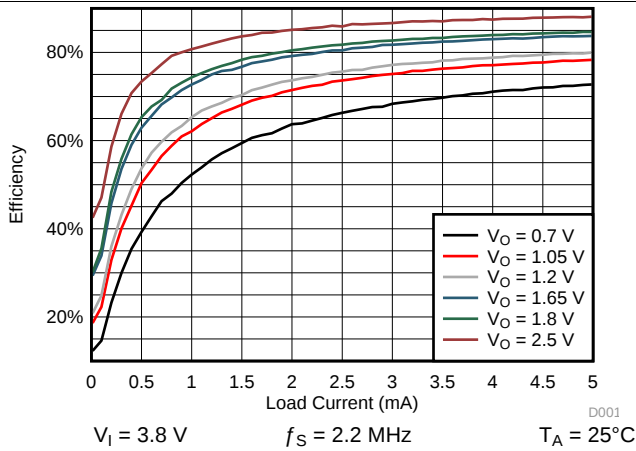


图 4-4. SMPS Efficiency for all SMPS in Eco-mode

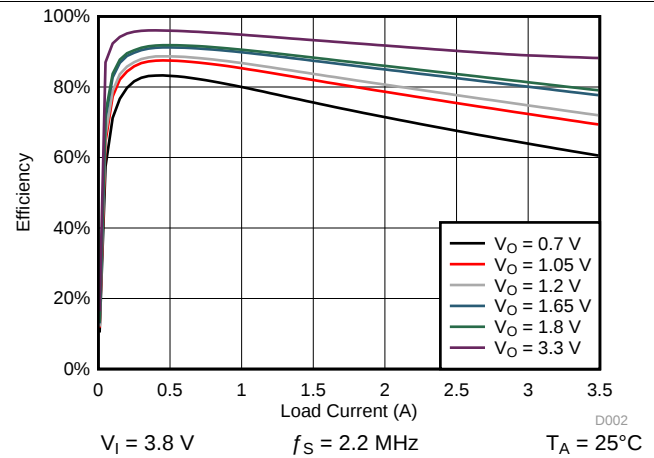


图 4-5. SMPS Efficiency for SMPS1 and SMPS2 in Single-Phase PWM Mode

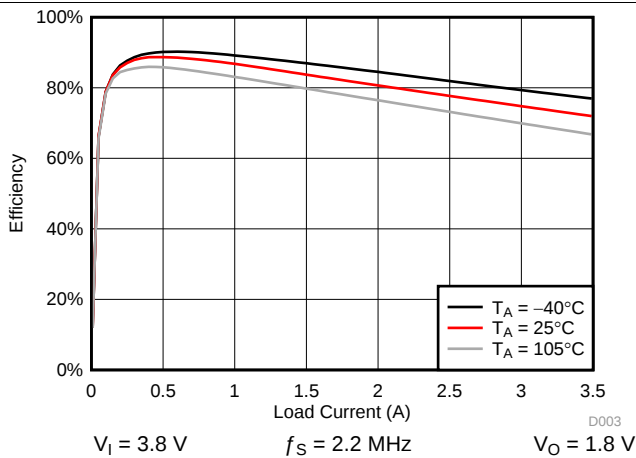


图 4-6. SMPS Efficiency for SMPS1 and SMPS2 in Single-Phase PWM Mode With Temperature Variation

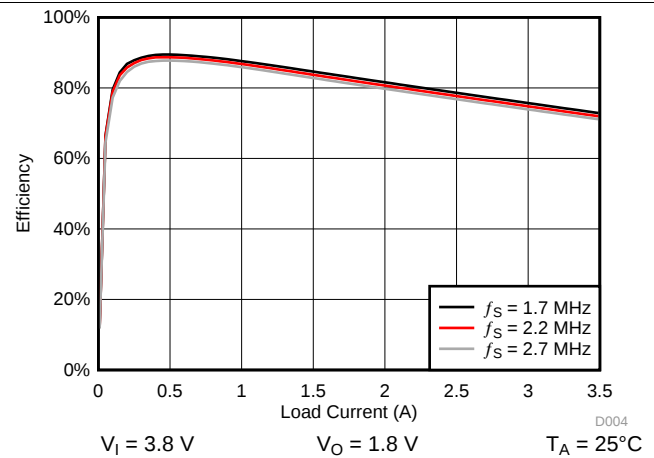


图 4-7. SMPS Efficiency for SMPS1 and SMPS2 in Single-Phase PWM Mode With Frequency Variation

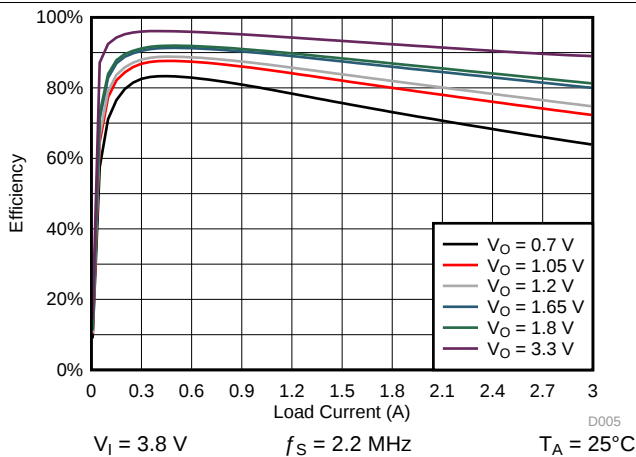


图 4-8. SMPS Efficiency for SMPS3 in PWM Mode

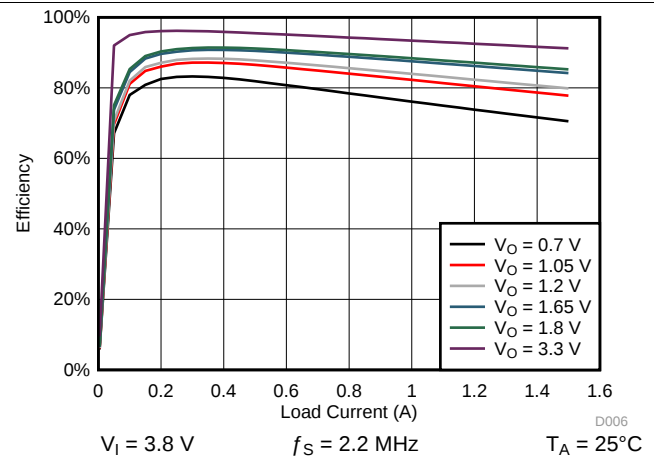


图 4-9. SMPS Efficiency for SMPS4 in PWM Mode

## Typical Characteristics (continued)

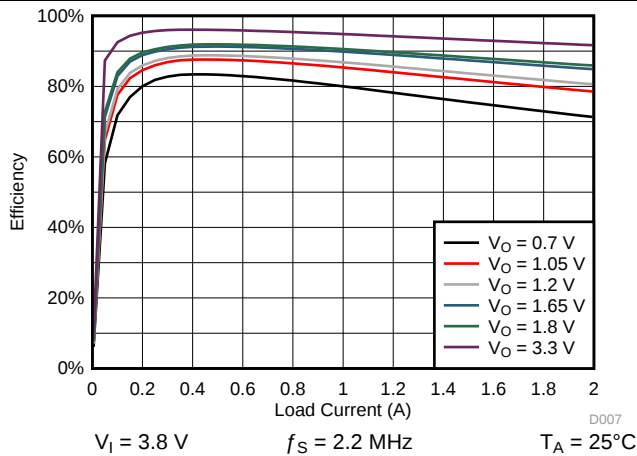


图 4-10. SMPS Efficiency for SMPS5 in PWM Mode

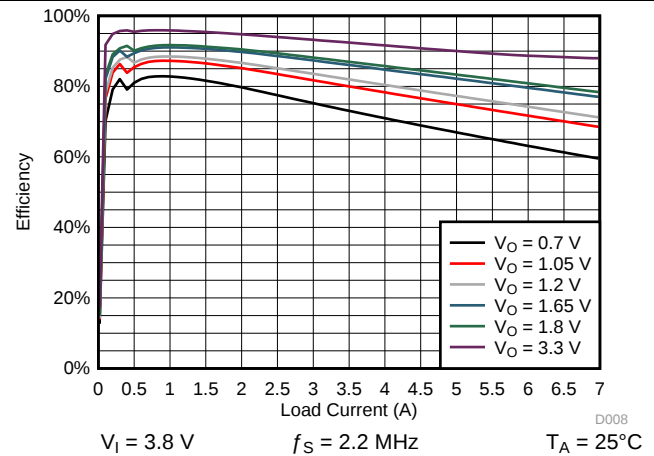


图 4-11. SMPS Efficiency for SMPS12 in Dual-Phase PWM Mode

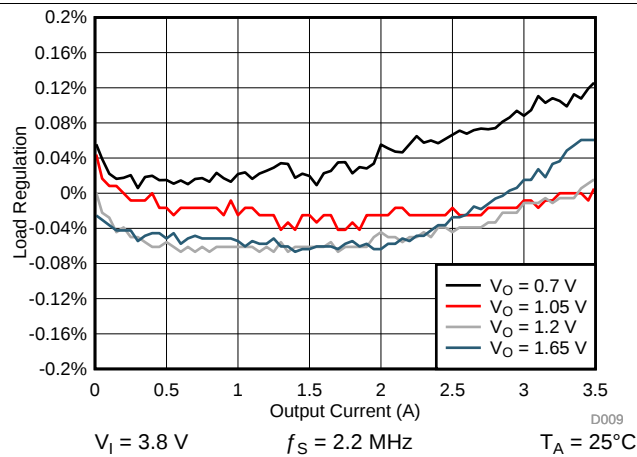


图 4-12. SMPS Load Regulation for SMPS1 and SMPS2 Single-Phase PWM Mode

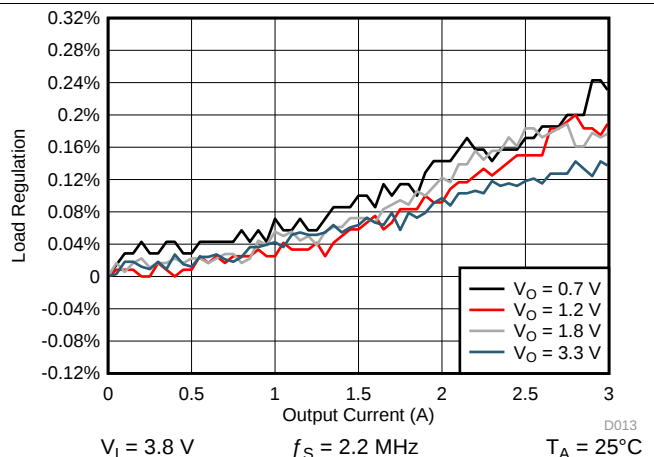


图 4-13. SMPS Load Regulation for SMPS3, PWM Mode

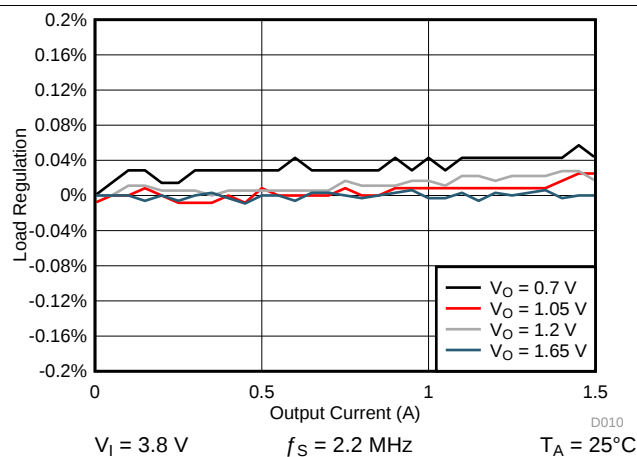


图 4-14. SMPS Load Regulation for SMPS4 in PWM Mode

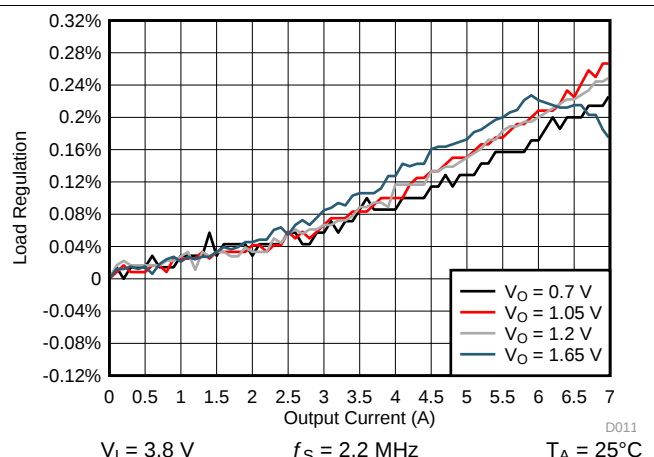


图 4-15. SMPS Load Regulation for SMPS12 in Dual-Phase PWM Mode

## Typical Characteristics (continued)

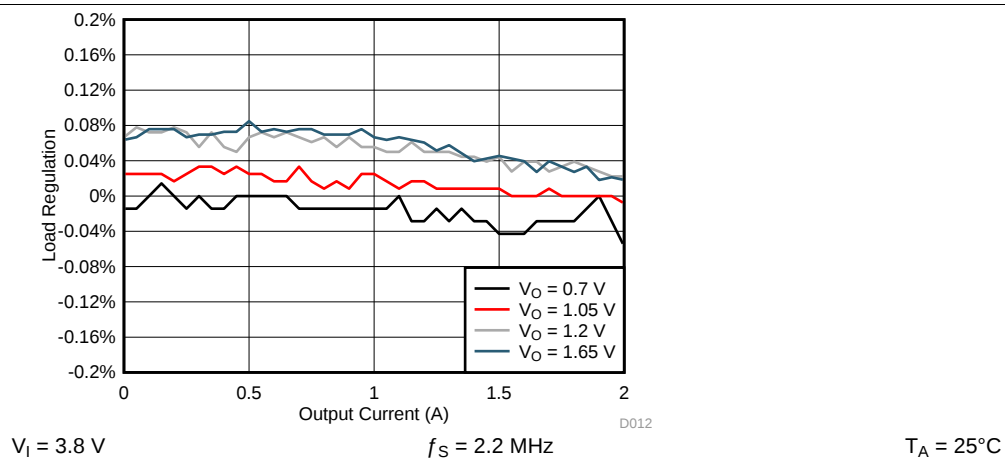


图 4-16. SMPS Load Regulation for SMPS5 in PWM Mode

## 5 Detailed Description

### 5.1 Overview

The TPS65917-Q1 device is an integrated power-management integrated circuit (PMIC), available in a 48-pin, 0.5-mm pitch, 7-mm × 7-mm QFN package. It is designed specifically for automotive applications. It provides five configurable step-down converter rails, with two of the rails having the ability to combine power rails and supply up to 7A of output current in multi-phase mode. The TPS65917-Q1 device also provides five external LDO rails. It also comes with a 12-bit GPADC with two external channels, seven configurable GPIOs, two I<sup>2</sup>C interface channels or one SPI interface channel, PLL for external clock sync and phase delay capability, and programmable power sequencer and control for supporting different processors and applications.


The five step-down converter rails are consisting of five high frequency switch mode converters with integrated FETs. They are capable of synchronizing to an external clock input and supports switching frequency between 1.7 MHz and 2.7 MHz. The SMPS1 and SMPS2 can combine in dual phase configuration to supply up to 7 A. In addition, SMPS1, SMPS2, and SMPS3 support dynamic voltage scaling by a dedicated I<sup>2</sup>C interface for optimum power savings.

The five LDOs support 0.9 V to 3.3 V output with 50-mV step. The LDOs can be supplied from either a system supply or a pre-regulated supply. All LDOs and step-down converters can be controlled by the SPI or I<sup>2</sup>C interface, or by power request signals. In addition, voltage scaling registers allow transitioning the SMPS to different voltages by SPI, I<sup>2</sup>C, or roof and floor control.

The power-up and power-down controller is configurable and programmable through OTP. The TPS65917-Q1 device includes a 32-kHz RC oscillator to sequence all resources during power up and power down. An internal LDOVRTC generates the supply for the entire digital circuitry of the device as soon as the VSYS supply is available through the VCCA input.

Configurable GPIOs with multiplexed feature are available on the TPS65917-Q1 device. The GPIOs can be configured and used as enable signals for external resources, which can be included into the power-up and power-down sequence. The general-purpose (GP) sigma-delta analog-to-digital converter (ADC) with two external input channels included in this device can be used as thermal or voltage and current monitors.

## 5.2 Functional Block Diagram

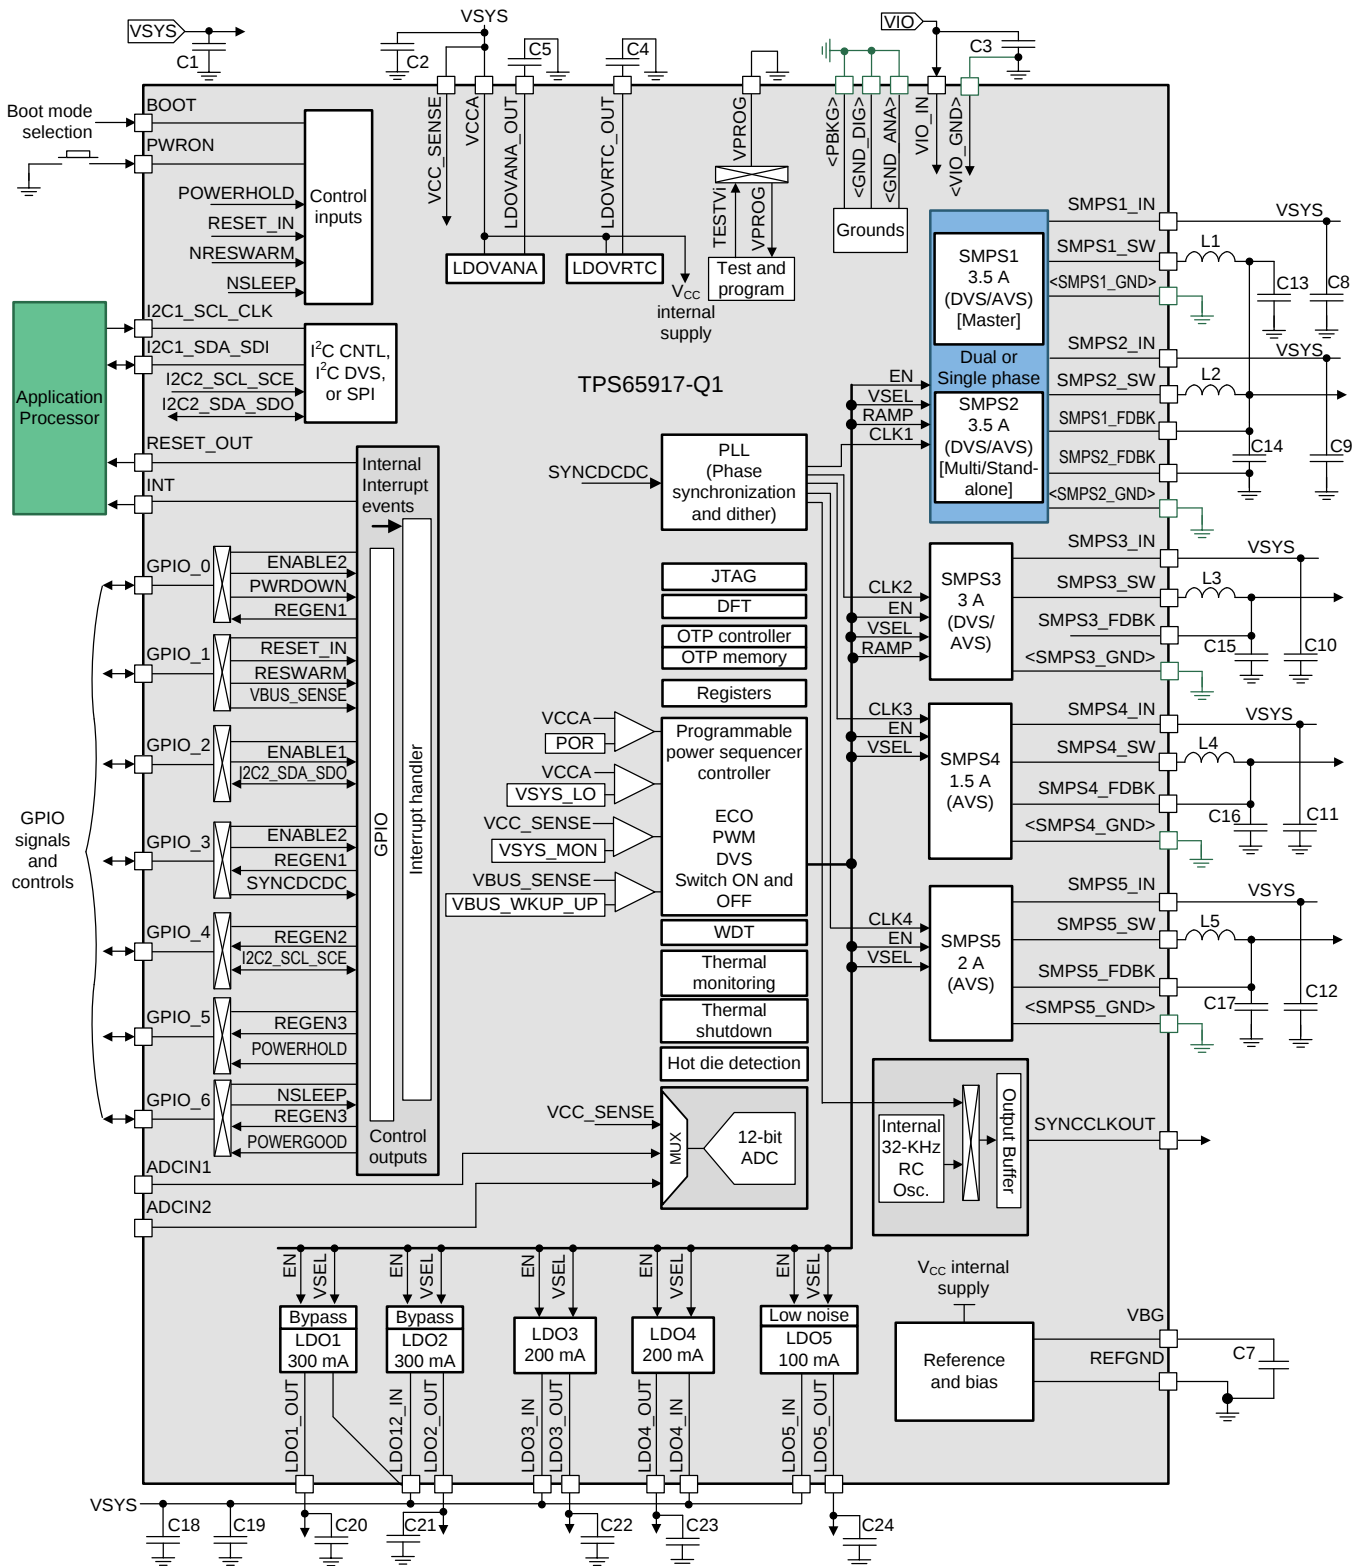

Copyright © 2017, Texas Instruments Incorporated

### 5.3 Device State Machine

The TPS65917-Q1 device integrates an embedded power controller (EPC) that fully manages the state of the device during power transitions. According to the four defined types of requests (ON, OFF, WAKE, and SLEEP), the EPC executes one of the five predefined power sequences (OFF2ACT, ACT2OFF, SLP2OFF, ACT2SLP, and SLP2ACT) to control the state of the device resources. Any resource can be included in any power sequence. When a resource is not controlled or configured through a power sequence, the resource is left in the default state as pre-programmed by the OTP.

Each resource is only configured through register bits. Therefore, the user can statically control the resource through the control interfaces (I<sup>2</sup>C or SPI), or the EPC can automatically control the resource during power transitions which are predefined sequences of registers accesses.

The EPC is powered by an internal LDO which is automatically enabled when VSYS is available to the device. Ensuring that the VSYS pin (which is connected to VCCA, VCC\_SENSE, SMPSx\_In and LDOx\_IN as suggested in the device block diagram) is the first supply available to the device is important to ensure proper operation of all the power resources provided by the device. Ensuring that the VSYS pin is stable prior to the VIO supply becoming available is important to ensure proper operation of the control interface and device I/Os.

#### 5.3.1 Embedded Power Controller

The EPC is composed of the following three main modules:

- An event arbitration module that is used to prioritize ON, OFF, WAKE, and SLEEP requests.
- A power state-machine that is used to determine which power sequence to execute based on the system state (supplies, temperature, and so forth) and requested transition (from the event arbitration module).
- A power sequencer that fetches the selected power sequence from OTP and executes the sequence. The power sequencer sets up and controls all resources accordingly, based on the definition of each sequence.

图 5-1 shows the EPC block diagram.

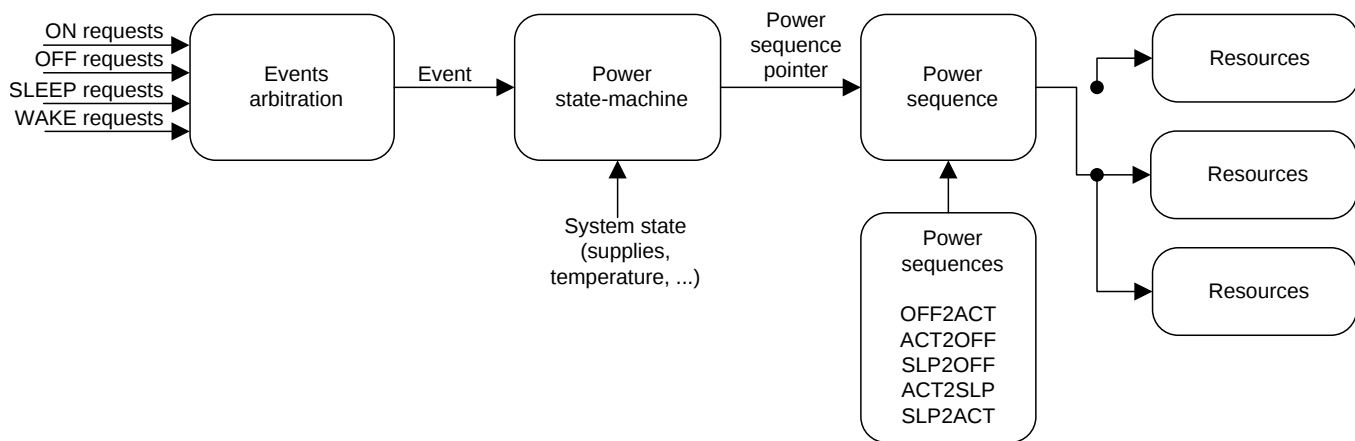


图 5-1. EPC Block Diagram

The power state-machine is defined through the following states:

**NO SUPPLY** The device is not powered by a valid energy source on the system power rail ( $V_{CCA} < POR$ ).

**BACKUP** The device is powered by a valid supply on the system power rail which is above power-on reset (POR) threshold but below the system low threshold ( $POR < V_{CCA} < V_{SYS\_LO}$ ).

**OFF** The device is powered by a valid supply on the system power rail ( $V_{CCA} > V_{SYS\_LO}$ ) and is waiting for a start-up event or condition. All device resources, except VRTC, are in the

OFF state.

- ACTIVE** The device is powered by a valid supply on the system power rail ( $VCC\_SENSE > VSYS\_HI$ ) and has received a start-up event. The device has switched to the ACTIVE state and has full capacity to supply the processor and other platform modules.
- SLEEP** The device is powered by a valid supply on the system power rail ( $VCCA > VSYS\_LO$ ) and is in low-power mode. All configured resources are set to the low-power mode, which can be ON, SLEEP, or OFF depending on the specific resource setting. If a given resource is maintained active (ON) during low-power mode, then all linked subsystems are automatically maintained active.

图 5-2 shows the state diagram for the power control state-machine.

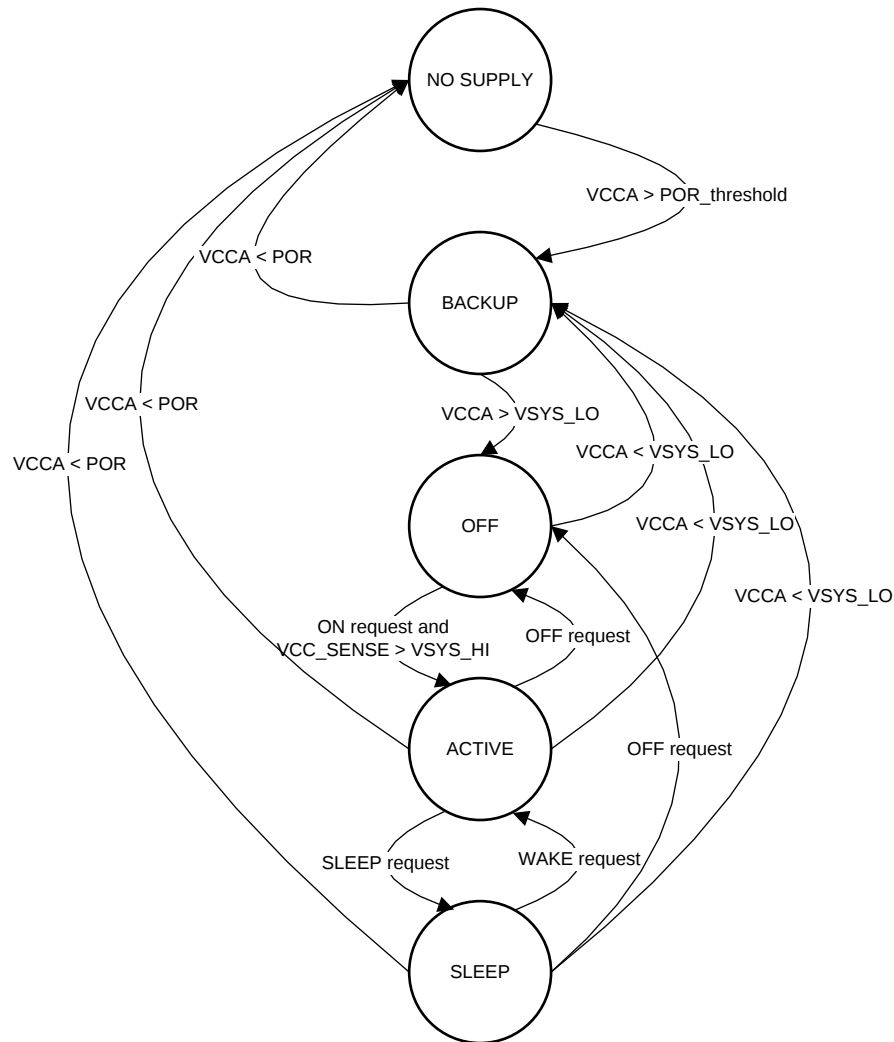


图 5-2. State Diagram for the Power Control State-Machine

Power sequences define how a resource state switches between the OFF, ACTIVE, and SLEEP states, but these sequences have no effect during the NO SUPPLY or BACKUP states. When the device is brought into the OFF state from a NO SUPPLY or BACKUP state, internal hardware manages the state transition automatically before the EPC takes control of the device power sequencing as the device arrives the OFF state.

The allowed power transitions include the following:

- OFF to ACTIVE (OFF2ACT)
- ACTIVE to OFF (ACT2OFF)

- ACTIVE to SLEEP (ACT2SLP)
- SLEEP to ACTIVE (SLP2ACT)
- SLEEP to OFF (SLP2OFF)

Each power transition consists of a sequence of one or several register accesses that controls the resources according to the EPC supervision. Because these sequences are stored in nonvolatile memory (OTP), these sequences cannot be altered.

As an additional safety feature, an error detection routine of the OTP bit integrity is available with this device. If enabled, this routine is executed to compare the current OTP values with the preprogrammed values at the beginning of every OFF2ACT power sequence. When an OTP bit integrity error is detected, the OTP register, CRC\_CONTROL, can be preprogrammed to select the following options:

- *Skip Error Detection* and execute all power sequence
- *Execute Error Detection* and execute all power-up sequence, even if an error is detected
- *Execute Error Detection*. If an error is detected, execute power-up sequence until the VIO supply rail is up
- *Execute Error Detection*. If an error is detected, stop power-up sequence altogether

When an error is detected, an interrupt (INT2.OTP\_ERROR) is sent to the host processor regardless of the CRC\_CONTROL setting.

### 5.3.2 State Transition Requests

#### 5.3.2.1 ON Requests

ON requests are used to switch on the device, which transitions the device from the OFF to the ACTIVE state. 表 5-1 lists the ON requests.

**表 5-1. ON Requests**

| EVENT                      | MASKABLE                                  | POLARITY | COMMENT         | DEBOUNCE         |
|----------------------------|-------------------------------------------|----------|-----------------|------------------|
| PWRON (pin)                | No                                        | Low      | Level sensitive | N/A              |
| Part of interrupts (event) | Yes (INTx_MASK register. Default: Masked) | Event    | Edge sensitive  | N/A              |
| POWERHOLD (pin)            | No                                        | High     | Level sensitive | 3 - 5 ms typical |

If one of the events listed in 表 5-1 occurs, the event powers on the device unless one of the gating conditions listed in 表 5-2 is present. 表 5-12 lists interrupt sources that can be configured as ON requests.

**表 5-2. ON Requests Gating Conditions**

| EVENT           | MASKABLE | POLARITY         | COMMENT                                     |
|-----------------|----------|------------------|---------------------------------------------|
| VSYS_HI (event) | No       | Low              | VCC_SENSE < VSYS_HI                         |
| HOTDIE (event)  | No       | High             | Device temperature exceeds the HOTDIE level |
| PWRDOWN (pin)   | No       | OTP configurable | —                                           |
| RESET_IN (pin)  | No       | OTP configurable | —                                           |

#### 5.3.2.2 OFF Requests

OFF requests are used to switch off the device, meaning a transition from SLEEP or ACTIVE to OFF state. 表 5-3 lists the OFF requests. OFF requests have the highest priority, which means these requests have no gating conditions. Any OFF request is executed even though a valid SLEEP or ON request is present. The device goes to the OFF state and then, when the OFF request is cleared, the device reacts to an ON request, if one occurs.

表 5-3. OFF Requests

| EVENT                                               | MASKABLE | POLARITY         | DEBOUNCE                              | SWITCH OFF DELAY <sup>(1)</sup> | RESET LEVEL <sup>(2)</sup> | RESET SEQUENCE <sup>(3)</sup> |
|-----------------------------------------------------|----------|------------------|---------------------------------------|---------------------------------|----------------------------|-------------------------------|
| PWRON (pin)<br>(long press key)                     | No       | Low              | LPK_TIME (OTP)                        | SWOFF_DLY                       | OTP configurable           | OTP configurable              |
| PWRDOWN (pin)                                       | No       | OTP configurable |                                       | SWOFF_DLY                       | OTP configurable           | OTP configurable              |
| WATCHDOG TIMEOUT <sup>(4)</sup><br>(internal event) | N/A      | N/A              | N/A                                   | SWOFF_DLY                       | OTP configurable           | OTP configurable              |
| THERMAL SHUTDOWN<br>(internal event)                | No       | N/A              | N/A                                   | 0                               | OTP configurable           | OTP configurable              |
| RESET_IN (pin)                                      | No       | OTP configurable | 1 ms for ACT2OFF<br>26 ms for OFF2ACT | SWOFF_DLY                       | OTP configurable           | OTP configurable              |
| SW_RST<br>(register bit)                            | No       | N/A              | N/A                                   | 0                               | OTP configurable           | OTP configurable              |
| DEV_ON <sup>(5)</sup><br>(register bit)             | No       | N/A              | N/A                                   | 0                               | SWORST                     | SD                            |
| VSYS_LO<br>(internal event)                         | No       | N/A              |                                       | 0                               | OTP configurable           | OTP configurable              |
| POWERHOLD <sup>(6)</sup><br>(pin)                   | No       | Low              |                                       | 0                               | SWORST                     | SD                            |
| GPADC_SHUTDOWN                                      | Yes      | N/A              | N/A                                   | SWOFF_DLY                       | OTP configurable           | OTP configurable              |

- (1) SWOFF\_DLY is the same for all requests. When configured (in the PMU\_CONFIG register) to a specific value (0, 1, 2, or 4 s), the value is applied to all OFF requests.
- (2) The reset level is selectable as HWRST (a wide set of registers is reset to default values) or SWORTS (a more limited set of registers is reset). See 节 5.3.7.
- (3) The OFF requests in the reset sequence are configured to force the EPC to execute either a shutdown (SD) or a cold restart (CR). Configuration occurs in the SWOFF\_COLDST register.
  - When configured to generate a shutdown, the EPC executes a transition to the OFF state (SLP2OFF or ACT2OFF power sequence) and remains in the OFF state.
  - When configured to generate a cold restart, the EPC executes a transition to the OFF state (SLP2OFF or ACT2OFF power sequence) and restarts, transitioning to the ACTIVE state (OFF2ACT power sequence) if none of the ON request gating conditions are present.
- (4) The watchdog is disabled by default. Software can enable watchdog and lock (write protect) watchdog register (WATCHDOG).
- (5) The DEV\_ON event has a lower priority than other ON events, meaning that DEV\_ON forces the device to go to the OFF state only if no other ON conditions keep the device active (POWERHOLD).
- (6) The POWERHOLD event has a lower priority than other ON events, meaning that POWERHOLD forces the device to go to the OFF state only if no other ON conditions keep the device active (DEV\_ON).

### 5.3.2.3 SLEEP and WAKE Requests

The device transitions from the ACTIVE to the SLEEP state after receiving a SLEEP request. Upon this request, internal resources as well as user-defined resources will enter the low-power mode as predefined by the user. The states of the resources during ACTIVE and SLEEP states are defined in the LDO\*\_CTRL and SMPSx\_CTRL registers.

表 5-4 lists the SLEEP requests. Any of these events trigger the ACT2SLP sequence unless pending interrupts (unmasked) are present. Once the device enters the SLEEP state, only an interrupt or an NSLEEP signal can generate a WAKE request to wake up the device (exit from the SLEEP state). A WAKE request (only during the SLEEP state) wakes up the device and triggers a SLP2ACT or a SLP2OFF power sequence.

表 5-4. SLEEP Requests

| EVENT        | MASKABLE              | POLARITY | COMMENT         |
|--------------|-----------------------|----------|-----------------|
| NSLEEP (pin) | Yes (Default: Masked) | Low      | Level sensitive |

For each resource, a transition from the ACTIVE state to the SLEEP state or from the SLEEP state to the ACTIVE state is controlled in two different ways which are described as follows:

- Through EPC sequencing (ACT2SLP or SLP2ACT power sequence) when the resource is associated to the NSLEEP signal.

- Through direct control of the resource power mode (ACTIVE or SLEEP) in which case the user can bypass SLEEP and WAKE sequencing by having resources assigned to two external control signals (ENABLE1 and ENABLE2). These signals have a direct control on the power modes (ACTIVE or SLEEP) of any resources associated to them and they trigger an immediate switch from one mode to the other, regardless of the EPC sequencing.

Therefore, all resources can be associated to three external pins (NSLEEP, ENABLE1, and ENABLE2) and can switch between the SLEEP and ACTIVE states. 表 5-5 outlines the type of state transition each resource undergoes according to the logic combination of the NSLEEP, ENABLE1 and ENABLE2 assignments.

**表 5-5. Resources SLEEP and ACTIVE Assignments<sup>(1)</sup>**

| ENABLE1<br>ASSIGNMENT | ENABLE2<br>ASSIGNMENT | NSLEEP<br>ASSIGNMENT | ENABLE1<br>PIN STATE | ENABLE2<br>PIN STATE | NSLEEP<br>PIN STATE | STATE             | TRANSITION |
|-----------------------|-----------------------|----------------------|----------------------|----------------------|---------------------|-------------------|------------|
| 0                     | 0                     | 0                    | Don't care           | Don't care           | Don't care          | ACTIVE            | None       |
| 0                     | 0                     | 1                    | Don't care           | Don't care           | 0 ↔ 1               | SLEEP ↔<br>ACTIVE | Sequenced  |
| 0                     | 1                     | 0                    | Don't care           | 0 ↔ 1                | Don't care          | SLEEP ↔<br>ACTIVE | Immediate  |
| 0                     | 1                     | 1                    | Don't care           | 0                    | 0 ↔ 1               | SLEEP ↔<br>ACTIVE | Sequenced  |
|                       |                       |                      |                      | 1                    | 0 ↔ 1               | ACTIVE            | None       |
|                       |                       |                      |                      | 0 ↔ 1                | 0                   | SLEEP ↔<br>ACTIVE | Immediate  |
|                       |                       |                      |                      | 0 ↔ 1                | 1                   | ACTIVE            | None       |
| 1                     | 0                     | 0                    | 0 ↔ 1                | Don't care           | Don't care          | SLEEP ↔<br>ACTIVE | Immediate  |
| 1                     | 0                     | 1                    | 0                    | Don't care           | 0 ↔ 1               | SLEEP ↔<br>ACTIVE | Sequenced  |
|                       |                       |                      | 1                    |                      | 0 ↔ 1               | ACTIVE            | None       |
|                       |                       |                      | 0 ↔ 1                |                      | 0                   | SLEEP ↔<br>ACTIVE | Immediate  |
|                       |                       |                      | 0 ↔ 1                |                      | 1                   | ACTIVE            | None       |
| 1                     | 1                     | 0                    | 0                    | 0 ↔ 1                | Don't care          | SLEEP ↔<br>ACTIVE | Immediate  |
|                       |                       |                      | 1                    | 0 ↔ 1                |                     | ACTIVE            | None       |
|                       |                       |                      | 0 ↔ 1                | 0                    |                     | SLEEP ↔<br>ACTIVE | Immediate  |
|                       |                       |                      | 0 ↔ 1                | 1                    |                     | ACTIVE            | None       |
| 1                     | 1                     | 1                    | 0                    | 0                    | 0 ↔ 1               | SLEEP ↔<br>ACTIVE | Sequenced  |
|                       |                       |                      | 0                    | 1                    | 0 ↔ 1               | ACTIVE            | None       |
|                       |                       |                      | 1                    | 0                    | 0 ↔ 1               | ACTIVE            | None       |
|                       |                       |                      | 1                    | 1                    | 0 ↔ 1               | ACTIVE            | None       |
|                       |                       |                      | 0                    | 0 ↔ 1                | 0                   | SLEEP ↔<br>ACTIVE | Immediate  |
|                       |                       |                      | 0                    | 0 ↔ 1                | 1                   | ACTIVE            | None       |
|                       |                       |                      | 1                    | 0 ↔ 1                | 0                   | ACTIVE            | None       |
|                       |                       |                      | 1                    | 0 ↔ 1                | 1                   | ACTIVE            | None       |
|                       |                       |                      | 0 ↔ 1                | 0                    | 0                   | SLEEP ↔<br>ACTIVE | Immediate  |
|                       |                       |                      | 0 ↔ 1                | 0                    | 1                   | ACTIVE            | None       |
|                       |                       |                      | 0 ↔ 1                | 1                    | 0                   | ACTIVE            | None       |
|                       |                       |                      | 0 ↔ 1                | 1                    | 1                   | ACTIVE            | None       |

## (1) Notes:

- The polarity of the NSLEEP, ENABLE1, and ENABLE2 signals is configurable through the POLARITY\_CTRL register. By default:
  - ENABLE1 and ENABLE2 are active high, meaning a transition from 0 to 1 requests a transition from SLEEP state to ACTIVE state.
  - NSLEEP is active low, meaning a transition from 1 to 0 requests a transition from ACTIVE state to SLEEP state.
- Resource assignments to the NSLEEP, ENABLE1, and ENABLE2 signals are configured in the ENABLEx\_YYY\_ASSIGN and NSLEEP\_YYY\_ASSIGN registers (where x = 1 or 2 and YYY = RES, SMPS, or LDO).
- Several resources can be assigned to the same ENABLE signal (ENABLE1 or ENABLE2) and therefore, when triggered, they all switch their power mode at the same time.
- When resources are assigned only to the NSLEEP signal, the respective switching order is controlled and defined in the power sequence.
- When a resource is not assigned to any signal (NSLEEP, ENABLE1, or ENABLE2), it never switches from the ACTIVE state to the SLEEP state. The resource always remains in ACTIVE mode.

### 5.3.3 Power Sequences

A power sequence is an automatic preprogrammed sequence the TPS65917-Q1 device configures its resources, which include the states of the SMPSs, LDOs, 32-kHz clock, and part of the GPIOs (REGEN signals). For a detailed description of the GPIOs signals, please refer to [节 5.9](#).

图 5-3 shows an example of an OFF2ACT transition followed by an ACT2OFF transition. The sequence is triggered through PWRON pin and the resources controlled (for this example) are: SMPS3 (VIO), LDO1, SMPS2, LDO2, REGEN1, LDO5, and LDO3. The time between each resource enable and disable (TinstX) is also part of the preprogrammed sequence definition.

When a resource is not assigned to any power sequence, it remains in off mode. The user (through software) can enable and configure this resource independently when the power sequence completes.

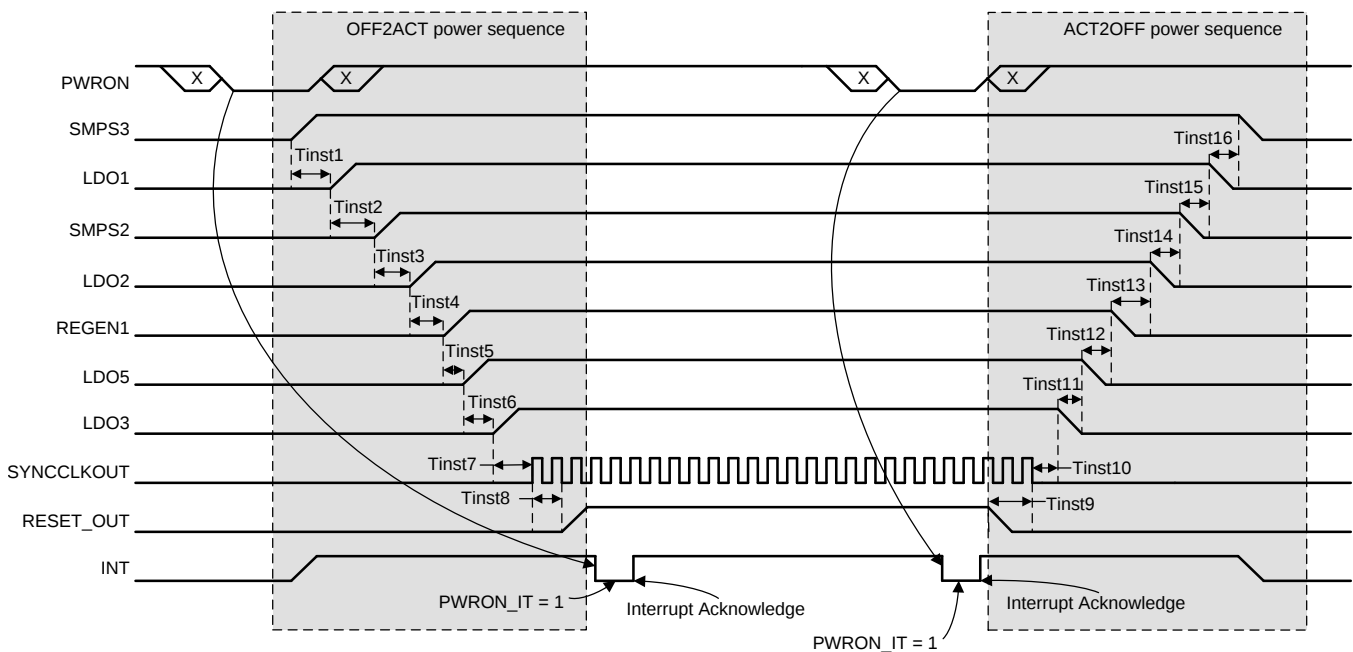


图 5-3. Power Sequence Example

As the power sequences of the TPS65917-Q1 device are defined according to the processor requirements, the total time for the completion of the power sequence will vary across various system definitions.

### 5.3.4 Device Power Up Timing

图 5-4 shows the timing diagram of the TPS65917-Q1 after the first supply detection.

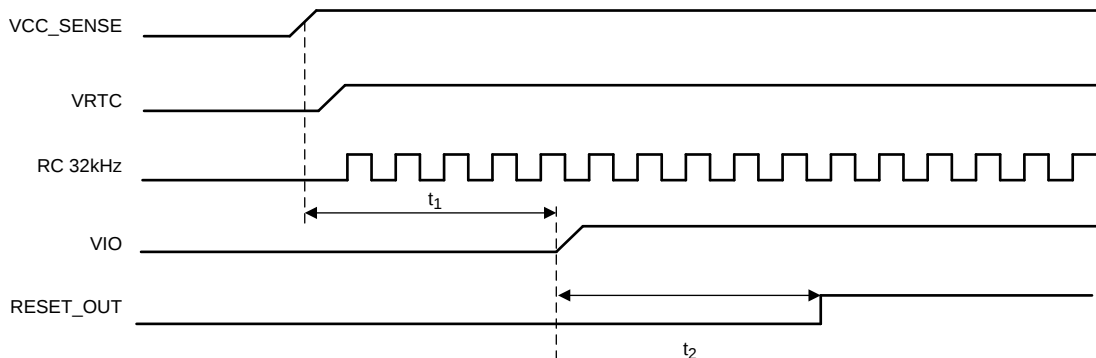


图 5-4. TPS65917-Q1 Power-Up Sequence After FSD

The time  $t_1$  is the delay from VCC crossing the POR threshold to VIO rising up. The time  $t_1$  must be at least 6 ms. If the time from VCC to VIO is less than 6 ms, the VIO buffers will be supplied while the OTP is still being initialized, which could cause glitches on any VIO output buffer. Supplying VIO at least 6 ms after supplying VCC ensures that the OTP is initialized and output buffers are held low when VIO is supplied.

The time  $t_2$  is the delay between the start of the power-up sequence and the RESET\_OUT release. The RESET\_OUT resource is released when the power-up sequence is complete. The duration of the power-up sequence depends on OTP programming.

### 5.3.5 Power-On Acknowledge

The PMIC is designed to support the following power-on acknowledge modes: POWERHOLD mode and AUTODEVON mode.

#### 5.3.5.1 POWERHOLD Mode

In POWERHOLD mode, the power-on acknowledge is received through a dedicated pin, POWERHOLD. When an ON request is received, the device initiates the power-up sequence and asserts the RESET\_OUT pin high while the device is in the ACTIVE state (reset released). The device remains in ACTIVE state for a fixed delay of 8 seconds and then automatically shuts down. During this timeframe, to keep the device active, the host processor must assert and keep the POWERHOLD pin high. The device interprets a the high to low transition of the POWERHOLD pin as an OFF request.

图 5-5 shows the POWERHOLD mode timing diagram.

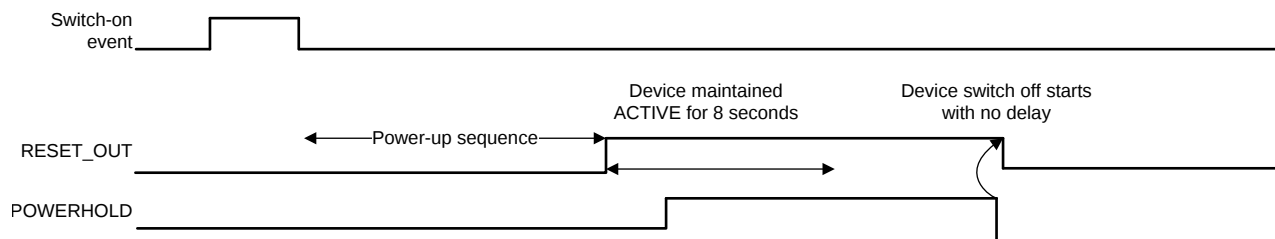


图 5-5. POWERHOLD Mode Timing Diagram

### 5.3.5.2 AUTODEVON Mode

In AUTODEVON mode, at the end of the power-up sequence, the DEV\_CTRL.DEV\_ON register bit is automatically set to 1 and the device remains in the ACTIVE state until the host processor clears this bit. No dedicated signal from processor is required to maintain the PMIC in the ACTIVE state.

图 5-6 和 图 5-7 show the AUTODEVON mode timing diagrams.

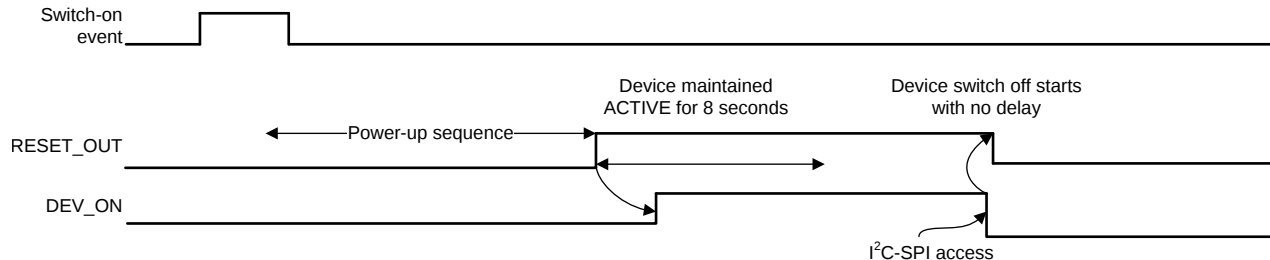


图 5-6. AUTODEVON Mode Timing Diagram

The DEV\_ON bit can also be configured so that it is not auto-updated (set to 1) at the end of the power-up sequence. In this case, the device functions similarly to when it is in the POWERHOLD mode, except that the host has control over the device using the DEV\_CTRL.DEV\_ON register bit instead of the POWERHOLD pin. Therefore, to maintain the device in the ACTIVE state, the host must set and keep this bit at 1.

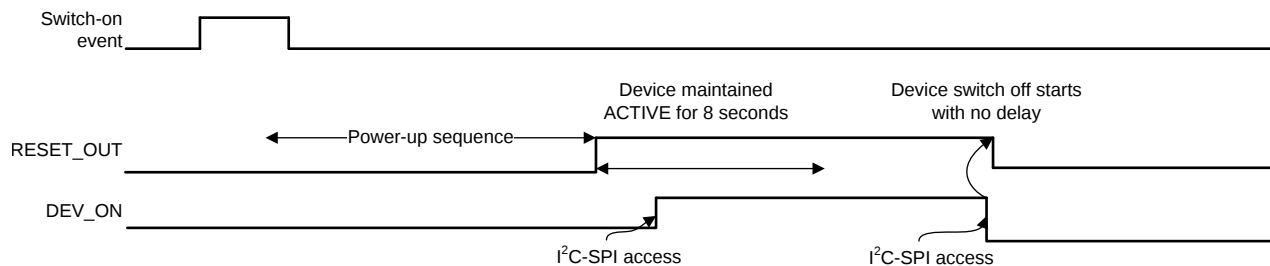


图 5-7. DEV\_ON Mode Timing Diagram

### 5.3.6 BOOT Configuration

All TPS65917-Q1 resource settings are stored in registers. Therefore, any platform-related settings are linked to an action which alters these registers. This action is either a static update (register initialization value) or a dynamic update of the register (from the user or a power sequence).

Resources and platform settings are stored in nonvolatile memory (OTP). These settings are defined as follows:

**Static platform settings** These settings define, for example, the SMPS and LDO default voltages, GPIO functionality, and TPS65917-Q1 switch-on events.

**Sequence platform settings** These settings define TPS65917-Q1 power sequences between state transitions. An example includes the OFF2ACT sequence when transitioning from OFF state to ACTIVE state. Each power sequence is composed of several register accesses that define the resources (and the corresponding registers) that must be updated during the respective state transition. Small modifications from the main sequence can be defined with the BOOT pin as long as the OTP memory size constraint is respected. The user can overwrite these settings when the power sequence completes.

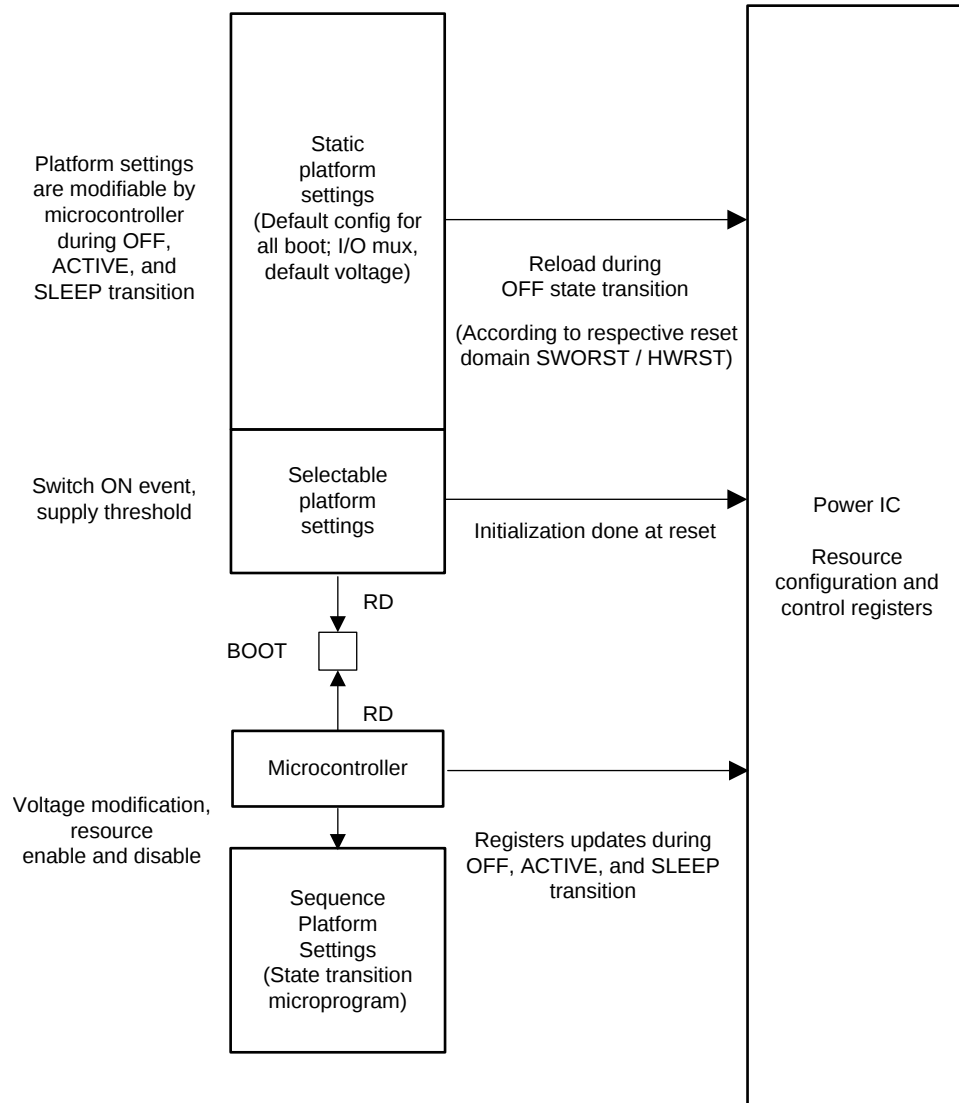


图 5-8. Boot Pins Control

### 5.3.6.1 Boot Pin Usage and Connection

表 5-6 lists the associated configurations of the boot pins.

表 5-6. Boot Pins Associated Configurations

| BOOT | OTP CONFIGURATION | POWER SEQUENCE SELECTOR |
|------|-------------------|-------------------------|
| 0    | OTP5 (0x00~0x2F)  | Sel_0                   |
| 1    | OTP5 (0x30~0x5F)  | Sel_1                   |

The BOOT pin must be grounded or pulled up.

The status of the BOOT pin is latched at the end of the transition from OFF to ACTIVE mode and stored in the BOOT\_STATUS register.

The BOOT pin can also be used as static selectors during execution of the power sequence. This static selection provides from within a static power sequence, to branch to different instructions. This static selection allows the selection of power sequences (or subpart of power sequences) without altering the power sequences themselves in OTP.

### 5.3.7 Reset Levels

The TPS65917-Q1 resource control registers are defined by the following three categories:

- Power-on request (POR) registers
- Hardware (HW) registers
- Switchoff (SWO) registers

These registers are associated to three levels of reset which are described as follows

**Power-on reset (POR)** A POR occurs when the device receives supplies and transition from the NO SUPPLY state to the BACKUP state. The POR is the global device reset which resets all registers.

The values of the registers in this domain will retain their value under HWRST and SWORST event. This ensures the information which contains the cause of the switch off event is retained when the device is reset to its default operating state.

The following registers are reset only during POR event:

- SMPS\_THERMAL\_STATUS
- SMPS\_SHORT\_STATUS
- SMPS\_POWERGOOD\_MASK
- LDO\_SHORT\_STATUS
- SWOFF\_STATUS

This list is indicative only; a full list and bit details can be found in the *TPS65917-Q1 Register Map* (SLVUAH1).

**Hardware reset (HWRST)** A HWRST occurs when any OFF request is configured to generate a hardware reset. Configuration of the reset level is programmed in the SWOFF\_HWRST register. This reset triggers a transition to the OFF state from either the ACTIVE or SLEEP state, and therefore executes the ACT2OFF or SLP2OFF sequence.

A HWRST will reset all registers in the HWRST and the SWORST domain, but leave the registers in the POR domain unchanged.

The following registers are in the HWRST domain:

- SMPS control registers expect MODE\_ACTIVE and MODE\_SLEEP bits
- LDO control registers expect MODE\_ACTIVE and MODE\_SLEEP bits
- VSYS\_LO Threshold
- PMU\_CONFIG & PMU\_CTRL
- NSLEEP, ENABLE1, and ENABLE2 resource assignment registers
- Input and Output, including the GPIO pins, Configuration and Control registers
- Interrupt Control, Status and Mask Registers
- OTP CRC results register
- GPADC Configuration and Results registers

This list is indicative only; a full list and bit details can be found in the *TPS65917-Q1 Register Map* (SLVUAH1).

**Switch-off reset (SWORST)** A SWORST occurs when any OFF request is configured to not generate a hardware reset. Configuration is done in the SWOFF\_HWRST register. This reset acts like the HWRST, except only the SWO registers are reset. The TPS65917-Q1 goes into the OFF state, from either ACTIVE or SLEEP, and therefore executes the ACT2OFF or SLP2OFF sequence.

A SWORST only resets registers in the SWORST domain, but leave the registers in the HWRST and POR domains unchanged.

The following registers are in the SWORST domain:

- SMPS control registers for voltage levels and operating mode control
- LDO control registers for voltage levels and operating mode control
- DEV\_CTRL & POWER\_CTRL registers
- VSYS\_MON enable and result register
- WATCHDOG configuration register
- PLL and REGEN Control registers


This list is indicative only; a full list and bit details can be found in the *TPS65917-Q1 Register*

Map (SLVUAH1).

表 5-7 lists the reset levels, and 图 5-9 shows the reset levels versus registers.

**表 5-7. Reset Levels**

| LEVEL | RESET TAG | REGISTERS AFFECTED | COMMENT                                                                          |
|-------|-----------|--------------------|----------------------------------------------------------------------------------|
| 0     | POR       | POR, HW, SWO       | This reset level is the lowest level, for which all registers are reset.         |
| 1     | HWRST     | HW, SWO            | During hardware reset (HWRST), all registers are reset except the POR registers. |
| 2     | SWORST    | SWO                | Only the SWO registers are reset.                                                |

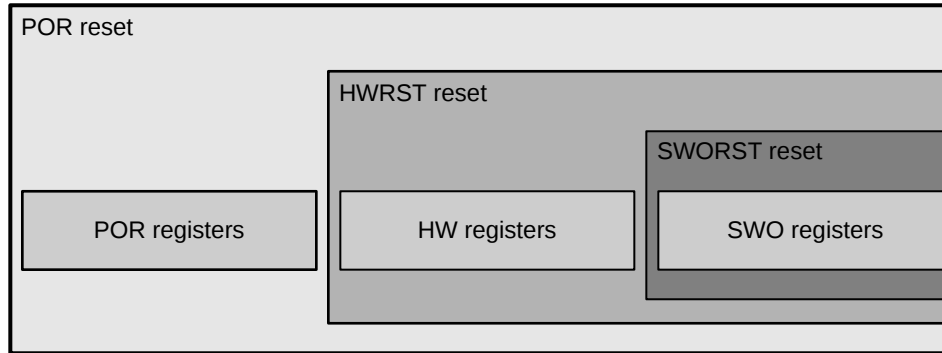

**图 5-9. Reset Levels versus Registers**

### 5.3.8 INT

The INT output is the interrupt request to the processor. By default, the INT pin is push-pull output and active low (when interrupt is pending, output is driven low). By default, the line is masked when the PMIC is in sleep state (configurable by setting the INT\_MASK\_IN\_SLEEP bit). Individual interrupt sources can be masked according to 表 5-12 .

### 5.3.9 Warm Reset

The TPS65917-Q1 device can execute a warm reset. The main purpose of this reset is to recover the device from a locked or unknown state by reloading default configuration. The warm reset is triggered by the NRESWARM pin. During a warm reset, the OFF2ACT sequence is executed regardless of the state (ACTIVE or SLEEP) and the device returns to or remains in the ACTIVE state. Resources that are not part of the OFF2ACT sequence are not impacted by a warm reset and retain the previous state. Resources that are part of power-up sequence go to active mode, and output voltage level is reloaded from OTP or kept in the previous value depending on the WR\_S bit in the SMPSx\_CTRL or LDOx\_CTRL register.

### 5.3.10 RESET\_IN

The RESET\_IN function causes a switch-off event (either a cold reset or shutdown). 表 5-3 shows that the RESET\_IN behavior is programmable. The RESET\_IN input has a 1-ms debounce that is independent of the selected polarity. In addition, after the device goes into the OFF state, a 25-ms masking period occurs before a new RESET\_IN event is accepted, which is equivalent to a 26-ms debounce for an OFF2ACT request.

## 5.4 Power Resources (Step-Down and Step-Up SMPS Regulators, LDOs)

The power resources provided by the TPS65917-Q1 device include inductor-based SMPSs and linear LDOs. These supply resources provide the required power to the external processor cores, external components, and to modules embedded in the TPS65917-Q1 device. 表 5-8 lists the power resources provided by the TPS65917-Q1 device.

表 5-8. Power Resources

| RESOURCE     | TYPE | VOLTAGE                                               | CURRENT | COMMENTS                                                               |
|--------------|------|-------------------------------------------------------|---------|------------------------------------------------------------------------|
| SMPS1, SMPS2 | SMPS | 0.7 to 1.65 V, 10-mV steps<br>1 to 3.3 V, 20-mV steps | 7 A     | Can be used as 1 dual-phase (7 A) or 2 single-phase (3.5 A) regulators |
| SMPS3        | SMPS | 0.7 to 1.65 V, 10-mV steps<br>1 to 3.3 V, 20-mV steps | 3 A     |                                                                        |
| SMPS4        | SMPS | 0.7 to 1.65 V, 10-mV steps<br>1 to 3.3 V, 20-mV steps | 1.5 A   |                                                                        |
| SMPS5        | SMPS | 0.7 to 1.65 V, 10-mV steps<br>1 to 3.3 V, 20-mV steps | 2 A     |                                                                        |
| LDO1, LDO2   | LDO  | 0.9 to 3.3 V, 50-mV steps                             | 300 mA  |                                                                        |
| LDO3         | LDO  | 0.9 to 3.3 V, 50-mV steps                             | 200 mA  |                                                                        |
| LDO4         | LDO  | 0.9 to 3.3 V, 50-mV steps                             | 200 mA  |                                                                        |
| LDO5         | LDO  | 0.9 to 3.3 V, 50-mV steps                             | 100 mA  | Low-noise LDO                                                          |

### 5.4.1 Step-Down Regulators

The synchronous step-down converter used in the power-management core has high efficiency while enabling operation with cost-competitive and small external components. The SMPSx\_IN supply pins of all the converters should be individually connected to the VSYS supply (VCCA pin). Two of these configurable step-down converters can be multiphased to create up to a 7-A rail. All of the step-down converters can synchronize to an external clock source between 1.7 MHz and 2.7 MHz, or an internal fallback clock at 2.2 MHz.

The step-down converter supports two operating modes, which can be selected independently. These two operating modes are defined as follows:

**Forced PWM mode:** In forced PWM mode, the device avoids pulse skipping and allows easy filtering of the switch noise by external filter components. The drawback is the higher IDDQ at low-output current levels.

**Eco-mode (lowest quiescent-current mode):** Each step-down converter can be individually controlled to enter a low quiescent-current mode. In ECO-mode, the quiescent current is reduced and the output voltage is supervised by a comparator while most of the control circuitry disabled to save power. The regulators should not be enabled under ECO-mode to ensure the stability of the output. ECO-mode should only be enabled when a converter has less than 5 mA of load current and  $V_O$  can remain constant. In addition, ECO-mode should be disabled before a load-transient step to allow the converter to respond in a timely manner to the excess current draw.

To ensure proper operation of the converter while it is in ECO-mode, the output voltage level must be less than 70% of the input supply voltage level. If the  $V_O$  of the converter is greater than 2.8 V, a safety feature of the device monitors the supply voltage of the converter and automatically switch off the converter if the input voltage falls below 4 V. The purpose of this safety mechanism is to prevent damage to the converter because of design limitation while the converter is in ECO mode.

In addition to the operating modes, the following parameters can be selected for the regulators:

- Powergood: See 节 5.4.1.3.
- Output discharge: Each switching regulator is equipped with an output discharge enable bit. When this bit is set to 1, the output of the regulator is discharged to ground with the equivalent of a 9-Ω resistor when the regulator is disabled. If the regulator enable bit is set, the discharge bit of the regulator is ignored.
- Output-current monitoring: The GPADC can monitor the SMPS output current. One SMPS at a time can be selected for measurement from the following: SMPS1, SMPS2, SMPS1&2, SMPS3, and SMPS5. Selection is controlled through the GPADC\_SMPS\_ILMONITOR\_EN register.

- Enable control of the Step-down converters: The step-down converter enable and disable is part of the flexible power-up and power-down state-machine. Each converter can be programmed such that it is powered up automatically to a preselected voltage in one of the time slots after a power-on condition occurs. Alternatively, each SMPS can be controlled by a dedicated pin. The NSLEEP, ENABLE1, and ENABLE2 pins can be mapped to any resource (LDOs, SMPS converter, 32-kHz clock output, or GPIO) to enable or disable the pin. Each SMPS can also be enabled and disabled through access to the I<sup>2</sup>C registers.

#### 5.4.1.1 Output Voltage and Mode Selection

One-time programmable (OTP) bits define the default output voltage and enabling of the regulator during the start-up sequence.

After start up, while the SMPS is in forced PWM mode, software can change the output voltage by setting the RANGE and VSEL bits in the SMPSx\_VOLTAGE register. When the SMPS enters ECO mode, the output voltage cannot be changed. Setting the SMPSx\_VOLTAGE.VSEL register to 0x0 disables the SMPS (turns off). The value for the RANGE bit cannot be changed when the SMPS is active. To change the operating voltage range, the SMPS must be disabled.

The operating mode (ECO, forced PWM, or off) of an SMPS when the TPS65917-Q1 device is in ACTIVE state can be selected in the SMPSx\_CTRL register by setting the MODE\_ACTIVE[1:0] bit field.

The operating mode of an SMPSx when the TPS65917-Q1 device is in the SLEEP state is controlled by the MODE\_SLEEP[1:0] bit field, depending on the SMPS assignment to the NSLEEP, ENABLE1, and ENABLE2 pins (see [表 5-5](#)).

The soft-start slew rate ( $t_{\text{ramp}}$ ) is fixed.

The pulldown discharge resistance for off mode is enabled and disabled in the SMPS\_PD\_CTRL register. By default, discharge is enabled. Two pulldown resistors, one at SMPSx\_SW and one at SMPS\_FDBK node, are enabled or disabled together. For multiphase SMPS, pulldown is in the master phase.

SMPS behavior for warm reset (reload default values or keep current values) is defined by the SMPSx\_CTRL.WR\_S bit.

#### 5.4.1.2 Clock Generation for SMPS

In PWM mode, the SMPSs are synchronized on an external input clock, SYNCDCDC (muxed with GPIO\_3), whereas in ECO mode, the switching frequency is based on an internal RC oscillator.

For PWM mode, a PLL is present to buffer the external clock input from SYNCDCDC pin, and to create 5 clock signals for the 5 SMPSs with different phases.

[图 5-10](#) shows the frequency of SYNCDCDC input clock ( $f_{\text{SYNC}}$ ) and the frequency of PLL output signal ( $f_{\text{SW}}$ ).

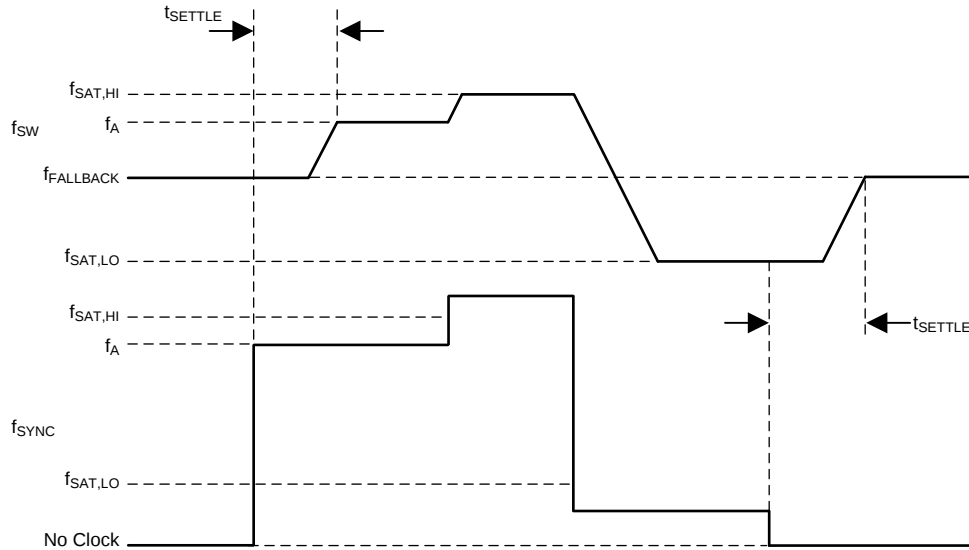


图 5-10. Synchronized Clock Frequency

When no clock is present on the SYNCDCDC pin, the PLL generates a clock with a frequency equal to the fallback frequency ( $f_{\text{FALLBACK}}$ ).

When a clock is present on the SYNCDCDC pin with a frequency between the low and high PLL saturation frequencies ( $f_{\text{SAT,LO}}$  and  $f_{\text{SAT,HI}}$ ), then the PLL is synchronized on the SYNCDCDC clock and generates a clock with frequency equal to  $f_{\text{SYNC}}$ .

If  $f_{\text{SYNC}}$  is higher than  $f_{\text{SAT,HI}}$ , then the PLL generates a clock with a frequency equal to  $f_{\text{SAT,HI}}$ .

If  $f_{\text{SYNC}}$  is smaller than  $f_{\text{SAT,LO}}$ , then the PLL generates a clock with a frequency equal to  $f_{\text{SAT,LO}}$ .

Dithering can be achieved by changing the frequency of the clock provided on the SYNCDCDC pin. The sync clock dither specification parameters are based on a triangular dither pattern, but other patterns that comply with the minimum and maximum sync frequency range and the maximum dither slope can also be used, as seen in 图 5-11.

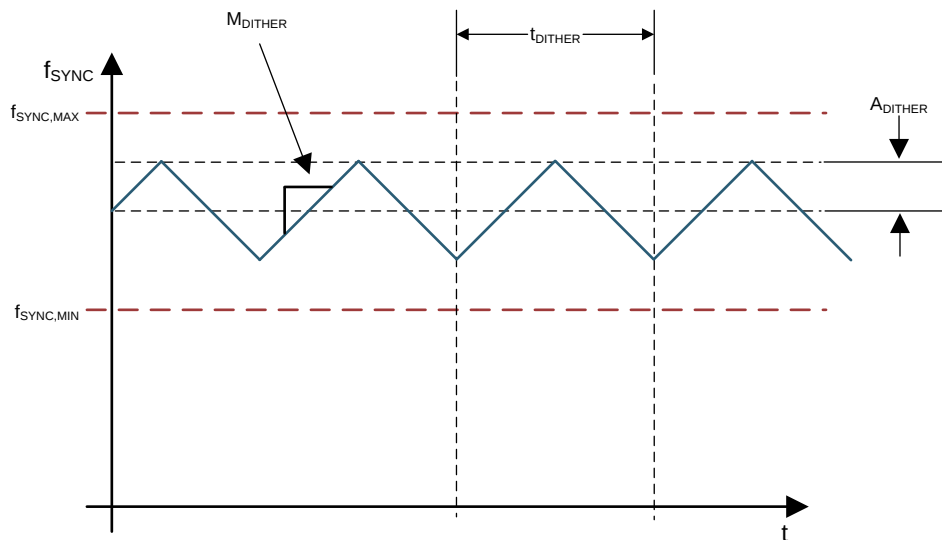


图 5-11. Synchronized Clock Frequency Range and Dither

### 5.4.1.3 Current Monitoring and Short Circuit Detection

SMPS1, SMPS2, SMPS1&2, and SMPS3 include several other features.

The SMPS sink current limitation is controlled with the SMPS\_NEGATIVE\_CURRENT\_LIMIT\_EN register. The limitation is enabled by default.

Channel 4 of the GPADC can be used to monitor the output current of SMPS1, SMPS2, SMPS1&2, SMPS3, or SMPS5. Load current monitoring is enabled for a given SMPS in the SMPS\_ILMONITOR\_EN register. SMPS output-power monitoring is intended to be used during the steady state of the output voltage, and is supported in PWM mode only.

Use [公式 1](#) to calculate the SMPS output-current result.

$$I_{LOAD} = I_{FS} \times \text{GPADC code} / (2^{12} - 1) - I_{OS} \quad (1)$$

where

- $I_{FS} = I_{FS0} \times K$
- $I_{OS} = I_{OS0} \times K$
- K is the number of SMPS active phases

Use [公式 2](#) to calculate the temperature compensated result.

$$I_{LOAD} = I_{FS} \times \text{GPADC code} / ([2^{12} - 1] \times [1 + TC\_R0 \times (TEMP - 25)]) - I_{OS} \quad (2)$$

For the values of  $I_{FS0}$  and  $I_{OS0}$ , see [Section 4.10](#).

The SMPS thermal monitoring is enabled (default) and disabled with the SMPS\_THERMAL\_EN register. When enabled, the SMPS thermal status is available in the SMPS\_THERMAL\_STATUS register. SMPS12, SMPS3, and SMPS5 have thermal protection. A unique thermal sensor is shared and protecting both SMPS1 and SMPS2. SMPS4 has no dedicated thermal protection.

Each SMPS has a detection for load current above  $I_{LIM}$ , indicating overcurrent or a shorted SMPS output. The SMPS\_SHORT\_STATUS register indicates any SMPS short condition. Depending on the setting of the INT2\_MASK.SHORT register, an interrupt is generated upon any shorted SMPS. If a short occurs on any enabled SMPSs, the corresponding short status bit is set in the SMPS\_SHORT\_STATUS register. A switch-off signal is then sent to the corresponding SMPS, and it remains off until the corresponding bit in the SMPS\_SHORT\_STATUS register is cleared. This register is cleared on read, or by issuing a POR. The same behavior applies to LDO shorts using the LDO\_SHORT\_STATUS registers.

A short must occur on any enabled SMPS or LDO for at least 155 us to 185 us for the short detection to shut off the rail. During startup of the device, there is a 2 ms counter that masks any short-circuit shutdown. This counter starts when the device is enabled and the counter is reset when any SMPSx or LDOx rail becomes ACTIVE. When no rail has been enabled for 2 ms, the counter reaches its threshold and the short-circuit shutdown is no longer masked for the enabled SMPSs and LDOs.

### 5.4.1.4 POWERGOOD

The TPS65917-Q1 device includes an external POWERGOOD pin which indicates if the outputs of the SMPS are within the acceptable range of the programmed output voltage, and if the current loading for the SMPS is within the range of the current limit. Users can select whether POWERGOOD reports the result of both voltage and current monitoring or only current monitoring. This selection applies to all SMPSs in the SMPS\_POWERGOOD\_MASK2 register. POWERGOOD\_TYPE\_SELECT register. When both the voltage and current are monitored, the POWERGOOD signal indicates whether or not all SMPS outputs are within a certain percentage, as specified by the  $V_{SMPSPG}$  parameter, of the programmed value while the load current is below  $I_{LIM}$ .


All POWERGOOD sources can be masked in the SMPS\_POWERGOOD\_MASK1 and SMPS\_POWERGOOD\_MASK2 registers. By default, only the SMPS1 rail (or SMPS12 rail if in dual phase) is monitored. When an SMPS is disabled, it should be masked in the SMPS\_POWERGOOD\_MASKx registers to prevent the SMPS from forcing the POWERGOOD pin to go inactive. When the SMPS voltage is transitioning from one target voltage to another because of a DVS command, voltage monitoring is internally masked and POWERGOOD is not impacted.

The GPADC result for SMPS output current monitoring can be included in POWERGOOD by setting the SMPS\_COMPMODE bit to 1. The GPADC can monitor only one SMPS.

图 5-12 is the block diagram of the circuitry which constructs the logic output of the POWERGOOD pin.

#### CAUTION

When operating in dual phase, the SMPS12 current monitor may cause POWERGOOD to change to a low level (with default polarity) when transitioning from dual phase operation to single phase operation. TI recommends masking SMPS12 as a POWERGOOD source, using SMPS\_POWERGOOD\_MASK1, or debouncing the POWERGOOD signal if this POWERGOOD toggle is not desired in the application design.

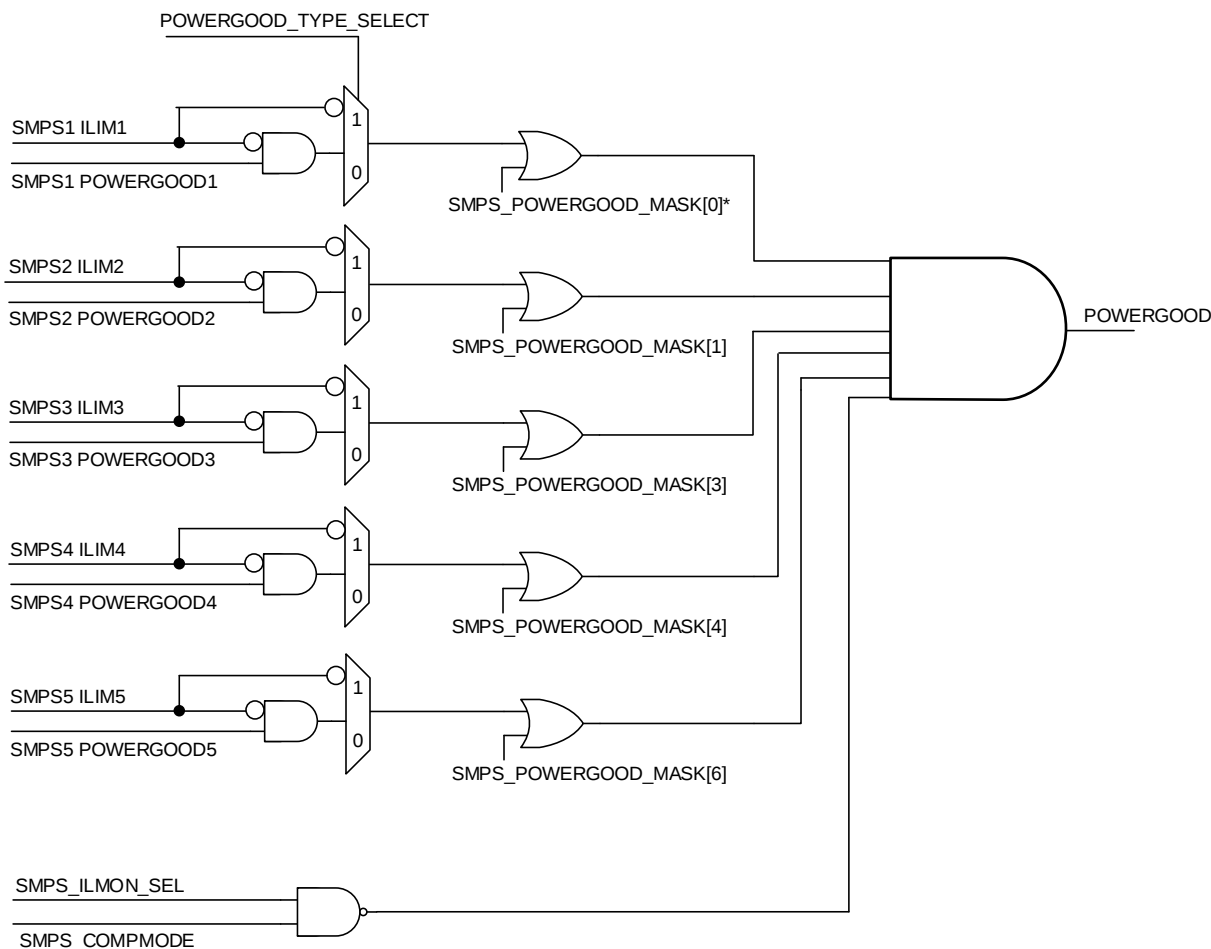

\*When operating in dual phase, SMPS\_POWERGOOD\_MASK[0] controls the monitoring of SMPS12.  
SMPS\_POWERGOOD\_MASK[1] is masked internally with dual phase operation.

图 5-12. POWERGOOD Block Diagram

#### 5.4.1.5 DVS-Capable Regulators


The Step-down converters, SMPS1, SMPS2, or SMPS1&2 and SMPS3, are DVS-capable and have some additional parameters for control. The slew rate of the output voltage during a voltage level change is fixed at 2.5 mV/μs. The control for two different voltage levels (roof and floor) with the NSLEEP, ENABLE1, and ENABLE2 signals is available. When the roof-floor control is not used (ROOF\_FLOOR\_EN = 0), the CMD bit in the SMPSx\_FORCE register can select two different voltage levels.

Below are the steps for programming two difference output voltage levels (roof and floor) for the DVS-capable step-down converters:

- The NSLEEP, ENABLE1, or ENABLE2 pins can be used for roof-floor control of SMPS. For roof-floor operation, set the SMPSx\_CTRL.ROOF\_FLOOR\_EN register, and assign SMPS to NSLEEP, ENABLE1, and ENABLE2 in the NSLEEP\_SMPS\_ASSIGN, ENABLE1\_SMPS\_ASSIGN, and ENABLE2\_SMPS\_ASSIGN registers, respectively. When the controlling pin is active, the value for the SMPS output is defined by the SMPSx\_VOLTAGE register. When the controlling pin is not active, the value for the SMPS output is defined by the SMPSx\_FORCE register.
- Set the second value for the output voltage with the SMPSx\_FORCE.VSEL register. Setting this register to 0x0 turns off the SMPS.

- Select which register, SMPSx\_VOLTAGE or SMPSx\_FORCE, to use with the SMPSx\_FORCE.CMD bit. The default is the voltage setting of SMPSx\_VOLTAGE. For the CMD bit to work, ensure that the SMPSx\_CTRL.ROOF\_FLOOR\_EN bit is set to 0.

图 5-13 shows the SMPS controls for DVS.

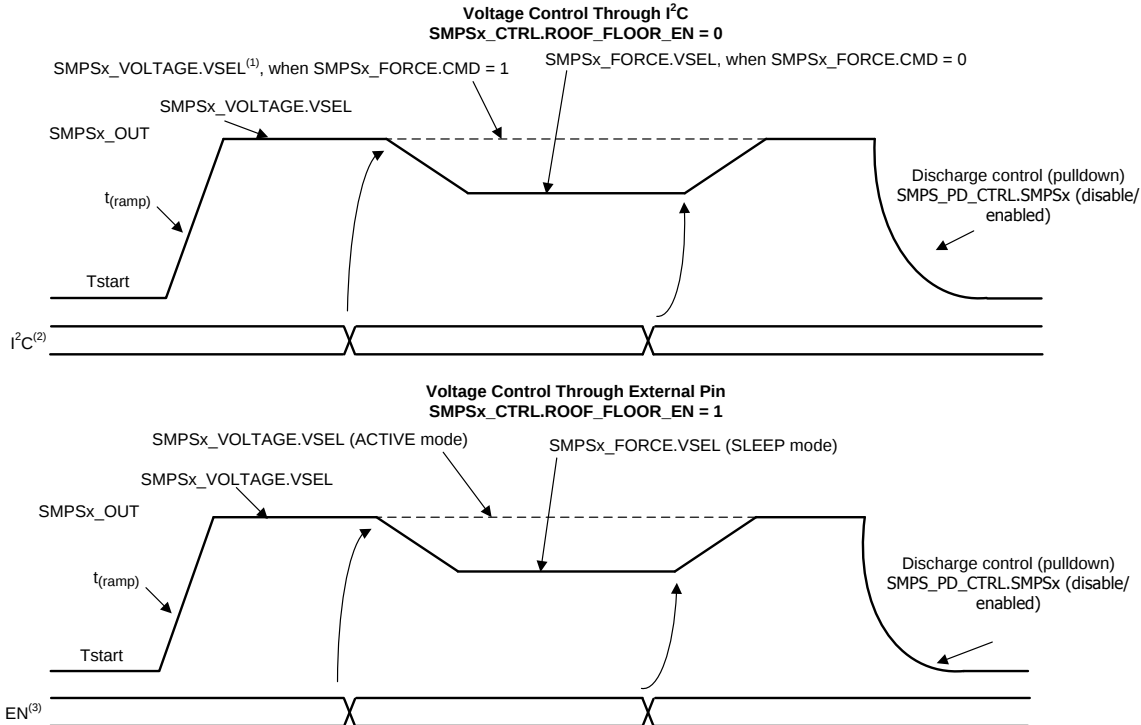

- VSEL[6:0] (voltage selection):**  
 SMPSx\_VOLTAGE.RANGE = 0: OFF, 0.5 V to 1.65 V in 10-mV steps  
 SMPSx\_VOLTAGE.RANGE = 1: 1 to 3.3 V in 20-mV steps
- I²C:** Control through access to SMPSx\_VOLTAGE, SMPSx\_FORCE registers
- EN:** Control through NSLEEP, ENABLE1, and ENABLE2 pins (see 表 5-5)

图 5-13. SMPS Controls for DVS

#### 5.4.1.5.1 Non DVS-Capable Regulators

SMPS4 and SMPS5 are non-DVS-capable regulators. The slew rate of the output voltage is not controlled internally, and the converter achieves the new output voltage in JUMP mode. When changes to the output voltage are required, programming the changes to the output voltages of SMPS4 and SMPS5 at a rate slower than 2.5 mV/μs is recommended to avoid voltage overshoot or undershoot.

#### 5.4.1.6 Step-Down Converters SMPS1, SMPS2 or SMPS1&2

The step-down converters, SMPS1 and SMPS2, can be used in two different configurations which are described as follows:

- SMPS1 and SMPS2 in single-phase configuration with each SMPS supporting a 3.5-A load current
- SMPS1&2 in dual-phase configuration supporting 7-A load current

SMPS1 and SMPS2 can be used as separate converters. In dual-phase configuration the two interleaved synchronous buck-regulator phases with built-in current sharing operate in opposite phases. For light loads, the converter automatically changes to single-phase operation.

图 5-14 shows the connections for dual-phase configurations.

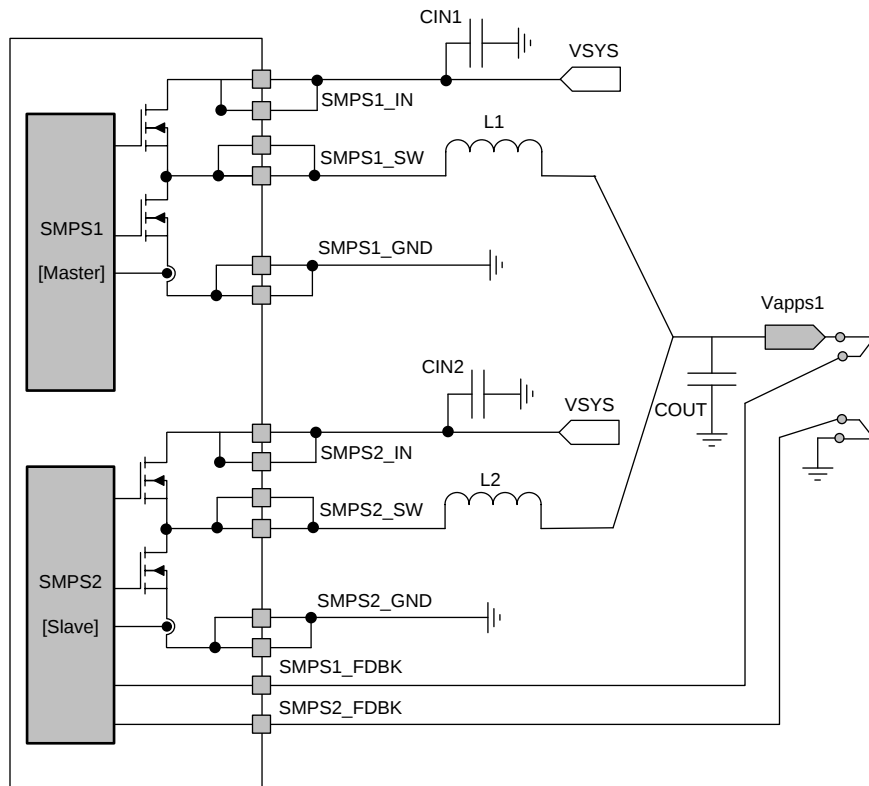


图 5-14. SMPS1&2 Dual-Phase Configuration

Below are the steps to program the SMPS1 and SMPS2 for single-phase or dual-phase operation:

- The OTP bit defines single-phase (SMPS1 and SMPS2) or dual-phase (SMPS1&2) operation. If dual-phase mode is selected, the SMPS12 registers control SMPS1&2.
- By default, SMPS1&2 operates in dual-phase mode for higher load currents and switches automatically to single-phase mode for low load currents. Forcing multiphase operation or single-phase operation is possible by setting the SMPS\_CTRL.SMPS12\_PHASE\_CTRL[1:0] bits when the SMPS1&2 are loaded. Under no-load condition, do not force the multiphase operation because it causes SMPS12 to exhibit instability.

#### 5.4.1.7 Step-Down Converters SMPS3, SMPS4, and SMPS5

SMPS3 is a buck converter supporting up to 3-A load current. SMPS4 and SMPS5 are also buck converters, with SMPS4 supporting up to 1.5-A load current, and SMPS5 supporting up to 2-A load current. SMPS3 is DVS-capable.

#### 5.4.2 Low Dropout Regulators (LDOs)

All LDOs are integrated. They can be connected to the system supply, to an external buck boost SMPS, or to another preregulated voltage source. The output voltages of all LDOs can be selected, regardless of the LDO input voltage level,  $V_{IN}$ . No hardware protection is available to prevent software from selecting an improper output voltage if the  $V_{IN}$  minimum level is lower than the total DC-output voltage ( $T_{DCOV(LDOx)}$ ) plus the dropout voltage ( $D_{V(LDOx)}$ ). In such conditions, the output voltage is lower and nearly equal to the input supply. The output voltage of the regulator cannot be modified while the LDO is enabled from one voltage range (0.9 to 2.1 V) to the other voltage range (2.2 to 3.3 V). The regulator must be restarted in these cases. If an LDO is not needed, the external components do not need to be mounted. The TPS65917-Q1 device is not damaged by such configuration. The other functions do not depend on the unused LDOs and work properly.

#### 5.4.2.1 LDOVANA

The LDOVANA voltage regulator is dedicated to supply the analog functions of the TPS65917-Q1 device, such as the GPADC and other analog circuitry. The LDOVANA regulator is automatically enabled and disabled as needed. The automatic control optimizes the overall current consumption if the SLEEP state.

#### 5.4.2.2 LDOVRTC

The LDOVRTC regulator supplies always-on functions, such as wake-up functions. This power resource is active as soon as a valid energy source is present.

This resource has two modes which are Normal mode and backup mode. The LDOVRTC regulator functions in normal mode when supplied from the main system power rail and is able to supply all digital components of the TPS65917-Q1 device. The LDOVRTC regulator functions backup mode when supplied from system power rail that is above the power-on reset threshold but below the system low threshold and is only able to supply always-on components.

The LDOVRTC regulator supplies the digital components of the TPS65917-Q1 device. In the BACKUP state, the digital activity is reduced to maintaining the wake up functions only. In the OFF state, the turn-on events and detection mechanism are added to the previous current load in the BACKUP state. In the BACKUP and OFF states, the external load on the LDOVRTC pin should not exceed 0.5 mA.

In the ACTIVE state, the LDOVRTC switches automatically into active mode. The reset is released and the clocks are available. In SLEEP state, the LDOVRTC is kept active. The reset is released and only the 32-kHz clock is available. To reduce power consumption, the user is still able to select low-power mode through the software.

---

#### 注

If  $V_{CC}$  is discharged rapidly and then resupplied, a POR may not be reliably generated. In this case a pulldown resistor can be added on the LDOVRTC output. See 节 5.15 for details.

---

#### 5.4.2.3 LDO1 and LDO2

The LDO1 and LDO2 regulators have bypass capability to connect the input voltage to the output. This ability is useful, for example, as an input-output (I/O) supply of an SD card and preregulated with a 2.7 to 3.3 V supply. This ability allows switching between 1.8 V (normal LDO mode) and the preregulated supply (bypass mode).

#### 5.4.2.4 Low-Noise LDO (LDO5)

LDO5 is specifically designed to supply noise sensitive circuits. This supply can be used to power circuits such as PLLs, oscillators, or other analog modules that require low noise on the supply.

#### 5.4.2.5 Other LDOs

All other LDOs have the same output voltage capability which is from 0.9 to 3.3 V in 50-mV steps.

### 5.5 SMPS and LDO Input Supply Connections

To avoid leakage, all SMPSx\_IN supply pins and the VCCA pin must be externally connected together.

The LDO preregulation from a boosted supply (voltage at LDOx\_IN > voltage at VCCA) is supported if the output voltage of the LDO is 2.2 V (minimum).

### 5.6 First Supply Detection

The TPS65917-Q1 device can be configured to detect and wake up from a first supply-detection (FSD) event.

When an automatic start from an FSD event is enabled, the PMIC powers up automatically when a supply is inserted, without waiting for a PWRON button press or other start-up event. An FSD event is detected when the VCCA pin voltage increases above the VSYS\_LO threshold. Transition to ACTIVE state requires that the VCC\_SENSE voltage increases above the VSYS\_HI voltage.

The FSD feature is enabled through unmasking the corresponding interrupt. This event triggers the interrupt, FSD, to the interrupt (INT) line. When an FSD interrupt occurs, the source can be determined using the FSD\_STATUS bit in the PMU\_SECONDARY\_INT register. An interrupt from an FSD event, if not masked, is a wake-up event. Interrupt masking is pre-programmed in the one time programmable memory (OTP) of the device. Any HWRST event sets the interrupt mask bits to the default (OTP) value. The FSD event can also be masked through the PMU\_SECONDARY\_INT register by setting the FSD\_MASK bit.

## 5.7 Long-Press Key Detection

The TPS65917-Q1 device can detect a long press on a key (or pin), PWRON. Upon detection, the device generates a LONG\_PRESS\_KEY interrupt and then switches the system off. The key-press duration is configured through the LONG\_PRESS\_KEY.LPK\_TIME bits.

## 5.8 12-Bit Sigma-Delta General-Purpose ADC (GPADC)

The features of the GPADC include the following:

The GPADC consists of a 12-bit sigma-delta ADC combined with a 8-input analog multiplexer. The running frequency of the GPADC is 2.5MHz. The GPADC lets the host processor monitor analog signals using analog-to-digital conversion on the input source. After the conversion is complete, an interrupt is generated to signal the host processor that the result of the conversion is ready to be accessed through the I<sup>2</sup>C interface.

The GPADC supports 8 analog inputs. Two of these inputs are available on external pins and the remaining inputs are dedicated to VSYS supply voltage monitoring and internal resource monitoring.

图 5-15 shows the block diagram of the GPADC.

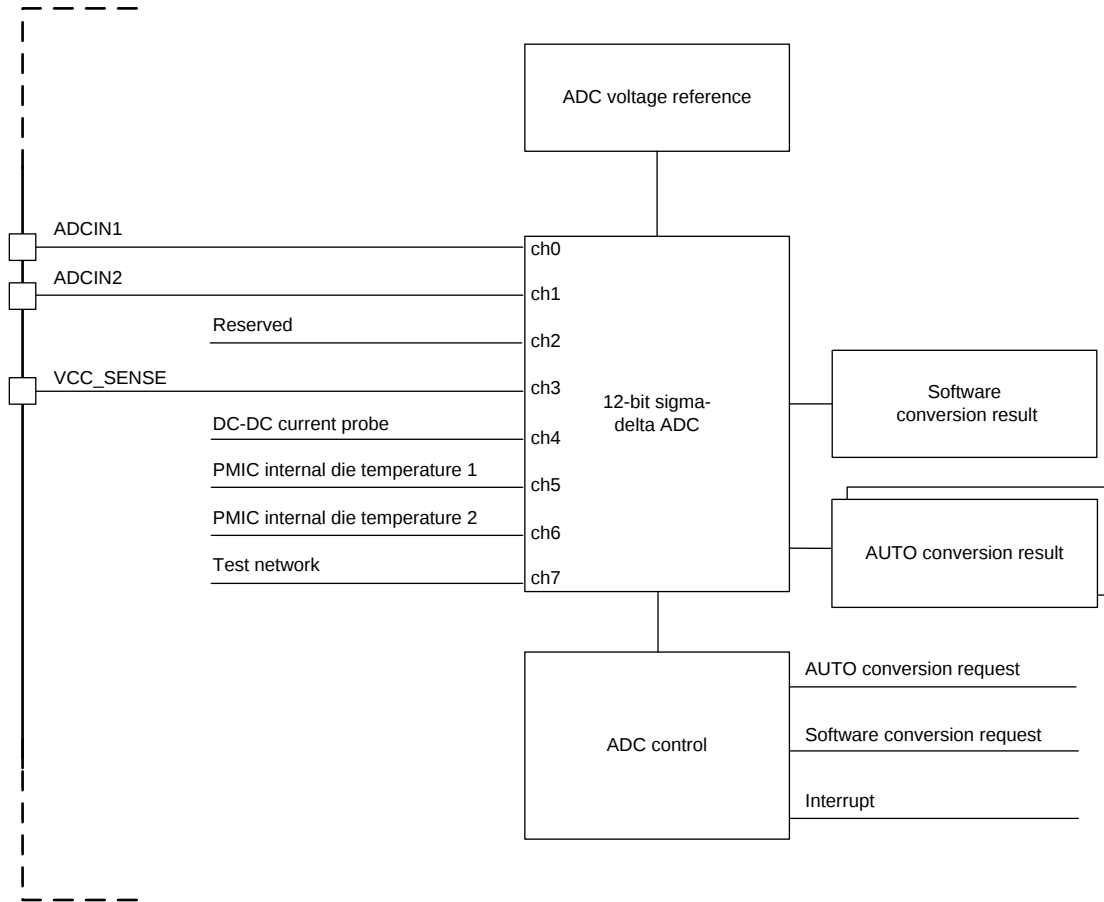


图 5-15. Block Diagram of the GPADC

The conversion requests are initiated by the host processor either by software through the I<sup>2</sup>C or by periodical measurements.

Two kinds of conversion requests occur with the following priority:

1. Asynchronous conversion request (SW), see 节 5.8.1
2. Periodic conversion (AUTO), see 节 5.8.2

表 5-9 lists the GPADC channel assignments.

Use 公式 3 to convert from the GPADC code to the internal die temperature using GPADC channels 5 and 6.

$$\text{Die Temperature (}^{\circ}\text{C)} = \frac{\left( \left[ \frac{\text{GPADC Code}}{2^{12}} \right] \times 1.25 \right) - 0.753 \text{ V}}{2.64 \text{ mV}} \quad (3)$$

表 5-9. GPADC Channel Assignments

| CHANNEL    | TYPE                    | INPUT VOLTAGE<br>FULL RANGE <sup>(1)</sup> | INPUT VOLTAGE<br>PERFORMANCE RANGE <sup>(2)</sup> | SCALER | OPERATION       |
|------------|-------------------------|--------------------------------------------|---------------------------------------------------|--------|-----------------|
| 0 (ADCIN1) | External <sup>(3)</sup> | 0 to 1.25 V                                | 0.01 to 1.215 V                                   | No     | General purpose |
| 1 (ADCIN2) | External <sup>(3)</sup> | 0 to 1.25 V                                | 0.01 to 1.215 V                                   | No     | General purpose |
| 2          | Reserved                |                                            |                                                   |        |                 |

(1) The minimum and maximum voltage full range corresponds to typical minimum and maximum output codes (0 and 4095).

(2) The performance voltage is a range where gain error drift, offset drift, INL and DNL parameters are ensured.

(3) If VANALDO is off, maximum current to draw from GPADC\_INx is 1 mA for reliability. For current higher than 1 mA, LDOVANA must be in the SLEEP or ACTIVE state.

**表 5-9. GPADC Channel Assignments (continued)**

| CHANNEL          | TYPE     | INPUT VOLTAGE<br>FULL RANGE <sup>(1)</sup>                                                | INPUT VOLTAGE<br>PERFORMANCE RANGE <sup>(2)</sup>                                            | SCALER | OPERATION                            |
|------------------|----------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------|--------------------------------------|
| 3<br>(VCC_SENSE) | Internal | 2.5 to 5 V when<br>HIGH_VCC_SENSE = 0<br>2.3 V to (VCCA – 1 V) when<br>HIGH_VCC_SENSE = 1 | 2.5 to 4.86 V when<br>HIGH_VCC_SENSE = 0<br>2.3 V to (VCCA – 1 V) when<br>HIGH_VCC_SENSE = 1 | 4      | System supply voltage<br>(VCC_SENSE) |
| 4                | Internal | 0 to 1.25 V                                                                               |                                                                                              | No     | DC-DC current probe                  |
| 5                | Internal | 0 to 1.25 V                                                                               | 0 to 1.215 V                                                                                 | No     | PMIC internal die<br>temperature 1   |
| 6                | Internal | 0 to 1.25 V                                                                               | 0 to 1.215 V                                                                                 | No     | PMIC internal die<br>temperature 2   |
| 7                | Internal | 0 to VCCA V                                                                               | 0.055 to VCCA V                                                                              | 5      | Test network                         |

### 5.8.1 Asynchronous Conversion Request (SW)

The user can request an asynchronous conversion. This conversion is not critical for start-of-conversion positioning.

The user must select the channel to be converted through the software and then request the conversion through the GPADC\_SW\_SELECT register. An GPADC\_EOC\_SW interrupt is generated when the conversion result is ready, and the result is stored in the GPADC\_SW\_CONV0\_LSB and GPADC\_SW\_CONV0\_MSB registers.

#### CAUTION

A defect in the digital controller of TPS65917-Q1 device may cause an unreliable result from the first asynchronous conversion request after the device exit from a warm reset. Texas Instruments recommends that user rely on subsequent requests to obtain accurate result from the asynchronous conversion after a device warm reset.

For detailed information regarding this issue, see *Guide to Using the GPADC in TPS65903x and TPS6591x Devices* [SLIA087](#).

### 5.8.2 Periodic Conversion (AUTO)

The user can enable periodic conversions to compare one or two channels with a predefined threshold level. One or two channels can be selected by programming the GPADC\_AUTO\_SELECT register. The thresholds and polarity of the conversion can be programmable through the GPADC\_THRES\_CONV0\_LSB, GPADC\_THRES\_CONV0\_MSB, GPADC\_THRES\_CONV1\_LSB, and GPADC\_THRES\_CONV1\_MSB registers. In addition, software must select the conversion interval with the GPADC\_AUTO\_CTRL register and enable the periodic conversion with the AUTO\_CONV0\_EN and AUTO\_CONV1\_EN bits.

The GPADC does not need to be enabled separately. The control logic enables and disables the GPADC automatically to save power. The latest conversion result is always stored in the GPADC\_AUTO\_CONV0\_LSB, GPADC\_AUTO\_CONV0\_MSB, GPADC\_AUTO\_CONV1\_LSB, and GPADC\_AUTO\_CONV1\_MSB registers. All selected channels are queued and converted from channel 0 to 7. The first (lower) converted channel result is placed in the GPADC\_AUTO\_CONV0 register and the second result is placed in the GPADC\_AUTO\_CONV1 register. Therefore, it is recommended to place the lower channel for conversion in the AUTO\_CONV0\_SEL bit field of the GPADC\_AUTO\_SELECT register, and the higher channel for conversion in the AUTO\_CONV1\_SEL bit field.

If the conversion result triggers the threshold level, an INT interrupt is generated and the conversion result is stored. If the interrupt is not cleared or the results are not read before another auto-conversion is complete, then the registers store only the latest results, discarding the previous ones. The auto-conversion is never stopped by an uncleared interrupt or unread registers.

Programming the triggering of the threshold level can also generate shutdown. This programming is available independently for the CONV0 and CONV1 channels and is enabled by setting the SHUTDOWN bits in the GPADC\_AUTO\_CTRL register. During sleep and off modes, only channels 0 to 4 can be converted. For channels 5 and 6, conversion is possible in sleep state if the thermal sensor is not disabled.

### 5.8.3 Calibration

The GPADC channels are calibrated in the production line using a 2-point calibration method. The channels are measured with two known values (X1 and X2) and the difference (D1 and D2) to the ideal values (Y1 and Y2) are stored in the OTP memory. 图 5-16 shows the principle of the calibration.

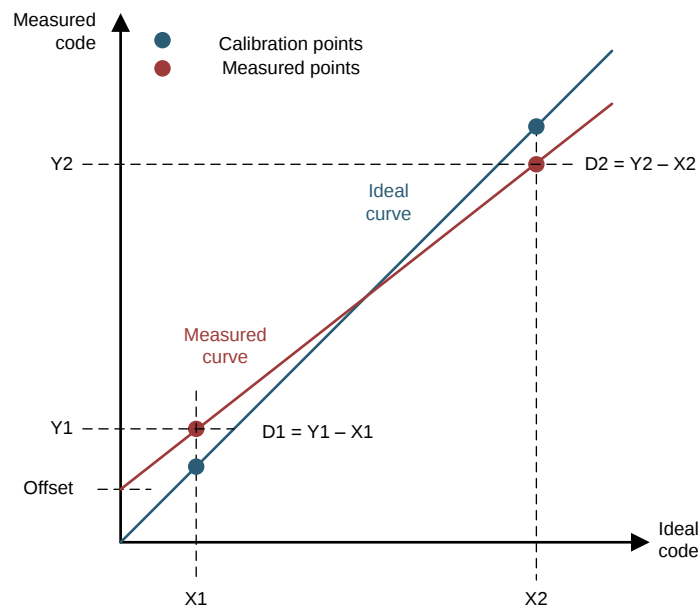


图 5-16. ADC Calibration Scheme

Some of the GPADC channels can use the same calibration data. Use 公式 4 and 公式 5 to calculate the corrected result.

$$\text{Gain: } k = 1 + \frac{(D2 - D1)}{(X2 - X1)} \quad (4)$$

$$\text{Offset: } b = D1 - (k - 1) \times X1 \quad (5)$$

If the measured code is  $a$ , the corrected code  $a'$  is calculated using 公式 6.

$$a' = \frac{(a - b)}{k} \quad (6)$$

表 5-10 lists the parameters, X1 and X2, and the register for D1 and D2 required in the calculation for all the channels.

表 5-10. GPADC Calibration Parameters

| CHANNEL | X1            | X2            | D1          | D2          | COMMENTS |
|---------|---------------|---------------|-------------|-------------|----------|
| 0, 1    | 2064 (0.63 V) | 3112 (0.95 V) | GPADC_TRIM1 | GPADC_TRIM2 |          |

**表 5-10. GPADC Calibration Parameters (continued)**

| CHANNEL | X1            | X2           | D1          | D2          | COMMENTS                   |
|---------|---------------|--------------|-------------|-------------|----------------------------|
| 3       | 2064 (2.52 V) | 3112 (3.8 V) | GPADC_TRIM3 | GPADC_TRIM4 | When<br>HIGH_VCC_SENSE = 0 |
| 3       | 2064 (2.52 V) | 3112 (3.8 V) | GPADC_TRIM5 | GPADC_TRIM6 | When<br>HIGH_VCC_SENSE = 1 |

## 5.9 General-Purpose I/Os (GPIO Pins)

The TPS65917-Q1 device integrates seven configurable general-purpose I/Os that are multiplexed with alternative features as listed in [表 5-11](#)

**表 5-11. General Purpose I/Os Multiplexed Functions**

| PIN    | PRIMARY FUNCTION           | SECONDARY FUNCTION                                                                                                                                                 |
|--------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GPIO_0 | General-purpose I/O Port 0 | Input: PWRDOWN (Power down signal)                                                                                                                                 |
|        |                            | Input: ENABLE2 (Peripheral power request input 2)                                                                                                                  |
|        |                            | Output: REGEN1 (External regulator enable output 4)                                                                                                                |
| GPIO_1 | General-purpose I/O Port 1 | Input: RESET_IN (Reset input)                                                                                                                                      |
|        |                            | Input: NRESWARM (Warm reset input)                                                                                                                                 |
|        |                            | Input: VBUS_SENSE (VBUS input)                                                                                                                                     |
| GPIO_2 | General-purpose I/O Port 2 | Input: ENABLE1 (Peripheral power request input 1)<br>Input/Output: I2C2_SDA_SDO (DVS control I <sup>2</sup> C serial bidirectional data) or SPI output data signal |
| GPIO_3 | General-purpose I/O Port 3 | Input: ENABLE2 (Peripheral power request input 2)                                                                                                                  |
|        |                            | Output: REGEN1 (External regulator enable output 1)                                                                                                                |
|        |                            | Input: SYNCDCDC (SMPS clock synchronization input)                                                                                                                 |
| GPIO_4 | General-purpose I/O Port 4 | Output: REGEN2 (External regulator enable output 2)                                                                                                                |
|        |                            | Input/Output: I2C2_SCL_SCE (DVS control I <sup>2</sup> C serial clock) or SPI chip-select signal                                                                   |
| GPIO_5 | General-purpose I/O Port 5 | Input: POWERHOLD (Power hold input)                                                                                                                                |
|        |                            | Output: REGEN3 (External regulator enable output 3)                                                                                                                |
| GPIO_6 | General-purpose I/O Port 6 | Input: NSLEEP (Sleep mode request signal)                                                                                                                          |
|        |                            | Output: POWERGOOD (Indicator signal for valid regulator output voltages)                                                                                           |
|        |                            | Output: REGEN3 (External regulator enable output 3)                                                                                                                |

For GPIOs characteristics, refer to:

- Pin description,
- Electrical characteristics, [Section 4.14](#) and [Section 4.15](#)
- Pullup and pulldown characteristics, [Section 4.16](#)

Each GPIO event can generate an interrupt on a rising edge, falling edge, or both; each line is individually maskable (as described in [节 5.11](#)). A GPIO-interrupt applies only when the primary function (general-purpose I/O) has been selected.

All GPIOs can be used as wake-up events.

### 注

GPIO\_2 and GPIO\_4 are in the VIO domain (only the I/O supply is required to be available) and therefore these GPIOs cannot be used as ON requests from the OFF mode.

The REGEN1 output is muxed in GPIO\_0 and GPIO\_3, the REGEN2 output is muxed in GPIO\_4, and the REGEN3 output is muxed in GPIO\_5 and GPIO\_6. When the GPIO\_0, GPIO\_3, GPIO\_4, GPIO\_5, and GPIO\_6 pins are configured as REGEN1, REGEN2, or REGEN3, these pins can be programmed as part of the power-up sequence to enable external devices such as external SMPSs. The REGEN1 and REGEN3 signals are at the VRTC voltage level and the REGEN2 signal is at the VIO voltage level.

The PRIMARY\_SECONDARY\_PAD1 and PRIMARY\_SECONDARY\_PAD2 registers control selection between primary and secondary functions.

When configured as primary functions, all GPIOs are controlled through the following set of registers:

- GPIO\_DAT\_DIR: Configures individually each GPIO direction (read and write)
- GPIO\_DATA\_IN: Data line-in when configured as an input (read only)
- GPIO\_DATA\_OUT: Data line-out when configured as an output (read and write)
- GPIO\_DEBOUNCE\_EN: Enables individually each GPIO debouncing (read and write)
- GPIO\_CTRL: Global GPIO control to enable and disable all GPIOs (read and write)
- GPIO\_CLEAR\_DATA\_OUT: Clears individually each GPIO data out (write only)
- GPIO\_SET\_DATA\_OUT: Sets individually each GPIO data out (write only)
- PU\_PD\_GPIO\_CTRL1, PU\_PD\_GPIO\_CTRL2: Configures each line pullup and pulldown (read and write)
- OD\_OUTPUT\_GPIO\_CTRL: Enables individual output open drain (read and write)

When configured as secondary functions, none of the GPIO control registers (see [表 5-11](#)) affect GPIO lines. The line configurations (pullup, pulldown, or open drain) for secondary functions are held in a separate register set as well as specific function settings.

## 5.10 Thermal Monitoring

The TPS65917-Q1 device includes several thermal monitoring functions for internal thermal protection of the PMIC.

The TPS65917-Q1 device integrates two thermal detection modules to monitor the temperature of the die. These modules are placed on opposite sides of the device and close to the LDO and SMPS modules. An over-temperature condition at either module first generates a warning to the system and then, if the temperature continues to rise, a switch-off of the PMIC device can occur before damage to the die.

Two thermal protection levels are available. One of these protections is a hot-die (HD) function which sends an interrupt to software. Software is expected to close any noncritical running tasks to reduce power. The second protection is a thermal shutdown (TS) function which immediately begins device switch-off.

By default, thermal protection is always enabled except in the BACKUP or OFF state. Disabling thermal protection in sleep state is possible for minimum power consumption.

To use thermal monitoring in the system do the following:

- Set the value for the hot-die temperature threshold with the OSC\_THERM\_CTRL.THERM\_HD\_SEL[1:0] bits.
- Disable thermal shutdown in sleep state by setting the THERM\_OFF\_IN\_SLEEP bit to 1 in the OSC\_THERM\_CTRL register.

During operation, if the die temperature increases beyond HD\_THR\_SEL, an interrupt (INT1.HOTDIE) is sent to the host processor. Immediate action to reduce the PMIC power dissipation by shutting down some functions must occur.

If the die temperature of the PMIC device rises further (above 148°C), an immediate shutdown occurs. Indication of a thermal shutdown event indication is written to the status register, INT1\_STATUS\_HOTDIE. The system cannot restart until the temperature falls below the HD\_THR\_SEL threshold.

### 5.10.1 Hot-Die Function (HD)

The HD detector monitors the temperature of the die and provides a warning to the host processor through the interrupt system when the temperature reaches a critical value. The threshold value must be set to less than the thermal shutdown threshold. Hysteresis is added to the HD detection to avoid generating multiple interrupts.

The integrated HD function provides the host PM software with an early warning overtemperature condition. This monitoring system is connected to the interrupt controller (INTC) and can send an interrupt when the temperature is higher than the programmed threshold. The TPS65917-Q1 device allows the programming of four junction-temperature thresholds to increase the flexibility of the system: in nominal conditions, the threshold triggering of the interrupt can be set from 117°C to 130°C. The HD hysteresis is 10°C in typical conditions.

When the power-management software triggers an interrupt, immediate action must be taken to reduce the amount of power drawn from the PMIC device (for example, noncritical applications must be closed).

### 5.10.2 Thermal Shutdown

The thermal shutdown detector monitors the temperature on the die. If the junction reaches a temperature at which damage can occur, a switch-off transition is initiated and a thermal shutdown event is written into a status register.

The system cannot restart until the die temperature falls below the HD threshold.

## 5.11 Interrupts

表 5-12 lists the TPS65917-Q1 interrupts.

These interrupts are split into four register groups (INT1, INT2, INT3, and INT4) and each group has three associated control registers which are defined as follows:

**INTx\_STATUS** Reflects which interrupt source has triggered an interrupt event

**INTx\_MASK** Used to mask any source of interrupt, to avoid generating an interrupt on a specified source

**INTx\_LINE\_STATE** Reflects the real-time state of each line associated to each source of interrupt

The INT4 register group has two additional registers, INT4\_EDGE\_DETECT1 and INT4\_EDGE\_DETECT2, to independently configure rising and falling edge detection (respectively).

All interrupts are logically combined on a single output line, INT (default is active low). The INT line is used as an external interrupt line to warn the host processor of any interrupt event that has occurred within the device. The host processor must read the interrupt status registers (INTx\_STATUS) through the control interface (I<sup>2</sup>C) to identify the interrupt source. Any interrupt source can be masked by programming the corresponding mask register, INTx\_MASK. When an interrupt is masked, the associated event-detection mechanism is disabled. Therefore the corresponding STATUS bit is not updated and the INT line is not triggered if the masked event occurs. If an event occurs while the corresponding interrupt is masked, that event is not recorded. If an interrupt is masked after it has been triggered (the event has occurred and has not been cleared), the STATUS bit would reflect the event until the bit is cleared. While the event is masked, the STATUS bit will not be over-written when a new event occurs.

Because some interrupts are sources of ON requests (see 表 5-12), source masking can mask a specific device switch-on event. Because an active interrupt line, INT, is treated as an ON request, any interrupt that is not masked must be cleared to allow the execution of a sleep sequence of the device, when requested.

The polarity of the INT line and clearing method of interrupts can be configured using the INT\_CTRL register.

An INT line can be triggered in either SLEEP or ACTIVE state, depending on the setting of the OSC\_THERM\_CTRL.INT\_MASK\_IN\_SLEEP bit.

When a new interrupt occurs while the INT line is still active (not all interrupts are cleared), then the following occurs:

- If the new interrupt source is the same as the one that has already triggered the INT line, the interrupt can be discarded or stored as a pending interrupt depending on the setting of the INT\_CTRL.INT\_PENDING bit.
  - When the INT\_CTRL.INT\_PENDING bit is active, then any new interrupt event occurring on the same source (while the INT line is still active) is stored as a pending interrupt. Because only one level of pending interrupts can be stored for a given source, when more than two events occur on the same source, only the last event is stored. While an interrupt is pending, two accesses are required (either read or write) to clear the STATUS bit: one access for the actual interrupt and the other for the pending interrupt. Two consecutive read-write (R/W) operations to the same register clear only one interrupt. Another register must be accessed between the two R/W clear operations. For example, of a clear-on-read operation, when the INT signal is active, read all four INTx\_STATUS registers in sequence to collect the status of all potential interrupt sources. The read access clears the full register for the active or actual interrupt. If the INT line is still active, repeat the read sequence to check and clear pending interrupts.
  - When the INT\_CTRL.INT\_PENDING bit is inactive (default), then any new interrupt event occurring on the same source (while the INT line is still active) is discarded. Two consecutive R/W operations to the same register only clear one interrupt. Another register must be accessed between the two R/W-to-clear operations.
- If the new interrupt source is different from the one that already triggered the INT line, then the interrupt is stored immediately in the corresponding STATUS bit.

To clear the interrupt line, all status registers must be cleared. The clearing of all status registers occurs by using a clear-on-read or a clear-on-write method. The clearing method is selectable through the INT\_CTRL.INT\_CLEAR bit. When this bit is set, the clearing method applies to all bits for all interrupts.

The two different clear operations are defined as follows:

**Clear-on-read** Read operation on a single status register clears all bits for only this specific register (8 bits). Therefore, a read operation of all the four status registers is required to clear all the interrupts requests. When the four read operations are complete, if the INT line is still active then another interrupt event has occurred during the read process. Therefore, the read sequence must be repeated.

**Clear-on-write** This method is bit-based; setting a specific bit to 1 clears only the written bit. Therefore, to clear a complete status register, write 0xFF. Writing 0xFF to all four status registers is required to clear all the interrupt requests. When the four write operations are complete, if the INT line is still active then another interrupt event has occurred during the write process. Therefore the write sequence must be repeated.

表 5-12. Interrupt Sources

| INTERRUPT      | ASSOCIATED EVENT | EDGES DETECTION          | ON REQUEST                    | REG. GROUP | REG. BIT | DESCRIPTION                                                                                                                                                                                                           |
|----------------|------------------|--------------------------|-------------------------------|------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| VSYS_MON       | Internal event   | Rising and falling       | Never                         | INT1       | 6        | System voltage monitoring interrupt<br>Triggered when the system voltage crosses the configured threshold in the VSYS_MON register.                                                                                   |
| HOTDIE         | Internal event   | Rising and Falling       | Never                         |            | 5        | Hot-die temperature interrupt<br>The embedded thermal monitoring module has detected a die temperature above the hot-die detection threshold. An interrupt is generated in ACTIVE and SLEEP states, not in OFF state. |
| PWRDOWN        | PWRDOWN (pin)    | Rising and falling       | Never                         |            | 4        | Power-down interrupt<br>Triggered when event is detected on the PWRDOWN pin.                                                                                                                                          |
| LONG_PRESS_KEY | PWRON (pin)      | Falling                  | Never                         |            | 2        | Power-on long key-press interrupt<br>Triggered when PWRON is low during more than the long-press delay, LONG_PRESS_KEY.LPK_TIME.                                                                                      |
| PWRON          | PWRON (pin)      | Falling                  | Always (INT mask, don't care) |            | 1        | Power-on interrupt<br>Triggered when the PWRON button is pressed (low) while the device is on. An interrupt is generated in ACTIVE and SLEEP states, not in OFF state.                                                |
| SHORT          | Internal event   | Rising                   | Yes (if INT not masked)       | INT2       | 6        | Short interrupt<br>Triggered when at least one of the power resources (SMPS or LDO) outputs is shorted.                                                                                                               |
| FSD            | Internal event   | Rising                   | Yes (if INT not masked)       |            | 5        | First supply detection interrupt<br>Triggered when a first supply detection is detected. This functions is selected by PMU_SECONDARY_INT.FSD_MASK.                                                                    |
| RESET_IN       | RESET_IN (pin)   | Rising                   | Never                         |            | 4        | RESET_IN interrupt<br>Triggered when event is detected on the RESET_IN pin.                                                                                                                                           |
| WDT            | Internal event   | Rising                   | Never                         |            | 2        | Watchdog time-out interrupt<br>Triggered when watchdog time-out expires.                                                                                                                                              |
| OTP_ERROR      | Internal event   | Rising                   | Never                         |            | 1        | OTP bit error detection interrupt<br>Triggered when an OTP bit error is detected.                                                                                                                                     |
| VBUS           | VBUS (pin)       | Rising and falling       | Yes (if INT not masked)       | INT3       | 7        | VBUS wake-up comparator interrupt<br>Active in OFF state. Triggered when VBUS present.                                                                                                                                |
| GPADC_EOC_SW   | Internal event   | N/A                      | Yes (if INT not masked)       |            | 2        | GPADC software end-of-conversion interrupt<br>Triggered when the conversion result is available.                                                                                                                      |
| GPADC_AUTO_1   | Internal event   | N/A                      | Yes (if INT not masked)       |            | 1        | GPADC automatic periodic conversion 1<br>Triggered when the result of a conversion is either above or below (depending on configuration) reference threshold GPADC_AUTO_CONV1_LSB and GPADC_AUTO_CONV1_MSB.           |
| GPADC_AUTO_0   | Internal event   | N/A                      | Yes (if INT not masked)       |            | 0        | GPADC automatic periodic conversion 0<br>Triggered when the result of a conversion is either above or below (depending on configuration) reference threshold GPADC_AUTO_CONV0_LSB and GPADC_AUTO_CONV0_MSB.           |
| GPIO_6         | GPIO_6 (pin)     | Rising, falling, or both | Yes (if INT not masked)       | INT4       | 6        | GPIO_6 rising-edge detection interrupt, falling-edge detection interrupt, or detection interrupt for both edges                                                                                                       |
| GPIO_5         | GPIO_5 (pin)     | Rising, falling, or both | Yes (if INT not masked)       |            | 5        | GPIO_5 rising-edge detection interrupt, falling-edge detection interrupt, or detection interrupt for both edges                                                                                                       |
| GPIO_4         | GPIO_4 (pin)     | Rising, falling, or both | Yes (if INT not masked)       |            | 4        | GPIO_4 rising-edge detection interrupt, falling-edge detection interrupt, or detection interrupt for both edges                                                                                                       |
| GPIO_3         | GPIO_3 (pin)     | Rising, falling, or both | Yes (if INT not masked)       |            | 3        | GPIO_3 rising-edge detection interrupt, falling-edge detection interrupt, or detection interrupt for both edges                                                                                                       |
| GPIO_2         | GPIO_2 (pin)     | Rising, falling, or both | Yes (if INT not masked)       |            | 2        | GPIO_2 rising-edge detection interrupt, falling-edge detection interrupt, or detection interrupt for both edges                                                                                                       |
| GPIO_1         | GPIO_1 (pin)     | Rising, falling, or both | Yes (if INT not masked)       |            | 1        | GPIO_1 rising-edge detection interrupt, falling-edge detection interrupt, or detection interrupt for both edges                                                                                                       |
| GPIO_0         | GPIO_0 (pin)     | Rising, falling, or both | Yes (if INT not masked)       |            | 0        | GPIO_0 rising-edge detection interrupt, falling-edge detection interrupt, or detection interrupt for both edges                                                                                                       |

## 5.12 Control Interfaces

The TPS65917-Q1 device has two, exclusive selectable (from factory settings) interfaces; 2 high-speed I<sup>2</sup>C interfaces (I2C1\_SCL\_SCK or I2C1\_SDA\_SDI and I2C2\_SCL\_SCE or I2C2\_SDA\_SDO) or 1 SPI (I2C1\_SCL\_SCK, I2C1\_SDA\_SDI, I2C2\_SDA\_SDO, or I2C2\_SCL\_SCE). Both are used to fully control and configure the device and have access to all the registers. When the I<sup>2</sup>C configuration is selected (either I2C1\_SCL\_SCK or I2C1\_SDA\_SDI) a general purpose control (GPC) interface is dedicated to configure the device and the I2C2\_SCL\_SCE or I2C2\_SDA\_SDO interface, dynamic voltage scaling (DVS) is dedicated to dynamically change the output voltage of the SMPS converters. The DVS I<sup>2</sup>C interface has access only to the voltage scaling registers of the SMPS converters (R/W mode).

### 5.12.1 I<sup>2</sup>C Interfaces

The GPC I<sup>2</sup>C interface (I2C1\_SCL\_SCK and I2C1\_SDA\_SDI) is dedicated to access the configuration registers of all the resources of the system.

The DVS I<sup>2</sup>C interface (I2C2\_SCL\_SCE and I2C2\_SDA\_SDO) is dedicated to access the DVS registers independently from the GPC I<sup>2</sup>C.

The control interfaces comply with the HS-I<sup>2</sup>C specification and support the following features:

- Mode: Slave only (receiver and transmitter)
- Speed:
  - Standard mode (100 kbps)
  - Fast mode (400 kbps)
  - High-speed mode (3.4 Mbps)
- Addressing: 7-bit mode addressing device

The following features are not supported:

- 10-bit addressing
- General call
- Master mode (bus arbitration and clock generation)

I<sup>2</sup>C is a 2-wire serial interface developed by NXP (formerly Philips Semiconductor) (see *I<sup>2</sup>C-Bus Specification and user manual, Rev 03, June 2007*). The bus consists of a data line (SDA) and a clock line (SCL) with pullup structures. When the bus is idle, the SDA and SCL lines are pulled high. All the I<sup>2</sup>C-compatible devices connect to the I<sup>2</sup>C bus through open-drain I/O pins, SDA and SCL. A master device, usually a microcontroller or a digital signal processor, controls the bus. The master is responsible for generating the SCL signal and device addresses. The master also generates specific conditions that indicate the start and stop of data transfers. A slave device receives data, transmits data, or both on the bus under control of the master device. The data transfer protocol for standard and fast modes is exactly the same. In this data sheet, these modes are referred to as F/S mode. The protocol for high-speed (HS) mode is different from F/S mode.

#### 5.12.1.1 I<sup>2</sup>C Implementation

The TPS65917-Q1 standard I<sup>2</sup>C 7-bit slave device address is set to 010010xx (binary) where the two least-significant bits are used for page selection.

The device is organized in five internal pages of 256 bytes (registers) as follows:

- Slave device address 0x48: Power registers
- Slave device address 0x49: Interfaces and auxiliaries
- Slave device address 0x4A: Trimming and test
- Slave device address 0x4B: OTP
- Slave device address 0x12: DVS

The device address for the DVS I<sup>2</sup>C interface is set to 0x12.

If one of the addresses conflicts with another device I<sup>2</sup>C address, remapping each address to a fixed alternative address is possible as listed in 表 5-13. The I<sup>2</sup>C for DVS is fixed because it is a dedicated interface.

**表 5-13. I<sup>2</sup>C Address Configuration**

| REGISTER | BIT        | PAGE                       | ADDRESSES            |
|----------|------------|----------------------------|----------------------|
| I2C_SPI  | ID_I2C1[0] | Power registers            | ID_I2C1[0] = 0: 0x48 |
|          |            |                            | ID_I2C1[0] = 1: 0x58 |
|          | ID_I2C1[1] | Interfaces and auxiliaries | ID_I2C1[1] = 0: 0x49 |
|          |            |                            | ID_I2C1[1] = 1: 0x59 |
|          | ID_I2C1[2] | Trimming and test          | ID_I2C1[2] = 0: 0x4A |
|          |            |                            | ID_I2C1[2] = 1: 0x5A |
|          | ID_I2C1[3] | OTP                        | ID_I2C1[3] = 0: 0x4B |
|          |            |                            | ID_I2C1[3] = 1: 0x5B |
|          | ID_IDC2    | DVS                        | ID_I2C2 = 0: 0x12    |

#### 5.12.1.2 F/S Mode Protocol

The master initiates a data transfer by generating a START condition. The START condition is when a high-to-low transition occurs on the SDA line while SCL is high (see 图 5-17). All I<sup>2</sup>C-compatible devices should recognize a START condition.

The master then generates SCL pulses and transmits the 7-bit address and the read or write direction bit (R/W) on the SDA line. During all transmissions, the master ensures that data is valid. A valid data condition requires the SDA line to be stable during the entire high period of the clock pulse (see 图 5-18). All devices recognize the address sent by the master and compare it to the internal fixed addresses of the respective device. Only the slave device with a matching address generates an acknowledge signal (see 图 5-19) by pulling the SDA line low during the entire high period of the ninth SCL cycle. When this acknowledge signal is detected, the communication link between the master and the slave device has been established.

The master generates further SCL cycles to either transmit data to the slave (R/W bit 1) or receive data from the slave (R/W bit 0). In either case, the receiver must acknowledge the data sent by the transmitter. An acknowledge signal can be generated by the master or the slave, depending on which device is the receiver. Nine-bit valid data sequences consisting of 8-bit data and 1-bit acknowledge can continue for as long as required.

To signal the end of the data transfer, the master generates a STOP condition by pulling the SDA line from low to high while the SCL line is high (see 图 5-17). Pulling the line from low to high while SCL is high releases the bus and stops the communication link with the addressed slave. All I<sup>2</sup>C-compatible devices must recognize the STOP condition. Upon the receipt of a STOP condition, the slave device must wait for a START condition followed by a matching address.

Attempting to read data from the register addresses not listed in this section results in a read out of 0xFF.


#### 5.12.1.3 HS Mode Protocol

When the bus is idle, the SDA and SCL lines are pulled high by the pullup devices.


The master generates a START condition followed by a valid serial byte containing the HS master code, 00001XXX. This transmission is made in F/S mode at no more than 400 kbps. No device is allowed to acknowledge the HS master code, but all devices must recognize it and switch the internal setting to support 3.4-Mbps operation.

The master then generates a REPEATED START condition (a REPEATED START condition has the same timing as the START condition). After the REPEATED START condition, the protocol is the same as F/S mode, except that transmission speeds up to 3.4 Mbps are allowed. A STOP condition ends the HS mode and switches all the internal settings of the slave devices to support F/S mode. Instead of using a STOP condition, REPEATED START conditions are used to secure the bus in HS mode.


Attempting to read data from register addresses not listed in this section results in a read out of 0xFF.

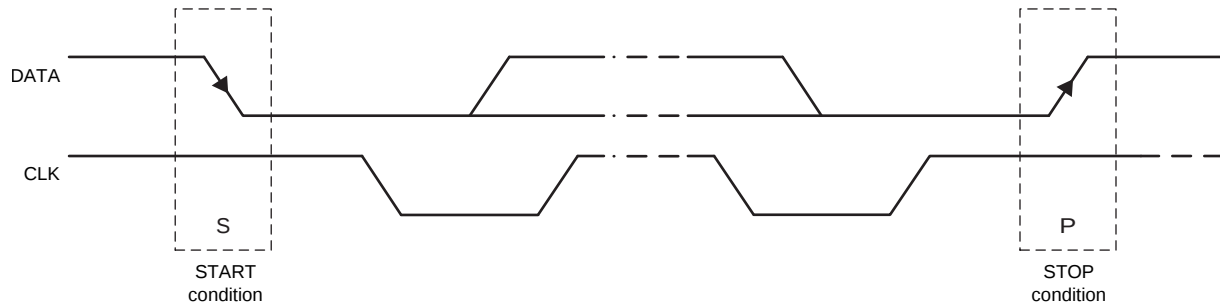

**图 5-17. START and STOP Conditions**

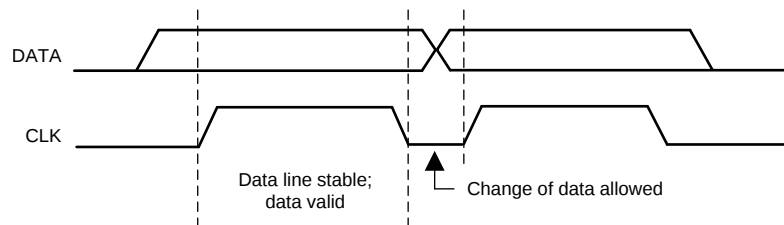

**图 5-18. Bit Transfer on the Serial Interface**

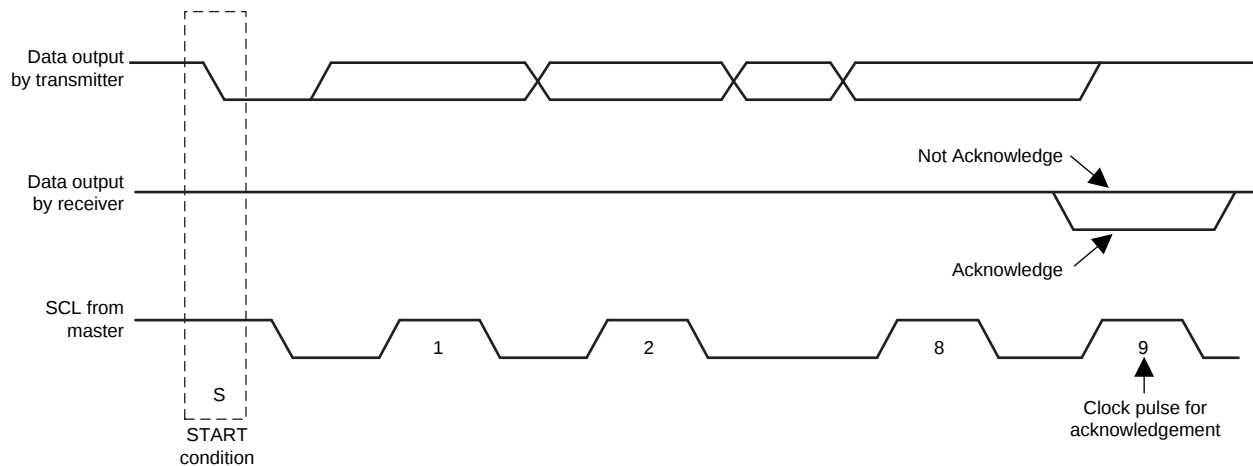

**图 5-19. Acknowledge on the I<sup>2</sup>C Bus**

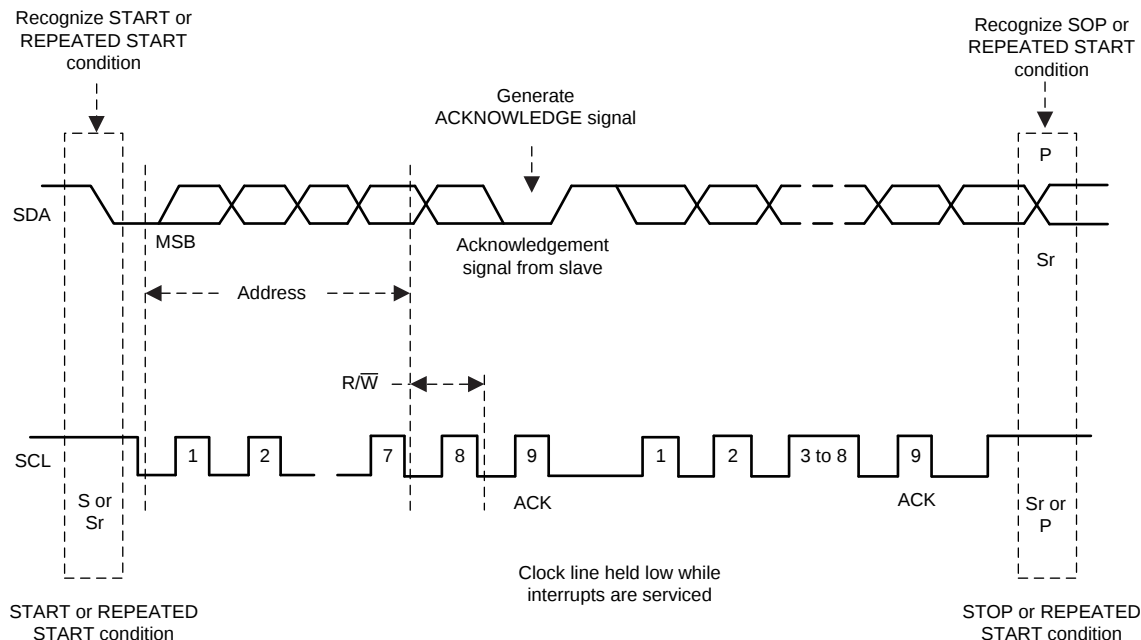


图 5-20. Bus Protocol

### 5.12.2 Serial Peripheral Interface (SPI)

The SPI is a 4-wire slave interface used to access and configure the device. The SPI allows read-and-write access to the configuration registers of all resources of the system.

The SPI uses the following signals:

- SCE (I2C2\_SCL\_SCE): Chip enable which is the input driven by host master. This signal is used to initiate and terminate a transaction
- SCK (I2C1\_SCL\_SCK): Clock which is the input driven by host master. This signal is as master clock for data transaction
- SDI (I2C1\_SDA\_SDI): Data input which is the input driven by host master. This signal is as data line from master to slave
- SDO (I2C2\_SDA\_SDO): Data output which is the output driven by TPS65917-Q1. This signal is as data line from slave to master and defaults to high impedance

#### 5.12.2.1 SPI Modes

This SPI supports two access modes which are single access and burst access. All shifts occur with the most significant bit (MSB) first (data, address, page). These two access modes have the following features:

- Single access (read or write)
  - This mode consists of fetching and storing one single data location. The protocol is shown in 图 5-21.
  - The R/W bit is always provided first, followed by page address and register address fields. When the R/W bit = 0, a read access is performed. When the R/W bit = 1, a write access is performed.
  - One burst bit indicates if the following transfer is a single access (BURST = 0) or a burst access (BURST = 1).
  - Four unused bits follow the burst bit and the 8-bit data is finally either shifted in (write) or out (read).
  - For a write access, the data output line SDO is invalid (useless) during the whole transaction.
  - For a read access, the data output line SDO is invalid during the unused bits (time slot used for data fetch) and then becomes active or valid after the unused bits.

- Burst access (read or write)
  - This mode consists of fetching and storing several data at contiguous locations. The protocol is shown in 图 5-22.
  - The R/W bit is always provided first, followed by page address and register address fields. When the R/W bit 0, a read access is performed. When the R/W bit 1, a write access is performed.
  - One burst bit indicates if the following transfer is a single access (BURST = 0) or a burst access (BURST = 1).
  - Four unused bits follow the burst bit and packets of 8-bit data are finally either shifted in (write) or out (read).
  - The transaction remains active as long as the SCE signal is maintained high by the host.
  - The address is automatically incremented internally for each new 8-bit packet received.
  - The host must pull the SCE signal low after a complete 8-bit data is transferred, otherwise the last transaction is discarded.
  - For a write access, the data output line SDO is invalid (useless) during the whole transaction.
  - For a read access, the data output line SDO is invalid during the unused bits (time slot used for data fetch) and then becomes active or valid after the unused bits.

### 5.12.2.2 SPI Protocol

图 5-21 shows the SPI protocol for a single read and write access. 图 5-22 shows the SPI protocol for a burst read and write access.

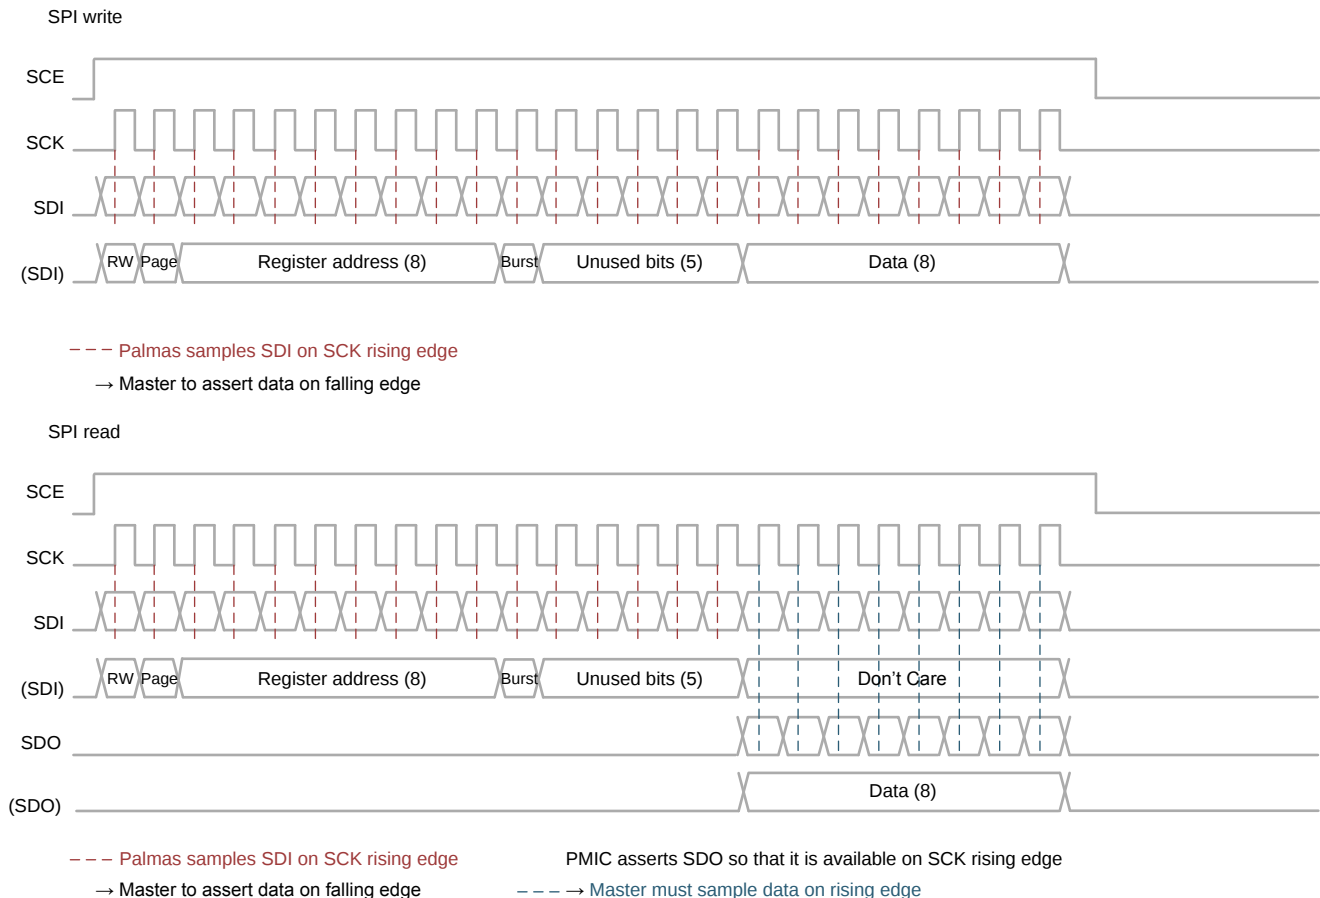


图 5-21. SPI Single Read and Write Access

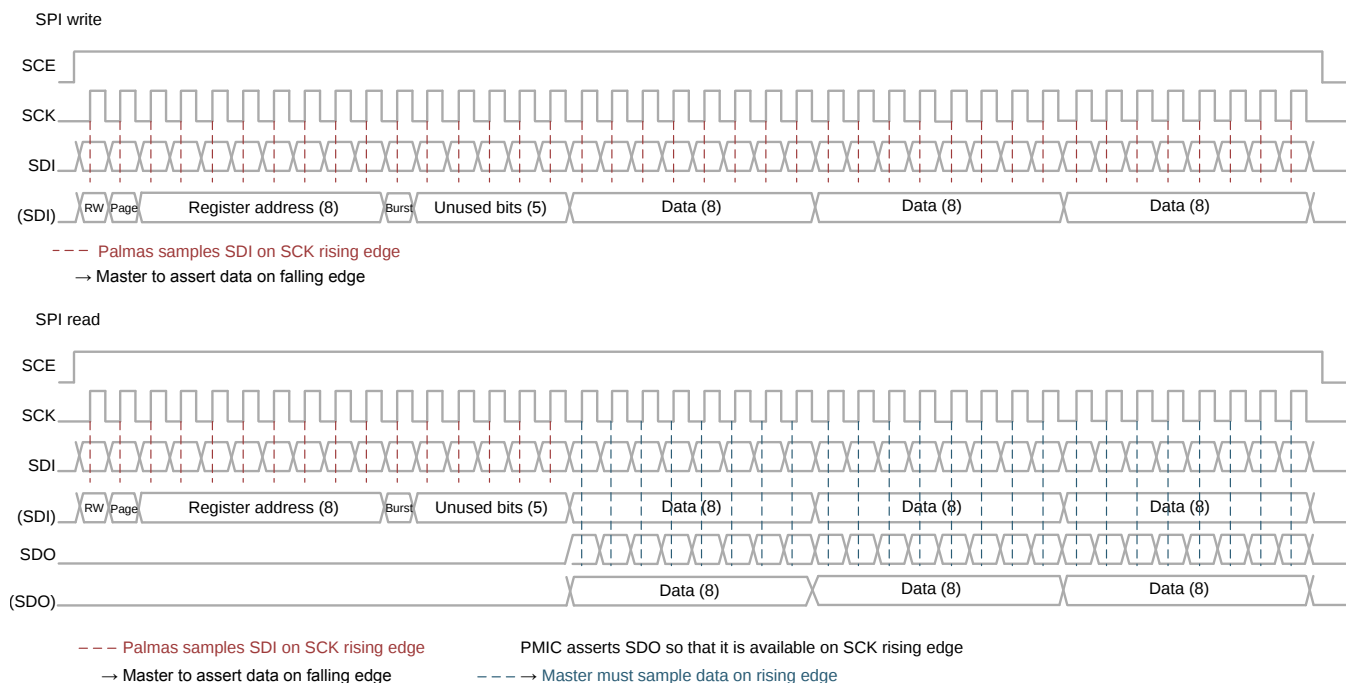


图 5-22. SPI Burst Read and Write Access

### 5.13 OTP Configuration Memory

The register mapping for the device describes the OTP configuration bits. These bits are highlighted as the value X during reset in the register mapping (the value of the bit is the copy of the OTP configuration memory).

### 5.14 Watchdog Timer (WDT)

The watchdog timer has two modes of operation: periodic mode and interrupt mode.

In periodic mode, an interrupt is generated with a regular period  $N$ , defined by the setting of WATCHDOG.TIMER. This interrupt is generated at the beginning of the period (when the watchdog internal counter equals 1). The IC initiates a shutdown at the end of the period (when the internal counter reaches  $N$ ) only if the interrupt is not cleared within the defined time frame (0 to  $N$ ). In this mode, when the interrupt is cleared, the internal counter is not reset. The counter continues counting until it reaches the maximum value (defined by the TIMER setting) and automatically rolls over to 0 to start a new counting period. Regardless of when the interrupt is cleared within a given period ( $N$ ), the next interrupt is generated only when the ongoing period completes (reaches  $N$ ). The internal watchdog counter is initialized and kept at 0 as long as the RESET\_OUT pin is low. The watchdog counter begins counting when the RESET\_OUT pin is released.

In interrupt mode, any interrupt source resets the watchdog counter and starts the counting. If the sources of the interrupts are not cleared (meaning the INT line is released) before the end of the predefined period,  $N$  (set by WATCHDOG.TIMER setting), then the device initiates a shutdown. If the sources of the interrupts are cleared within the predefined period, then the watchdog counter is discarded (dc) and no shutdown sequence is initiated.

By default, the watchdog is disabled. The watchdog can be enabled by setting the ENABLE bit of the WATCHDOG register to 1, and this selection is write protected by setting the LOCK bit to 1. Reset of the device returns these bits to default values.

图 5-23 和 图 5-24 show the watchdog timings.

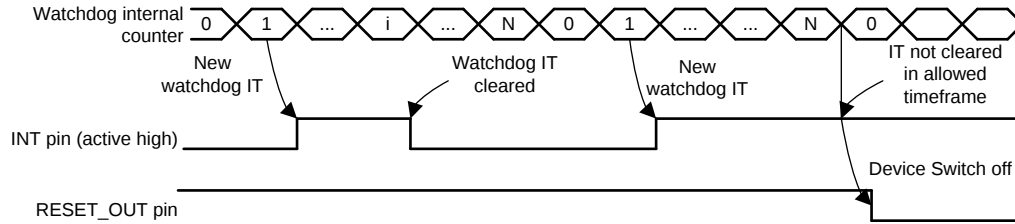


图 5-23. Watchdog Timings—Periodic Mode

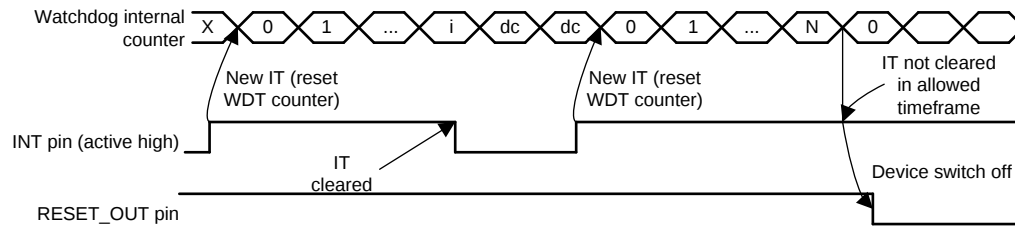


图 5-24. Watchdog Timings—Interrupt Mode

### 5.15 System Voltage Monitoring

Comparators that monitor the voltage on the VCC\_SENSE, and VCCA pins control the power state machine of the TPS65917-Q1 device. For electrical parameters, see [Section 4.12](#).

**POR** When the supply at the VCCA pin is below the POR threshold, the TPS65917-Q1 device is in the NO SUPPLY state. All functionality is off. The device moves from the NO SUPPLY state to the BACKUP state when the voltage in VCCA rises above the POR threshold.

**VSYS\_LO** When the voltage on the VCCA pin rises above VSYS\_LO, the device enters from the BACKUP state to the OFF state. When the device is in an ACTIVE, SLEEP, or OFF state and the voltage on VCCA decreases below the VSYS\_LO level, the device enters backup mode. When the device transitions from the ACTIVE state to the BACKUP state, all active SMPS and LDO regulators, except LDOVRTC, are disabled simultaneously. There is a 180- $\mu$ s deglitch time after VCCA becomes less than VSYS\_LO and before the regulators are disabled. The level of VSYS\_LO is OTP programmable.

**VSYS\_MON** During power up, the value of VSYS\_HI OTP is used as a threshold for the VSYS\_MON comparator which is gating PMIC start-up (that is, as a threshold for transition from the OFF state to the ACTIVE state). The VSYS\_MON comparator monitors the VCC\_SENSE pin. After power up, software can configure the comparator threshold in the VSYS\_MON register.

**VBUS\_DET** The VBUS\_DET comparator is monitoring the VBUS\_SENSE (secondary function of GPIO1) pin. This comparator is active when VCCA is greater than the POR threshold. Triggering the threshold level generates an interrupt. It can wake up the device from the SLEEP state, but can also switch on the device from the OFF state.

图 5-25 shows a block diagram of the system comparators and 图 5-26 shows the state transitions.

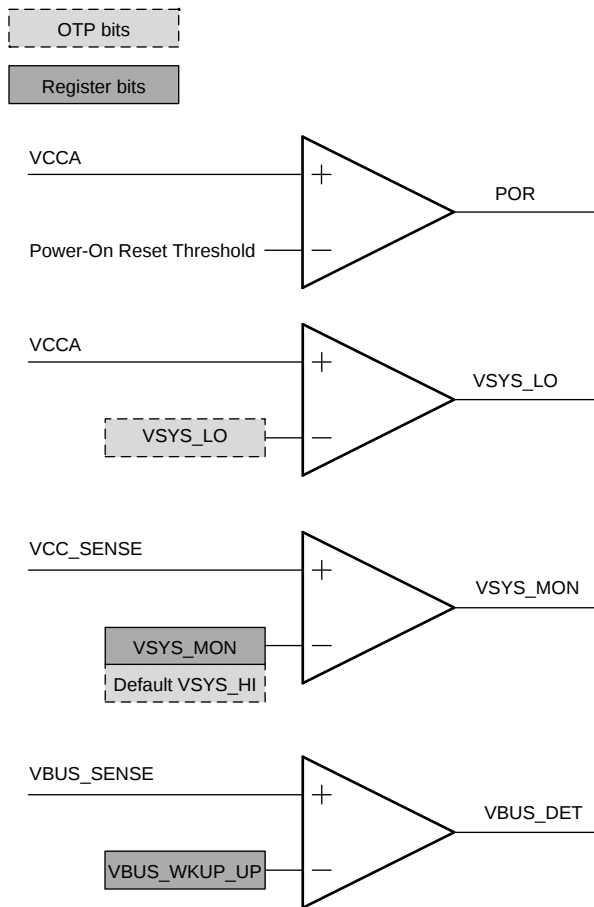


图 5-25. System Comparators

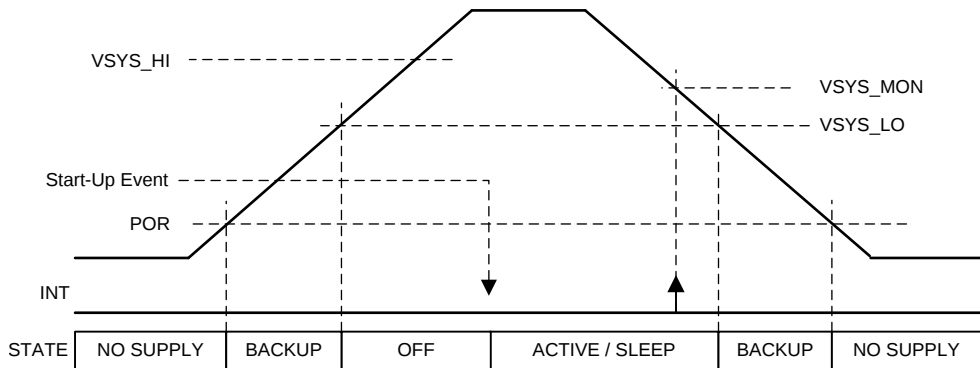


图 5-26. State Transitions

注

To generate a POR from a falling  $V_{CC}$ ,  $V_{CC}$  is sampled every 1 ms and compared to the POR threshold. In case  $V_{CC}$  is discharged and resupplied quickly, a POR may not be reliably generated if  $V_{CC}$  crosses the POR threshold between samples. Another way to generate POR is to discharge the LDOVRTC regulator to 0 V after  $V_{CC}$  is removed. With no external load, this could take seconds for the LDOVRTC output to discharge to 0 V. The PMIC should not be restarted after  $V_{CC}$  is removed but before LDOVRTC is discharged to 0 V. If necessary, TI recommends adding a pulldown resistor from the LDOVRTC output to GND with a minimum of 3.9 k $\Omega$  to speed up the LDOVRTC discharge time.

The value of the pulldown resistor should be chosen based on the desired discharge time and acceptable current draw in the OFF state, but no greater than 0.5 mA. Use [公式 7](#) to calculate the pulldown resistor based on the desired discharge time.

$$R_{PD} \text{ (k}\Omega\text{)} = \frac{t_{\text{discharge}} \text{ (ms)}}{C_O \text{ (}\mu\text{F)} \times 3}$$

where

- $t_{\text{discharge}}$  = discharge time of the VRTC output
- $R_{PD}$  = pulldown resistance from the VRTC output to GND
- $C_O$  = output capacitance on the VRTC line (typically 2.2  $\mu\text{F}$ )

(7)

Because LDOVRTC is always on when VCC is supplied, additional current is drawn through the pulldown resistor. The output current of LDOVRTC while the PMIC is in OFF state should not exceed 0.5 mA. Use [公式 8](#) to calculate the pulldown current.

$$I_{PD} = \frac{1.8 \text{ V}}{R_{PD}}$$

where

- $I_{PD}$  = current through the pulldown resistor
- $R_{PD}$  = pulldown resistance from the VRTC regulator


(8)

To use comparators in the system:

- The VSYS\_HI and VSYS\_LO thresholds are defined in the OTP. Software cannot change these levels.
- After startup, the VSYS\_MON comparator is automatically disabled. Software can select new threshold levels using the VSYS\_MON register and then enable the comparators.
- To have the same coding for rising and falling edge, the VSYS\_MON comparator does not include hysteresis and thus can generate multiple interrupts when the voltage level is at threshold level. New interrupt generation has a 125- $\mu\text{s}$  debounce time. This time lets software mask the interrupt and update the threshold level or disable the comparator before receiving a new interrupt.

[图 5-27](#) shows more details on VSYS\_MON comparator. When the VSYS\_MON comparator is enabled, and the internal buffer is bypassed, the input impedance at VCC\_SENSE pin is 500 k $\Omega$  (typical). When the comparator is disabled, the VCC\_SENSE pin is in the high-impedance state. If GPADC is enabled to measure channel 2 or channel 3, 40 k $\Omega$  is added in parallel to the corresponding comparator. See [表 5-9](#) for GPADC input range.

To enable system voltage sensing above 5.25 V, an external resistive divider can be used. Internal buffers can be enabled by setting the OTP bit HIGH\_VCC\_SENSE to 1 to provide high impedance for the external resistive dividers. The maximum input level for the internal buffer is VCCA – 1 V.

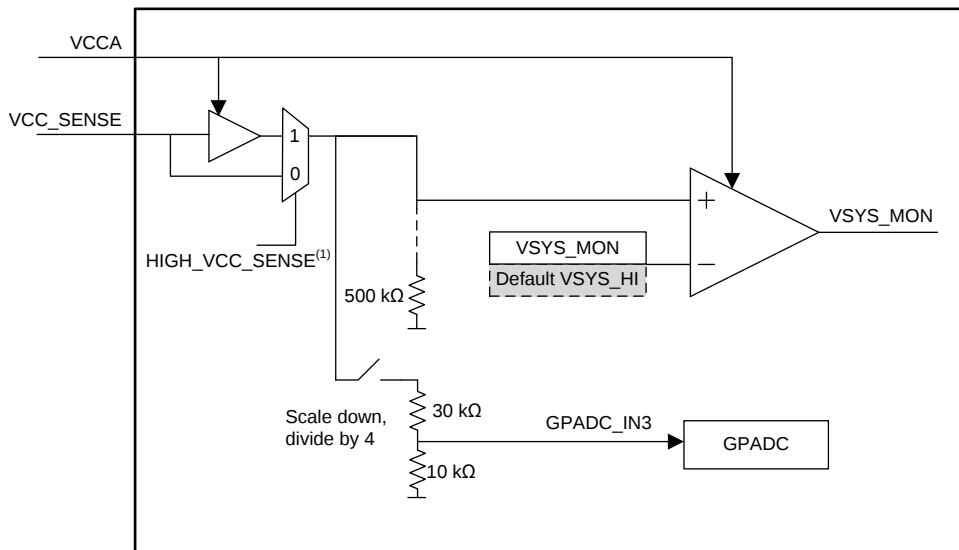

- (1) **HIGH\_VCC\_SENSE = 0:** buffer bypassed (not enabled). **HIGH\_VCC\_SENSE = 1:** buffer enabled, bypass disabled (Hi-Z at SENSE input)

图 5-27. VSYS\_MON Comparator Details

## 5.16 Register Map

### 5.16.1 Functional Register Mapping

For the register descriptions, refer to the [TPS65917-Q1 Register Map](#).

## 5.17 Device Identification

The following registers can differentiate the TPS65917-Q1 device being used.

表 5-14. TPS65917-Q1 Device ID

| REGISTER NAME  | REGISTER DESCRIPTION                                                              |              | VALUE                            |
|----------------|-----------------------------------------------------------------------------------|--------------|----------------------------------|
| PRODUCT_ID_MSB | For all TPS65917-Q1 devices, this register will have the same value.              |              | 0x09                             |
| PRODUCT_ID_LSB | For all TPS65917-Q1 devices, this register will have the same value.              |              | 0x17                             |
| DESIGNREV      | This register distinguishes which silicon version is used.                        | Revision 1.0 | 0x0                              |
|                |                                                                                   | Revision 1.1 | 0x1                              |
| SW_REVISION    | This register will be representative of the OTP version programmed on the device. |              | OTP dependent - See User's Guide |

## 6 Applications, Implementation, and Layout

### 注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 6.1 Application Information


The TPS65917-Q1 device is an integrated power management integrated circuits (PMIC), available in a 48-pin, 0.5-mm pitch, 7-mm × 7-mm QFN package. It is designed specifically for automotive applications. It has five configurable step-down converter rails, with two of these SMPSs capable of combining power rails and supply up to 7 A of output current in multi-phase mode. These step-down converters can be synchronized to an external clock between 1.7 MHz to 2.7 MHz, or an internal fallback clock at 2.2 MHz. The TPS65917-Q1 device also has five external LDOs which can be supplied from the system supply or a pre-regulated supply. Two of these LDOs can be configured in bypass mode. One of the five LDOs also provides low noise output.

The TPS65917-Q1 device also come with a 12-bit GPADC with two external channels, seven configurable GPIOs, two I<sup>2</sup>C interface channels or one SPI interface channel, a PLL for external clock sync and phase delay capability, and a programmable power sequencer and control for supporting different processors and applications.

As TPS65917-Q1 device is a highly integrated PMIC device, it is very important that customers should take necessary actions to ensure the PMIC is operating under the recommended operating conditions to ensure desired performance from the device. Additional cooling strategies may be necessary to maintain the junction temperature below maximum limit allowed for the device. To minimize the interferences when turning on a power rail while the device is in operation, optimal PCB layout and grounding strategy are essential and are recommended in [节 6.3](#). In addition, customer may take steps such as turning on additional rails only when the systems is operating in light load condition.

Details on how to use this device as a power management device for a application processor are described throughout this device specification. The following sections provides the typical application use case with the recommended external components and layout guidelines. A design checklist for the TPS65917-Q1 device is also available on which provides application design guidance and cross checks.

## 6.2 Typical Application

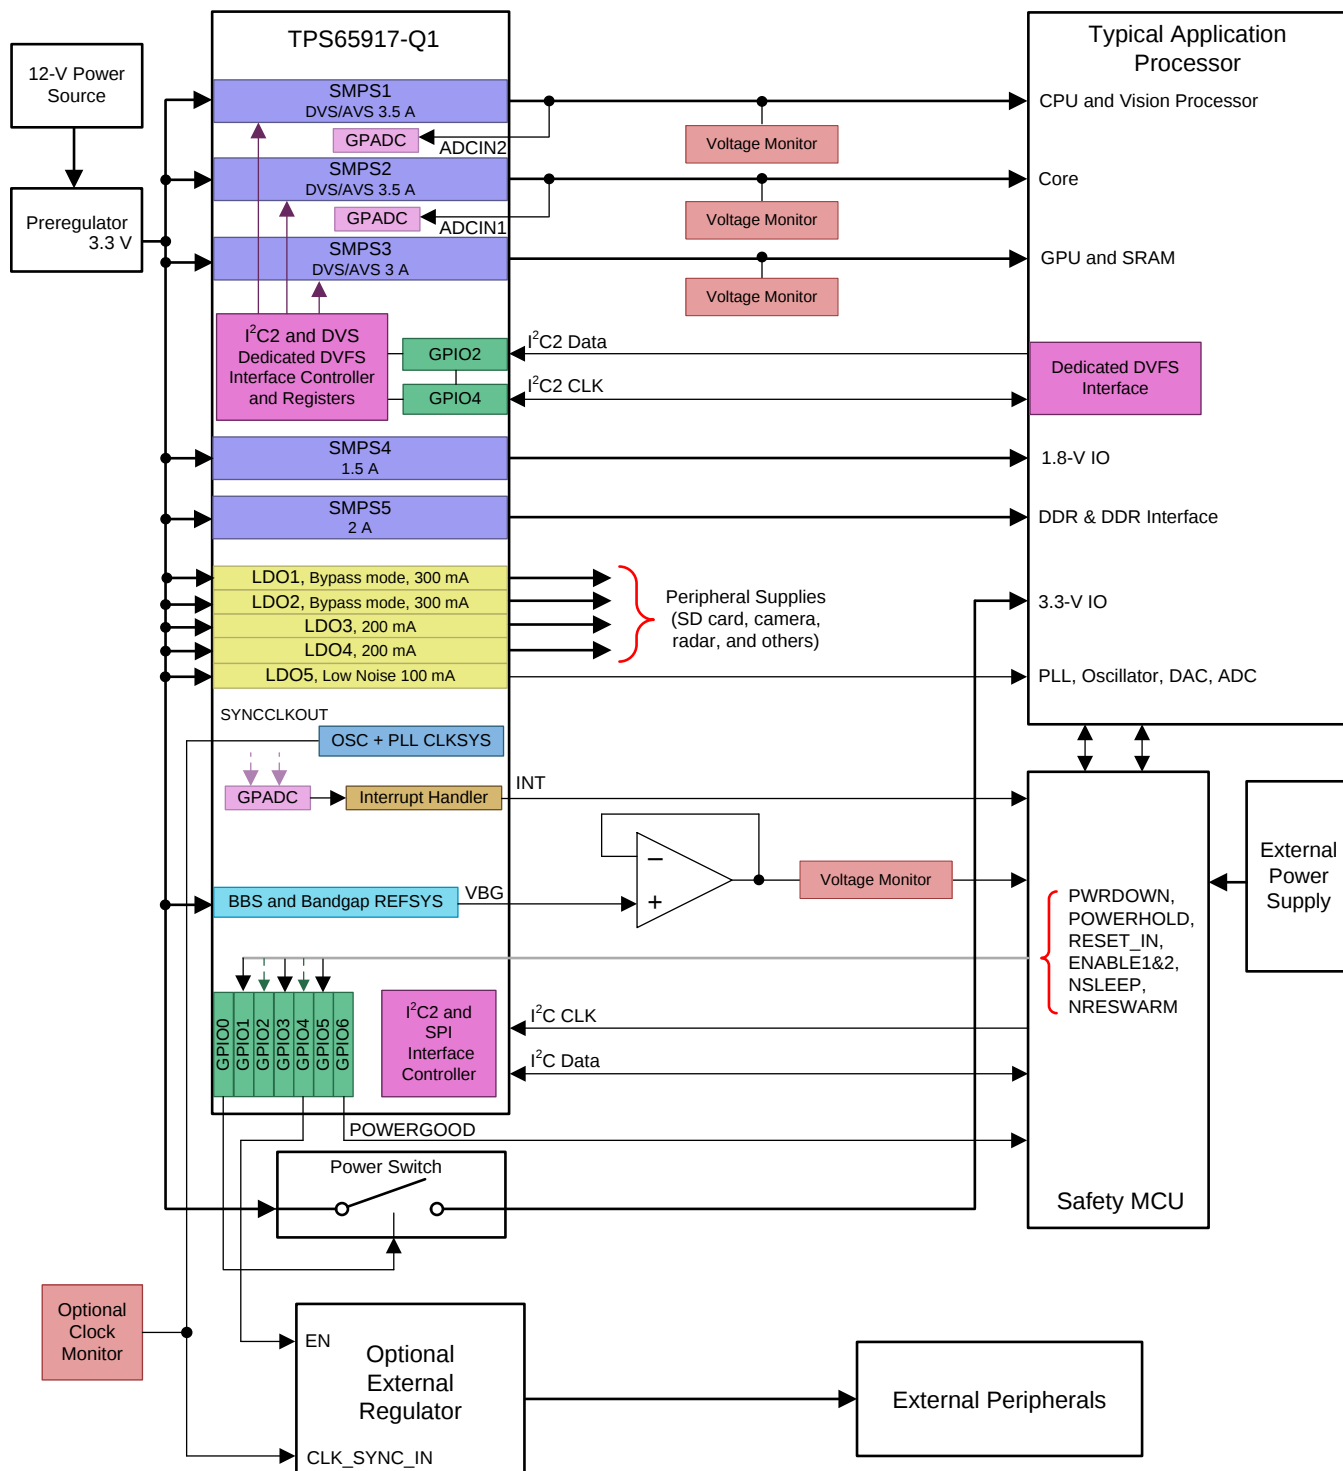

Copyright © 2017, Texas Instruments Incorporated

图 6-1. Application Diagram in a Typical ADAS System

### 6.2.1 Design Requirements

For a typical ADAS application shown in 图 6-1, 表 6-1 lists the key design parameters of the power resources.

**表 6-1. Design Parameters**

| DESIGN PARAMETER    | VALUE           |
|---------------------|-----------------|
| Supply voltage      | 3.3 V to 5 V    |
| Switching frequency | 2.2 MHz         |
| SMPS1 voltage       | 1.15 V          |
| SMPS1 current       | Up to 3.5 A     |
| SMPS2 voltage       | 1.15 V          |
| SMPS2 current       | Up to 3.5 A     |
| SMPS3 voltage       | 1.06 V          |
| SMPS3 current       | Up to 3 A       |
| SMPS4 voltage       | 1.8 V           |
| SMPS4 current       | Up to 1.5 A     |
| SMPS5 voltage       | 1.35 V or 1.5 V |
| SMPS5 current       | Up to 2 A       |
| LDO1 voltage        | 1.8 V or 3.3 V  |
| LDO1 current        | Up to 300 mA    |
| LDO2 voltage        | 1.8 V           |
| LDO2 current        | Up to 300 mA    |
| LDO3 voltage        | 1.8 V           |
| LDO3 current        | Up to 200 mA    |
| LDO4 voltage        | 3.3 V           |
| LDO4 current        | Up to 200 mA    |
| LDO5 voltage        | 1.8 V           |
| LDO5 current        | Up to 100 mA    |

## 6.2.2 Detailed Design Procedure

表 6-2 lists the recommended external components.

表 6-2. Recommended External Components

| REFERENCE COMPONENTS                            | COMPONENT <sup>(1)</sup>                    | MANUFACTURER | PART NUMBER        | VALUE            | EIA size code <sup>(2)</sup> | SIZE (mm)        | MASS PRODUCTION <sup>(3)</sup> |
|-------------------------------------------------|---------------------------------------------|--------------|--------------------|------------------|------------------------------|------------------|--------------------------------|
| <b>INPUT POWER SUPPLIES EXTERNAL COMPONENTS</b> |                                             |              |                    |                  |                              |                  |                                |
| C1, C2                                          | VSYS and VCCA tank capacitor <sup>(4)</sup> | Murata       | GCM21BR70J106KE22  | 10 $\mu$ F, 6V3  | 0805                         | 2 × 1.25 × 1.25  | Available <sup>(5)</sup>       |
| C3                                              | Decoupling capacitor                        | Murata       | GCM155R71C104KA55  | 100 nF, 16 V     | 0402                         | 1 × 0.5 × 0.5    | Available <sup>(5)</sup>       |
| <b>BANDGAP EXTERNAL COMPONENTS</b>              |                                             |              |                    |                  |                              |                  |                                |
| C7                                              | Capacitor                                   | Murata       | GCM155R71C104KA55  | 100 nF, 16 V     | 0402                         | 1 × 0.5 × 0.5    | Available <sup>(5)</sup>       |
| <b>SMPS EXTERNAL COMPONENTS</b>                 |                                             |              |                    |                  |                              |                  |                                |
| C8, C9, C10, C11, C12                           | Input capacitor                             | Murata       | GCM21BC71A475MA735 | 4.7 $\mu$ F 10 V | 0805                         | 2 × 1.25 × 1.25  | Available <sup>(5)</sup>       |
| C13, C14, C15, C16, C17                         | Output capacitor                            | Murata       | GCM32ER70J476KE19  | 47 $\mu$ F 10 V  | 1210                         | 3.2 × 2.5 × 2.5  | Available <sup>(5)</sup>       |
| L1, L2, L3, L4, L5                              | Inductor                                    | VISHAY       | IHLP1616ABER1R0M11 | 1 $\mu$ H        |                              | 4.45 × 4.1 × 1.2 | Available <sup>(5)</sup>       |
| <b>LDO EXTERNAL COMPONENTS</b>                  |                                             |              |                    |                  |                              |                  |                                |
| C18, C19                                        | Input capacitor                             | Murata       | GCM188R70J225KE22  | 2.2 $\mu$ F 6V3  | 0603                         | 1.6 × 0.8 × 0.8  | Available <sup>(5)</sup>       |
| C4, C5, C20, C21, C22, C23, C24                 | Output capacitor                            | Murata       | GCM188R70J225KE22  | 2.2 $\mu$ F 6V3  | 0603                         | 1.6 × 0.8 × 0.8  | Available <sup>(5)</sup>       |

(1) Component minimum and maximum tolerance values are specified in the electrical parameters section of each IP.

(2) The PACK column describes the external component package type.

(3) This column refers to the criteria.

(4) The tank capacitors filter the VSYS and VCCA input voltage of the LDO and SMPS core architectures.

(5) Component used on the validation boards.

### 6.2.2.1 SMPS Input Capacitors

All SMPS inputs require an input decoupling capacitor to minimize input ripple voltage. Using a 10-V, 4.7- $\mu$ F capacitor for each SMPS is recommended. Depending on the input voltage of the SMPS, a 6.3-V or 10-V capacitor can be used. See [表 6-2](#) for the specific part number of the recommended input capacitor.

For optimal performance, the input capacitors should be placed as close to the SMPS input pins as possible. See the [节 6.3.1](#) section for more information about component placement.

### 6.2.2.2 SMPS Output Capacitors

All SMPS outputs require an output capacitor to hold up the output voltage during a load step or changes to the input voltage. To ensure stability across the entire switching frequency range, the TPS65917-Q1 device requires an output capacitance value between 33  $\mu$ F and 57  $\mu$ F. To meet this requirement across temperature and DC bias voltage, using a 47- $\mu$ F capacitor for each SMPS is recommended. Remember that each SMPS requires an output capacitor, not just each output rail. For example, SMPS12 is a dual-phase regulator and an output capacitor is required for the SMPS1 output and the SMPS2 output. Note, this requirement excludes any capacitance seen at the load and only refers to the capacitance seen close to the device. Additional capacitance placed near the load can be supported, but the end application or system should be evaluated for stability. See [表 6-2](#) for the specific part number of the recommended output capacitor.

### 6.2.2.3 SMPS Inductors

Again, to ensure stability across the entire switching frequency range, using a 1- $\mu$ H inductor on each SMPS is recommended. Remember that each SMPS requires an inductor, not just each output rail. For example, SMPS12 is a dual-phase regulator and an inductor is required for the SMPS1\_SW pins and the SMPS2\_SW pins. See [表 6-2](#) for the specific part number of the recommended inductor.

### 6.2.2.4 LDO Input Capacitors

All LDO inputs require an input decoupling capacitor to minimize input ripple voltage. Using a 2.2- $\mu$ F capacitor for each LDO is recommended. Depending on the input voltage of the LDO, a 6.3-V or 10-V capacitor can be used. See [表 6-2](#) for the specific part number of the recommended input capacitors.

For optimal performance, the input capacitors should be placed as close to the LDO input pins as possible. See the [节 6.3.1](#) section for more information about component placement.

### 6.2.2.5 LDO Output Capacitors

All LDO outputs require an output capacitor to hold up the output voltage during a load step or changes to the input voltage. Using a 2.2- $\mu$ F capacitor for each LDO output is recommended. Note, this requirement excludes any capacitance seen at the load and only refers to the capacitance seen close to the device. Additional capacitance placed near the load can be supported, but the end application or system should be evaluated for stability. See [表 6-2](#) for the specific part number of the recommended output capacitors.

### 6.2.2.6 VCCA

VCCA is the supply for the analog input voltage of the device. This pin requires a 10- $\mu$ F decoupling capacitor.

Texas Instruments recommends to always power down the TPS65917-Q1 before removing power from VCCA. If the input voltage to the device is removed while the device is ACTIVE, the device will shut off when VCCA reaches the VSYS\_LO threshold. As mentioned in the [节 5.15](#) section, once VCCA reaches VSYS\_LO, there is about 180  $\mu$ s delay before all the output rails are disabled simultaneously.

There are two scenarios to consider in the system-level design in the event of unexpected loss of power.

#### 6.2.2.6.1 Meeting the Power-Down Sequence

To prevent a sequencing violation, it is important to block reverse current and implement a disable signal to the PMIC. A Schottky diode can block reverse current when the input is removed. Additionally, capacitors can help maintain the input voltage level while the power-down sequence occurs. Depending on the system design, there are a couple ways to implement a disable signal.

For a system where the TPS65917-Q1 is powered by the system input voltage, a supervisor can be used to create a logic signal, indicating if the power is at a good level. An example of this solution is shown in 图 6-2.

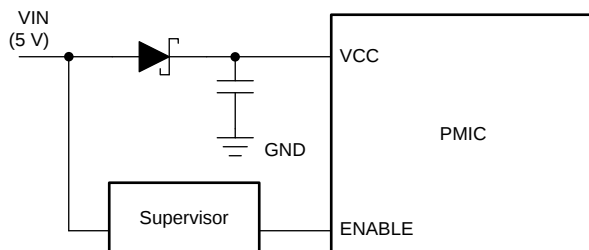


图 6-2. Supporting Uncontrolled Power Down When the PMIC is Supplied by the System Input Voltage

An alternative solution is possible when a pre-regulator is present. In the case of the pre-regulator, the pre-regulator output capacitance can also act as the energy storage to maintain VCCA for the necessary time. The total supply capacitance should be calculated to support the worst-case leakage current during power down so that the voltage is maintained until the power-down sequence completes. 图 6-3 shows an example of this configuration.

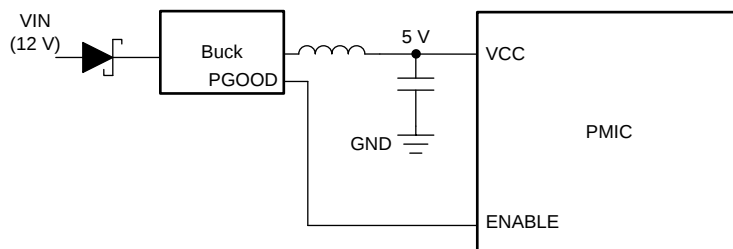


图 6-3. Supporting Uncontrolled Power Down when the PMIC is Supplied by a Preregulator

To determine the capacitance needed at the output of the pre-regulator, use 公式 9. This equation is used to ensure that the power down sequence is complete before the device is disabled.

$$C = I \times \Delta T / (V_{CCA} - V_{SYS\_LO})$$

where

- C is total capacitance on VCCA, including preregulator output capacitance and PMIC input capacitance
- I is the total current on the PMIC input supply
- $\Delta T$  is the time it takes the power-down sequence to complete
- VCCA is the voltage at the VCCA pin
- VSYS\_LO is the threshold where the device is disabled

(9)

#### 6.2.2.6.2 Maintaining Sufficient Input Voltage

In the event of high loading during loss of input voltage, there is a risk to go below the voltage level necessary for the internal logic of the device to work properly before the device is disabled. This means that when the VCCA voltage supply level becomes lower than the VSYS\_LO threshold, the input voltage may continue dropping to very low voltages during the 180 us  $\pm 10\%$  delay before the device is disabled.

If a large input voltage drop occurs before the device is disabled, the internal logic can no longer properly drive the FETs of the SMPS, and it is possible that the high-side FET and low-side FET of the SMPS are on at the same time. In the event that the high-side and low-side FETs for an SMPS are on at the same time, there is a direct path from SMPSx\_IN to GND, allowing cross-conduction and possible damage of the device.

In order to prevent damage or irregular switching behavior, it is important that the voltage at the SMPSx\_IN pin stays above 1.8 V, including negative transients, before the device is disabled. The minimum voltage seen at the SMPSx\_IN pin is dependent on VCCA and the PCB inductance between the SMPSx\_IN pin and the input capacitor. Use 公式 10 to determine the minimum capacitance needed on VCCA to ensure that the device continues switching properly before it is disabled.

$$C = I \times \Delta T / (V_{SYS\_LO} - V_{CCA\_MIN})$$

where

- C is total capacitance on VCCA, including preregulator output capacitance and PMIC input capacitance
- I is the total current on the PMIC input supply
- $\Delta T$  is the maximum debounce time after VCCA = VSYS\_LO before the device switches off (198us)
- VSYS\_LO is the threshold where the device is disabled
- VCCA\_MIN is the minimum VCCA voltage to keep the SMPSx\_IN transients above 1.8 V

(10)

When measuring the SMPSx\_IN and VCCA during power down, use active differential probes and a high resolution oscilloscope (4GS/sec or more). VCCA can be measured over the 10uF input capacitor. However, SMPSx\_IN must be measured at the pin in order to measure the transients on this rail accurately. To measure SMPSx\_IN, place the negative lead of the differential probe at a nearby GND, such as the GND of the SMPSx\_IN input capacitor. Place the positive lead of the differential probe directly on the exposed metal of the SMPSx\_IN pin. With this set up, verify that SMPSx\_IN, including the ripple on this signal, does not drop below 1.8V before the SMPS stops switching. See 图 6-4 for an example of how to take this measurement. For ways to decrease the amplitude of the transient spikes, see 表 6-3 for recommended parasitic inductance requirements.

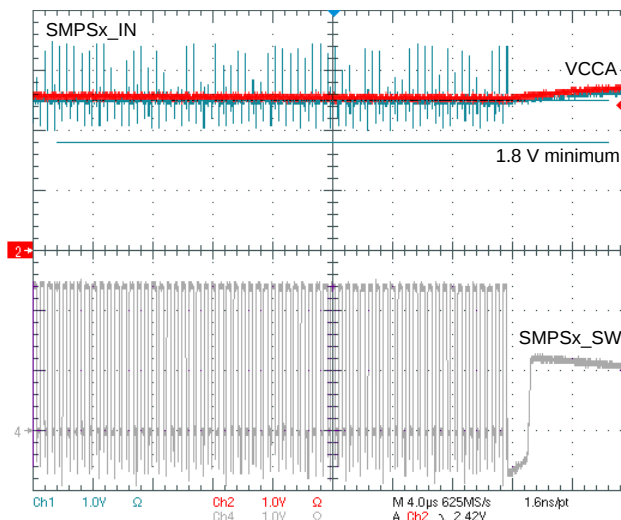


图 6-4. Waveform of SMPSx\_IN Transients

#### 6.2.2.7 VIO\_IN

VIO\_IN is the supply for the interface IO circuits inside the device. This pin requires a 0.1-µF decoupling capacitor.

### 6.2.2.8 GPADC

To perform a software conversion with the GPADC, use the following steps:

1. Enable software conversion mode – GPADC\_SW\_SELECT.SW\_CONV\_EN
2. Select the channel to convert – GPADC\_SW\_SELECT.SW\_CONV0\_SEL
  - For channel 0, set up the current source in the GPADC\_CTRL1 register if needed.
3. For minimum latency, the GPADC can be set to always on (instead of default enabled from conversion request) by GPADC\_CTRL1.GPADC\_FORCE.
4. Unmask software conversion interrupt – INT3\_MASK.GPADC\_EOC\_SW
5. Start conversion – GPADC\_SW\_SELECT.SW\_START\_CONV0.
6. An interrupt is generated at the end of the conversion INT3\_STATUS.GPADC\_EOC\_SW.
7. Read conversion result – GPADC\_SW\_CONV0\_MSB and GPADC\_SW\_CONV0\_LSB
8. Expected result =  $\text{dec}(\text{GPADC\_SW\_CONV0\_MSB}[3:0].\text{GPADC\_SW\_CONV0\_LSB}[7:0]) / 4096 \times 1.25 \times \text{scaler}$

To perform an auto conversion with the GPADC, use the following steps:

1. Select the channel to convert – GPADC\_AUTO\_SELECT.AUTO\_CONV0\_SEL
2. Configure auto conversion frequency – GPADC\_AUTO\_CTRL.COUNTER\_CONV
3. Set the threshold level for comparison – GPADC\_THRESH\_CONV0\_MSB.THRESH\_CONV0\_MSB, GPADC\_THRESH\_CONV0\_LSB.THRESH\_CONV0\_LSB
  - Level = expected voltage threshold / (1.25 × scaler) × 4096 (in hexadecimal)
4. Set if the interrupt is triggered when conversion is above or below threshold – GPADC\_THRESH\_CONV0\_MSB.THRESH\_CONV0\_POL
5. Triggering the threshold level can also be programmed to generate shutdown – GPADC\_AUTO\_CTRL.SHUTDOWN\_CONV0
6. Unmask AUTO\_CONV\_0 interrupt – INT3\_MASK.GPADC\_AUTO\_0
7. Enable AUTO\_CONV0 – GPADC\_AUTO\_CTRL.AUTO\_CONV0\_EN
8. When selected channel crosses programmed threshold, interrupt is generated – INT3\_STATUS.GPADC\_AUTO\_0
9. Conversion results are available – GPADC\_AUTO\_CONV0\_MSB, GPADC\_AUTO\_CONV0\_LSB
10. If shutdown was enabled, chip switches off after SWOFF\_DLY, unless interrupt is cleared

Both examples above are for CONV0; a similar procedure applies to CONV1.

## 6.2.3 Application Curves

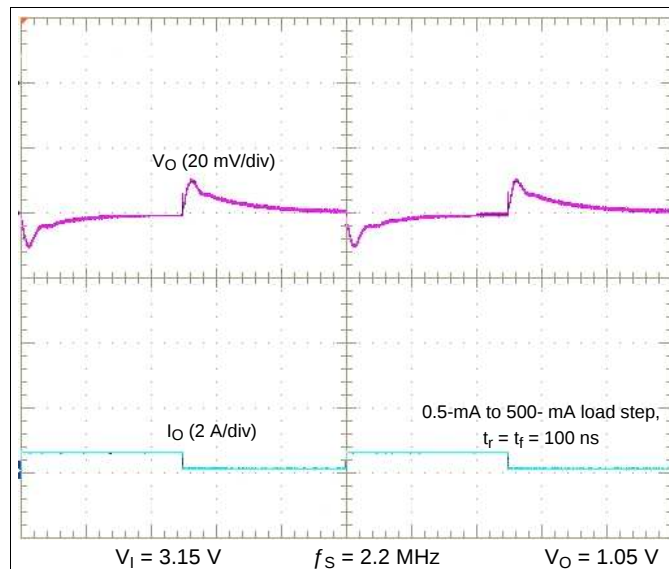


图 6-5. Typical SMPS Load Transient Response for SMPS12 in Dual Phase Mode

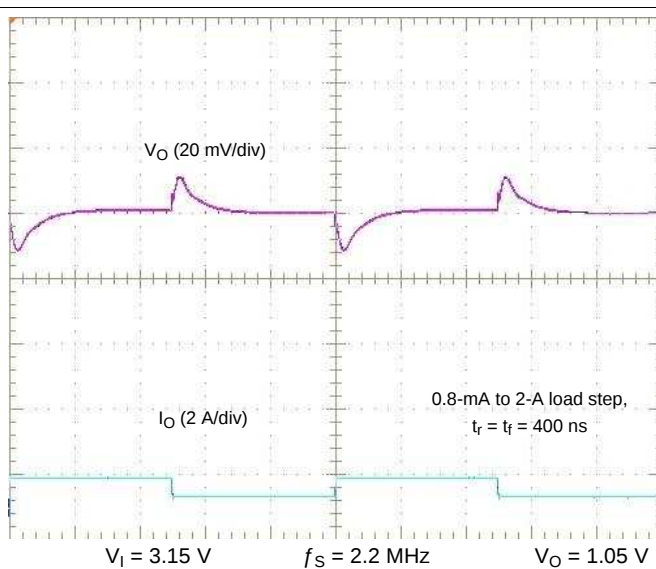


图 6-6. Typical SMPS Load Transient Response for SMPS12 in Dual Phase Mode

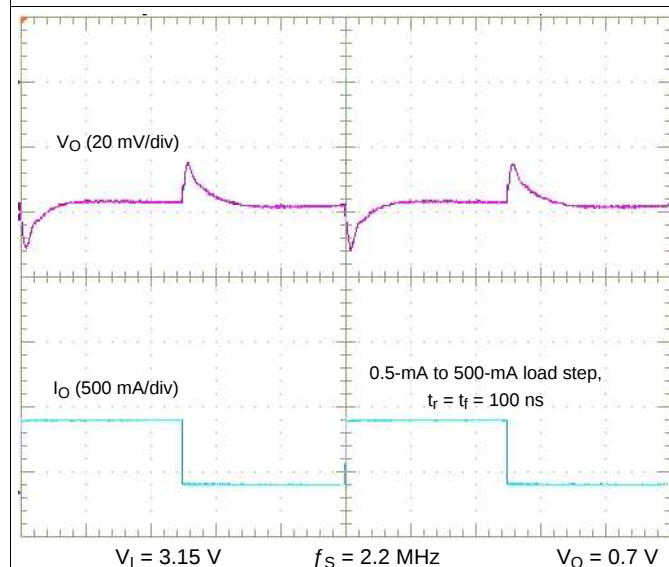


图 6-7. Typical SMPS Load Transient Response for SMPS1, SMPS2, SMPS3, and SMPS5

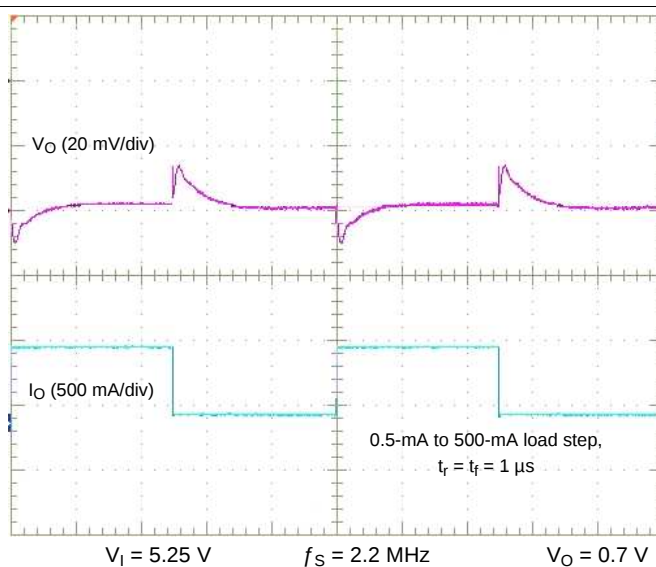


图 6-8. Typical SMPS Load Transient Response for SMPS4

## 6.3 Layout

### 6.3.1 Layout Guidelines

As in every switch-mode-supply design, general layout rules apply:

- Use a solid ground-plane for the power ground (PGND)
- Connect those grounds at a star-point that is located ideally underneath the device.
- Place input capacitors as close as possible to the input pins of the device. This placement is paramount and more important than the output-loop.
- Place the inductor and output capacitor as close as possible to the phase node (or switch-node) of the device.
- Keep the loop-area formed by the phase-node, inductor, output-capacitor, and PGND as small as possible.
- For traces and vias on power-lines, keep inductance and resistance as small as possible by using wide traces. Avoid switching layers but, if needed, use plenty of vias.

The goal of these guidelines is a layout that minimizes emissions, maximizes EMI immunity, and maintains a safe operating area (SOA) for the device.

To minimize the spiking at the phase-node for both the high-side (VIN to SWx) and low-side (SWx to PGND), the decoupling of VIN is the most important guideline. Appropriate decoupling and thorough layout should ensure that the spikes never exceed 7V across the high-side and low-side FETs.

图 6-9 shows a set of guidelines regarding parasitic inductance and resistance that are recommended.

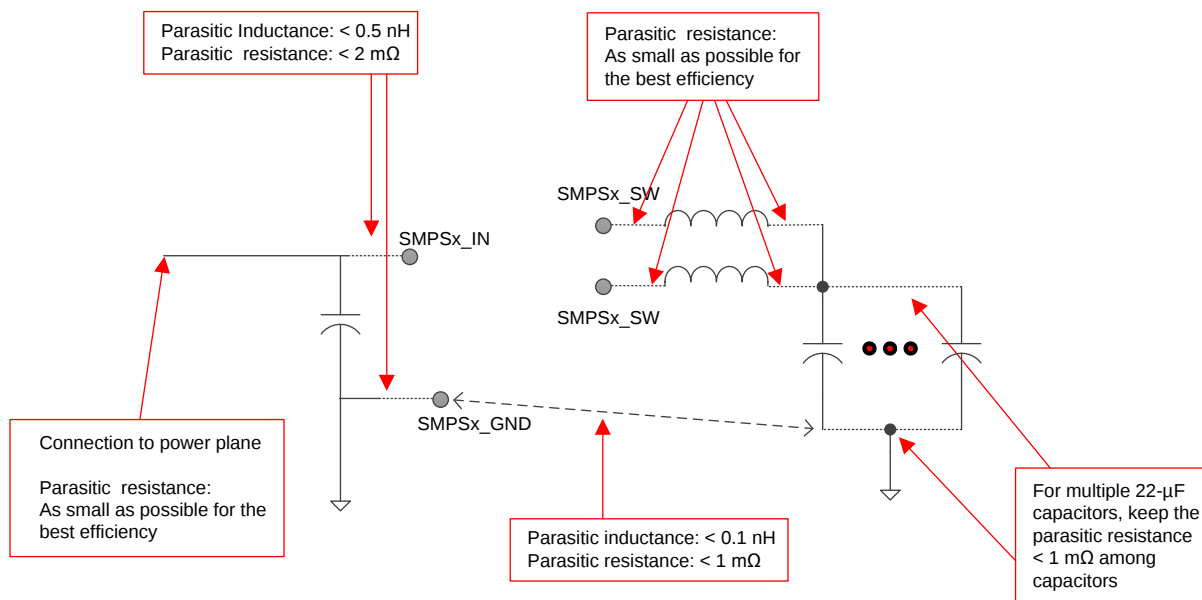


图 6-9. Parasitic Inductance and Resistance

表 6-3 lists the maximum allowable parasitic (inductance measured at 100 MHz) and the achievable values in an optimized layout.


表 6-3. Maximum Allowable Parasitic

| CONNECTION                                        | MAXIMUM ALLOWABLE INDUCTANCE                   | MAXIMUM ALLOWABLE RESISTANCE                                  | OPTIMIZED LAYOUT (EVM) INDUCTANCE              |        | OPTIMIZED LAYOUT (EVM) RESISTANCE                             |        |
|---------------------------------------------------|------------------------------------------------|---------------------------------------------------------------|------------------------------------------------|--------|---------------------------------------------------------------|--------|
| PowerPlane to C <sub>IN</sub>                     | N/A                                            | N/A for SOA<br>Maintain a low resistance value for efficiency | N/A                                            |        | N/A for SOA<br>Maintain a low resistance value for efficiency |        |
| C <sub>IN</sub> to SMPSx_IN                       | 0.5 nH                                         | 2 mΩ                                                          | SMPS1                                          | 0.2 nH | SMPS1                                                         | 1.1 mΩ |
|                                                   |                                                |                                                               | SMPS2                                          | 0.2 nH | SMPS2                                                         | 1.6 mΩ |
|                                                   |                                                |                                                               | SMPS3                                          | 0.2 nH | SMPS3                                                         | 1.5 mΩ |
|                                                   |                                                |                                                               | SMPS4                                          | 0.2 nH | SMPS4                                                         | 1.8 mΩ |
|                                                   |                                                |                                                               | SMPS5                                          | 0.2 nH | SMPS5                                                         | 1.5 mΩ |
| C <sub>IN</sub> to PGND                           | 0.5 nH                                         | 2 mΩ                                                          | SMPS1                                          | 0.3 nH | SMPS1                                                         | 0.4 mΩ |
|                                                   |                                                |                                                               | SMPS2                                          | 0.3 nH | SMPS2                                                         | 0.4 mΩ |
|                                                   |                                                |                                                               | SMPS3                                          | 0.4 nH | SMPS3                                                         | 0.5 mΩ |
|                                                   |                                                |                                                               | SMPS4                                          | 0.3 nH | SMPS4                                                         | 0.6 mΩ |
|                                                   |                                                |                                                               | SMPS5                                          | 0.4 nH | SMPS5                                                         | 0.5 mΩ |
| SMPSx_SW to inductor                              | N/A                                            | N/A for SOA<br>Maintain a low resistance value for efficiency | N/A                                            |        | SMPS1                                                         | 1 mΩ   |
|                                                   |                                                |                                                               |                                                |        | SMPS2                                                         | 0.7 mΩ |
|                                                   |                                                |                                                               |                                                |        | SMPS3                                                         | 1 mΩ   |
|                                                   |                                                |                                                               |                                                |        | SMPS4                                                         | 0.7 mΩ |
|                                                   |                                                |                                                               |                                                |        | SMPS5                                                         | 1.4 mΩ |
| Inductor to C <sub>OUT</sub>                      | N/A                                            | N/A for SOA<br>Maintain a low resistance value for efficiency | N/A                                            |        | N/A for SOA<br>Maintain a low resistance value for efficiency |        |
| C <sub>OUT</sub> to GND                           | Use dedicated GND plane to keep inductance low | 1 mΩ                                                          | SMPS1                                          | 0.8 nH | SMPS1                                                         | 0.7 mΩ |
|                                                   |                                                |                                                               | SMPS2                                          | 0.6 nH | SMPS2                                                         | 0.8 mΩ |
|                                                   |                                                |                                                               | SMPS3                                          | 0.5 nH | SMPS3                                                         | 0.6 mΩ |
|                                                   |                                                |                                                               | SMPS4                                          | 0.4 nH | SMPS4                                                         | 0.6 mΩ |
|                                                   |                                                |                                                               | SMPS5                                          | 0.5 nH | SMPS5                                                         | 0.5 mΩ |
| GND (C <sub>IN</sub> ) to GND (C <sub>OUT</sub> ) | Use dedicated GND plane to keep inductance low | 1 mΩ                                                          | Use dedicated GND plane to keep inductance low |        | mΩ                                                            |        |

Texas Instruments recommends measuring the voltages across the high-side FET (voltage at SMPSx\_IN versus SMPSx\_SW) and the low-side FET (SMPSx\_SW versus PGND) with a high bandwidth, high sampling-rate scope with a low-capacitance probe (ideally a differential probe). Measure the voltages as close as possible to the device pins and verify the amplitude of the spikes. A small-loop ground connection to PGND is essential.


When measuring the voltage difference between the SMPSx\_IN and SMPSx\_SW pins, there should be a maximum of 7 V when measuring at the pins. Similarly, when measuring the voltage difference between the SMPSx\_SW and PGND pins, there should be a maximum of 7 V when measuring at the pins.

For more information on cursor-positioning, see 图 6-10 and 图 6-11.

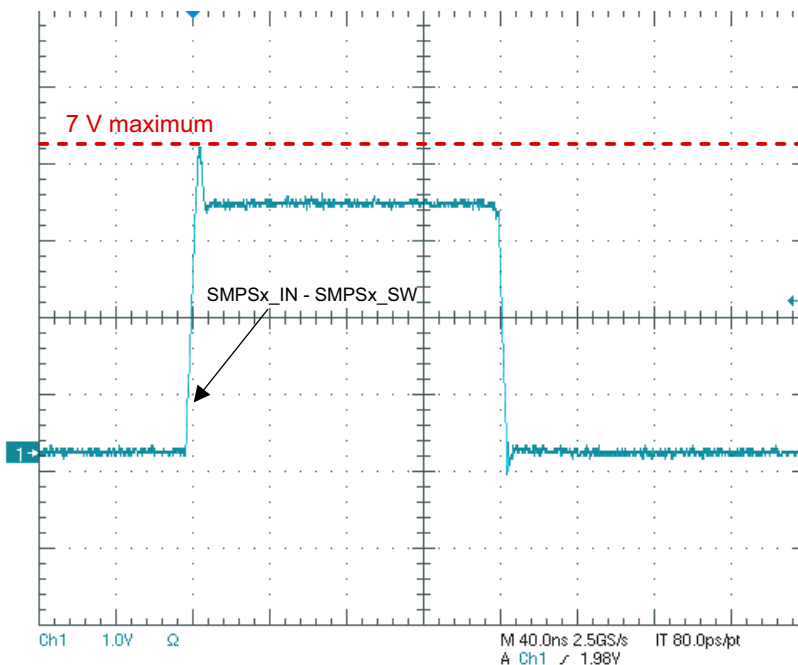

Measure across the high-side FET (SMPSx\_IN – SMPSx\_SW) as close to the IC as possible. The preferred measurement is with a differential probe. The negative side of the probe should be at SMPSx\_SW and the positive side of the probe should measure SMPSx\_IN. As shown in this image, the voltage across the high-side FET should not exceed 7 V. Repeat the measurement for all SMPSs in use.

图 6-10. Measuring the High-Side FET (Differentially)

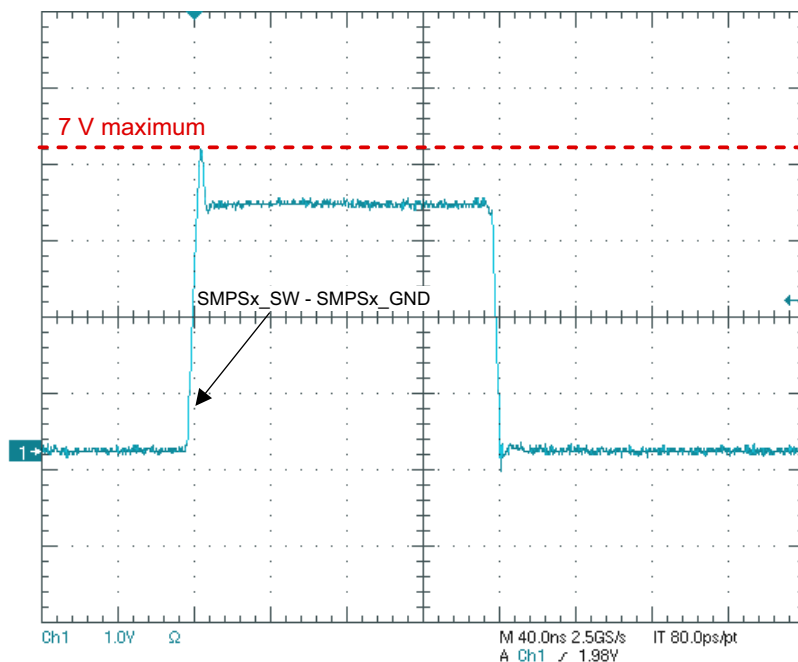

Measure across the low-side FET (SMPSx\_SW – GND) as close to the IC as possible. The preferred measurement is with a differential probe. The negative side of the probe should be at GND and the positive side of the probe should measure SMPSx\_SW. As shown in this image, the voltage across the low-side FET should not exceed 7 V. Repeat the measurement for all SMPSs in use.

图 6-11. Measuring the Low-Side FET (Differentially)

### 6.3.2 Layout Example

See 图 6-12 and 图 6-13 for the actual placement and routing on the EVM.

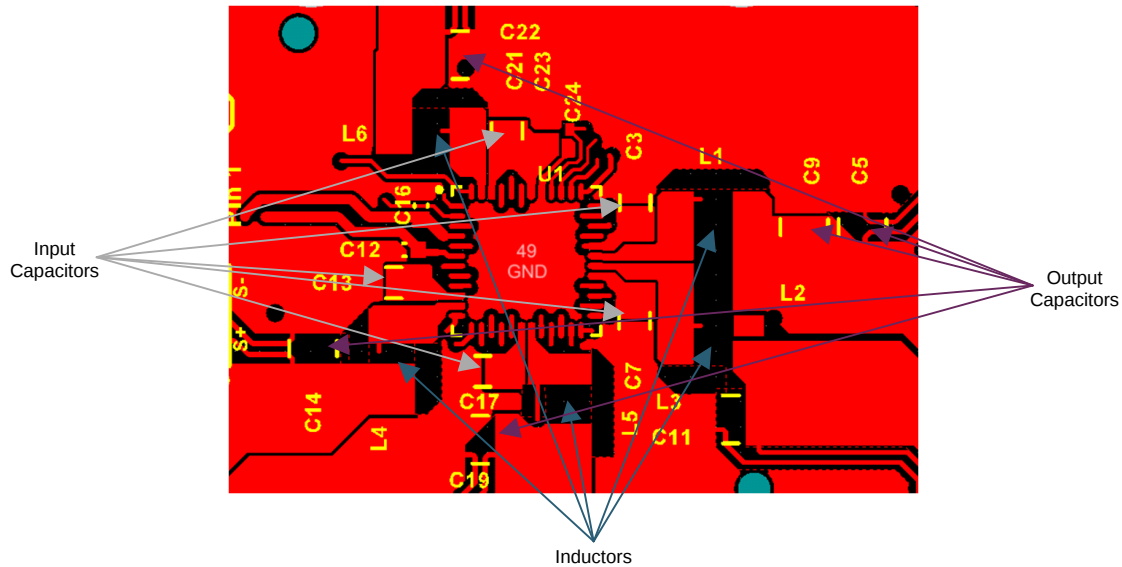


图 6-12. Top Layer Overview of Inductor and Capacitor Placement and Routing of SMPSs

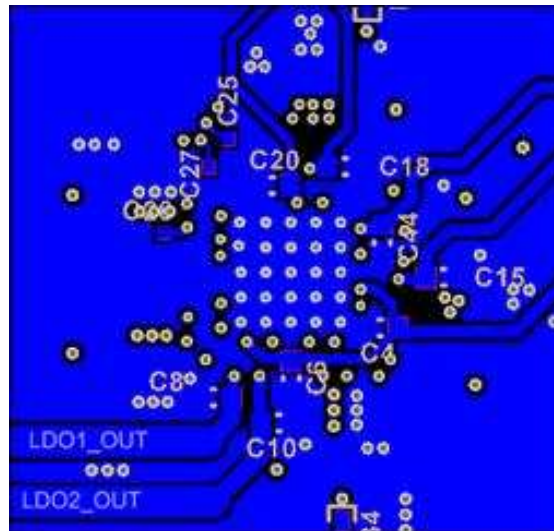


图 6-13. Bottom Layer Overview of Capacitor Placement and Routing of LDOs

## 6.4 Power Supply Coupling and Bulk Capacitors

The TPS65917-Q1 device is designed to work with an analog supply-voltage range of 3.135 V to 5.25 V. The input supply should be well regulated and connected to the VCCA pin, as well as SMPS and LDO input pins with appropriate bypass capacitors as recommended in 表 6-2. If the input supply is located more than a few inches from the TPS65917-Q1 device, additional capacitance may be required in addition to the recommended input capacitors at the VCCA pin and the SMPS and LDO input pins.

## 7 器件和文档支持

### 7.1 器件支持

#### 7.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

#### 7.1.2 器件命名规则

本数据表使用下列缩略词和术语。有关术语、缩写和定义の詳細列表，请参阅 [《TI 术语表》](#)。

|             |          |
|-------------|----------|
| <b>ADC</b>  | 模数转换器    |
| <b>APE</b>  | 应用处理器引擎  |
| <b>DVS</b>  | 数字电压调节   |
| <b>GPIO</b> | 通用输入/输出  |
| <b>LDO</b>  | 低压降线性稳压器 |
| <b>PM</b>   | 电源管理     |
| <b>PMIC</b> | 电源管理集成电路 |
| <b>PSRR</b> | 电源抑制比    |
| <b>RTC</b>  | 实时时钟     |
| <b>SMPS</b> | 开关模式电源   |
| <b>NA</b>   | 不适用      |
| <b>OTP</b>  | 一次性可编程   |
| <b>ESR</b>  | 等效串联电阻   |
| <b>PMU</b>  | 电源管理单元   |
| <b>PFM</b>  | 脉频调制     |
| <b>PWM</b>  | 脉宽调制     |
| <b>SPI</b>  | 串行外设接口   |
| <b>EPC</b>  | 嵌入式电源控制器 |
| <b>FSD</b>  | 首次电源检测   |

### 7.2 文档支持

#### 7.2.1 相关文档

请参阅如下相关文档：

- 德州仪器 (TI)，[《电池供电的汽车类 ADAS 和信息娱乐系统处理器电源参考设计》](#)
- 德州仪器 (TI)，[《TPS65903x 和 TPS6591x 器件中的 GPADC 使用指南》](#)
- 德州仪器 (TI)，[《适用于处理器的 TPS65917-Q1 电源管理单元 \(PMU\) 安全手册》](#)
- 德州仪器 (TI)，[《TPS65917-Q1 EVM 用户指南》](#)
- 德州仪器 (TI)，[《TPS65917-Q1 寄存器映射》](#)
- 德州仪器 (TI)，[《为 DRA7xx 和 TDA2x/TDA2Ex 供电的 TPS65917-Q1 用户指南》](#)
- 德州仪器 (TI)，[《为 DRA71x、DRA79x 和 TDA2E-17 供电的 TPS65919-Q1 和 TPS65917-Q1 用户指南》](#)
- 德州仪器 (TI)，[《为 TDA3x 供电的 TPS65919-Q1 和 TPS65917-Q1 用户指南》](#)

### 7.3 接收文档更新通知

要接收文档更新通知，请导航至 [TI.com.cn](http://ti.com.cn) 上的器件产品文件夹。单击右上角的通知我 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

## 7.4 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** The TI engineer-to-engineer (E2E) community was created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**设计支持** **TI 参考设计支持** 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

## 7.5 商标

Eco-mode, E2E are trademarks of Texas Instruments.  
All other trademarks are the property of their respective owners.

## 7.6 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

## 7.7 Glossary

**TI Glossary** This glossary lists and explains terms, acronyms, and definitions.

## 8 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如欲获取此数据表的浏览器版本，请参阅左侧的导航。

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)    |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|------------------------|
| <a href="#">O917A130TRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 30 1.1 |
| O917A130TRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 30 1.1 |
| <a href="#">O917A130TRGZTQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 30 1.1 |
| O917A130TRGZTQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 30 1.1 |
| <a href="#">O917A131TRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 31 1.1 |
| O917A131TRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 31 1.1 |
| <a href="#">O917A131TRGZTQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 31 1.1 |
| O917A131TRGZTQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 31 1.1 |
| <a href="#">O917A132TRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 32 1.1 |
| O917A132TRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 32 1.1 |
| <a href="#">O917A132TRGZTQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 32 1.1 |
| O917A132TRGZTQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 32 1.1 |
| <a href="#">O917A133TRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 33 1.1 |
| O917A133TRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 33 1.1 |
| <a href="#">O917A133TRGZTQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 33 1.1 |
| O917A133TRGZTQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 33 1.1 |

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)    |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|------------------------|
| <a href="#">O917A14DTRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 4D 1.1 |
| O917A14DTRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 4D 1.1 |
| <a href="#">O917A14DTRGZTQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 4D 1.1 |
| O917A14DTRGZTQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 4D 1.1 |
| <a href="#">O917A14FTRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 4F 1.1 |
| O917A14FTRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 4F 1.1 |
| <a href="#">O917A14FTRGZTQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 4F 1.1 |
| O917A14FTRGZTQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 4F 1.1 |
| <a href="#">O917A151TRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 51 1.1 |
| O917A151TRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 51 1.1 |
| <a href="#">O917A152TRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 52 1.1 |
| O917A152TRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 52 1.1 |
| <a href="#">O917A152TRGZTQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 52 1.1 |
| O917A152TRGZTQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 52 1.1 |
| <a href="#">O917A154TRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 54 1.1 |
| O917A154TRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 54 1.1 |
| <a href="#">O917A154TRGZTQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 54 1.1 |

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)    |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|------------------------|
| O917A154TRGZTQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 54 1.1 |
| <a href="#">O917A186TRGZRQ1</a> | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 86 1.1 |
| O917A186TRGZRQ1.A               | Active        | Production           | VQFN (RGZ)   48 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 105   | TPS65917<br>OTP 86 1.1 |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION

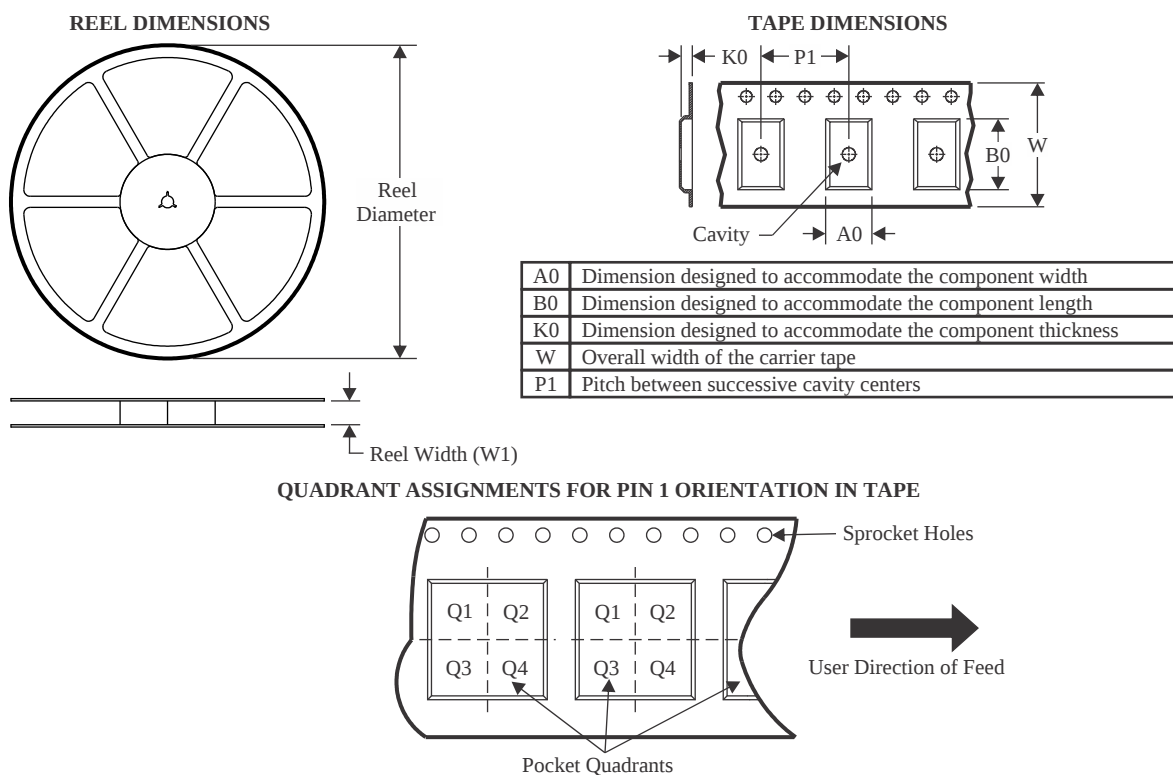


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| O917A130TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A130TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A130TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 180.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A131TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A131TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A131TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 180.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A132TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A132TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A132TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 180.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A133TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A133TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A133TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 180.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A14DTRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A14DTRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A14DTRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 180.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A14FTRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| O917A14FTRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A14FTRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 180.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A151TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A151TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A152TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A152TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A152TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 180.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A154TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A154TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A154TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 180.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |
| O917A186TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 330.0              | 16.4               | 7.3     | 7.3     | 1.1     | 12.0    | 16.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS

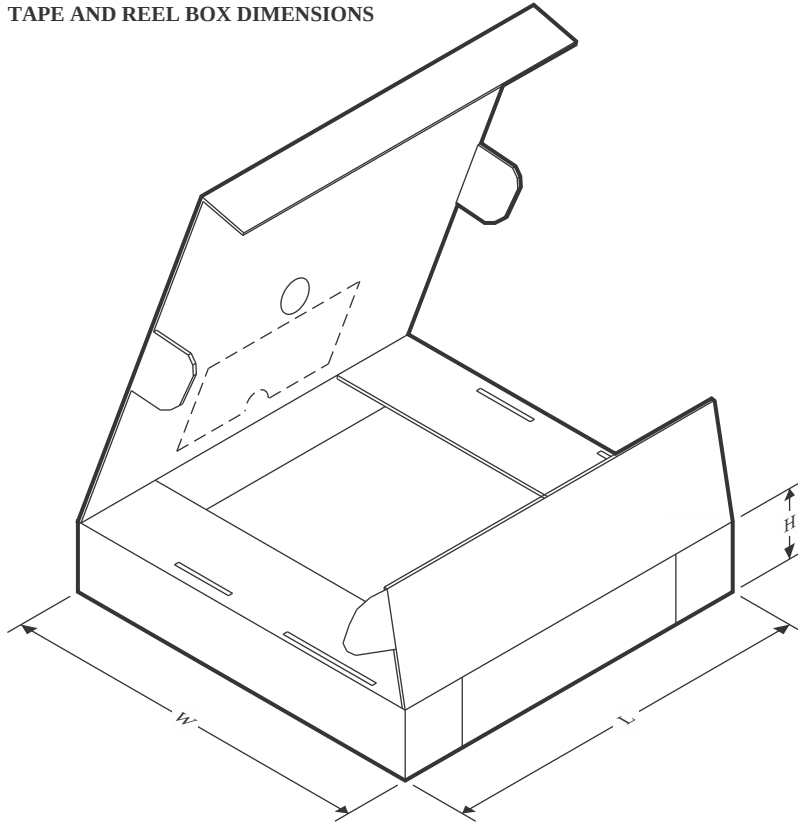

\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| O917A130TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A130TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A130TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 210.0       | 185.0      | 35.0        |
| O917A131TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A131TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A131TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 210.0       | 185.0      | 35.0        |
| O917A132TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A132TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A132TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 210.0       | 185.0      | 35.0        |
| O917A133TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A133TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A133TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 210.0       | 185.0      | 35.0        |
| O917A14DTRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A14DTRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A14DTRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 210.0       | 185.0      | 35.0        |
| O917A14FTRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A14FTRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A14FTRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 210.0       | 185.0      | 35.0        |

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| O917A151TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A151TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A152TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A152TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A152TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 210.0       | 185.0      | 35.0        |
| O917A154TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |
| O917A154TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 38.0        |
| O917A154TRGZTQ1 | VQFN         | RGZ             | 48   | 250  | 210.0       | 185.0      | 35.0        |
| O917A186TRGZRQ1 | VQFN         | RGZ             | 48   | 2500 | 367.0       | 367.0      | 35.0        |


## GENERIC PACKAGE VIEW

**RGZ 48**

**VQFN - 1 mm max height**

7 x 7, 0.5 mm pitch


PLASTIC QUADFLAT PACK- NO LEAD

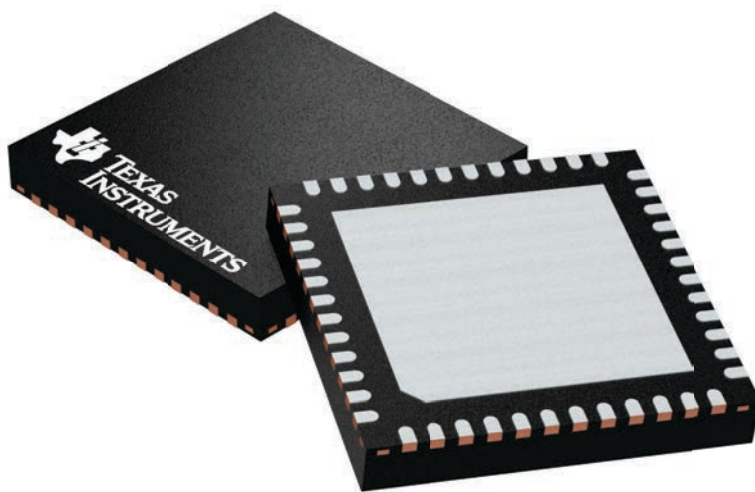

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4224671/A




RGZ0048D



# PACKAGE OUTLINE

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

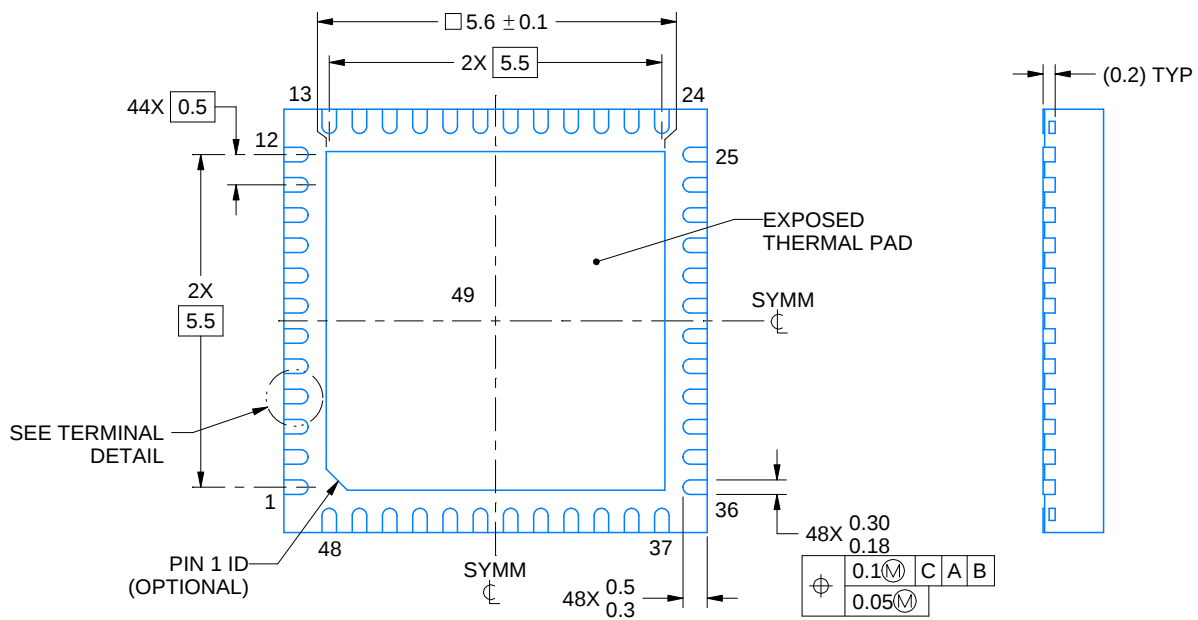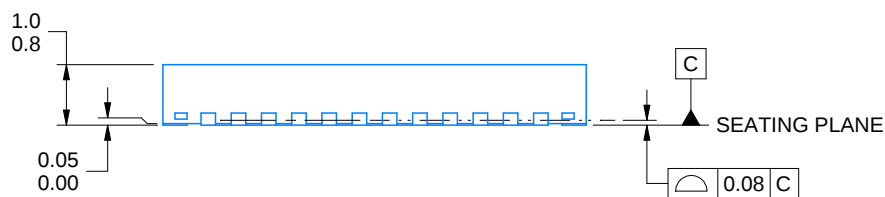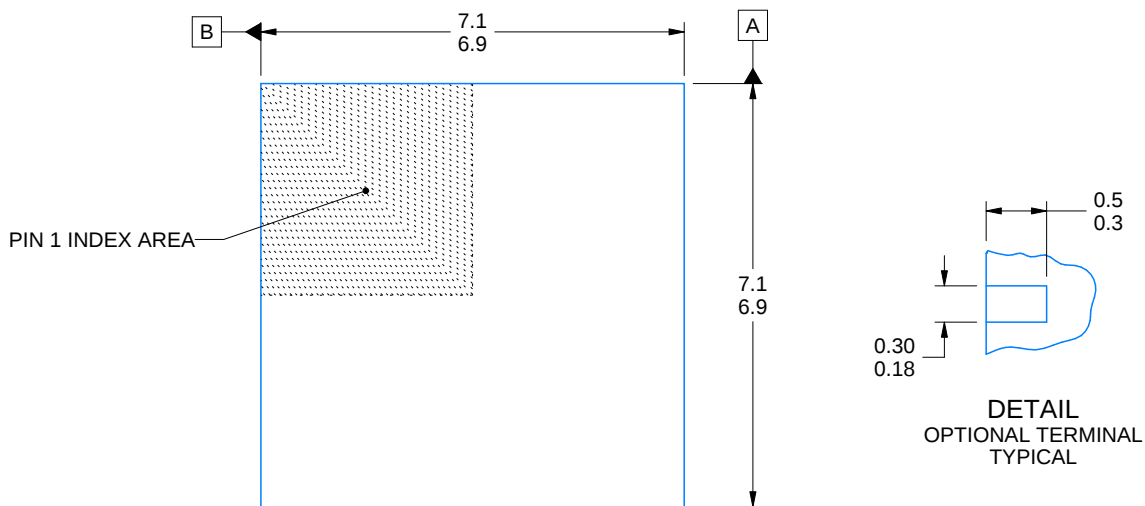

4219046/B 11/2019

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT


RGZ0048D

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

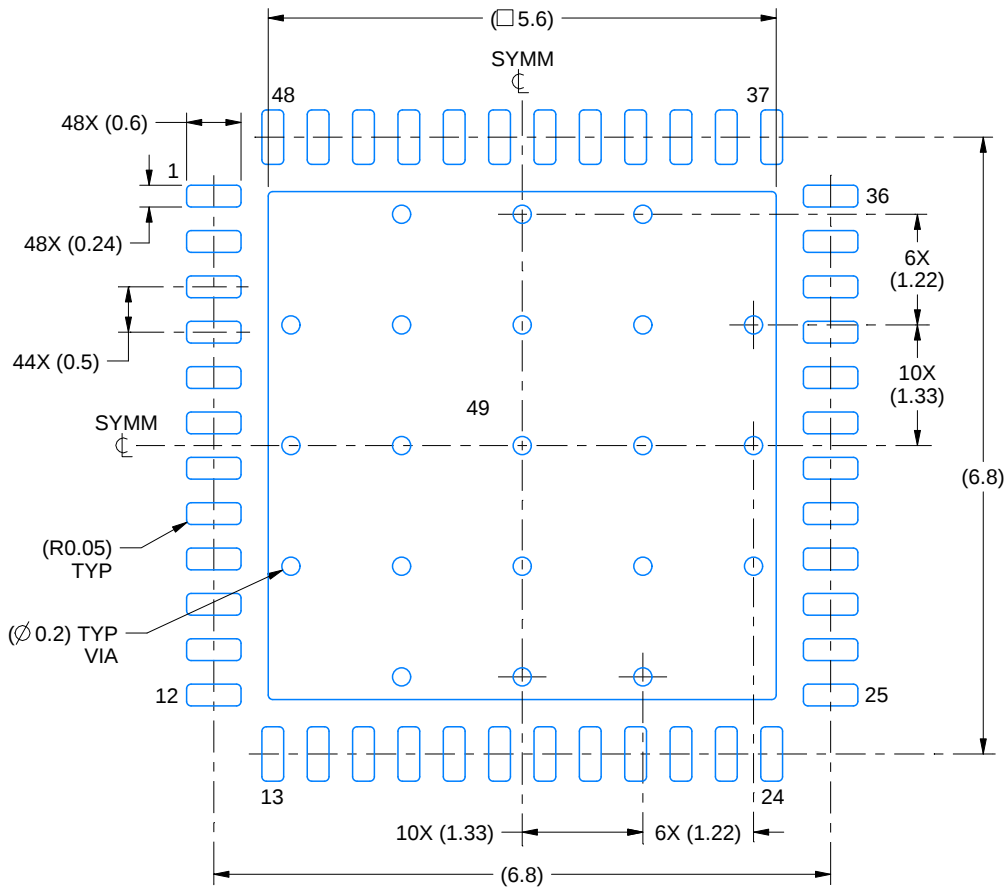

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:12X

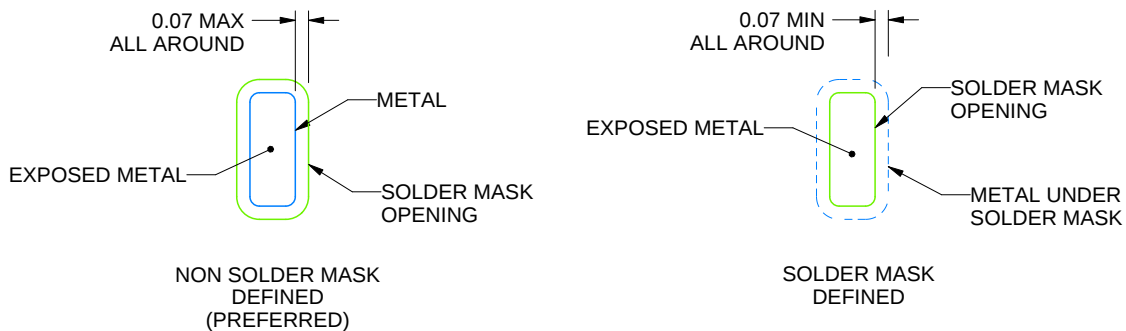

SOLDER MASK DETAILS

4219046/B 11/2019


NOTES: (continued)

- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

**RGZ0048D**

**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

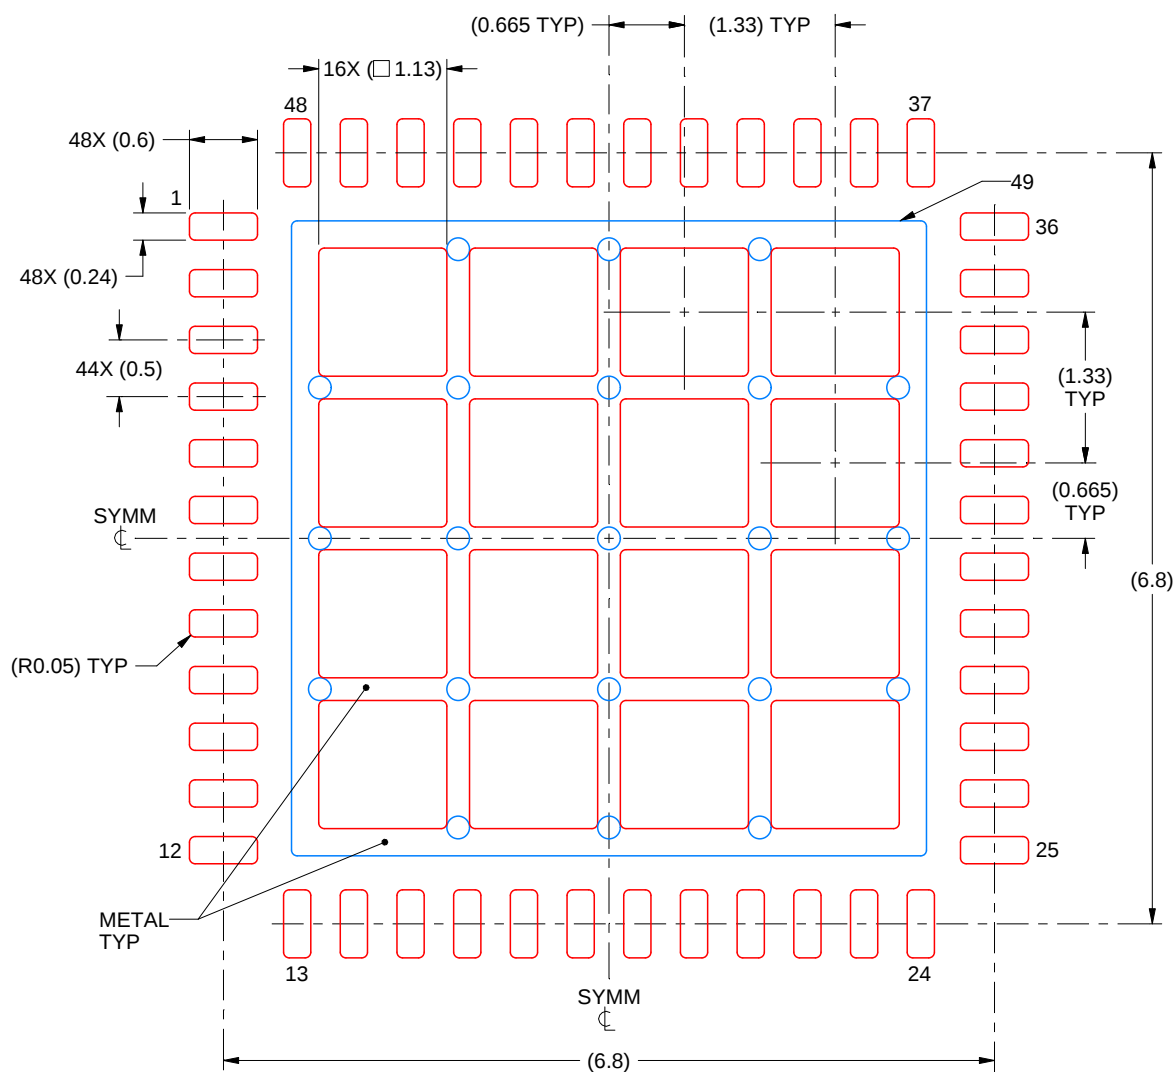

## SOLDER PASTE EXAMPLE BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 49  
66% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:15X

4219046/B 11/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月