www.ti.com

SGLS366A - AUGUST 2006-REVISED DECEMBER 2010

# SINGLE D-TYPE FLIP-FLOP WITH ASYNCHRONOUS CLEAR


Check for Samples: SN74LVC1G175-EP

#### **FEATURES**

- Supports 5-V V<sub>CC</sub> Operation
- Inputs Accept Voltages to 5.5 V
- Max t<sub>pd</sub> of 4.3 ns at 3.3 V
- Low Power Consumption, 10-μA Max I<sub>CC</sub>
- ±24-mA Output Drive at 3.3 V
- I<sub>off</sub> Supports Partial Power-Down-Mode Operation
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

## SUPPORTS DEFENSE, AEROSPACE, AND MEDICAL APPLICATIONS

- Controlled Baseline
- One Assembly/Test Site
- One Fabrication Site
- Available in Military (–55°C/125°C)
   Temperature Range<sup>(1)</sup>
- Extended Product Life Cycle
- Extended Product-Change Notification
- Product Traceability



(1) Additional temperature ranges available - contact factory

#### **DESCRIPTION/ORDERING INFORMATION**

This single D-type flip-flop is designed for 1.65-V to 5.5-V  $V_{CC}$  operation.

The SN74LVC1G175 has an asynchronous clear ( $\overline{\text{CLR}}$ ) input. When  $\overline{\text{CLR}}$  is high, data from the input pin (D) is transferred to the output pin (Q) on the clock's (CLK) rising edge. When  $\overline{\text{CLR}}$  is low, Q is forced into the low state, regardless of the clock edge or data on D.

This device is fully specified for partial-power-down applications using  $I_{\text{off}}$ . The  $I_{\text{off}}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

#### ORDERING INFORMATION(1)

T <sub>A</sub>	PACKAGE <sup>(2)</sup>		ORDERABLE PART NUMBER	TOP-SIDE MARKING <sup>(3)</sup>	
–55°C to 125°C	SOT (SC-70) – DCK	Reel of 3000	CLVC1G175MDCKREP	BUD	

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at www.ti.com.
- (2) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.
- (3) The actual top-side marking has one additional character that designates the assembly/test site.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



#### **FUNCTION TABLE**

	INPUTS		OUTPUT
CLR	CLK	D	Q
Н	<b>↑</b>	L	L
Н	<b>↑</b>	Н	Н
Н	H or L	Χ	Qo
L	Χ	X	L

#### LOGIC DIAGRAM (POSITIVE LOGIC)



## Absolute Maximum Ratings(1)

over operating free-air temperature range (unless otherwise noted)

•			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range		-0.5	6.5	V
VI	Input voltage range		-0.5	6.5	V
Vo	Voltage range applied to any output in the	-0.5	6.5	V	
Vo	Voltage range applied to any output in the high or low state (2) (3)		-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		-50	mA
Io	Continuous output current			±50	mA
	Continuous current through V <sub>CC</sub> or GND		±100	mA	
$\theta_{JA}$	Package thermal impedance (4)		259	°C/W	
T <sub>stg</sub>	Storage temperature range		-65	150	°C

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V<sub>CC</sub> is provided in the recommended operating conditions table.
- (4) The package thermal impedance is calculated in accordance with JESD 51-7.

Submit Documentation Feedback



www.ti.com

## Recommended Operating Conditions<sup>(1)</sup>

			MIN	MAX	UNIT
	Committee	Operating	1.65	5.5	V
V <sub>CC</sub>	Supply voltage	Data retention only	1.5		V
		V <sub>CC</sub> = 1.65 V to 1.95 V	0.65 × V <sub>CC</sub>		
. ,	I Pale Java Canada a Nama	V <sub>CC</sub> = 2.3 V to 2.7 V	1.7		V
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V	2		V
		V <sub>CC</sub> = 4.5 V to 5.5 V	0.7 × V <sub>CC</sub>		
		V <sub>CC</sub> = 1.65 V to 1.95 V		0.35 × V <sub>CC</sub>	
. ,		V <sub>CC</sub> = 2.3 V to 2.7 V		0.7	.,
$V_{IL}$	Low-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V		0.8	V
		V <sub>CC</sub> = 4.5 V to 5.5 V			
V <sub>I</sub>	Input voltage		0	5.5	V
V <sub>O</sub>	Output voltage		0	V <sub>CC</sub>	V
		V <sub>CC</sub> = 1.65 V		-4	
		V <sub>CC</sub> = 2.3 V		-8	
Он	High-level output current	V 0.V		-16	mA
		V <sub>CC</sub> = 3 V		-24	
		V <sub>CC</sub> = 4.5 V		-32	
		V <sub>CC</sub> = 1.65 V		4	
		V <sub>CC</sub> = 2.3 V		8	
OL	Low-level output current			16	mA
		V <sub>CC</sub> = 3 V		24	
		V <sub>CC</sub> = 4.5 V		32	
		$V_{CC} = 1.8 \text{ V} \pm 0.15 \text{ V}, 2.5 \text{ V} \pm 0.2 \text{ V}$		20	
Δt/Δv	Input transition rise or fall rate	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$		10	ns/V
		$V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$			
T <sub>A</sub>	Operating free-air temperature	·	-55	125	°C

<sup>(1)</sup> All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. See the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.



#### **Electrical Characteristics**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITION	NS	V <sub>cc</sub>	MIN	TYP <sup>(1)</sup>	MAX	UNIT		
	$I_{OH} = -100 \mu A$		1.65 V to 5.5 V	V <sub>CC</sub> - 0.1					
	$I_{OH} = -4 \text{ mA}$		1.65 V	1.2					
V	$I_{OH} = -8 \text{ mA}$	2.3 V	1.9			V			
V <sub>OH</sub>	$I_{OH} = -16 \text{ mA}$	3 V	2.4			V			
	$I_{OH} = -24 \text{ mA}$	3 V	2.3						
	$I_{OH} = -32 \text{ mA}$	4.5 V	3.8						
	I <sub>OL</sub> = 100 μA		1.65 V to 5.5 V			0.1			
	I <sub>OL</sub> = 4 mA	1.65 V			0.45	0.45			
\/	I <sub>OL</sub> = 8 mA	2.3 V			0.3	V			
$V_{OL}$	I <sub>OL</sub> = 16 mA	3 V	0.4			V			
	I <sub>OL</sub> = 24 mA	3 V	0.55						
	I <sub>OL</sub> = 32 mA		4.5 V			0.55			
I <sub>I</sub>	V <sub>I</sub> = 5.5 V or GND		0 to 5.5 V			±1	μΑ		
I <sub>off</sub>	$V_I$ or $V_O = 5.5 \text{ V}$		0			±10	μА		
I <sub>cc</sub>	$V_I = 5.5 \text{ V or GND}, \qquad I_O =$	0	1.65 V to 5.5 V			10	μА		
ΔI <sub>CC</sub>	One input at V <sub>CC</sub> - 0.6 V, Other	er inputs at V <sub>CC</sub> or GND	3 V to 5.5 V			500	μΑ		
C <sub>i</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND		3.3 V		3		рF		

<sup>(1)</sup> All typical values are at  $V_{CC} = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

## **Timing Requirements**

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

				V <sub>CC</sub> = ± 0.1		V <sub>CC</sub> = ± 0.2		V <sub>CC</sub> = ± 0.3		$V_{CC} = 5 V$ $\pm 0.5 V$		UNIT	
				MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX		
f <sub>clock</sub> Clock frequency			100		125		150		175	MHz			
Dulas desaffer		CLR	Low	6.0		3.5		3.2		3.0			
t <sub>w</sub>	Pulse duration	CLK	High or low	4.0		3.5		3.2		3.0		ns	
	Catum times hafana CLIKA	Data		3		2.5		2		1.5			
t <sub>su</sub> Setup time, before CLK↑		CLR inactive		0.7		0.7		0.7		0.7		ns	
t <sub>h</sub>	Hold time, data after CLK	<b>↑</b>				0.7		0.7		0.7		ns	

Submit Documentation Feedback



www.ti.com

## **Switching Characteristics**

over recommended operating free-air temperature range,  $C_L = 30 \text{ pF or } 50 \text{ pF}$  (unless otherwise noted) (see Figure 2)

PARAMETER	FROM (INPUT)	M IO		1.8 V I5 V	V <sub>CC</sub> = ± 0.	2.5 V 2 V	V <sub>CC</sub> = ± 0.		V <sub>CC</sub> = ± 0.		UNIT
	(INFOT)	(001701)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
f <sub>max</sub>			100		125		150		175		MHz
	CLK	0	2.7	16	2.2	9	1.6	8	1.5	5	20
<sup>L</sup> pd	CLR	Q	2.7	16	2.2	9	1.5	8	1.3	5	ns


## **Operating Characteristics**

 $T_A = 25$ °C

	PARAMETER	TEST	V <sub>CC</sub> = 1.8 V	$V_{CC} = 2.5 V$	$V_{CC} = 3.3 \text{ V}$	V <sub>CC</sub> = 5 V	UNIT
	FARAMETER	CONDITIONS	TYP	TYP	TYP	TYP	UNIT
$C_{pd}$	Power dissipation capacitance	f = 10 MHz	18	19	19	21	pF




#### PARAMETER MEASUREMENT INFORMATION



TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	$V_{LOAD}$
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

V	INI	PUTS	.,	· ·		В	V
V <sub>CC</sub>	VI	t <sub>r</sub> /t <sub>f</sub>	V <sub>M</sub>	V <sub>LOAD</sub>	CL	R <sub>L</sub>	$V_{\Delta}$
1.8 V ± 0.15 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	15 pF	<b>1 M</b> Ω	0.15 V
2.5 V $\pm$ 0.2 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	$2 \times V_{CC}$	15 pF	<b>1 M</b> Ω	0.15 V
3.3 V $\pm$ 0.3 V	3 V	≤2.5 ns	1.5 V	6 V	15 pF	<b>1 M</b> Ω	0.3 V
5 V $\pm$ 0.5 V	V <sub>CC</sub>	≤2.5 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	15 pF	<b>1 M</b> Ω	0.3 V

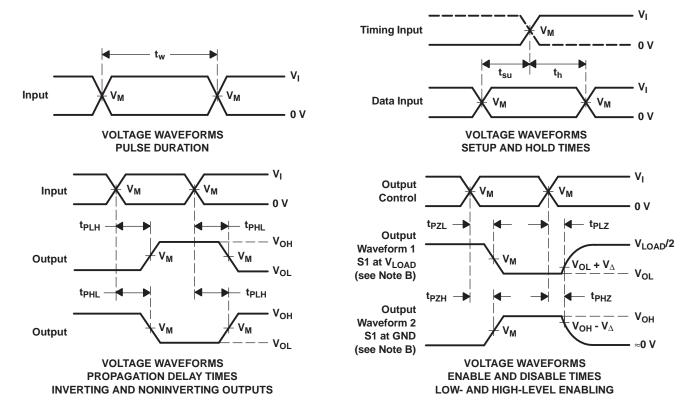

- NOTES: A.  $C_L$  includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ .
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
  - F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - G. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.
  - H. All parameters and waveforms are not applicable to all devices.


Figure 1. Load Circuit and Voltage Waveforms

Submit Documentation Feedback

Copyright © 2006–2010, Texas Instruments Incorporated




#### PARAMETER MEASUREMENT INFORMATION



TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	$V_{LOAD}$
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

v	INI	PUTS	.,	.,		_	.,
V <sub>CC</sub>	VI	t <sub>r</sub> /t <sub>f</sub>	V <sub>M</sub>	V <sub>LOAD</sub>	CL	R <sub>L</sub>	$oldsymbol{V}_{\Delta}$
1.8 V ± 0.15 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	<b>1 k</b> Ω	0.15 V
2.5 V $\pm$ 0.2 V	V <sub>CC</sub>	≤2 ns	V <sub>CC</sub> /2	2×V <sub>CC</sub>	30 pF	<b>500</b> Ω	0.15 V
3.3 V $\pm$ 0.3 V	3 V	≤2.5 ns	1.5 V	6 V	50 pF	<b>500</b> Ω	0.3 V
5 V + 0 5 V	Voo	<2.5 ns	Vool2	2 × V00	50 nF	500 ()	03V

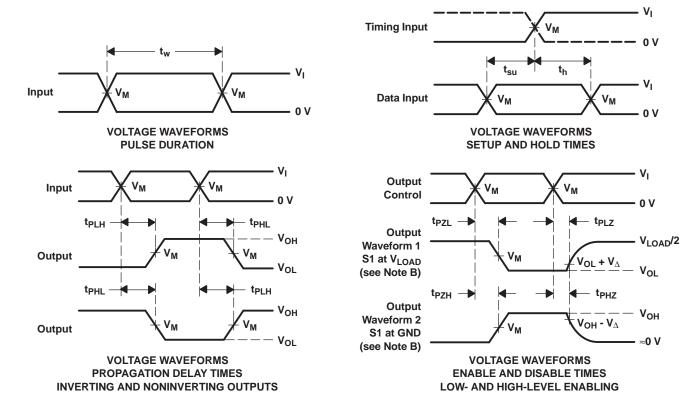

NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
- F. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
- G. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.
- H. All parameters and waveforms are not applicable to all devices.

Figure 2. Load Circuit and Voltage Waveforms

Submit Documentation Feedback

www.ti.com 11-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type (2)	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
CLVC1G175MDCKREP	Active	Production	SC70 (DCK)   6	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	BUD
CLVC1G175MDCKREPG4	Active	Production	SC70 (DCK)   6	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	BUD
V62/06633-01XE	Active	Production	SC70 (DCK)   6	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	BUD

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN74LVC1G175-EP:

Catalog: SN74LVC1G175

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



## **PACKAGE OPTION ADDENDUM**

www.ti.com 11-Nov-2025

NOTE: Qualified Version Definitions:


 $_{\bullet}$  Catalog - TI's standard catalog product

## PACKAGE MATERIALS INFORMATION

www.ti.com 24-Apr-2020

## TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing			Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CLVC1G175MDCKREP	SC70	DCK	6	3000	180.0	8.4	2.4	2.5	1.2	4.0	8.0	Q3

www.ti.com 24-Apr-2020




#### \*All dimensions are nominal

Device	Device Package Type		Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
CLVC1G175MDCKREP	SC70	DCK	6	3000	202.0	201.0	28.0	



SMALL OUTLINE TRANSISTOR

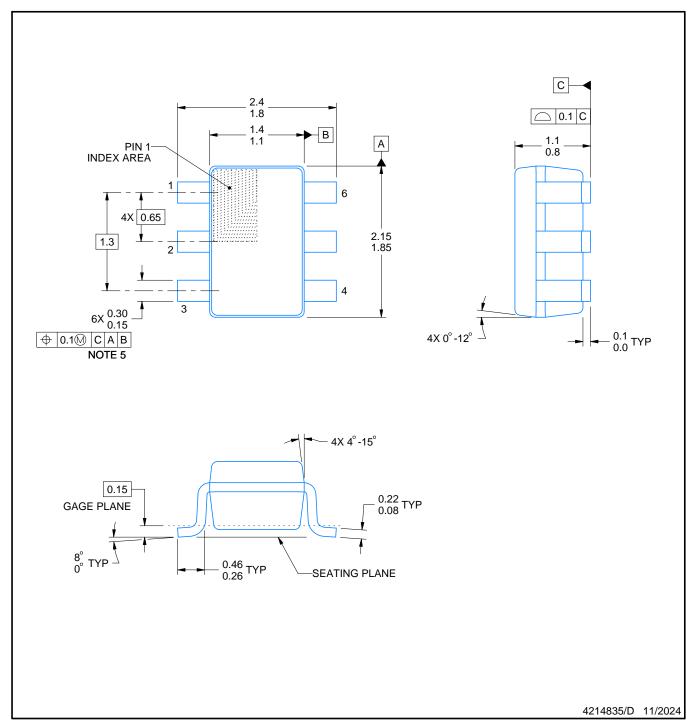

#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.


  2. This drawing is subject to change without notice.

  3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.

  4. Falls within JEDEC MO-203 variation AB.



SMALL OUTLINE TRANSISTOR

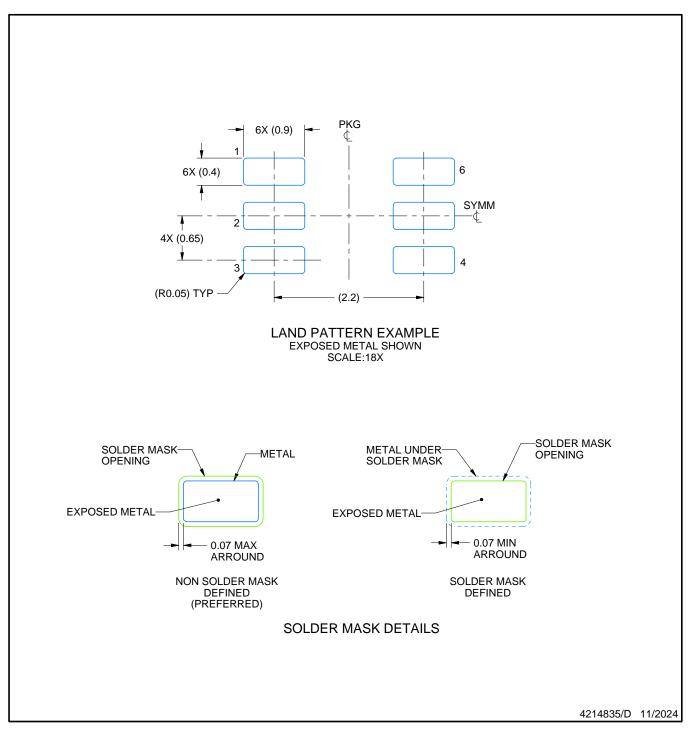


NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR

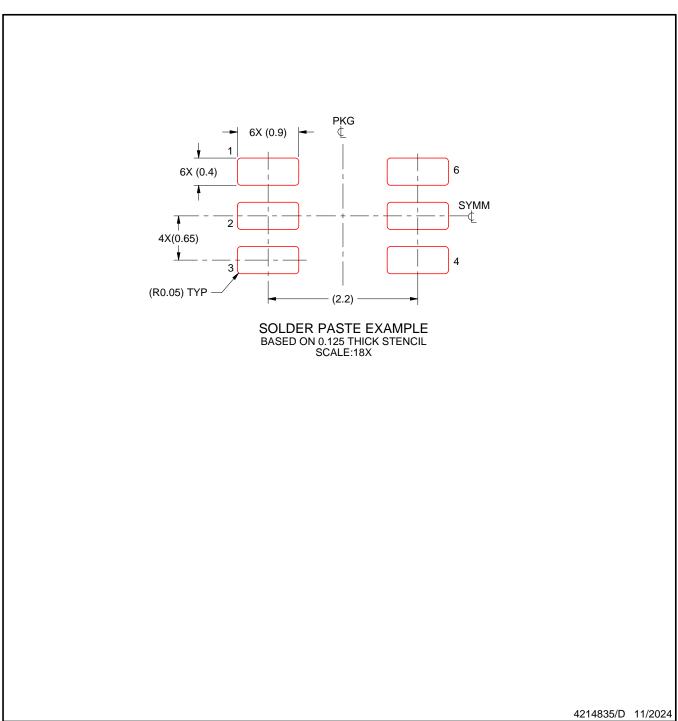

NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025