

Part Number: LP-EM-CC1354P10-6


Connect your LaunchPad to a computer
and visit dev.ti.com

LaunchPad™ Development Kit

Meet the
CC1354P10-6

The BoosterPack™ connector

The pinout to connect BoosterPack accessories (available separately) are shown below.

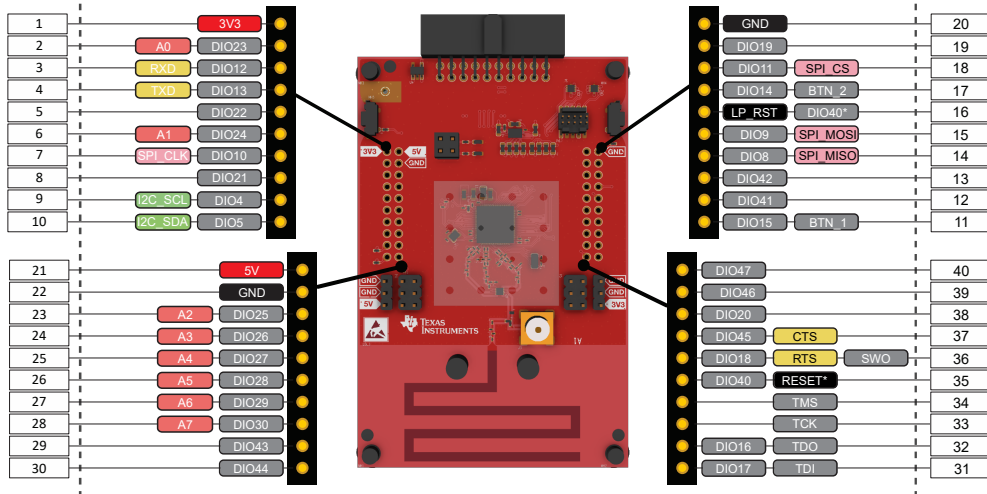


UART (DIO12, DIO13), Reset (LP_RST) and JTAG (TMS, TCK, TDO and TDI) are also present in the LP-EM Debug Connector. Power (GND, 3V3 and 5V) is also provided.

*These functions are not connected to the LaunchPad connector by default.



SmartRF Studio
A powerful application to
evaluate radio performance.
SimpleLink SDK and
SimpleLink Academy
Advanced software and
tutorials to easy ramp your
development with your new
LaunchPad.




Professional Software tools
www.ti.com/ccs
LaunchPads are supported by
professional IDEs that
provide industrial-grade
features and full debug-
ability. Set breakpoints,
watch variables, profile code,
inspect memory and more.


Software Tools

>>See them all @ ti.com/boosterpack

SimpleLink ULP Sense
BoosterPack
- Ultra low power accelerometer
- Two cap touch buttons
- Analog Light Sensor
- Reed switch
- 0-200k Ω potentiometer



Sharp[®] 128x128 Memory
LCD and microSD card
BoosterPack
- 1.28 128 x 128 pixel LCD
(LS013B7DH03)
- microSD card slot
- DCDC 3V to 5V converter
- Ultra-low-power operation



BoosterPack Ecosystem

XDS110 EnergyTrace™ Technology

The LP-EM-CC1354P10-6 is compatible with EnergyTrace technology.

EnergyTrace implements a new method for measuring MCU current consumption. It uses a DC-DC solution to measure the time density of charge pulses, allowing accuracy on ultra low power measurements. Its high dynamic range (700 nA to 400 mA) and fast sampling rate (256 KSPPS) captures the complete operational profile of the wireless MCU.

EnergyTrace Profile

EnergyTrace Profile runtime and energy data for low power modes along with each function run during Active Mode.

Graphical Power Data in Code Composer Studio

These two tabs of the EnergyTrace Technology window show a graph over time of power and energy.

Available in the LP-XDS110ET Debug Probe and selected LaunchPads

Find more information at
ti.com/EnergyTrace

A closer look at your new LaunchPad Development Kit

Featured microcontroller: CC1354P10

This LaunchPad is great for...

- Battery-operated wireless applications operating in the Sub-1 GHz (868 and 915 MHz) and 2.4 GHz ISM RF bands. It features two 2.4 GHz RF paths up to +14 and +20 dBm and one Sub-1 GHz up to +5 dBm
- Adding RF capabilities to your product using one of the supported protocols: Bluetooth LE, Zigbee, IEEE 802.15.4g, Wi-SUN®, Wireless M-Bus, MIOTY® and proprietary protocols

What comes in the box?

LP-EM-CC1354P10-6 LaunchPad

CC1354P10 Microcontroller

- 48 MHz CPU
- 1 MB Flash, 256 kB RAM
- Programmable radio supporting various protocols and up to +20 dBm at either 868/915 MHz or 2.4 GHz
- Low power consumption

QSG
This Quick Start Guide

10-pin Debug Cable

2-wire Power Cable

- Four 32-bit or eight x 16-bit timers
- ADC with 8 channels, 12 bits and 200 ksamples/s
- DAC with 8 bits
- Serial communications: UART, SPI, I2C
- Two comparators
- Real-time clock

LP-EM-CC1354P10-6 Overview

LP-EM Debug Connector
Together with a LP-XDS110 or LP-XDS110ET, allows:
- Debugging and programming
- Communicating to the host via UART
- Powering the microcontroller

10-pin Debug Connector
Allows using an external JTAG Debug Probe to debug/program the device

Button/Switch
BTN-1 (DIO15)

20-pin BoosterPack plug-in module connector
(J1, J2, J3 & J4)

Button/Switch
BTN-2 (DIO14)

User LEDs
Red (DIO6)
Green (DIO7)

CC1354P106T0RSK Wireless Microcontroller
(under the RF shield)

Antenna

Hardware setup


What do you need?

To use your new LaunchPad, you need to connect an external Debug Probe to either the 20-pin LP-EM Debug connector on the edge of the board or to the 10-pin Debug connector and supply power separately.

Option 1: Using the LP-EM Debug Connector

This is the easiest way to setup the hardware. It requires either an **LP-XDS110** or **LP-XDS110ET** Debug Probe (sold separately).


Simply connect the edge connector of the Debug Probe to the edge connector of the LaunchPad and connect the USB port of the Debug Probe to the host computer. A secondary UART communications channel will also be available and power to the LaunchPad will be provided directly.

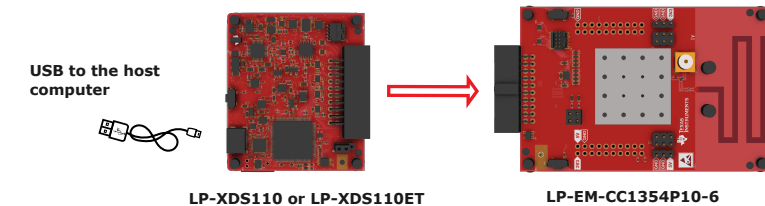

Option 2: Using the 10-pin debug connector

Either a standalone debug probe or a separate LaunchPad with a built-in debug probe can be used.

Connect the two boards as shown in the picture below:

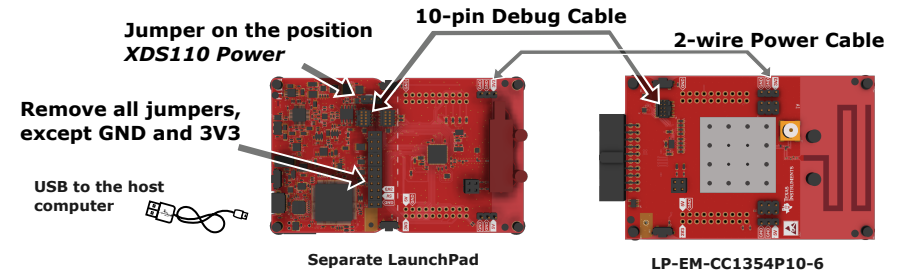

For additional details, consult dev.ti.com/?id=LP-EM-CC1354P10-6

When using the 10-pin debug connector, the UART communications channel must be wired separately (this connector does not carry UART signals).

If using a standalone Debug Probe, consult its documentation to see if it supports the ARM Cortex-M 10-pin standard.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2023, Texas Instruments Incorporated