



Low-power dual digital isolators

1 Features

- Qualified for automotive applications
- AEC-Q100 Qualified with the following results:
 - Device temperature grade 1: -40°C to +125°C ambient operating temperature range
 - Device HBM ESD classification level H3A
 - Device CDM ESD classification level C4
- Propagation delay less than 20 ns
- Low power consumption
- Safety and regulatory approvals
 - 4242 V_{PK} Isolation per VDE, 2.5 kVrms isolation per UL 1577, CSA approved per IEC 60950-1 and IEC 61010-1 End Equipment Standards
- 50 kV/ μ s Transient immunity typical
- Operates from 3.3 V or 5 V Supply and logic levels

2 Applications

- Opto-coupler replacement in:
 - Servo control interface
 - Motor control
 - Power supply
 - Battery packs


3 Description

The ISO7421E-Q1 provides double galvanic isolation of up to 2.5 kVrms for 1 minute per UL. This digital isolator has two isolation channels in a bi-directional configuration. Each isolation channel has a logic input and output buffer separated by a silicon oxide (SiO_2) insulation barrier. Used in conjunction with isolated power supplies, these devices prevent noise currents on a data bus or other circuits from entering the local ground and interfering with or damaging sensitive circuitry.

The devices have TTL input thresholds and require two supply voltages, 3.3 V or 5 V, or any combination. All inputs are 5-V tolerant when supplied from a 3.3-V supply.

Note: The ISO7421E-Q1 is specified for signaling rates up to 50 Mbps. Due to their fast response time, under most cases, these devices will also transmit data with much shorter pulse widths. Designers should add external filtering to remove spurious signals with input pulse duration < 20 ns if desired.

Simplified Schematic

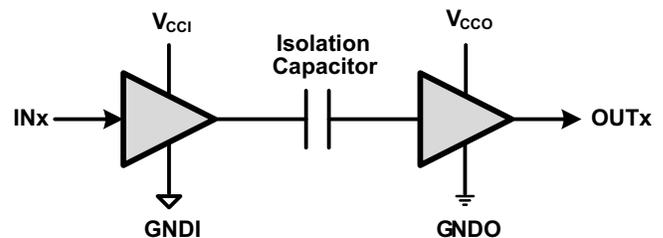

- (1) V_{CCI} and GNDI are supply and ground connections respectively for the input channels.
- (2) V_{CCO} and GNDO are supply and ground connections respectively for the output channels.



4 Pin Configuration and Functions

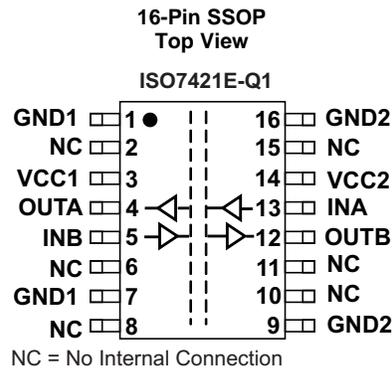


Table 1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	ISO7421E-Q1		
INA	13	I	Input, channel A
INB	5	–	Input, channel B
GND1	1, 7	–	Ground connection for V_{CC1}
GND2	9, 16	O	Ground connection for V_{CC2}
OUTA	4	O	Output, channel A
OUTB	12	–	Output, channel B
V_{CC1}	14	–	Power supply, V_{CC1}
V_{CC2}	14	-	Power supply, V_{CC2}
NC	2, 6, 8, 10, 11, 15		No Connect Pin

4.1 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

4.1 Device Function Table

INPUT SIDE V_{CC} (V_{CCI}) ⁽¹⁾	OUTPUT SIDE V_{CC} (V_{CCO}) ⁽¹⁾	INPUT (IN) ⁽¹⁾	OUTPUT (OUT) ⁽¹⁾
PU	PU	H	H
		L	L
		Open	H
PD	PU	X	H

(1) PU = Powered Up ($V_{CC} \geq 3.15V$); PD = Powered Down ($V_{CC} \leq 2.4V$); X = Irrelevant; H = High Level; L = Low Level

4.2 Available Options

PRODUCT	RATED T_A	MARKED AS	ORDERING NUMBER
ISO7421E-Q1	-40°C to 125°C	ISO7421EQ	ISO7421EQDWRQ1

5 Absolute Maximum Ratings⁽¹⁾

		VALUE		UNIT		
		MIN	MAX			
V_{CC}	Supply voltage ⁽²⁾ , V_{CC1} , V_{CC2}	-0.5	6	V		
V_I	Voltage at IN, OUT	-0.5	$V_{CC} + 0.5$ ⁽³⁾	V		
I_O	Output Current		±15	mA		
ESD	Electrostatic discharge	Human Body Model	AEC-Q100 Classification Level H3A	All pins	4	kV
		Charged Device Model	AEC-Q100 Classification Level C4		1	kV
T_J	Maximum junction temperature		150		°C	

- (1) Stresses beyond those listed under [Absolute Maximum Ratings^{\(1\)}](#) may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under [Recommended Operating Conditions](#) is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values except differential I/O bus voltages are with respect to network ground terminal and are peak voltage values.
- (3) Maximum voltage must not exceed 6 V. A strongly driven input signal can weakly power the floating V_{CC} via an internal protection diode and cause undetermined output.

6 Thermal Information

THERMAL METRIC ⁽¹⁾		ISO7421E-Q1	UNITS
		DW (16 Pins)	
θ_{JA}	Junction-to-ambient thermal resistance	79.9	°C/W
$\theta_{Jc\text{top}}$	Junction-to-case (top) thermal resistance	44.6	
θ_{JB}	Junction-to-board thermal resistance	51.2	
ψ_{JT}	Junction-to-top characterization parameter	18.0	
ψ_{JB}	Junction-to-board characterization parameter	42.2	
$\theta_{Jc\text{bot}}$	Junction-to-case (bottom) thermal resistance	n/a	
P_D	Device power dissipation, $V_{cc1} = V_{cc2} = 5.25V$, $T_J = 150^\circ\text{C}$, $C_L = 15\text{ pF}$, Input a 0.5 MHz 50% duty cycle square wave	42	mW

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report ([SPRA953](#)).

7 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
V_{CC1}, V_{CC2}	Supply voltage - 3.3V Operation	3.15	3.3	3.45	V
	Supply voltage - 5V Operation	4.75	5	5.25	
I_{OH}	High-level output current	-4			mA
I_{OL}	Low-level output current			4	mA
V_{IH}	High-level output voltage	2		V_{CC}	V
V_{IL}	Low-level output voltage	0		0.8	V
T_A	Ambient Temperature	-40		125	°C
$T_J^{(1)}$	Junction temperature	-40		136	°C
$1/t_{ui}$	Signaling rate	0		50	Mbps
t_{ui}	Input pulse duration	1			μs

- (1) To maintain the recommended operating conditions for T_J , see the *Package Thermal Characteristics* table and the *Icc Equations* section of this data sheet

8 Electrical Characteristics

 V_{CC1} and V_{CC2} at 5 V \pm 5%, $T_A = -40^\circ\text{C}$ to 125 $^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT	
V_{OH}	High-level output voltage	$I_{OH} = -4$ mA; See Figure 1	$V_{CC} - 0.8$	4.6		V	
		$I_{OH} = -20$ μA ; See Figure 1	$V_{CC} - 0.1$	5			
V_{OL}	Low-level output voltage	$I_{OL} = 4$ mA; See Figure 1		0.2	0.4	V	
		$I_{OL} = 20$ μA ; See Figure 1		0	0.1		
$V_{I(HYS)}$	Input threshold voltage hysteresis			400		mV	
I_{IH}	High-level input current	I_{Nx} at 0 V or V_{CC}			10	μA	
I_{IL}	Low-level input current		-10			μA	
CMTI	Common-mode transient immunity	$V_I = V_{CC}$ or 0 V; See Figure 3	25	50		kV/ μs	
SUPPLY CURRENT (All inputs switching with square wave clock signal for dynamic I_{CC} measurement)							
I_{CC1}	Supply current for V_{CC1} and V_{CC2}	DC to 1 Mbps	DC Input: $V_I = V_{CC}$ or 0 V AC Input: $C_L = 15$ pF		2.3	3.6	mA
I_{CC2}					2.3	3.6	
I_{CC1}		10 Mbps	$C_L = 15$ pF		2.9	4.5	
I_{CC2}					2.9	4.5	
I_{CC1}		25 Mbps	$C_L = 15$ pF		4.3	6	
I_{CC2}					4.3	6	
I_{CC1}		50 Mbps	$C_L = 15$ pF		6	9.1	
I_{CC2}					6	9.1	

9 Switching Characteristics

 V_{CC1} and V_{CC2} at 5 V \pm 5%, $T_A = -40^\circ\text{C}$ to 125 $^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH} , t_{PHL}	Propagation delay time	See Figure 1		9	14	ns
PWD ⁽¹⁾	Pulse width distortion $ t_{PHL} - t_{PLH} $			0.3	3.7	ns
$t_{sk(pp)}$	Part-to-part skew time				4.9	ns
$t_{sk(o)}$	Channel-to-channel output skew time				3.6	ns
t_r	Output signal rise time	See Figure 1		1		ns
t_f	Output signal fall time			1		ns
t_{fs}	Fail-safe output delay time from input power loss	See Figure 2		6		μs

(1) Also known as pulse skew.

10 Electrical Characteristics

 V_{CC1} at 5 V \pm 5%, V_{CC2} at 3.3 V \pm 5%, $T_A = -40^\circ\text{C}$ to 105 $^\circ\text{C}$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{OH}	High-level output voltage	$I_{OH} = -4$ mA; See Figure 1	5-V side	$V_{CC} - 0.8$	4.6		V
			3.3-V side	$V_{CC} - 0.4$	3		
		$I_{OH} = -20$ μA ; See Figure 1	$V_{CC} - 0.1$	V_{CC}			
V_{OL}	Low-level output voltage	$I_{OL} = 4$ mA; See Figure 1			0.2	0.4	V
		$I_{OL} = 20$ μA ; See Figure 1			0	0.1	
$V_{I(HYS)}$	Input threshold voltage hysteresis				400		mV
I_{IH}	High-level input current	I_{Nx} at 0 V or V_{CC}				10	μA
I_{IL}	Low-level input current			-10			μA
CMTI	Common-mode transient immunity	$V_I = V_{CC}$ or 0 V; See Figure 3		25	40		kV/ μs
SUPPLY CURRENT (All inputs switching with square wave clock signal for dynamic I_{CC} measurement)							
I_{CC1}	Supply current for V_{CC1} and V_{CC2}	DC to 1 Mbps	DC Input: $V_I = V_{CC}$ or 0 V AC Input: $C_L = 15$ pF		2.3	3.6	mA
I_{CC2}					1.8	2.8	
I_{CC1}		10 Mbps	$C_L = 15$ pF		2.9	4.5	
I_{CC2}					2.2	3.2	
I_{CC1}		25 Mbps	$C_L = 15$ pF		4.3	6	
I_{CC2}					2.8	4.1	
I_{CC1}		50 Mbps	$C_L = 15$ pF		6	9.1	
I_{CC2}					3.8	5.8	

11 Switching Characteristics

 V_{CC1} at 5 V \pm 5%, V_{CC2} at 3.3 V \pm 5%, $T_A = -40^\circ\text{C}$ to 125 $^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH} , t_{PHL}	Propagation delay time	See Figure 1		10	17	ns
PWD ⁽¹⁾	Pulse width distortion $ t_{PHL} - t_{PLH} $			0.5	5.6	ns
$t_{sk(pp)}$	Part-to-part skew time				6.3	ns
$t_{sk(o)}$	Channel-to-channel output skew time				4	ns
t_r	Output signal rise time	See Figure 1		2		ns
t_f	Output signal fall time			2		ns
t_{fs}	Fail-safe output delay time from input power loss	See Figure 2		6		μs

(1) Also known as pulse skew.

12 Electrical Characteristics

 V_{CC1} at 3.3 V \pm 5%, V_{CC2} at 5 V \pm 5%, $T_A = -40^\circ\text{C}$ to 125 $^\circ\text{C}$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{OH}	High-level output voltage	$I_{OH} = -4$ mA; See Figure 1	5-V side	$V_{CC} - 0.8$	4.6		V
			3.3-V side	$V_{CC} - 0.4$	3		
		$I_{OH} = -20$ μA ; See Figure 1	$V_{CC} - 0.1$	V_{CC}			
V_{OL}	Low-level output voltage	$I_{OL} = 4$ mA; See Figure 1			0.2	0.4	V
		$I_{OL} = 20$ μA ; See Figure 1			0	0.1	
$V_{I(HYS)}$	Input threshold voltage hysteresis				400		mV
I_{IH}	High-level input current	INx at 0 V or V_{CC}				10	μA
I_{IL}	Low-level input current			-10			μA
CMTI	Common-mode transient immunity	$V_I = V_{CC}$ or 0 V; See Figure 3		25	40		kV/ μs
SUPPLY CURRENT (All inputs switching with square wave clock signal for dynamic I_{CC} measurement)							
I_{CC1}	Supply current for V_{CC1} and V_{CC2}	DC to 1 Mbps	DC Input: $V_I = V_{CC}$ or 0 V AC Input: $C_L = 15$ pF		1.8	2.8	mA
I_{CC2}					2.3	3.6	
I_{CC1}		10 Mbps	$C_L = 15$ pF		2.2	3.2	
I_{CC2}					2.9	4.5	
I_{CC1}		25 Mbps	$C_L = 15$ pF		2.8	4.1	
I_{CC2}					4.3	6	
I_{CC1}		50 Mbps	$C_L = 15$ pF		3.8	5.8	
I_{CC2}					6	9.1	

13 Switching Characteristics

 V_{CC1} at 3.3 V \pm 5%, V_{CC2} at 5 V \pm 5%, $T_A = -40^\circ\text{C}$ to 125 $^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH} , t_{PHL}	Propagation delay time	See Figure 1		10	17	ns
PWD ⁽¹⁾	Pulse width distortion $ t_{PHL} - t_{PLH} $			0.5	4	ns
$t_{sk(pp)}$	Part-to-part skew time				8.5	ns
$t_{sk(o)}$	Channel-to-channel output skew time				4	ns
t_r	Output signal rise time	See Figure 1		2		ns
t_f	Output signal fall time			2		ns
t_{fs}	Fail-safe output delay time from input power loss	See Figure 2		6		μs

(1) Also known as pulse skew.

14 Electrical Characteristics

 V_{CC1} and V_{CC2} at 3.3 V \pm 5%, $T_A = -40^\circ\text{C}$ to 125°C

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT	
V_{OH}	High-level output voltage	$I_{OH} = -4$ mA; See Figure 1	$V_{CC} - 0.4$	3		V	
		$I_{OH} = -20$ μA ; See Figure 1	$V_{CC} - 0.1$	3.3			
V_{OL}	Low-level output voltage	$I_{OL} = 4$ mA; See Figure 1		0.2	0.4	V	
		$I_{OL} = 20$ μA ; See Figure 1		0	0.1		
$V_{I(HYS)}$	Input threshold voltage hysteresis			400		mV	
I_{IH}	High-level input current	I_{Nx} at 0 V or V_{CC}				μA	
I_{IL}	Low-level input current		-10			μA	
CMTI	Common-mode transient immunity	$V_I = V_{CC}$ or 0 V; See Figure 3	25	40		kV/ μs	
SUPPLY CURRENT (All inputs switching with square wave clock signal for dynamic I_{CC} measurement)							
I_{CC1}	Supply current for V_{CC1} and V_{CC2}	DC to 1 Mbps	DC Input: $V_I = V_{CC}$ or 0 V AC Input: $C_L = 15$ pF		1.8	2.8	mA
I_{CC2}					1.8	2.8	
I_{CC1}		10 Mbps	$C_L = 15$ pF		2.2	3.2	
I_{CC2}					2.2	3.2	
I_{CC1}		25 Mbps	$C_L = 15$ pF		2.8	4.1	
I_{CC2}					2.8	4.1	
I_{CC1}		50 Mbps	$C_L = 15$ pF		3.8	5.8	
I_{CC2}					3.8	5.8	


15 Switching Characteristics

 V_{CC1} and V_{CC2} at 3.3 V \pm 5%, $T_A = -40^\circ\text{C}$ to 125°C

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH} , t_{PHL}	Propagation delay time	See Figure 1		12	20	ns
PWD ⁽¹⁾	Pulse width distortion $ t_{PHL} - t_{PLH} $			1	5	ns
$t_{sk(pp)}$	Part-to-part skew time				6.8	ns
$t_{sk(o)}$	Channel-to-channel output skew time				5.5	ns
t_r	Output signal rise time	See Figure 1		2		ns
t_f	Output signal fall time			2		ns
t_{fs}	Fail-safe output delay time from input power loss	See Figure 2		6		μs


(1) Also known as pulse skew.

16 Parameter Measurement Information

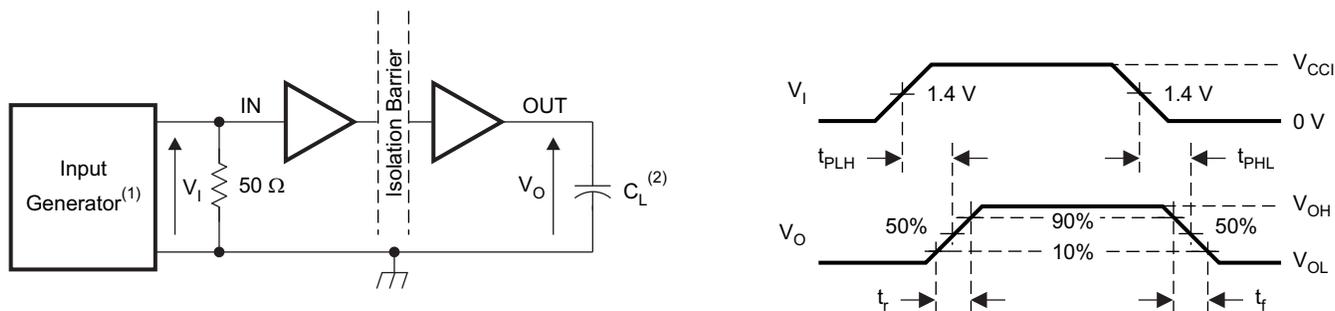


- A. The input pulse is supplied by a generator having the following characteristics: PRR ≤ 50 kHz, 50% duty cycle, $t_r \leq 3\text{ns}$, $t_f \leq 3\text{ns}$, $Z_0 = 50\Omega$.
- B. $C_L = 15\text{ pF}$ and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 1. Switching Characteristic Test Circuit and Voltage Waveforms

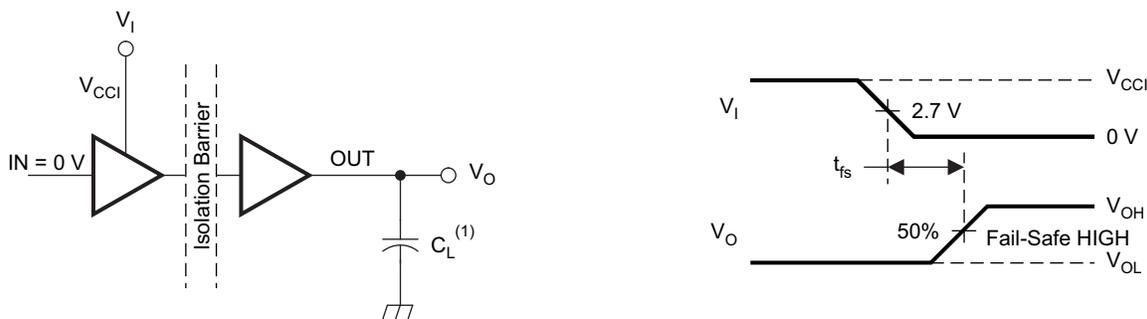

- A. $C_L = 15\text{ pF}$ and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 2. Failsafe Delay Time Test Circuit and Voltage Waveforms

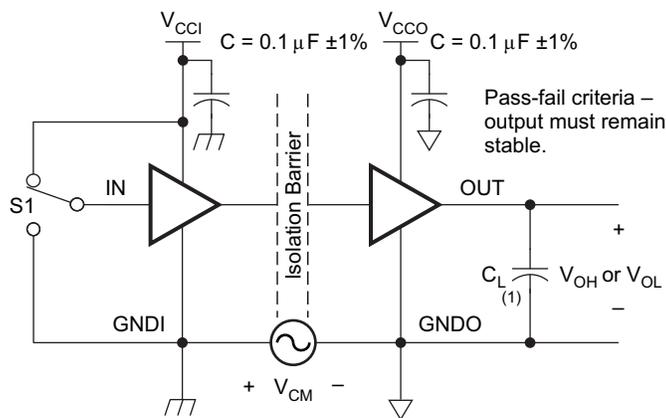

- A. $C_L = 15\text{ pF}$ and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 3. Common-Mode Transient Immunity Test Circuit

17 Device Information

17.1 Package Characteristics

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
L(I01)	Minimum air gap (Clearance)	Shortest terminal to terminal distance through air	7.6			mm
L(I02)	Minimum external tracking (Creepage)	Shortest terminal to terminal distance across the package surface	7.6			mm
CTI	Tracking resistance (Comparative Tracking Index)	DIN EN 60112 (VDE 0303-11)	≥400			V
	Minimum internal gap (Internal Clearance)	Distance through the insulation	0.014			mm
R _{IO}	Isolation resistance, input to output ⁽¹⁾	Input to output, V _{IO} = 500 V, all pins on each side of the barrier tied together creating a two-terminal device		>10 ¹²		Ω
C _{IO}	Barrier capacitance input to output ⁽¹⁾	V _{IO} = 0.4 sin(2πft), f = 1 MHz		2		pF
C _I	Input capacitance to ground ⁽²⁾	V _I = V _{CC} /2 + 0.4 sin(2πft), f = 1 MHz, V _{CC} = 5 V		2		pF

(1) All pins on each side of the barrier tied together creating a two-terminal device.

(2) Measured from input pin to ground.

NOTE

Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed circuit board do not reduce this distance

Creepage and clearance on a printed circuit board become equal according to the measurement techniques shown in the Isolation Glossary. Techniques such as inserting grooves and/or ribs on a printed circuit board are used to help increase these specifications.

17.2 IEC 60664-1 Ratings Table

PARAMETER	TEST CONDITIONS	SPECIFICATION
Basic Isolation Group	Material Group	II
Installation Classification	Rated mains voltages ≤ 150 Vrms	I - IV
	Rated mains voltages ≤ 300 Vrms	I - IV
	Rated mains voltages ≤ 400 Vrms	I - III

17.3 Insulation Characteristics

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	SPECIFICATION	UNIT
V_{IORM}	Maximum working insulation voltage		1414	Vpeak
V_{PR}	Input to output test voltage	Method a, After environmental tests subgroup 1, $V_{PR} = V_{IORM} \times 1.6$, $t = 10$ s, Partial discharge < 5 pC	2262	Vpeak
		After Input/Output Safety Test Subgroup 2/3, $V_{PR} = V_{IORM} \times 1.2$, $t = 10$ s, Partial discharge < 5 pC	1697	
		Method b1, $V_{PR} = V_{IORM} \times 1.875$, $t = 1$ s (100% Production test) Partial discharge < 5 pC	2651	
V_{IOTM}	Transient overvoltage	$t = 60$ sec (qualification)	4242	Vpeak
V_{ISO}	Isolation voltage per UL	$V_{TEST} = V_{ISO}$, $t = 60$ sec (qualification)	2500	Vrms
		$V_{TEST} = 1.2 \times V_{ISO}$, $t = 1$ sec (100% production)	3000	
R_S	Insulation resistance	$V_{TEST} = 500$ V at $T_S = 150^\circ\text{C}$	$>10^9$	Ω
	Pollution degree		2	

17.4 Regulatory Information

VDE	CSA	UL
Certified according to DIN VDE V 0884-11:2017-01	Approved according to IEC 60950-1 and IEC 61010-1	Recognized under UL 1577 Component Recognition Program
Certificate Number: 40047657	Master Contract Number: 220991	File Number: E181974

17.5 IEC Safety Limiting Values

Safety limiting intends to prevent potential damage to the isolation barrier upon failure of input or output circuitry. A failure of the IO can allow low resistance to ground or the supply and, without current limiting, dissipate sufficient power to overheat the die and damage the isolation barrier potentially leading to secondary system failures.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_S	Safety input, output, or supply current	$\theta_{JA} = 212^\circ\text{C}/\text{W}$, $V_I = 5.5$ V, $T_J = 170^\circ\text{C}$, $T_A = 25^\circ\text{C}$			112	mA
		$\theta_{JA} = 212^\circ\text{C}/\text{W}$, $V_I = 3.6$ V, $T_J = 170^\circ\text{C}$, $T_A = 25^\circ\text{C}$			171	
T_S	Maximum Case Temperature				150	$^\circ\text{C}$

The safety-limiting constraint is the absolute maximum junction temperature specified in the absolute maximum ratings table. The power dissipation and junction-to-air thermal impedance of the device installed in the application hardware determines the junction temperature. The assumed junction-to-air thermal resistance in the Thermal Characteristics table is that of a device installed on a High-K Test Board for Leaded Surface Mount Packages. The power is the recommended maximum input voltage times the current. The junction temperature is then the ambient temperature plus the power times the junction-to-air thermal resistance.

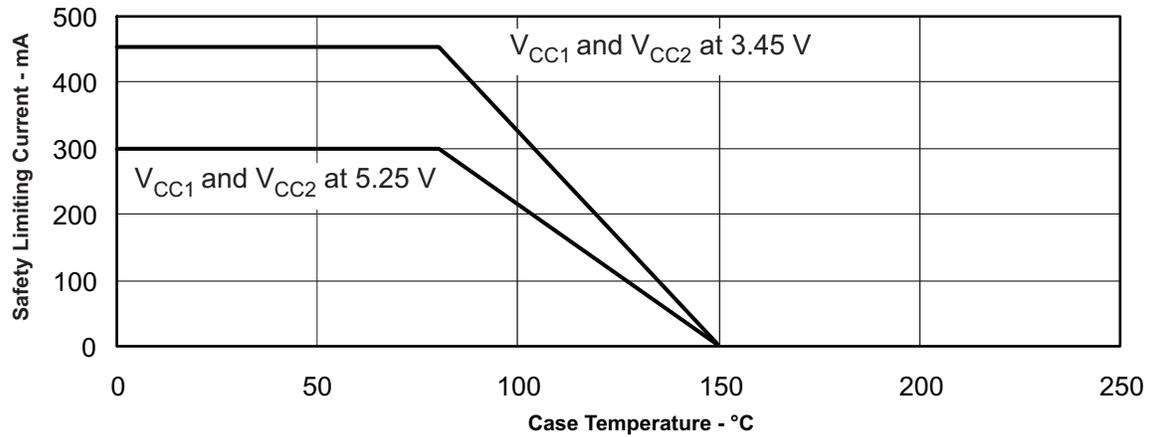


Figure 4. DW-16 Theta-JC Thermal Derating Curve per IEC 60747-5-2

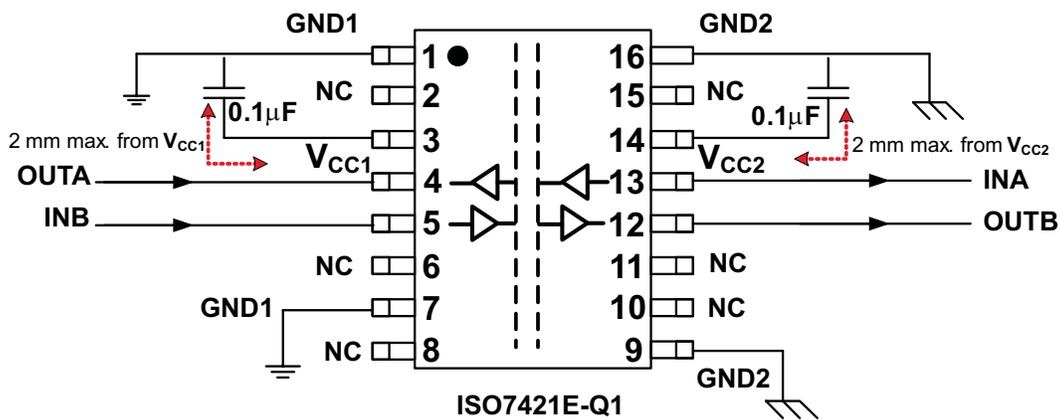


Figure 5. Typical ISO7421E-Q1 Application Circuit

17.6 Equivalent Input And Output Schematic Diagrams

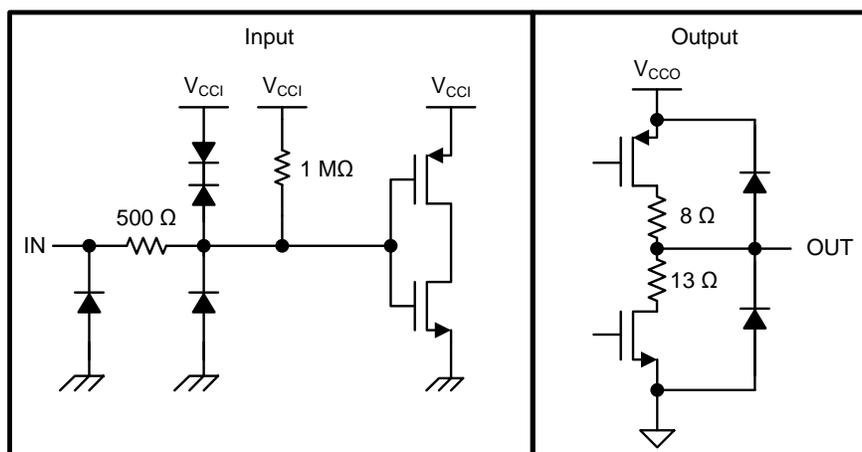


Figure 6. I/O Schematic

18 Typical Characteristics

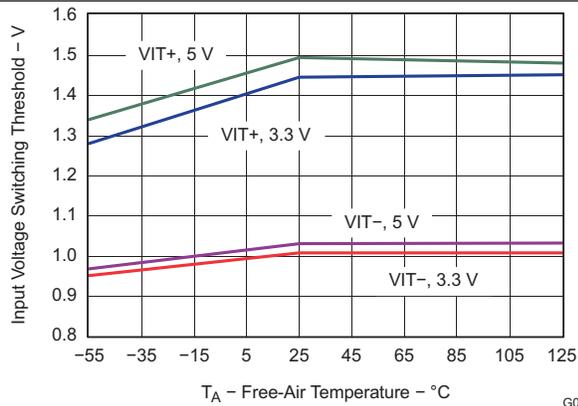


Figure 7. Input Voltage Switching Threshold Vs Free-air Temperature

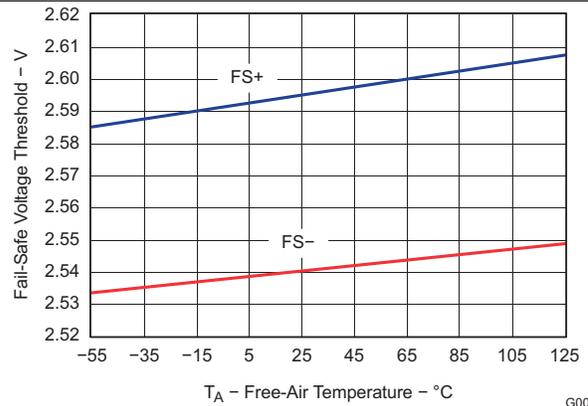


Figure 8. Fail-safe Voltage Threshold Vs Free-air Temperature

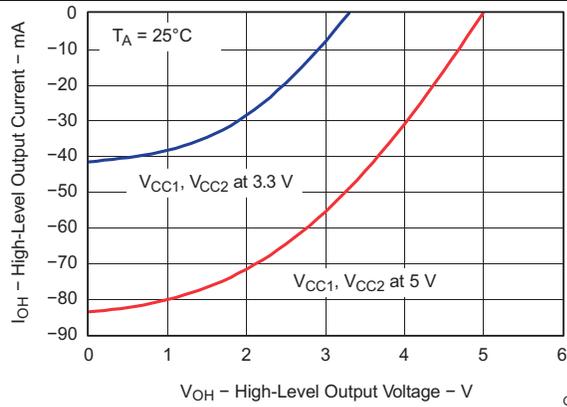


Figure 9. High-level Output Current Vs High-level Output Voltage

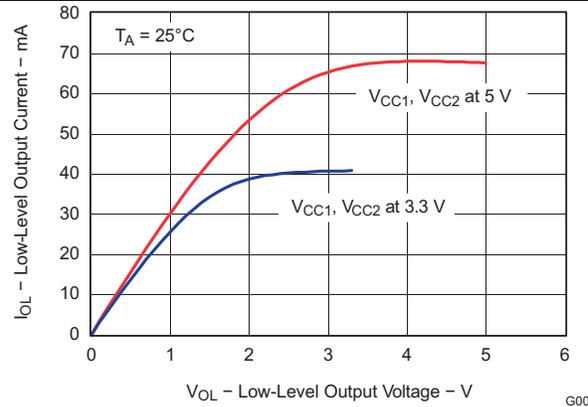


Figure 10. Low-level Output Current Vs Low-level Output Voltage

19 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision B (May 2012) to Revision C	Page
Deleted FEATURES bullet "Wide Ambient Temperature: –40°C to 125°C" since it was a duplicate entry.	1
Changed FEATURES bullet From: "4 kV peak Maximum Isolation, 2.5 kVrms per UL 1577, IEC/VDE and CSA Approved, IEC 60950-1, IEC 61010-1 End Equipment Standards Approved. All Approvals Pending." To: "4242 V _{PK} Isolation per VDE, 2.5 kVrms Isolation per UL 1577, CSA Approved per IEC 60950-1 and IEC 61010-1 End Equipment Standards"	1
Changed From:"The ISO7421E-Q1 provides double galvanic isolation..." To:"The ISO7421E-Q1 provides galvanic isolation..." in Description section.	1
Added Simplified Schematic of the device	1
Changed column titles From:"INPUT SIDE (VCC)" To:"INPUT SIDE V _{CC} (V _{CCI})" and From:"OUTPUT SIDE (VCC)" To:"OUTPUT SIDE V _{CC} (V _{CCO})" in Device Function Table	3
Changed MAX VALUE for V _I From: "6 V" To: "V _{CC} + 0.5 V"	3
Added : "Maximum voltage must not exceed 6 V. A strongly driven input signal can weakly power the floating V _{CC} via an internal protection diode and cause undetermined output."	3
Deleted Supply Current parameters with V _{CC1} and V _{CC2} at 5 V ± 5% for ISO7420x in Electrical Characteristics table since ISO7420x is not included in the data sheet.	5
Deleted Supply Current parameters with V _{CC1} at 5 V ± 5%, V _{CC2} at 3.3 V ± 5% for ISO7420x in Electrical Characteristics table since ISO7420x is not included in the data sheet.	6
Deleted Supply Current parameters with V _{CC1} at 3.3 V ± 5%, V _{CC2} at 5 V ± 5% for ISO7420x in Electrical Characteristics table since ISO7420x is not included in the data sheet.	7
Deleted Supply Current parameters with V _{CC1} and V _{CC2} at 3.3 V ± 5% for ISO7420x in Electrical Characteristics table since ISO7420x is not included in the data sheet.	8
Changed V _{CC1} to V _{CCI} and V _{CC2} to 50% in Figure 1	9
Changed V _{CC1} to V _{CCI} and IN From:"0V or V _{CC1} " To:"0 V" in Figure 2	9
Corrected 'Ground' symbols on both sides of the Isolation Barrier in Figure 3	9
Changed MIN specification for Clearance or L(I01) From: "8.34 mm" To:"7.6 mm" in Package Characteristics table.	10
Changed MIN specification for Creepage or L(I02) From: "8.1 mm" To:"7.6 mm" in Package Characteristics table.	10
Changed CTI TEST CONDITIONS From: " DIN IEC 60112 / VDE 0303 Part 1" To: "DIN EN 60112 (VDE 0303-11)"	10
Added "V _{TEST} = 1.2 x V _{ISO} " to V _{ISO} parameter TEST CONDITIONS in Insulation Characteristics table	11
Changed VDE standard name From: "IEC 60747-5-2" To:"DIN VDE V 0884-11:2017-01" and document reference From:"File Number: Pending" To:"Certificate Number: 40047657" respectively in Regulatory Information table.....	11
Changed CSA standard reference From:"Approved under CSA Component Acceptance Notice" To:"Approved according to IEC 60950-1 and IEC 61010-1" and document reference From: "File Number: pending" To:"Master Contract Number: 220991" respectively in Regulatory Information table.....	11
Changed UL standard reference From:"1577" To:"UL 1577" in Regulatory Information table.	11
Changed ground symbol of 'Output' to differentiate it from 'Input' in Figure 6	12

Changes from Revision A (March 2012) to Revision B	Page
Changed signaling rate info from 1 to 50 Mbps.	1
Changed Signaling rate max value from 1 to 50 Mbps, centered 0 in the min column.	4
Replaced Supply Current section with marked up table from commercial datasheet SLLSE45, changed 8.5 max value to 9.1.	5
Replaced Supply Current section with marked up table from commercial datasheet SLLSE45, changed 8.5 max value to 9.1 and changed 5.5 max value to 5.8.	6
Replaced Supply Current section with marked up table from commercial datasheet SLLSE45, changed 5.5 max value to 5.8 and changed 8.5 max value to 9.1.	7
Replaced Supply Current section with marked up table from commercial datasheet SLLSE45, changed 5.5 max	

value to 5.8.	8
--------------------	---

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
ISO7421EQDWRQ1	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	ISO7421EQ
ISO7421EQDWRQ1.A	Active	Production	SOIC (DW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	ISO7421EQ

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


OTHER QUALIFIED VERSIONS OF ISO7421E-Q1 :

- Catalog : [ISO7421E](#)


NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

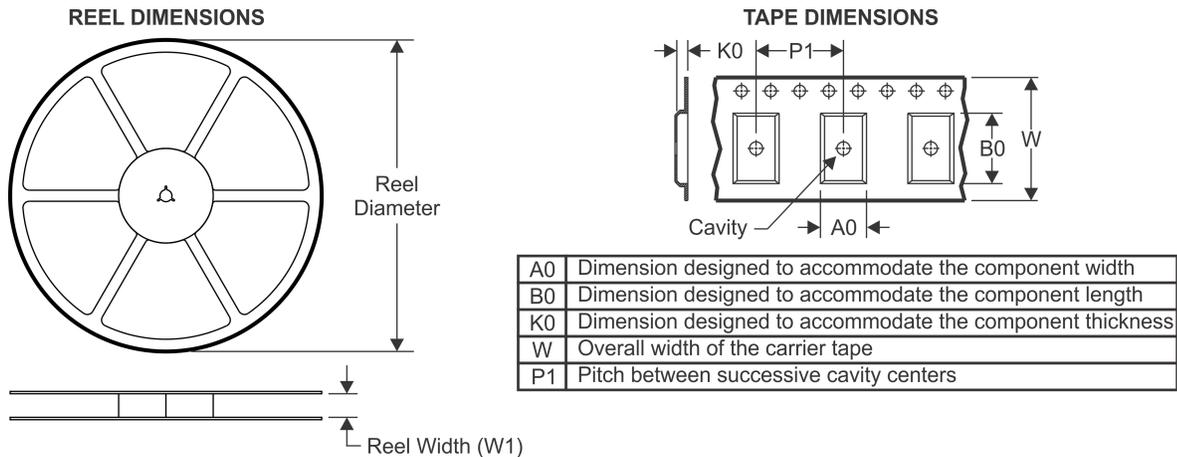


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

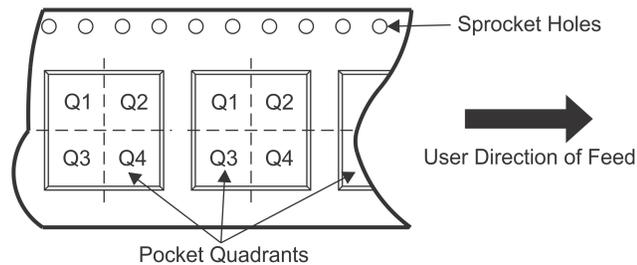

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ISO7421EQDWRQ1	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS

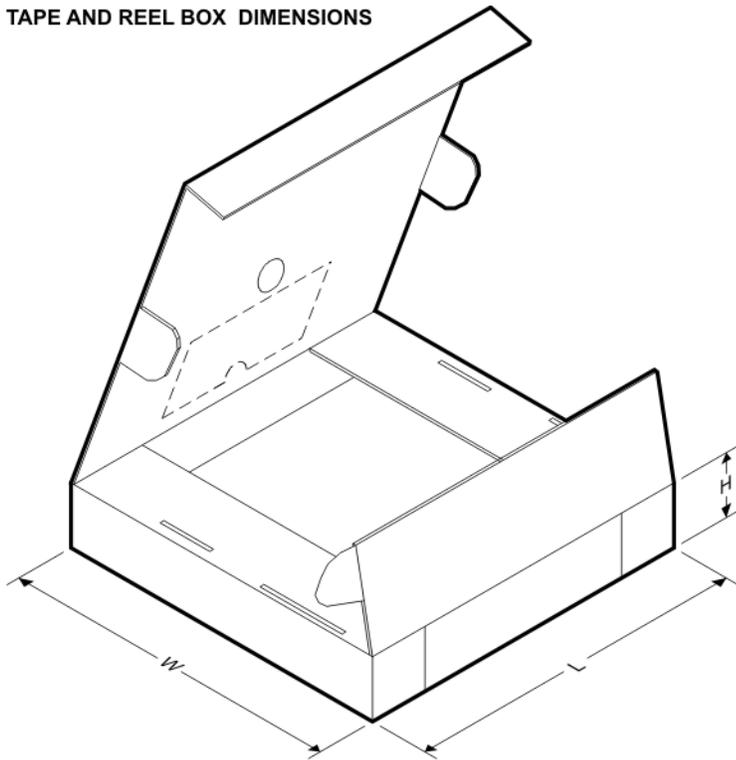

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ISO7421EQDWRQ1	SOIC	DW	16	2000	350.0	350.0	43.0

GENERIC PACKAGE VIEW


DW 16

SOIC - 2.65 mm max height


7.5 x 10.3, 1.27 mm pitch

SMALL OUTLINE INTEGRATED CIRCUIT

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

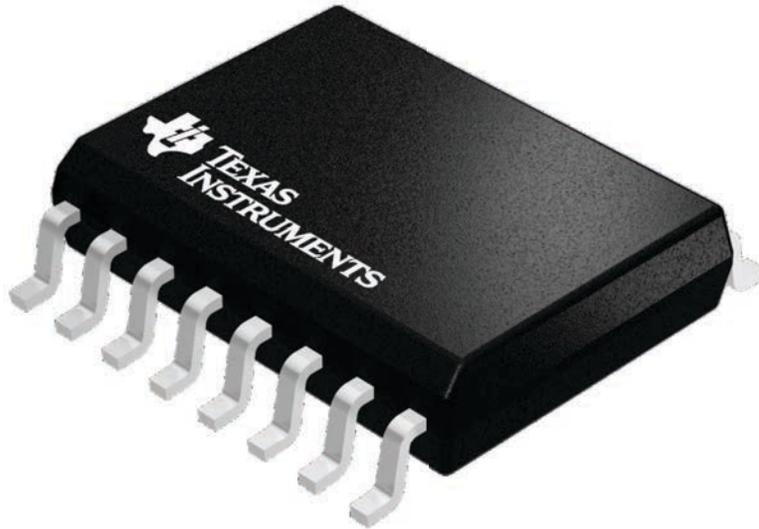

4224780/A




DW0016B

PACKAGE OUTLINE

SOIC - 2.65 mm max height

SOIC

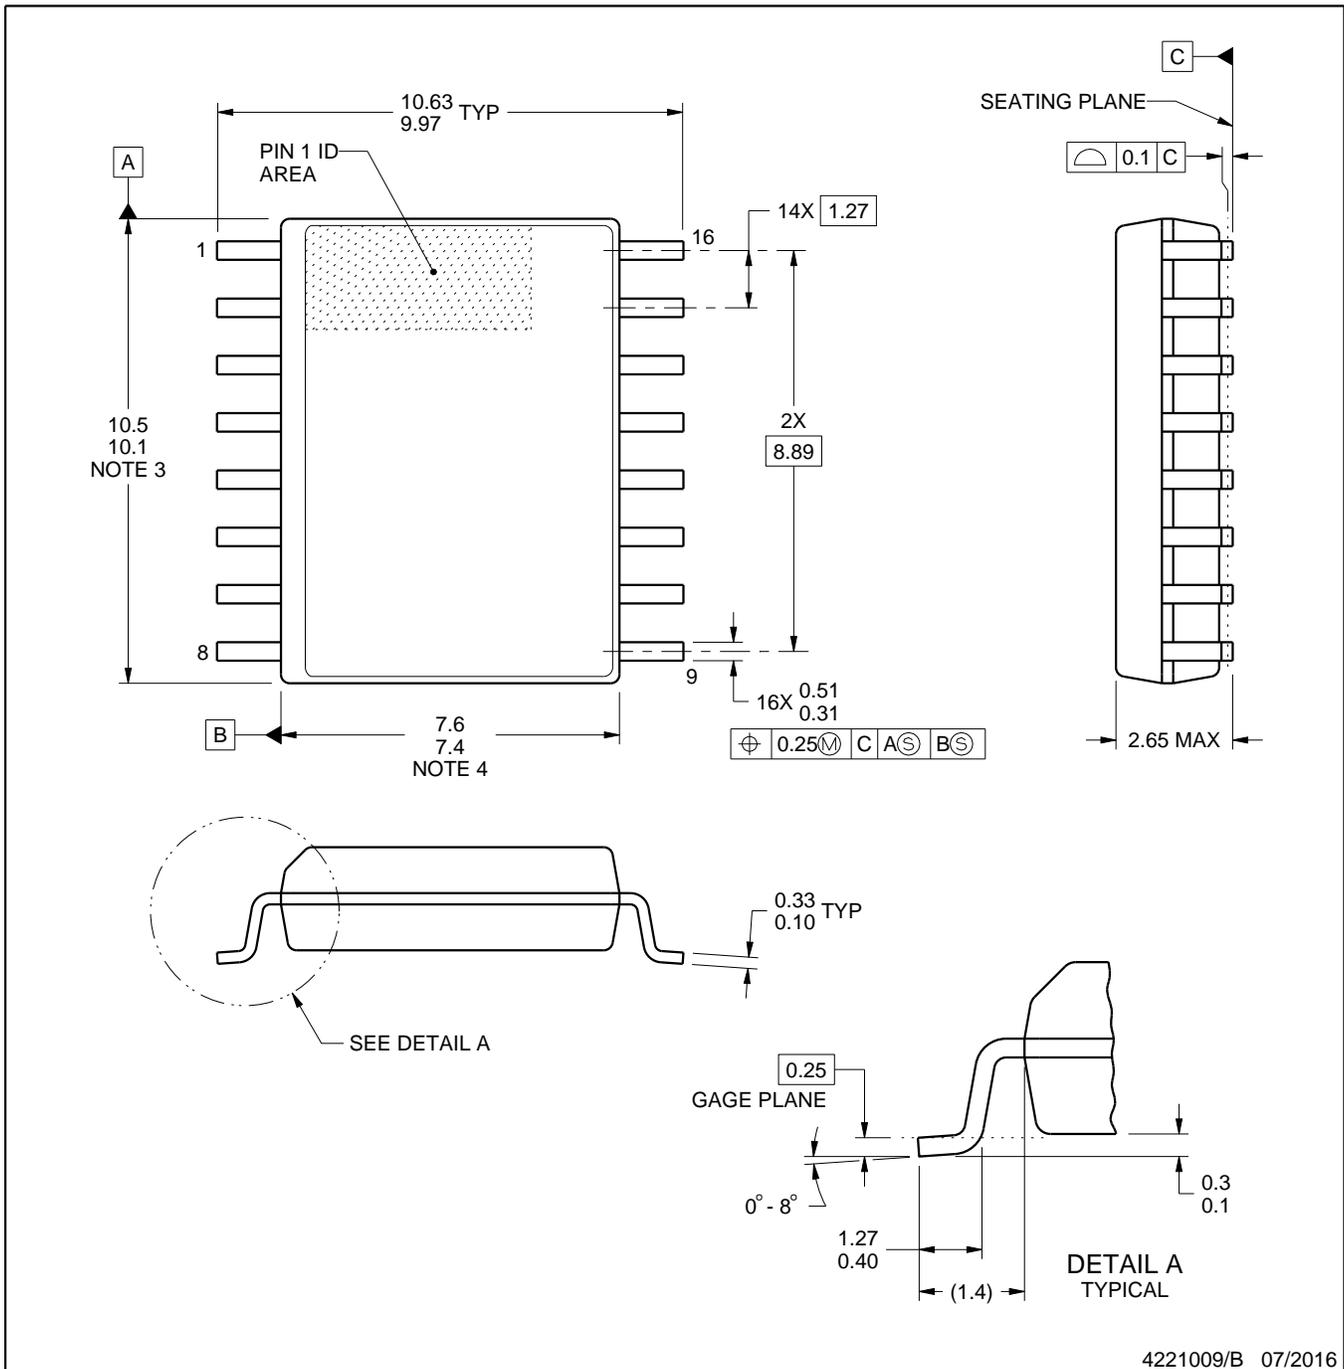

4221009/B 07/2016

NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
5. Reference JEDEC registration MS-013.

EXAMPLE BOARD LAYOUT


DW0016B

SOIC - 2.65 mm max height

SOIC

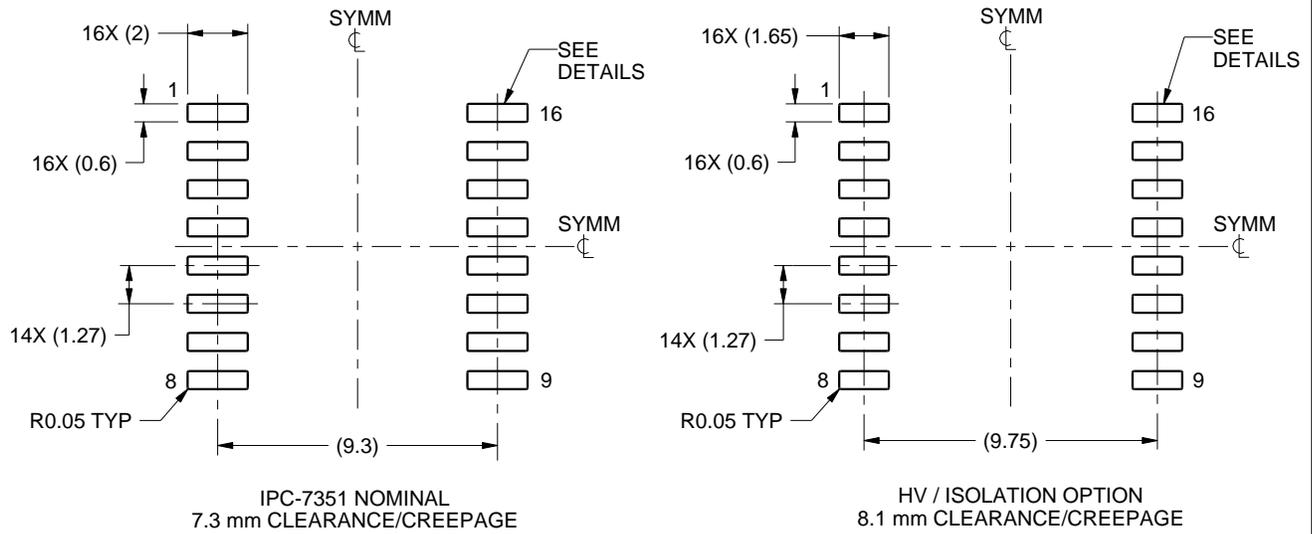

LAND PATTERN EXAMPLE
SCALE:4X

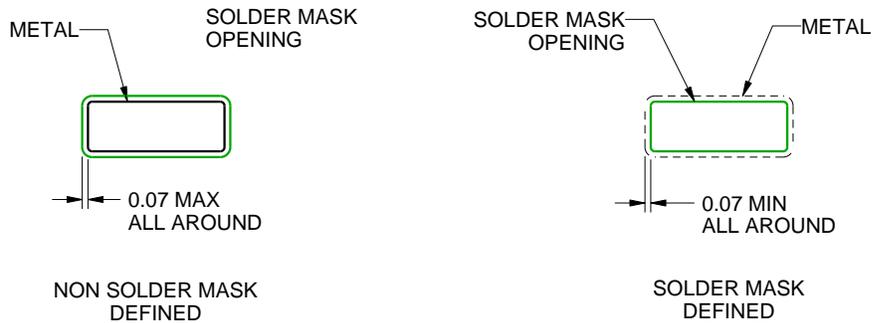

SOLDER MASK DETAILS

4221009/B 07/2016

NOTES: (continued)


- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DW0016B

SOIC - 2.65 mm max height

SOIC

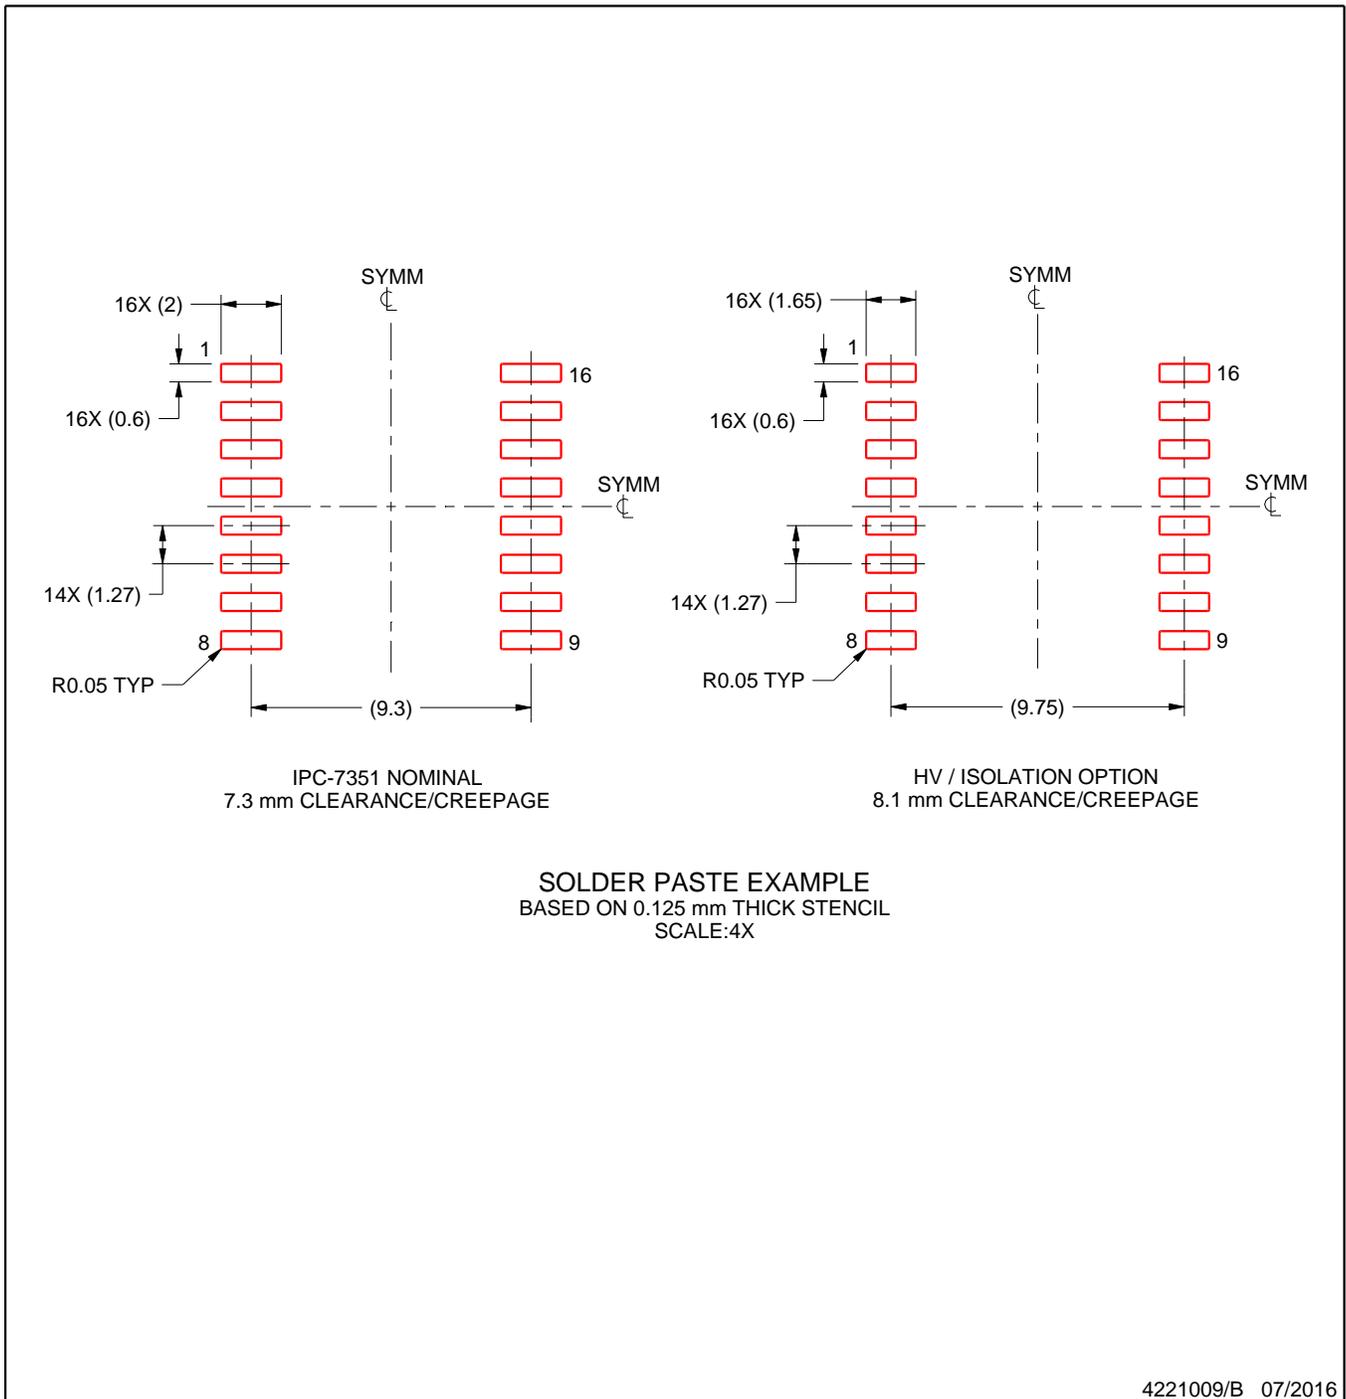

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025