

LMV34x Rail-to-Rail Output CMOS Operational Amplifiers With Shutdown

1 Features

- 2.7-V and 5-V Performance
- Rail-to-Rail Output Swing
- Input Bias Current: 1 pA (Typical)
- Input Offset Voltage: 0.25 mV (Typical)
- Low Supply Current: 100 μ A (Typical)
- Low Shutdown Current: 45 pA (Typical)
- Gain Bandwidth of 1 MHz (Typical)
- Slew Rate: 1 V/ μ s (Typical)
- Turnon Time From Shutdown: 5 μ s (Typical)
- Input Referred Voltage Noise (at 10 kHz): 20 nV/ $\sqrt{\text{Hz}}$
- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (HBM)
 - 750-V Charged-device model (CDM)

2 Applications

- Cordless and Cellular Phones
- Consumer Electronics (Laptops, PDAs)
- Audio Preamplifiers for Voice
- Portable, Battery-Powered Electronic Equipment
- Supply-Current Monitoring
- Battery Monitoring
- Buffers
- Filters
- Drivers

3 Description

The LMV34x devices are single, dual, and quad CMOS operational amplifiers, respectively, with low voltage, low power, and rail-to-rail output swing capabilities. The PMOS input stage offers an ultra-low input bias current of 1 pA (typical) and an offset voltage of 0.25 mV (typical). The single-supply amplifier is designed specifically for low-voltage (2.7 V to 5 V) operation, with a wide common-mode input voltage range that typically extends from -0.2 V to 0.8 V from the positive supply rail. The LMV341 (single) also offers a shutdown (SHDN) pin that can be used to disable the device. In shutdown mode, the supply current is reduced to 33 nA (typical). Additional features of the family are a 20-nV/ $\sqrt{\text{Hz}}$ voltage noise at 10 kHz, 1-MHz unity-gain bandwidth, 1-V/ μ s slew rate, and 100- μ A current consumption per channel.

Offered in both the SOT-23 and smaller SC70 packages, the LMV341 is suitable for the most space-constraint applications. The LMV342 dual device is offered in the standard SOIC and VSSOP packages. An extended industrial temperature range from -40°C to 125°C makes these devices suitable in a wide variety of commercial and industrial environments.

Device Information⁽¹⁾

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|------------|--------------------------|
| LMV341IDCK | SC70 (6) | 2.00 mm \times 1.25 mm |
| LMV341IDBV | SOT-23 (6) | 2.90 mm \times 1.60 mm |
| LMV342ID | SOIC (8) | 4.90 mm \times 3.91 mm |
| LMV342IDGK | VSSOP (8) | 3.00 mm \times 3.00 mm |
| LMV344ID | SOIC (14) | 8.65 mm \times 3.91 mm |
| LMV344IPW | TSSOP (14) | 5.00 mm \times 4.40 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Sample-and-Hold Circuit

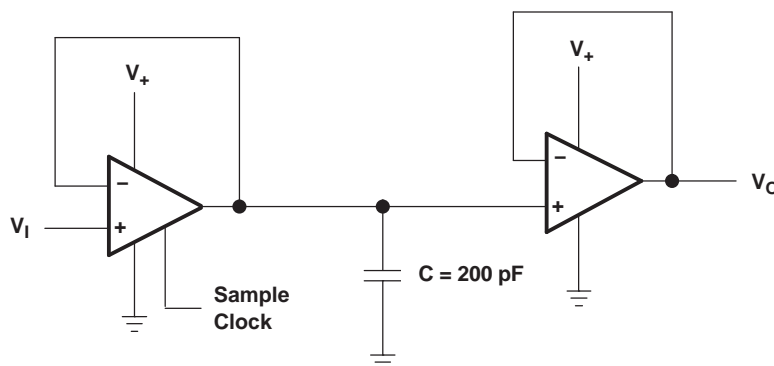


Table of Contents

| | | | |
|--|-----------|--|-----------|
| 1 Features | 1 | 7.2 Functional Block Diagram | 14 |
| 2 Applications | 1 | 7.3 Feature Description | 14 |
| 3 Description | 1 | 7.4 Device Functional Modes | 14 |
| 4 Revision History | 2 | 8 Application and Implementation | 15 |
| 5 Pin Configuration and Functions | 3 | 8.1 Application Information | 15 |
| 6 Specifications | 4 | 8.2 Typical Application | 15 |
| 6.1 Absolute Maximum Ratings | 4 | 9 Power Supply Recommendations | 16 |
| 6.2 ESD Ratings | 5 | 10 Layout | 17 |
| 6.3 Recommended Operating Conditions | 5 | 10.1 Layout Guidelines | 17 |
| 6.4 Thermal Information | 5 | 10.2 Layout Examples | 17 |
| 6.5 Electrical Characteristics: $V_+ = 2.7\text{ V}$ | 5 | 11 Device and Documentation Support | 18 |
| 6.6 Electrical Characteristics: $V_+ = 5\text{ V}$ | 6 | 11.1 Related Links | 18 |
| 6.7 Shutdown Characteristics: $V_+ = 2.7\text{ V}$ | 7 | 11.2 Community Resources | 18 |
| 6.8 Shutdown Characteristics: $V_+ = 5\text{ V}$ | 7 | 11.3 Trademarks | 18 |
| 6.9 Typical Characteristics | 8 | 11.4 Electrostatic Discharge Caution | 18 |
| 7 Detailed Description | 14 | 11.5 Glossary | 18 |
| 7.1 Overview | 14 | 12 Mechanical, Packaging, and Orderable Information | 18 |


4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision H (June 2012) to Revision I | Page |
|---|----------|
| <ul style="list-style-type: none"> Added <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i>, <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section. | 1 |
| <ul style="list-style-type: none"> Removed <i>Ordering Information</i> table | 1 |

5 Pin Configuration and Functions

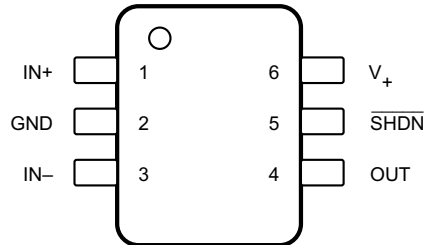
**DBV or DCK Package
6-Pin SOT-23 or SC70
Top View**



Pin Functions: LMV341


| PIN | | I/O | DESCRIPTION |
|--------------------------|--------------|-----|---------------------------------|
| NAME | SOT-23, SC70 | | |
| IN+ | 1 | I | Noninverting input on channel 1 |
| IN- | 3 | I | Inverting input on channel 1 |
| OUT | 4 | O | Output on channel 1 |
| GND | 2 | — | Ground |
| $\overline{\text{SHDN}}$ | 5 | I | Shutdown active low |
| V ₊ | 6 | — | Positive power supply |

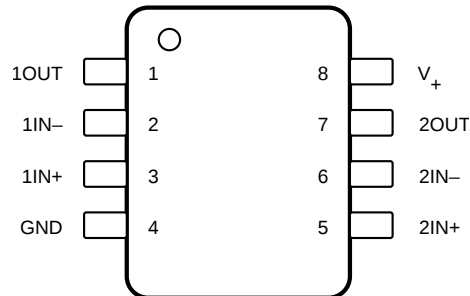**D or DGK Package
8-Pin SOIC or VSSOP
Top View**



Pin Functions: LMV342

| PIN | | I/O | DESCRIPTION |
|----------------|-------------|-----|---------------------------------|
| NAME | SOIC, VSSOP | | |
| 1IN+ | 3 | I | Noninverting input on channel 1 |
| 1IN- | 2 | I | Inverting input on channel 1 |
| 1OUT | 1 | O | Output on channel 1 |
| 2IN+ | 5 | I | Noninverting input on channel 2 |
| 2IN- | 6 | I | Inverting input on channel 2 |
| 2OUT | 7 | O | Output on channel 2 |
| GND | 4 | — | Ground |
| V ₊ | 8 | — | Positive power supply |

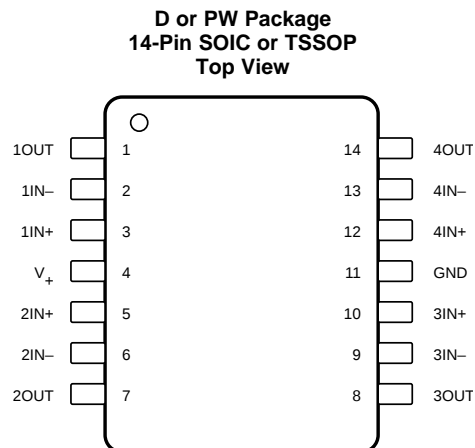
Pin Functions: LMV344

| PIN | | I/O | DESCRIPTION |
|----------------|-------------|-----|---------------------------------|
| NAME | SOIC, TSSOP | | |
| 1IN+ | 3 | I | Noninverting input on channel 1 |
| 1IN- | 2 | I | Inverting input on channel 1 |
| 1OUT | 1 | O | Output on channel 1 |
| 2IN+ | 5 | I | Noninverting input on channel 2 |
| 2IN- | 6 | I | Inverting input on channel 2 |
| 2OUT | 7 | O | Output on channel 2 |
| 3IN+ | 10 | I | Noninverting input on channel 3 |
| 3IN- | 9 | I | Inverting input on channel 3 |
| 3OUT | 8 | O | Output on channel 3 |
| 4IN+ | 12 | I | Noninverting input on channel 4 |
| 4IN- | 13 | I | Inverting input on channel 4 |
| 4OUT | 14 | O | Output on channel 4 |
| GND | 11 | — | Ground |
| V ₊ | 4 | — | Positive power supply |

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

| | | MIN | MAX | UNIT |
|------------------|---|------|-----------------------|------|
| V ₊ | Supply voltage ⁽²⁾ | -0.3 | 5.5 | V |
| V _{ID} | Differential input voltage ⁽³⁾ | | ±5.5 | V |
| V _I | Input voltage (either input) | -0.3 | 5.5 | V |
| V _O | Output voltage | -0.3 | V _{CC} + 0.3 | V |
| T _J | Operating virtual junction temperature | | 150 | °C |
| T _{stg} | Storage temperature | -65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values (except differential voltages) are with respect to the network GND.
- (3) Differential voltages are at IN+ with respect to IN-.

6.2 ESD Ratings

| | | | VALUE | UNIT |
|-------------|-------------------------|--|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±2000 | V |
| | | Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ±750 | |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

| | | | MIN | MAX | UNIT |
|-------|--|--|-----|-----|------|
| V_+ | Supply voltage (single-supply operation) | | 2.5 | 5.5 | V |
| T_A | Operating free-air temperature | | –40 | 125 | °C |

6.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | LMV342 | LMV344 | LMV341 | | LMV342 | LMV344 | UNIT |
|-------------------------------|---|----------|---------|--------------|------------|-------------|------------|------|
| | | D (SOIC) | | DBV (SOT-23) | DCK (SC70) | DGK (VSSOP) | PW (TSSOP) | |
| | | 8 PINS | 14 PINS | 6 PINS | 6 PINS | 8 PINS | 14 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance ^{(2) (3)} | 123.9 | 88.7 | 193.4 | 196.8 | 192.3 | 118 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 70.2 | 49 | 145.6 | 82.4 | 78.2 | 46.9 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 64.1 | 43 | 44.1 | 95.2 | 112.6 | 59.7 | °C/W |
| Ψ_{JT} | Junction-to-top characterization parameter | 25 | 16.9 | 34.1 | 1.8 | 15.2 | 5.1 | °C/W |
| Ψ_{JB} | Junction-to-board characterization parameter | 63.6 | 42.7 | 43.4 | 93.2 | 111.2 | 59.1 | °C/W |

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

(2) Maximum power dissipation is a function of $T_J(max)$, $R_{\theta JA}$, and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) - T_A)/R_{\theta JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.

(3) The package thermal impedance is calculated in accordance with JESD 51-7.

6.5 Electrical Characteristics: $V_+ = 2.7 V$

$V_+ = 2.7 V$, $GND = 0 V$, $V_{IC} = V_O = V_+/2$, $R_L > 1 M\Omega$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | T_A | MIN | TYP ⁽¹⁾ | MAX | UNIT | |
|----------------|---|--------------------------------|----------------|------|--------------------|-----|------------------|-----|
| V_{IO} | Input offset voltage | | 25°C | | 0.25 | 4 | mV | |
| | | | Full range | | | | | 4.5 |
| α_{VIO} | Average temperature coefficient of input offset voltage | | Full range | | 1.7 | | $\mu V/^\circ C$ | |
| I_{IB} | Input bias current | | 25°C | | 1 | 120 | pA | |
| | | | –40°C to 85°C | | | | | 250 |
| | | | –40°C to 125°C | | | | | 3 |
| I_{IO} | Input offset current | | 25°C | | 6.6 | | fA | |
| CMRR | Common-mode rejection ratio | $0 \leq V_{ICR} \leq 1.7 V$ | 25°C | 56 | 80 | | dB | |
| | | $0 \leq V_{ICR} \leq 1.6 V$ | Full range | 50 | | | | |
| k_{SVR} | Supply-voltage rejection ratio | $2.7 V \leq V_+ \leq 5 V$ | 25°C | 65 | 82 | | dB | |
| | | | Full range | 60 | | | | |
| V_{ICR} | Common-mode input voltage range | Lower range, CMRR ≥ 50 dB | 25°C | –0.2 | 0 | | V | |
| | | Upper range, CMRR ≥ 50 dB | 25°C | 1.7 | 1.9 | | | |
| A_V | Large-signal voltage gain ⁽²⁾ | $R_L = 10 k\Omega$ to 1.35 V | 25°C | 78 | 113 | | dB | |
| | | | Full range | 70 | | | | |
| | | $R_L = 2 k\Omega$ to 1.35 V | 25°C | 72 | 103 | | | |
| | | | Full range | 64 | | | | |

(1) Typical values represent the most likely parametric norm.

(2) $GND + 0.2 V \leq V_O \leq V_+ - 0.2 V$

Electrical Characteristics: $V_+ = 2.7\text{ V}$ (continued)
 $V_+ = 2.7\text{ V}$, $GND = 0\text{ V}$, $V_{IC} = V_O = V_+/2$, $R_L > 1\text{ M}\Omega$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | T_A | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|-----------|---|---|-------------------|------------|-----|--------------------|--------|------------------------|
| V_O | Output swing (delta from supply rails) | $R_L = 2\text{ k}\Omega$ to 1.35 V | Low level | 25°C | | 24 | 60 | mV |
| | | | | Full range | | | 95 | |
| | | | High level | 25°C | | 26 | 60 | |
| | | | | Full range | | | 95 | |
| | | $R_L = 10\text{ k}\Omega$ to 1.35 V | Low level | 25°C | | 5 | 30 | |
| | | | | Full range | | | 40 | |
| | | | High level | 25°C | | 5.3 | 30 | |
| | | | | Full range | | | 40 | |
| I_{CC} | Supply current (per channel) | | | 25°C | | 100 | 170 | μA |
| | | | | Full range | | | 230 | |
| I_{OS} | Output short-circuit current | Sourcing | LMV341, LMV342 | 25°C | | 20 | 32 | mA |
| | | | | | | Sinking | LMV344 | |
| | | | | | | | | |
| SR | Slew rate | $R_L = 10\text{ k}\Omega$ ⁽³⁾ | | 25°C | | 1 | | V/ μs |
| GBM | Unity-gain bandwidth | $R_L = 10\text{ k}\Omega$, $C_L = 200\text{ pF}$ | | 25°C | | 1 | | MHz |
| Φ_m | Phase margin | $R_L = 100\text{ k}\Omega$ | | 25°C | | 72 | | ° |
| G_m | Gain margin | $R_L = 100\text{ k}\Omega$ | | 25°C | | 20 | | dB |
| V_n | Equivalent input noise voltage | $f = 1\text{ kHz}$ | | 25°C | | 40 | | nV/ $\sqrt{\text{Hz}}$ |
| I_n | Equivalent input noise current | $f = 1\text{ kHz}$ | | 25°C | | 0.001 | | pA/ $\sqrt{\text{Hz}}$ |
| THD | Total harmonic distortion | $f = 1\text{ kHz}$, $A_V = 1$, $R_L = 600\ \Omega$, $V_I = 1\text{ V}_{PP}$ | | 25°C | | 0.017% | | |

 (3) Connected as voltage follower with 2- V_{PP} step input. Number specified is the slower of the positive and negative slew rates.

6.6 Electrical Characteristics: $V_+ = 5\text{ V}$
 $V_+ = 5\text{ V}$, $GND = 0\text{ V}$, $V_{IC} = V_O = V_+/2$, $R_L > 1\text{ M}\Omega$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | T_A | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|----------------|---|---|--|----------------|-----|--------------------|-----|------------------------------|
| V_{IO} | Input offset voltage | | | 25°C | | 0.25 | 4 | mV |
| | | | | Full range | | | 4.5 | |
| α_{VIO} | Average temperature coefficient of input offset voltage | | | Full range | | 1.9 | | $\mu\text{V}/^\circ\text{C}$ |
| I_{IB} | Input bias current | | | 25°C | | 1 | 200 | pA |
| | | | | -40°C to 85°C | | | 375 | |
| | | | | -40°C to 125°C | | | | 5 |
| I_{IO} | Input offset current | | | 25°C | | 6.6 | | fA |
| CMRR | Common-mode rejection ratio | $0 \leq V_{ICR} \leq 4\text{ V}$ | | 25°C | 56 | 86 | | dB |
| | | $0 \leq V_{ICR} \leq 3.9\text{ V}$ | | Full range | 50 | | | |
| k_{SVR} | Supply-voltage rejection ratio | $2.7\text{ V} \leq V_+ \leq 5\text{ V}$ | | 25°C | 65 | 82 | | dB |
| | | | | Full range | 60 | | | |
| V_{ICR} | Common-mode input voltage range | Lower range, CMRR $\geq 50\text{ dB}$ | | 25°C | | -0.2 | 0 | V |
| | | Upper range, CMRR $\geq 50\text{ dB}$ | | 25°C | 4 | 4.2 | | |
| A_V | Large-signal voltage gain ⁽²⁾ | $R_L = 10\text{ k}\Omega$ to 2.5 V | | 25°C | 78 | 116 | | dB |
| | | | | Full range | 70 | | | |
| | | $R_L = 2\text{ k}\Omega$ to 2.5 V | | 25°C | 72 | 107 | | |
| | | | | Full range | 64 | | | |

(1) Typical values represent the most likely parametric norm.

 (2) $GND + 0.2\text{ V} \leq V_O \leq V_+ - 0.2\text{ V}$

Electrical Characteristics: $V_+ = 5\text{ V}$ (continued)
 $V_+ = 5\text{ V}$, $\text{GND} = 0\text{ V}$, $V_{\text{IC}} = V_{\text{O}} = V_+/2$, $R_{\text{L}} > 1\text{ M}\Omega$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | T_{A} | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|-------------------|---|---|-------------------|--------------------|-----|--------------------|-----|------------------------------|
| V_{O} | Output swing (delta from supply rails) | $R_{\text{L}} = 2\text{ k}\Omega$ to 2.5 V | Low level | 25°C | | 32 | 60 | mV |
| | | | | Full range | | | 95 | |
| | | | High level | 25°C | | 34 | 60 | |
| | | | | Full range | | | 95 | |
| | | $R_{\text{L}} = 10\text{ k}\Omega$ to 2.5 V | Low level | 25°C | | 7 | 30 | |
| | | | | Full range | | | 40 | |
| | | | High level | 25°C | | 7 | 30 | |
| | | | | Full range | | | 40 | |
| I_{CC} | Supply current (per channel) | | | 25°C | | 107 | 200 | μA |
| | | | | Full range | | | 260 | |
| I_{OS} | Output short-circuit current | Sourcing | LMV341, LMV342 | 25°C | | 85 | 113 | mA |
| | | | LMV344 | | | 85 | 113 | |
| | | Sinking | | | | 50 | 75 | |
| SR | Slew rate | $R_{\text{L}} = 10\text{ k}\Omega$ ⁽³⁾ | | 25°C | | 1 | | $\text{V}/\mu\text{s}$ |
| GBM | Unity-gain bandwidth | $R_{\text{L}} = 10\text{ k}\Omega$, $C_{\text{L}} = 200\text{ pF}$ | | 25°C | | 1 | | MHz |
| Φ_{m} | Phase margin | $R_{\text{L}} = 100\text{ k}\Omega$ | | 25°C | | 70 | | $^\circ$ |
| G_{m} | Gain margin | $R_{\text{L}} = 100\text{ k}\Omega$ | | 25°C | | 20 | | dB |
| V_{n} | Equivalent input noise voltage | $f = 1\text{ kHz}$ | | 25°C | | 39 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| I_{n} | Equivalent input noise current | $f = 1\text{ kHz}$ | | 25°C | | 0.001 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| THD | Total harmonic distortion | $f = 1\text{ kHz}$, $A_{\text{V}} = 1$, $R_{\text{L}} = 600\ \Omega$, $V_{\text{I}} = 1\text{ V}_{\text{PP}}$ | | 25°C | | 0.012% | | |

(3) Connected as voltage follower with $2\text{-}V_{\text{PP}}$ step input. Number specified is the slower of the positive and negative slew rates.







6.7 Shutdown Characteristics: $V_+ = 2.7\text{ V}$
 $V_+ = 2.7\text{ V}$, $\text{GND} = 0\text{ V}$, $V_{\text{IC}} = V_{\text{O}} = V_+/2$, $R_{\text{L}} > 1\text{ M}\Omega$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | T_{A} | MIN | TYP | MAX | UNIT |
|-----------------------|--|------------------------------|--|--------------------|-----|-------|------|---------------|
| $I_{\text{CC(SHDN)}}$ | Supply current in shutdown mode | $V_{\text{SD}} = 0\text{ V}$ | | 25°C | | 0.045 | 1000 | nA |
| | | | | Full range | | | 1.5 | μA |
| $t_{\text{(on)}}$ | Amplifier turnon time | | | 25°C | | 5 | | μs |
| V_{SD} | Recommended shutdown pin voltage range | ON mode | | 25°C | | 2.4 | 2.7 | V |
| | | Shutdown mode | | | | 0 | 0.8 | |

6.8 Shutdown Characteristics: $V_+ = 5\text{ V}$
 $V_+ = 5\text{ V}$, $\text{GND} = 0\text{ V}$, $V_{\text{IC}} = V_{\text{O}} = V_+/2$, $R_{\text{L}} > 1\text{ M}\Omega$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | T_{A} | MIN | TYP | MAX | UNIT |
|-----------------------|--|------------------------------|--|--------------------|-----|-------|-----|---------------|
| $I_{\text{CC(SHDN)}}$ | Supply current in shutdown mode | $V_{\text{SD}} = 0\text{ V}$ | | 25°C | | 0.033 | 1 | μA |
| | | | | Full range | | | 1.5 | |
| $t_{\text{(on)}}$ | Amplifier turnon time | | | 25°C | | 5 | | μs |
| V_{SD} | Recommended shutdown pin voltage range | ON mode | | 25°C | | 4.5 | 5 | V |
| | | Shutdown mode | | | | 0 | 0.8 | |

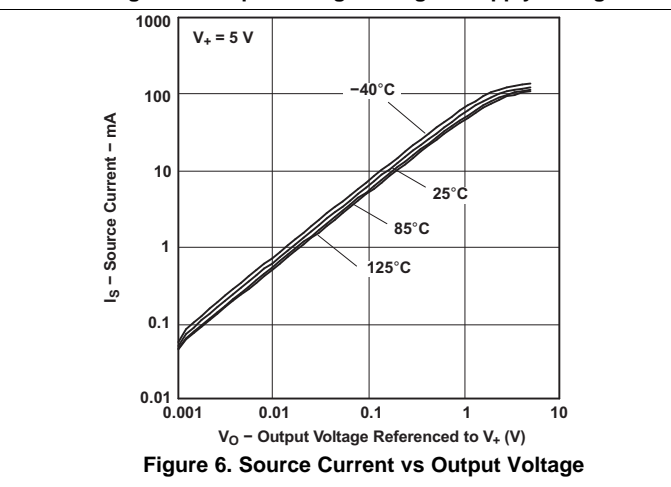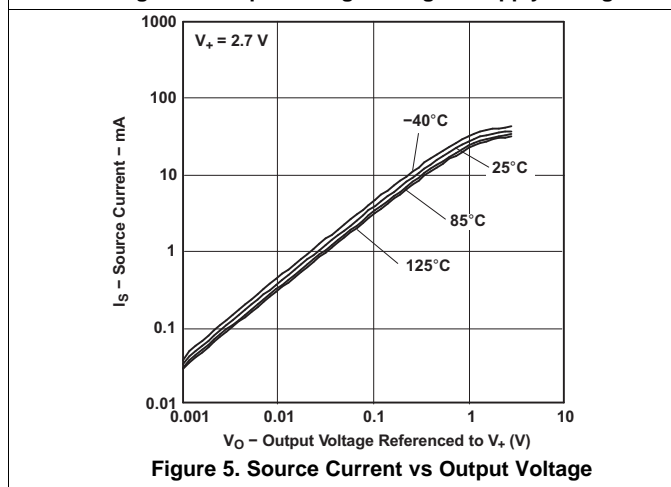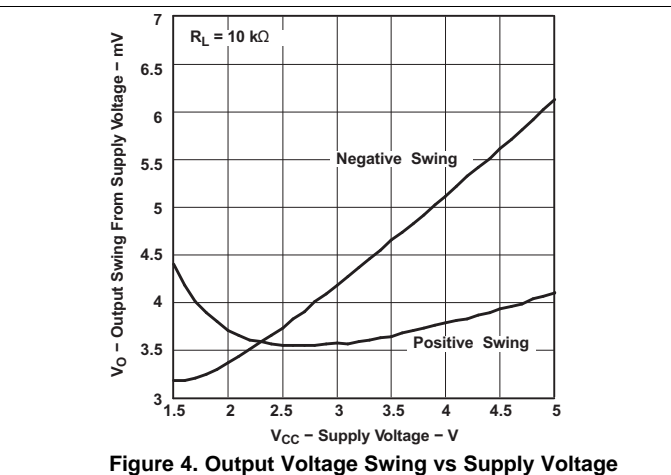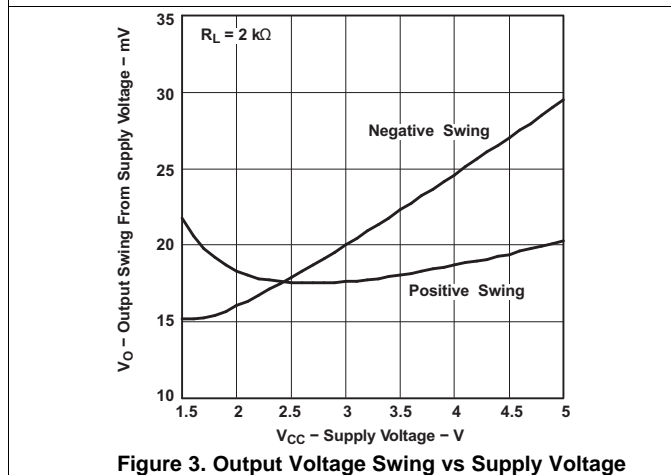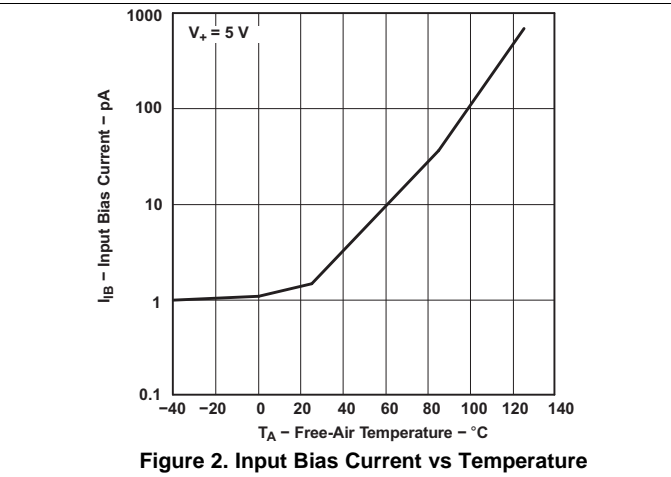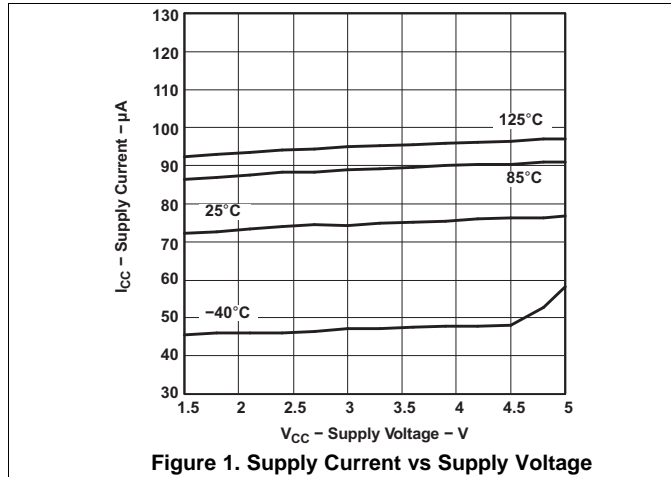6.9 Typical Characteristics



Typical Characteristics (continued)

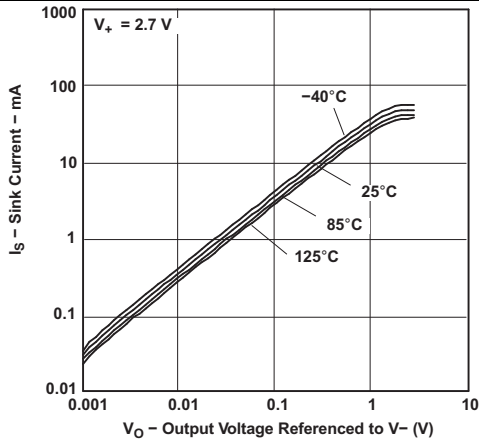


Figure 7. Sink Current vs Output Voltage

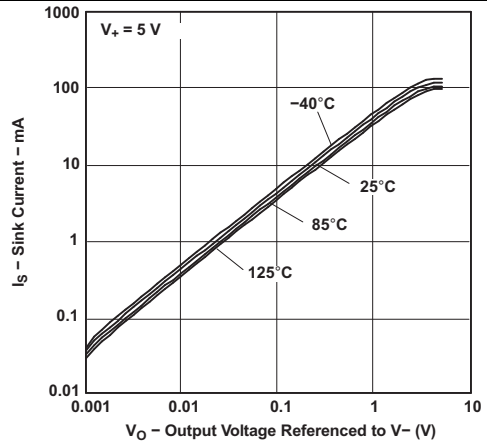


Figure 8. Sink Current vs Output Voltage

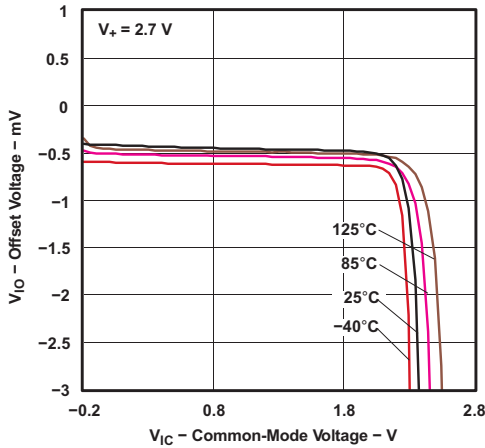


Figure 9. Offset Voltage vs Common-Mode Voltage

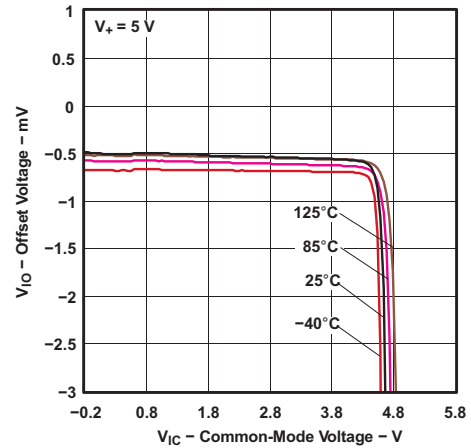


Figure 10. Offset Voltage vs Common-Mode Voltage

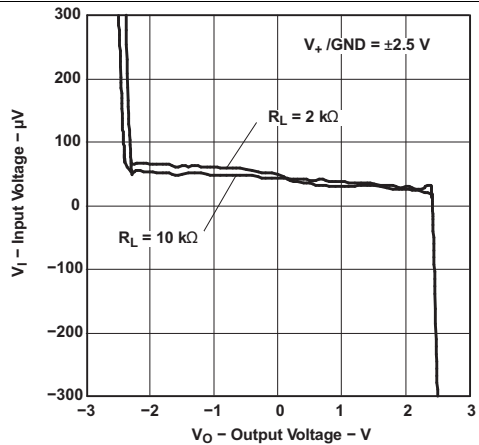


Figure 11. Input Voltage vs Output Voltage

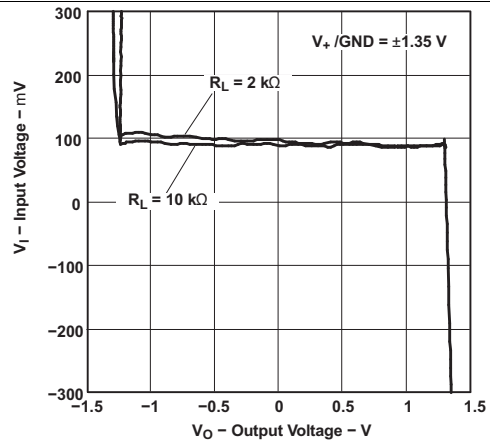


Figure 12. Input Voltage vs Output Voltage

Typical Characteristics (continued)

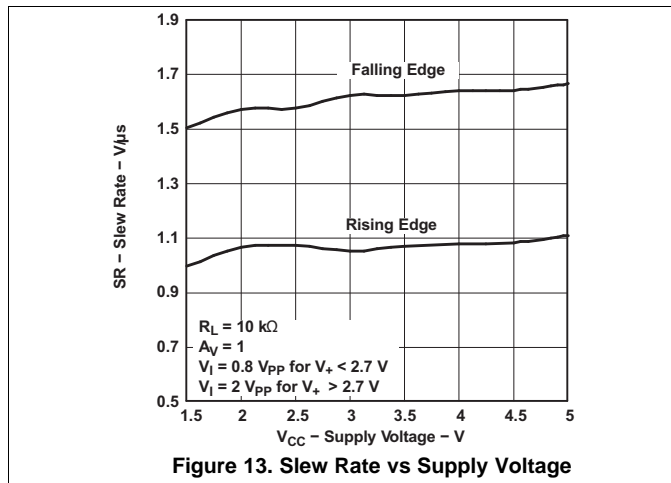


Figure 13. Slew Rate vs Supply Voltage

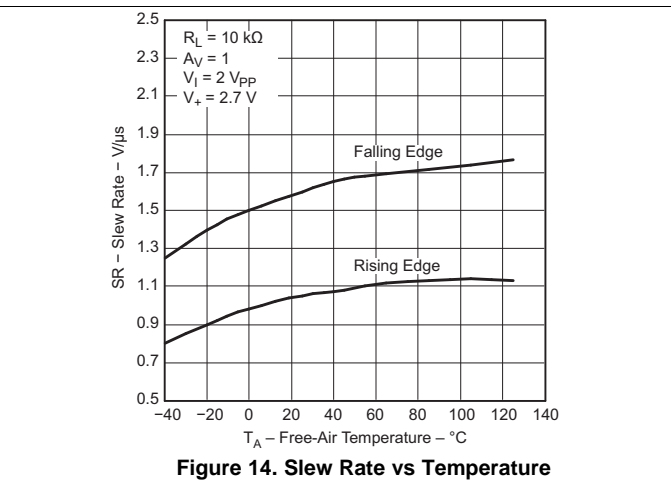


Figure 14. Slew Rate vs Temperature

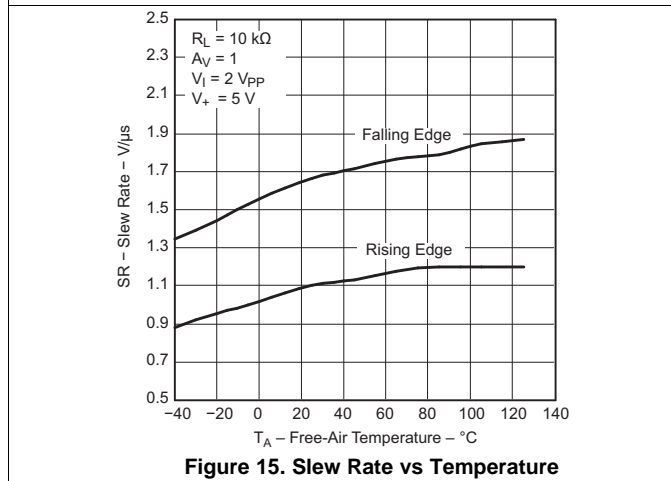


Figure 15. Slew Rate vs Temperature

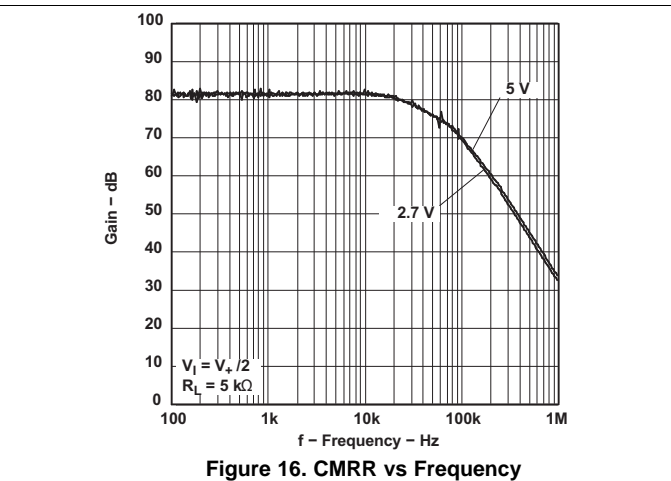


Figure 16. CMRR vs Frequency

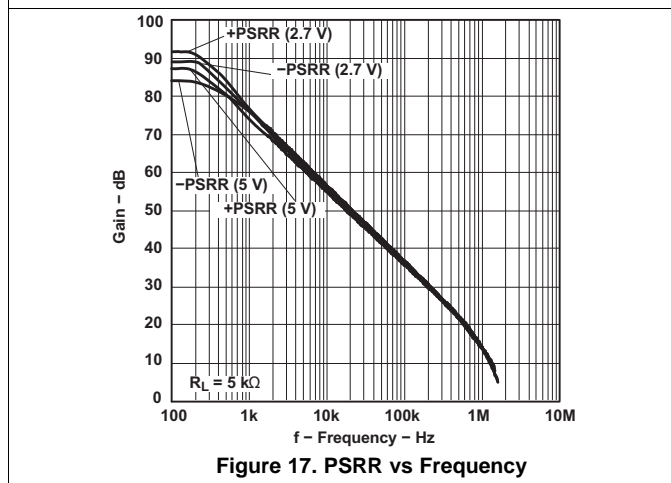


Figure 17. PSRR vs Frequency

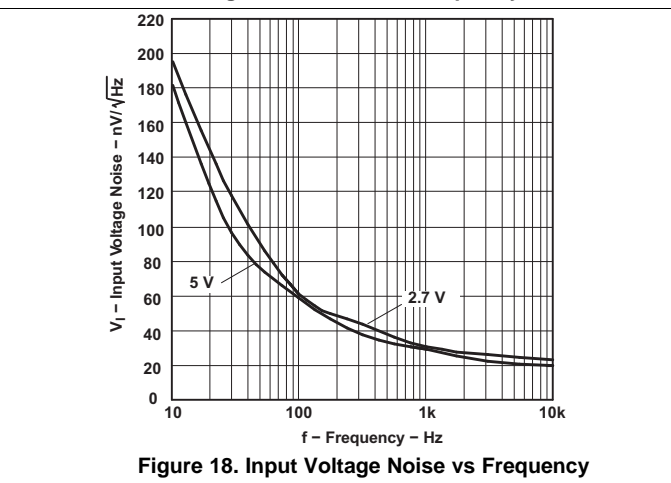


Figure 18. Input Voltage Noise vs Frequency

Typical Characteristics (continued)

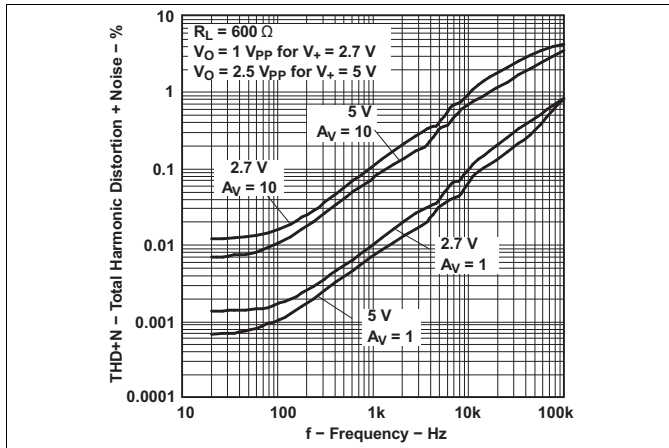


Figure 19. Total Harmonic Distortion + Noise vs Frequency



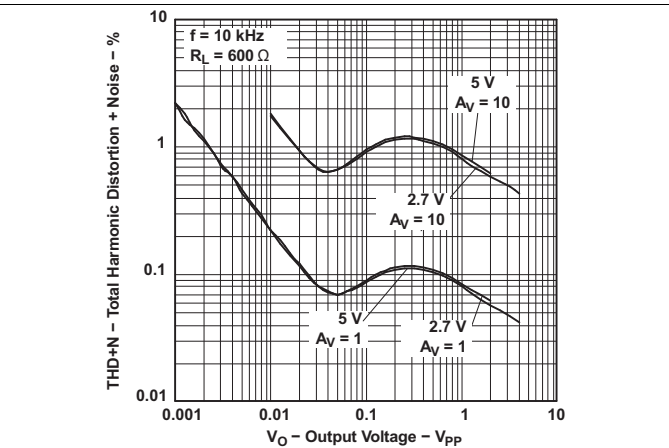


Figure 20. Total Harmonic Distortion + Noise vs Output Voltage

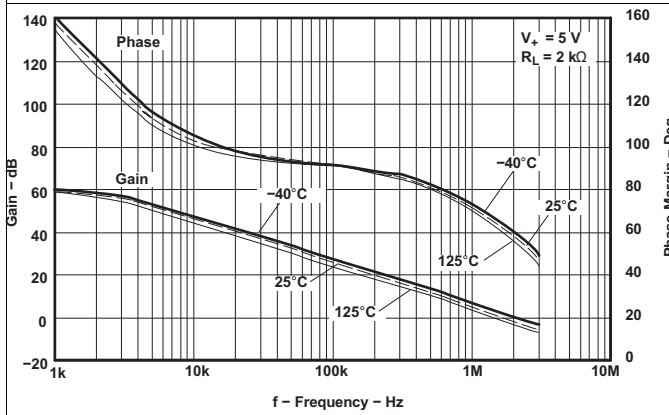


(T_A = -40°C, 25°C, 125°C)

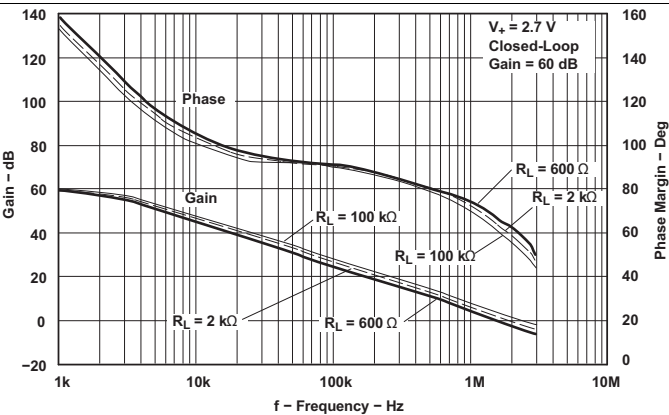Figure 21. Gain and Phase Margin vs Frequency




(R_L = 600 Ω, 2 kΩ, 100 kΩ)

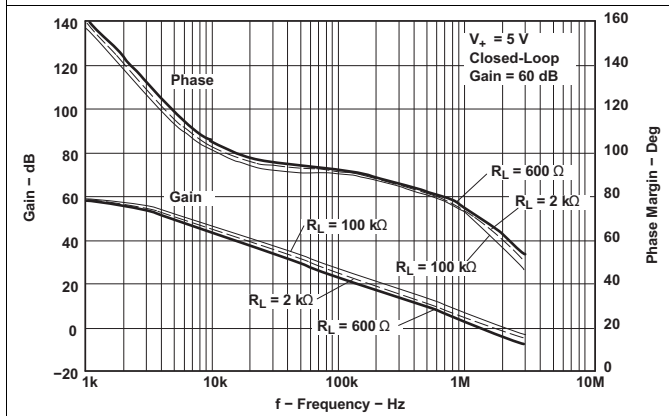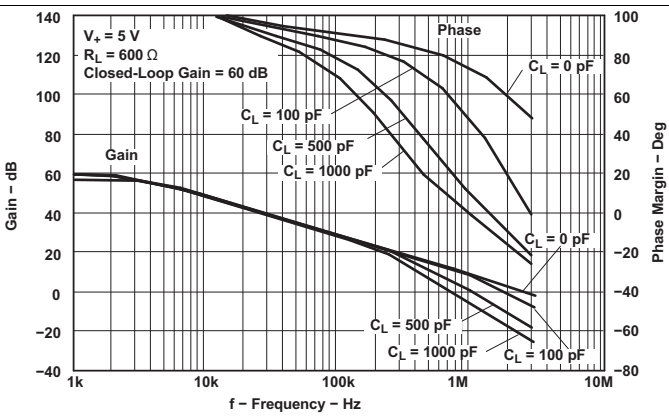Figure 22. Gain and Phase Margin vs Frequency




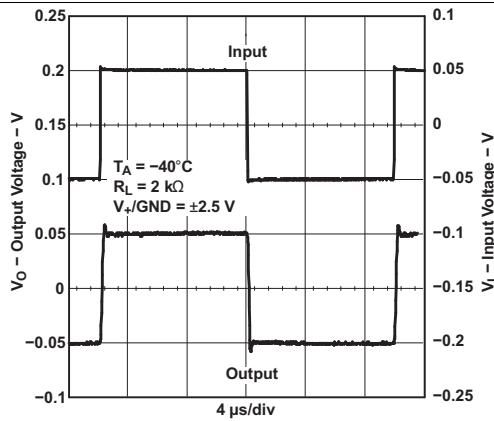
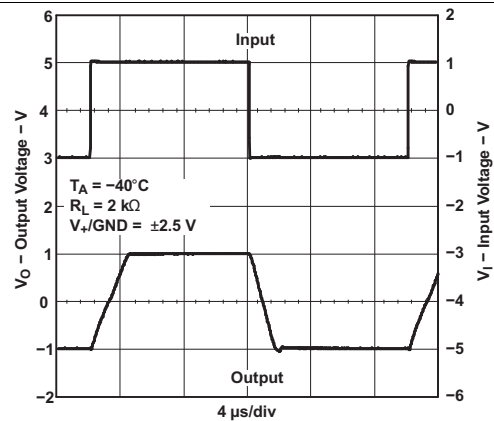
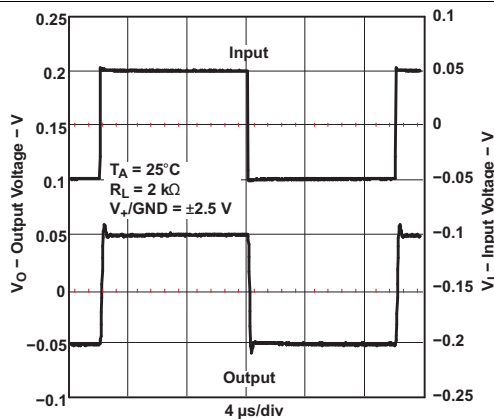
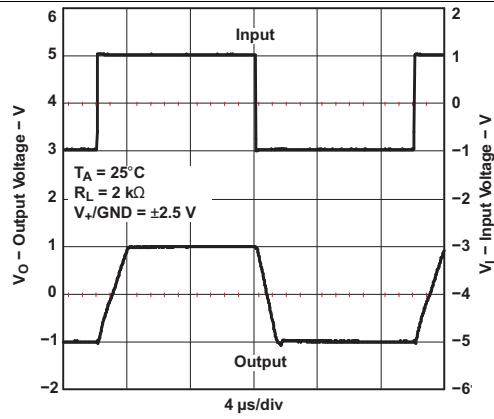
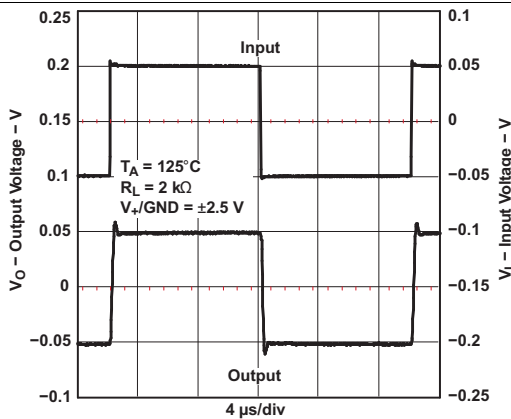
(R_L = 600 Ω, 2 kΩ, 100 kΩ)

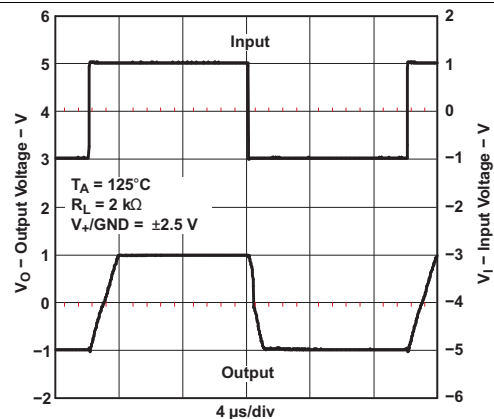Figure 23. Gain and Phase Margin vs Frequency



(C_L = 0 pF, 100 pF, 500 pF, 1000 pF)

Figure 24. Gain and Phase Margin vs Frequency

Typical Characteristics (continued)

Figure 25. Small-Signal Noninverting Response

Figure 26. Large-Signal Noninverting Response

Figure 27. Small-Signal Noninverting Response

Figure 28. Large-Signal Noninverting Response

Figure 29. Small-Signal Noninverting Response

Figure 30. Large-Signal Noninverting Response

Typical Characteristics (continued)

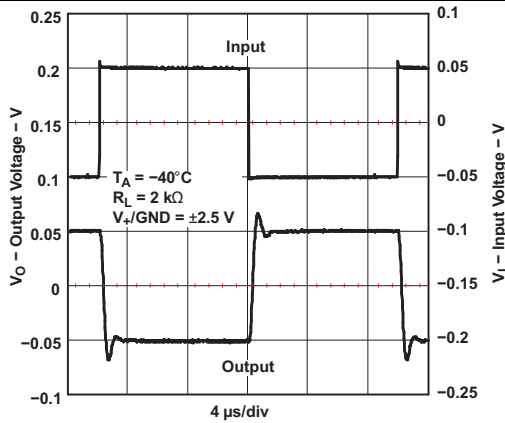


Figure 31. Small-Signal Inverting Response

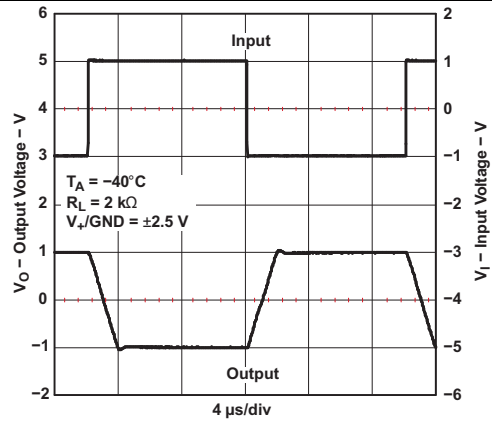


Figure 32. Large-Signal Inverting Response

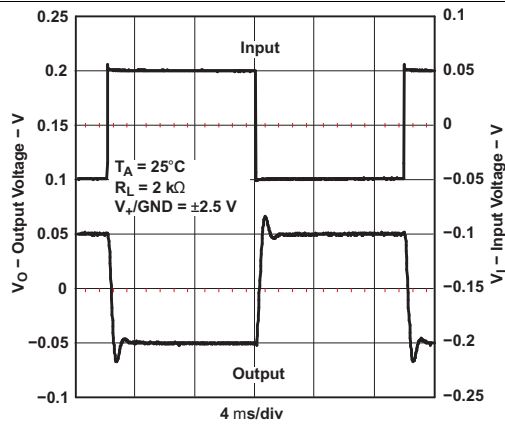


Figure 33. Small-Signal Inverting Response

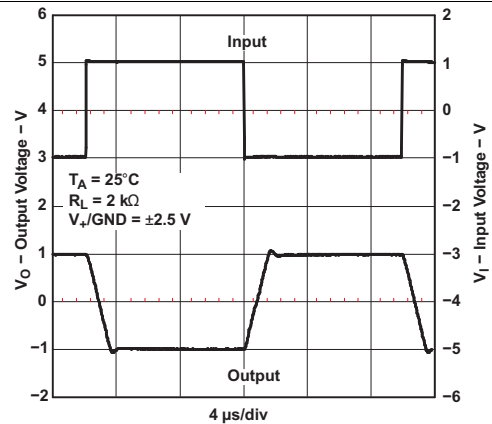


Figure 34. Large-Signal Inverting Response

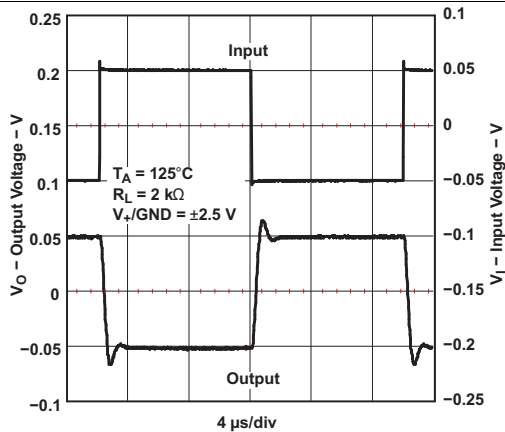


Figure 35. Small-Signal Inverting Response

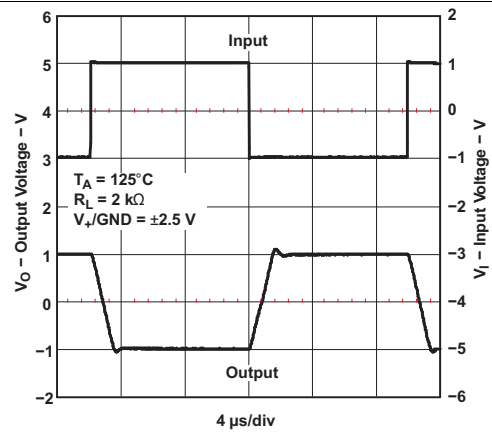



Figure 36. Large-Signal Inverting Response

7 Detailed Description

7.1 Overview

The LMV34x devices are precision operational amplifiers with CMOS inputs for very low input bias current. Output is rail-to-rail and input common-mode includes ground. LMV341 has a shutdown mode for very low supply current.

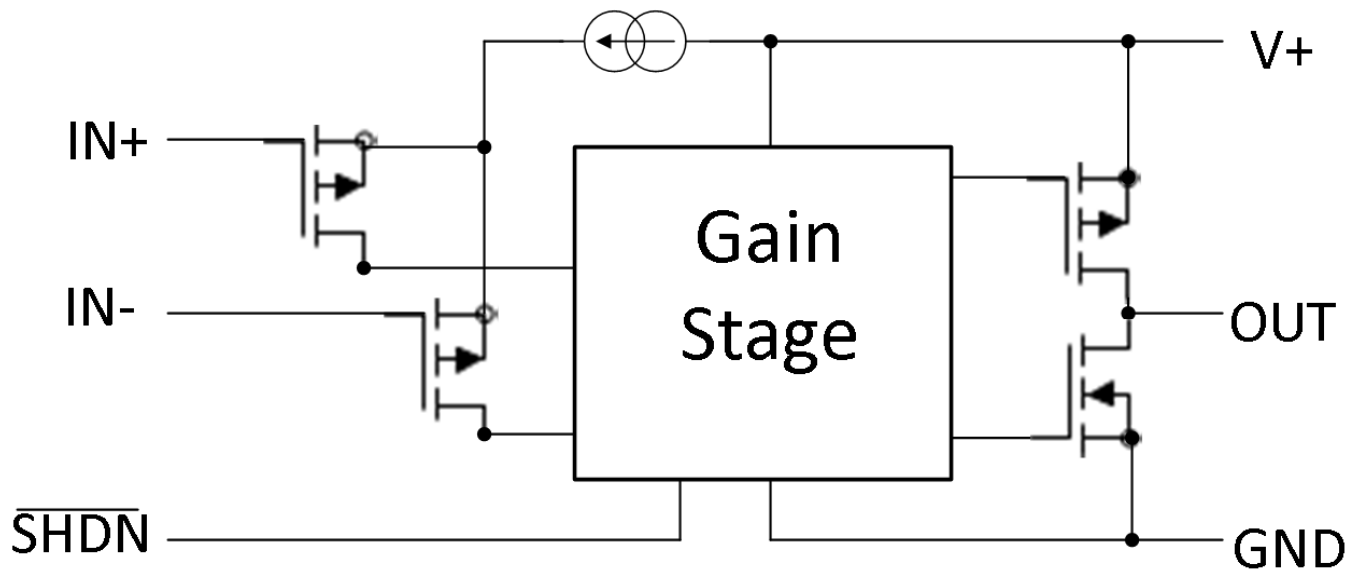7.2 Functional Block Diagram



7.3 Feature Description

7.3.1 PMOS Input Stage

PMOS Input Stage supports a lower input range that includes ground. Upper range limit is $V_+ - 1\text{ V}$.

7.3.2 CMOS Output Stage

The CMOS drain output topology allows rail-to-rail output swing.

7.3.3 Shutdown

LMV341 includes a shutdown pin. During shutdown, I_{CC} is nearly zero and the output becomes high impedance. The typical turnon time coming out of shutdown is 5 μs .

7.4 Device Functional Modes

The LMV34x devices have two modes of operation:

- Normal operation when $\overline{\text{SHDN}}$ pin is at V_+ level or the $\overline{\text{SHDN}}$ pin is not present
- Shutdown mode when $\overline{\text{SHDN}}$ is at GND level; I_{CC} is very low and output is high impedance.

8 Application and Implementation

NOTE

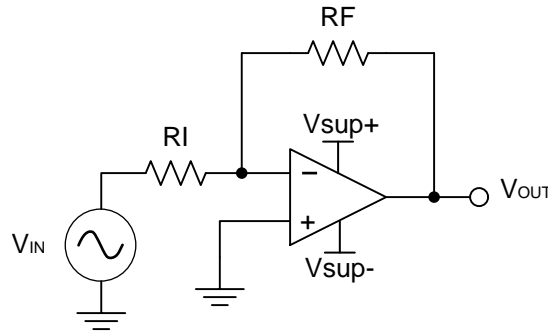
Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

LMV34x devices have rail-to-rail output and input range from ground to $V_{CC} - 1$ V. CMOS inputs provide very low input current. Shutdown capability is an option in dual amplifier version. Operation from 2.5-V to 5.5-V is possible.

8.2 Typical Application

A typical application for an operational amplifier in an inverting amplifier. This amplifier takes a positive voltage on the input, and makes it a negative voltage of the same magnitude. In the same manner, it also makes negative voltages positive.



Copyright © 2016, Texas Instruments Incorporated

Figure 37. Application Schematic

8.2.1 Design Requirements

The supply voltage must be chosen such that it is larger than the input voltage range and output range. For instance, this application scales a signal of ± 0.5 V to ± 1.8 V. Setting the supply at ± 2 V is sufficient to accommodate this application. The supplies can power up in any order; however, neither supply can be of opposite polarity relative to ground at any time; otherwise, a large current can flow through the input ESD diodes. To limit current in such an occurrence, TI highly recommends adding a series resistor to the grounded input. V_{sup+} must be more positive than V_{sup-} at all times; otherwise, a large reverse supply current may flow.

8.2.2 Detailed Design Procedure

Determine the gain required by the inverting amplifier using [Equation 1](#) and [Equation 2](#).

$$A_v = \frac{V_{OUT}}{V_{IN}} \quad (1)$$

$$A_v = \frac{1.8}{-0.5} = -3.6 \quad (2)$$

Once the desired gain is determined, choose a value for R_I or R_F . Choosing a value in the $k\Omega$ range is desirable because the amplifier circuit uses currents in the mA range. This ensures the part does not draw too much current. For this example, choose 10 $k\Omega$ for R_I , which means 36 $k\Omega$ is used for R_F . This was determined by [Equation 3](#).

$$A_v = -\frac{R_F}{R_I} \quad (3)$$

Typical Application (continued)

8.2.3 Application Curve

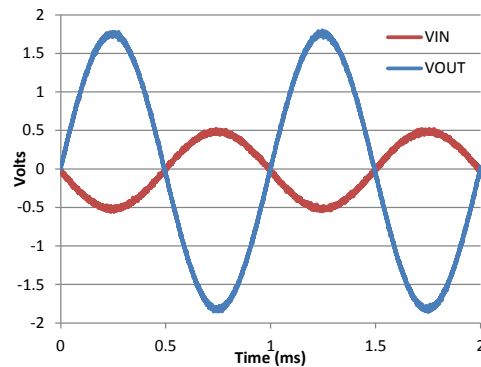


Figure 38. Input and Output Voltages of the Inverting Amplifier

9 Power Supply Recommendations

CAUTION

Supply voltages larger than 5.5 V for a single supply can permanently damage the device (see the [Absolute Maximum Ratings](#)).

Place 0.1- μ F bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies.

10 Layout

10.1 Layout Guidelines

For best operational performance of the device, use good PCB layout practices, including:

- Noise can propagate into analog circuitry through the power pins of the circuit as a whole, as well as the operational amplifier. Bypass capacitors are used to reduce the coupled noise by providing low-impedance power sources local to the analog circuitry.
 - Connect low-ESR, 0.1- μF ceramic bypass capacitors between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from V_+ to ground is applicable for single-supply applications.
- Separate grounding for analog and digital portions of circuitry is one of the simplest and most effective methods of noise suppression. One or more layers on multilayer PCBs are usually devoted to ground planes. A ground plane helps distribute heat and reduces EMI noise pickup. Make sure to physically separate digital and analog grounds, and pay attention to the flow of the ground current.
- To reduce parasitic coupling, run the input traces as far away from the supply or output traces as possible. If it is not possible to keep them separate, it is much better to cross the sensitive trace perpendicular as opposed to in parallel with the noisy trace.
- Place the external components as close to the device as possible. Keeping RF and RG close to the inverting input minimizes parasitic capacitance, as shown in [Layout Examples](#).
- Keep the length of input traces as short as possible. Always remember that the input traces are the most sensitive part of the circuit.
- Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.

10.2 Layout Examples

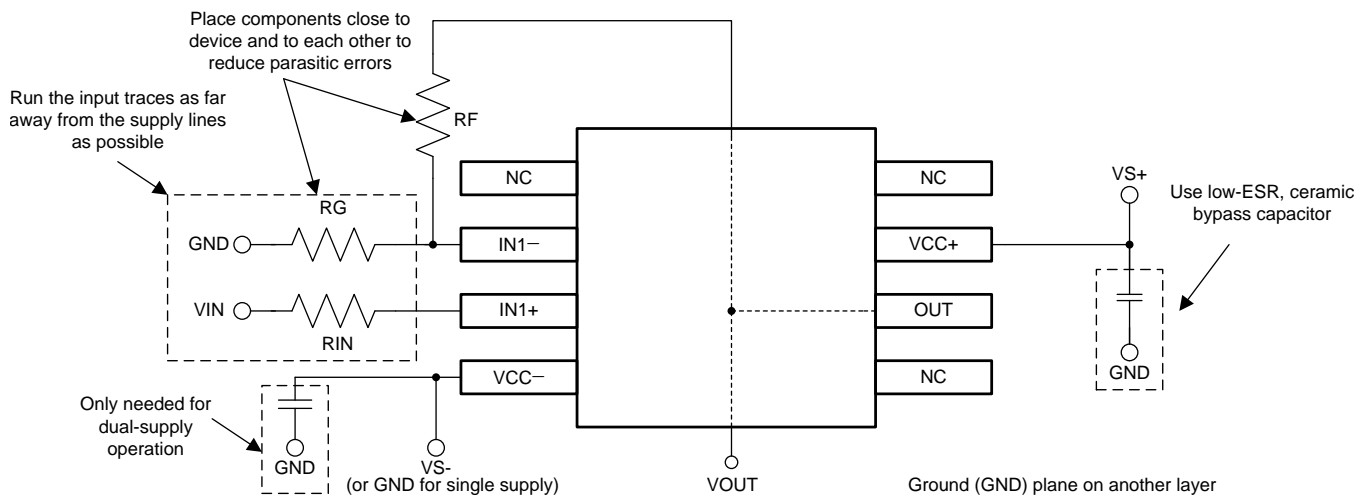


Figure 39. Operational Amplifier Layout for Noninverting Configuration

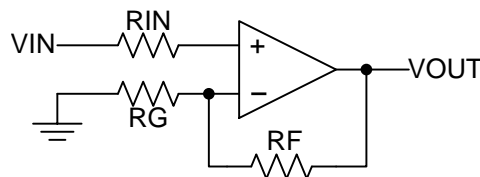


Figure 40. Operational Amplifier Schematic for Noninverting Configuration

11 Device and Documentation Support

11.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 1. Related Links

| PARTS | PRODUCT FOLDER | SAMPLE & BUY | TECHNICAL DOCUMENTS | TOOLS & SOFTWARE | SUPPORT & COMMUNITY |
|--------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| LMV341 | Click here | Click here | Click here | Click here | Click here |
| LMV342 | Click here | Click here | Click here | Click here | Click here |
| LMV344 | Click here | Click here | Click here | Click here | Click here |

11.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.3 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

11.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

11.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead finish/ Ball material (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| LMV341IDBVR | ACTIVE | SOT-23 | DBV | 6 | 3000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | (RC9A, RC9E, RC9S) | Samples |
| LMV341IDBVRE4 | ACTIVE | SOT-23 | DBV | 6 | 3000 | TBD | Call TI | Call TI | -40 to 125 | | Samples |
| LMV341IDBVRG4 | ACTIVE | SOT-23 | DBV | 6 | 3000 | TBD | Call TI | Call TI | -40 to 125 | | Samples |
| LMV341IDCKR | ACTIVE | SC70 | DCK | 6 | 3000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | (R4A, R4E) | Samples |
| LMV341IDCKRG4 | ACTIVE | SC70 | DCK | 6 | 3000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | (R4A, R4E) | Samples |
| LMV342ID | OBSOLETE | SOIC | D | 8 | | TBD | Call TI | Call TI | -40 to 125 | MV342I | |
| LMV342IDGKR | ACTIVE | VSSOP | DGK | 8 | 2500 | RoHS & Green | SN | Level-1-260C-UNLIM | -40 to 125 | RPA | Samples |
| LMV342IDGKRG4 | ACTIVE | VSSOP | DGK | 8 | 2500 | TBD | Call TI | Call TI | -40 to 125 | | Samples |
| LMV342IDGKT | PREVIEW | VSSOP | DGK | 8 | 250 | TBD | Call TI | Call TI | -40 to 125 | | |
| LMV342IDR | ACTIVE | SOIC | D | 8 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | MV342I | Samples |
| LMV342IDRG4 | ACTIVE | SOIC | D | 8 | 2500 | TBD | Call TI | Call TI | -40 to 125 | | Samples |
| LMV344ID | OBSOLETE | SOIC | D | 14 | | TBD | Call TI | Call TI | -40 to 125 | LMV344I | |
| LMV344IDR | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | LMV344I | Samples |
| LMV344IPW | OBSOLETE | TSSOP | PW | 14 | | TBD | Call TI | Call TI | -40 to 125 | MV344I | |
| LMV344IPWR | ACTIVE | TSSOP | PW | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | MV344I | Samples |
| LMV344IPWRG4 | ACTIVE | TSSOP | PW | 14 | 2000 | TBD | Call TI | Call TI | -40 to 125 | | Samples |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of ≤ 1000 ppm threshold. Antimony trioxide based flame retardants must also meet the ≤ 1000 ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LMV341, LMV344 :

- Automotive : [LMV341-Q1](#), [LMV344-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LMV341IDBVR | SOT-23 | DBV | 6 | 3000 | 180.0 | 8.4 | 3.23 | 3.17 | 1.37 | 4.0 | 8.0 | Q3 |
| LMV341IDCKR | SC70 | DCK | 6 | 3000 | 180.0 | 8.4 | 2.41 | 2.41 | 1.2 | 4.0 | 8.0 | Q3 |
| LMV341IDCKRG4 | SC70 | DCK | 6 | 3000 | 180.0 | 8.4 | 2.41 | 2.41 | 1.2 | 4.0 | 8.0 | Q3 |
| LMV342IDGKR | VSSOP | DGK | 8 | 2500 | 330.0 | 12.4 | 5.25 | 3.35 | 1.25 | 8.0 | 12.0 | Q1 |
| LMV342IDR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| LMV342IDR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| LMV344IDR | SOIC | D | 14 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |
| LMV344IDR | SOIC | D | 14 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |
| LMV344IPWR | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| LMV344IPWR | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LMV341IDBVR | SOT-23 | DBV | 6 | 3000 | 202.0 | 201.0 | 28.0 |
| LMV341IDCKR | SC70 | DCK | 6 | 3000 | 202.0 | 201.0 | 28.0 |
| LMV341IDCKRG4 | SC70 | DCK | 6 | 3000 | 202.0 | 201.0 | 28.0 |
| LMV342IDGKR | VSSOP | DGK | 8 | 2500 | 366.0 | 364.0 | 50.0 |
| LMV342IDR | SOIC | D | 8 | 2500 | 353.0 | 353.0 | 32.0 |
| LMV342IDR | SOIC | D | 8 | 2500 | 353.0 | 353.0 | 32.0 |
| LMV344IDR | SOIC | D | 14 | 2500 | 356.0 | 356.0 | 35.0 |
| LMV344IDR | SOIC | D | 14 | 2500 | 353.0 | 353.0 | 32.0 |
| LMV344IPWR | TSSOP | PW | 14 | 2000 | 356.0 | 356.0 | 35.0 |
| LMV344IPWR | TSSOP | PW | 14 | 2000 | 353.0 | 353.0 | 32.0 |

DGK0008A



PACKAGE OUTLINE

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



4214862/A 04/2023

NOTES:

PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

EXAMPLE BOARD LAYOUT

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X



SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

DGK0008A

TM VSSOP - 1.1 mm max height

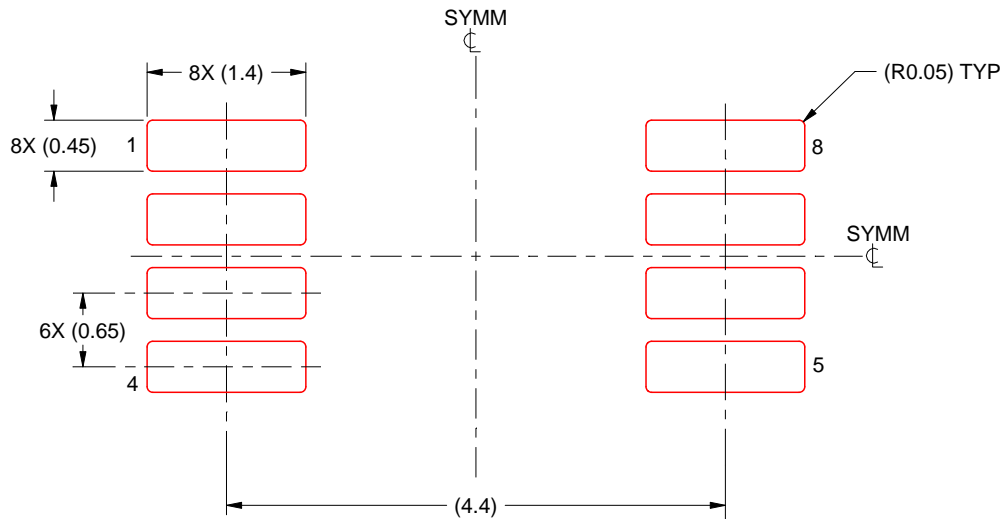SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.


DCK0006A



PACKAGE OUTLINE

SOT - 1.1 max height

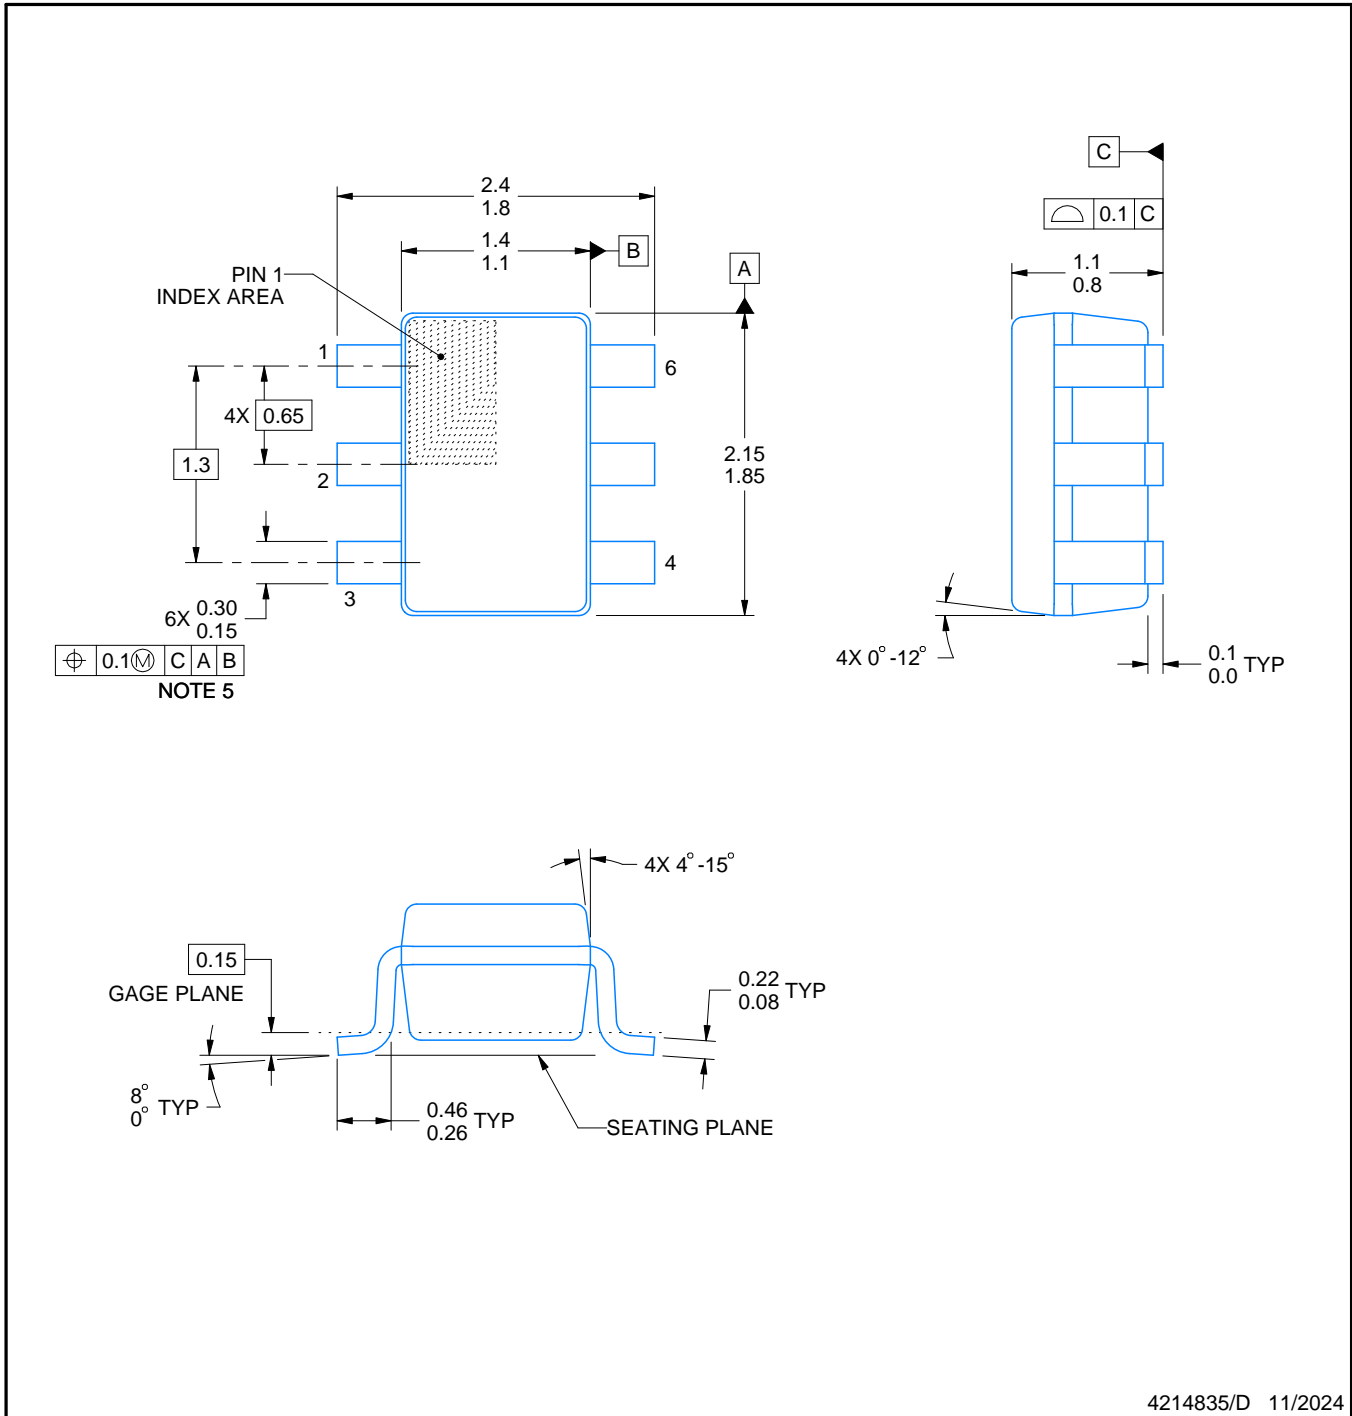
SMALL OUTLINE TRANSISTOR




4214835/D 11/2024

NOTES:

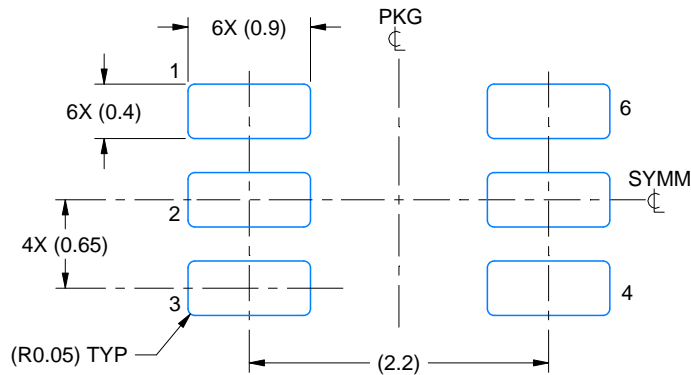1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
4. Falls within JEDEC MO-203 variation AB.



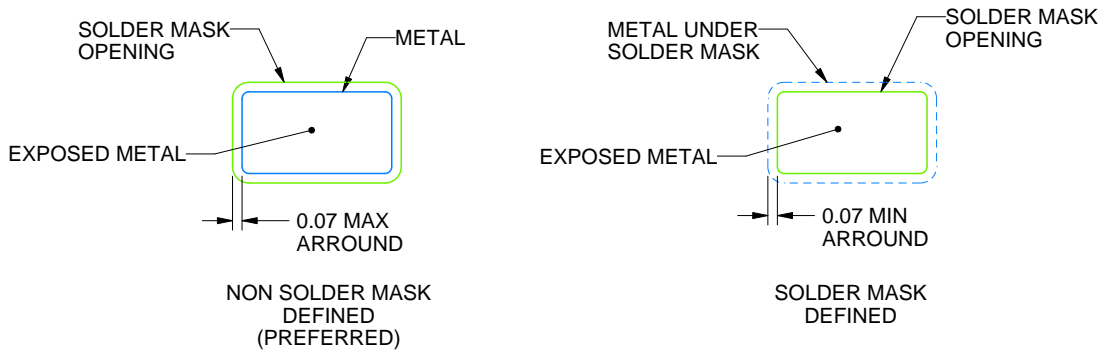LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:18X




SOLDER MASK DETAILS

4214835/D 11/2024

NOTES: (continued)

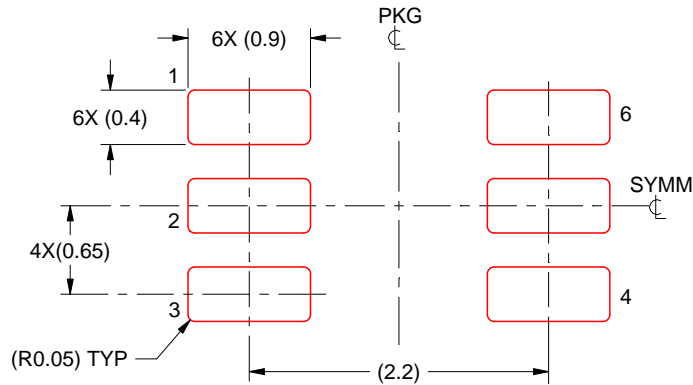- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOLDER PASTE EXAMPLE
BASED ON 0.125 THICK STENCIL
SCALE:18X

4214835/D 11/2024

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.



D0014A

PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



4220718/A 09/2016

NOTES:

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

EXAMPLE BOARD LAYOUT

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE
SCALE:8X



SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:8X

4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



D0008A

PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



4214825/C 02/2019

NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE
 EXPOSED METAL SHOWN
 SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

EXAMPLE BOARD LAYOUT


DBV0006A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



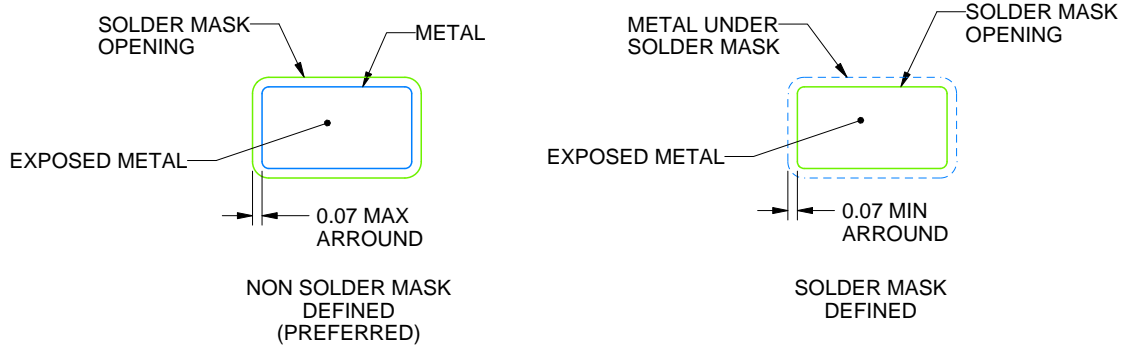LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X



SOLDER MASK DETAILS

4214840/G 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0006A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR




SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214840/G 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PW0014A



PACKAGE OUTLINE
TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



4220202/B 12/2023

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X



4220202/B 12/2023

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2025, Texas Instruments Incorporated