



- These assemblies must comply with workmanship standards IPC-A-610 Class 2, unless otherwise specified.
- These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.
- These assemblies are ESD sensitive, ESD precautions shall be observed.
- Install label in silkscreened box after final wash. Text shall be=8 pt font. Text shall be per the Label Table in the PDF schematic.

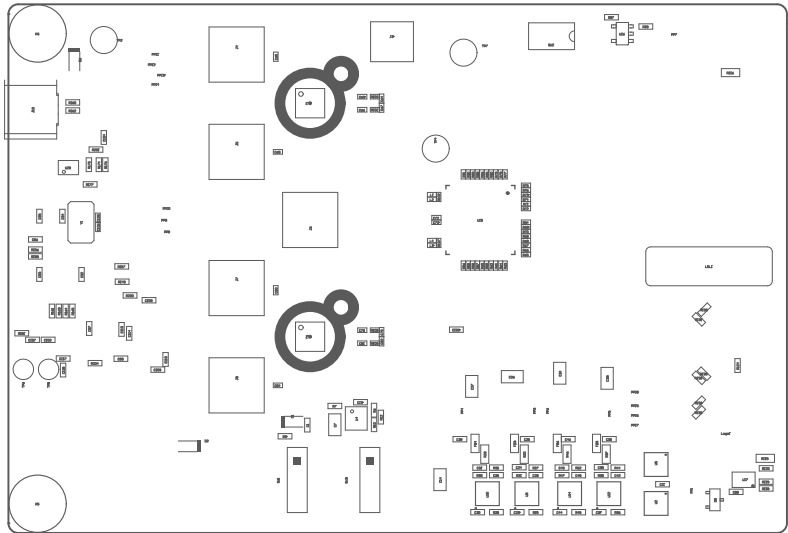

COMPONENTS MARKED 'DNP' SHOULD NOT BE POPULATED.
ASSEMBLY VARIANT: 001

PCB VIEWED FROM TOP SIDE	BOARD #: DC276	REV: C	SUN REV: 1a5319a59745b3b6442724175f06a0812f21cc0f [Locally Modified]
PLOT NAME = Top Assembly Drawing	GENERATED : 11/27/2024 5:47:58 PM	TEXAS INSTRUMENTS	

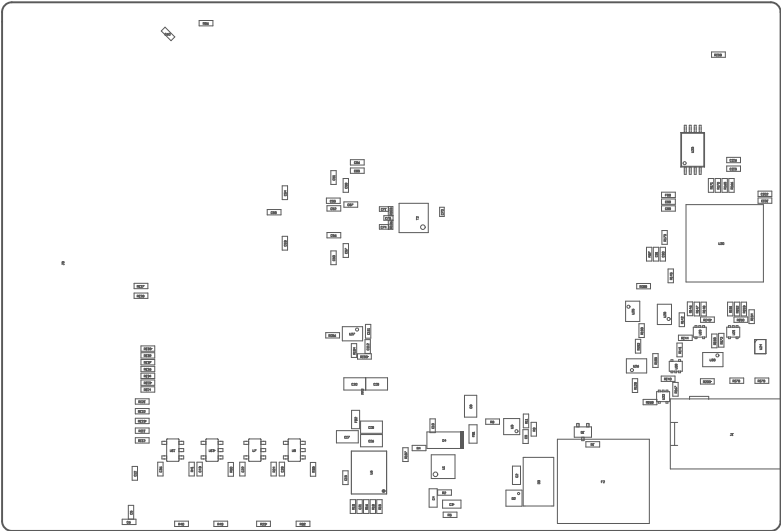

COMPONENTS MARKED 'DNP' SHOULD NOT BE POPULATED.
ASSEMBLY VARIANT: 001

PCB VIEWED FROM BOTTOM SIDE	BOARD #: DC276	REV: C	SUN REV: 1a5319a59745b3b6442724175f06a0812f21cc0f [Locally Modified]
PLOT NAME = Bottom Assembly Drawing	GENERATED : 11/27/2024 5:47:58 PM	TEXAS INSTRUMENTS	