

CSD16301Q2 25V N 沟道 NexFET™ 功率 MOSFET

1 特性


- 超低 Q_g 和 Q_{gd}
- 低热阻
- 无铅端子镀层
- 符合 RoHS
- 无卤素
- SON 2mm × 2mm 塑料封装

2 应用

- 直流/直流转换器
- 电池和负载管理应用


3 说明

该 25V 19mΩ 2mm × 2mm SON NexFET™ 功率 MOSFET 可以极大地降低电源转换和负载管理应用中的损耗。2mm × 2mm SON 封装可提供相对于封装尺寸而言出色的热性能。

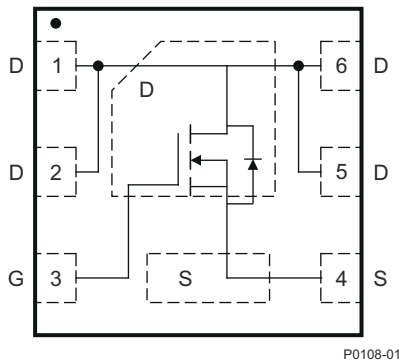


P0108-01

顶视图

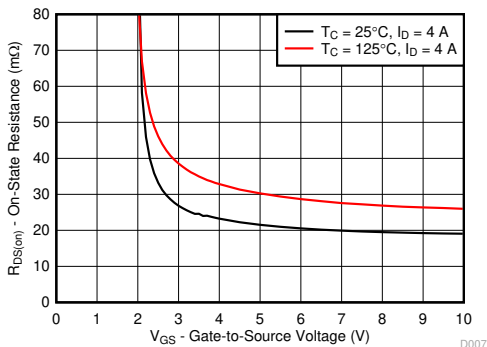

D007

$R_{DS(on)}$ 与 V_{GS} 之间的关系

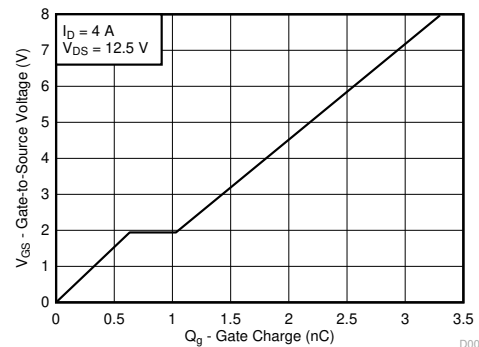

D004

栅极电荷

产品概要

$T_A = 25^\circ\text{C}$		典型值	单位
V_{DS}	漏源电压	25	V
Q_g	栅极电荷总量 (4.5V)	2	nC
Q_{gd}	栅极电荷 (栅极到漏极)	0.4	nC
$R_{DS(on)}$	漏源导电电阻	$V_{GS} = 3\text{V}$	27
		$V_{GS} = 4.5\text{V}$	23
		$V_{GS} = 8\text{V}$	19
$V_{GS(th)}$	阈值电压	1.1	V

器件信息

器件	数量	介质	封装 ⁽¹⁾	运输
CSD16301Q2	3000	7 英寸卷带	SON 2.00mm × 2.00mm 塑料封装	卷带

(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

绝对最大额定值

$T_A = 25^\circ\text{C}$		值	单位
V_{DS}	漏源电压	25	V
V_{GS}	栅源电压	+10/-8	V
I_D	持续漏极电流 (受封装限制)	5	A
	持续漏极电流 (受器件限制), $T_C = 25^\circ\text{C}$ 时测得	20	
	持续漏极电流 ⁽¹⁾	8.2	
I_{DM}	脉冲漏极电流 ⁽²⁾	85	A
P_D	功率耗散 ⁽¹⁾	2.5	W
	功率耗散, $T_C = 25^\circ\text{C}$	15	
T_J, T_{STG}	工作结温, 贮存温度	-55 至 150	$^\circ\text{C}$
E_{AS}	雪崩能量, 单脉冲 $I_D = 14\text{A}, L = 0.1\text{mH}, R_G = 25\Omega$	10	mJ

(1) 0.06 英寸厚 FR4 PCB 上 1 平方英寸、2oz 铜焊盘上的 $R_{\theta JA} = 50^\circ\text{C}/\text{W}$ (典型值)。

(2) 最大 $R_{\theta JC} = 8.4^\circ\text{C}/\text{W}$, 脉冲持续时间 $\leq 100 \mu\text{s}$, 占空比 $\leq 1\%$ 。



Table of Contents

1 特性	1	5.1 接收文档更新通知.....	7
2 应用	1	5.2 支持资源.....	7
3 说明	1	5.3 Trademarks.....	7
4 Specifications	3	5.4 静电放电警告.....	7
4.1 Electrical Characteristics.....	3	5.5 术语表.....	7
4.2 Thermal Information.....	3	6 Revision History	8
4.3 Typical MOSFET Characteristics.....	4	7 Mechanical, Packaging, and Orderable Information	9
5 Device and Documentation Support	7		

4 Specifications

4.1 Electrical Characteristics

$T_A = 25^\circ\text{C}$ (unless otherwise specified)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
STATIC CHARACTERISTICS						
BV_{DSS}	Drain-to-source voltage	$V_{GS} = 0V, I_D = 250 \mu A$	25			V
I_{DSS}	Drain-to-source leakage current	$V_{GS} = 0V, V_{DS} = 20V$			1	μA
I_{GSS}	Gate-to-source leakage current	$V_{DS} = 0V, V_{GS} = +10/-8V$			100	nA
$V_{GS(th)}$	Gate-to-source threshold voltage	$V_{DS} = V_{GS}, I_{DS} = 250 \mu A$	0.9	1.1	1.55	V
$R_{DS(on)}$	Drain-to-source on resistance	$V_{GS} = 3V, I_{DS} = 4A$		27	34	m Ω
		$V_{GS} = 4.5V, I_{DS} = 4A$		23	29	
		$V_{GS} = 8V, I_{DS} = 4A$		19	24	
g_{fs}	Transconductance	$V_{DS} = 15V, I_{DS} = 4A$		16.5		S
DYNAMIC CHARACTERISTICS						
C_{ISS}	Input capacitance	$V_{GS} = 0V, V_{DS} = 12.5V, f = 1MHz$		260	340	pF
C_{OSS}	Output capacitance			165	215	pF
C_{RSS}	Reverse transfer capacitance			13	17	pF
R_g	Series gate resistance			1.3	2.6	Ω
Q_g	Gate charge total (4.5 V)	$V_{DS} = 10V, I_{DS} = 4A$		2.0	2.8	nC
Q_{gd}	Gate charge gate-to-drain			0.4		nC
Q_{gs}	Gate charge gate-to-source			0.6		nC
$Q_{g(th)}$	Gate charge at V_{th}			0.3		nC
Q_{OSS}	Output charge	$V_{DS} = 12.5V, V_{GS} = 0V$		3.0		nC
$t_{d(on)}$	Turnon delay time	$V_{DS} = 12.5V, V_{GS} = 4.5V, I_{DS} = 4A$ $R_G = 2\Omega$		2.7		ns
t_r	Rise time			4.4		ns
$t_{d(off)}$	Turnoff delay time			4.1		ns
t_f	Fall time			1.7		ns
DIODE CHARACTERISTICS						
V_{SD}	Diode forward voltage	$I_{DS} = 4A, V_{GS} = 0V$		0.8	1	V
Q_{rr}	Reverse recovery charge	$V_{DD} = 12.5V, I_F = 4A, di/dt = 200A/\mu s$		5.1		nC
t_{rr}	Reverse recovery time			11		ns

4.2 Thermal Information

$T_A = 25^\circ\text{C}$ (unless otherwise stated)


THERMAL METRIC		MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-case thermal resistance ⁽¹⁾			8.4	$^\circ\text{C/W}$
$R_{\theta JA}$	Junction-to-ambient thermal resistance ^{(1) (2)}			65	$^\circ\text{C/W}$

- (1) $R_{\theta JC}$ is determined with the device mounted on a 1in² (6.45cm²), 2oz (0.071mm) thick Cu pad on a 1.5in × 1.5in (3.81cm × 3.81cm), 0.06in (1.52mm) thick FR4 PCB. $R_{\theta JC}$ is specified by design, whereas $R_{\theta JA}$ is determined by the user's board design.
- (2) Device mounted on FR4 material with 1in² (6.45cm²), 2oz (0.071mm) thick Cu.

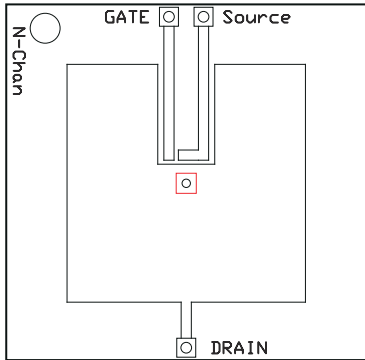

M0164-01

Max $R_{\theta JA} = 65^{\circ}\text{C/W}$ when mounted on 1in^2 (6.45cm^2) of 2oz (0.071mm) thick Cu.

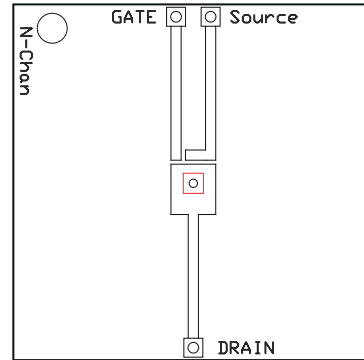


M0164-02

Max $R_{\theta JA} = 250^{\circ}\text{C/W}$ when mounted on minimum pad area of 2oz (0.071mm) thick Cu.

4.3 Typical MOSFET Characteristics

$T_A = 25^{\circ}\text{C}$ (unless otherwise specified)

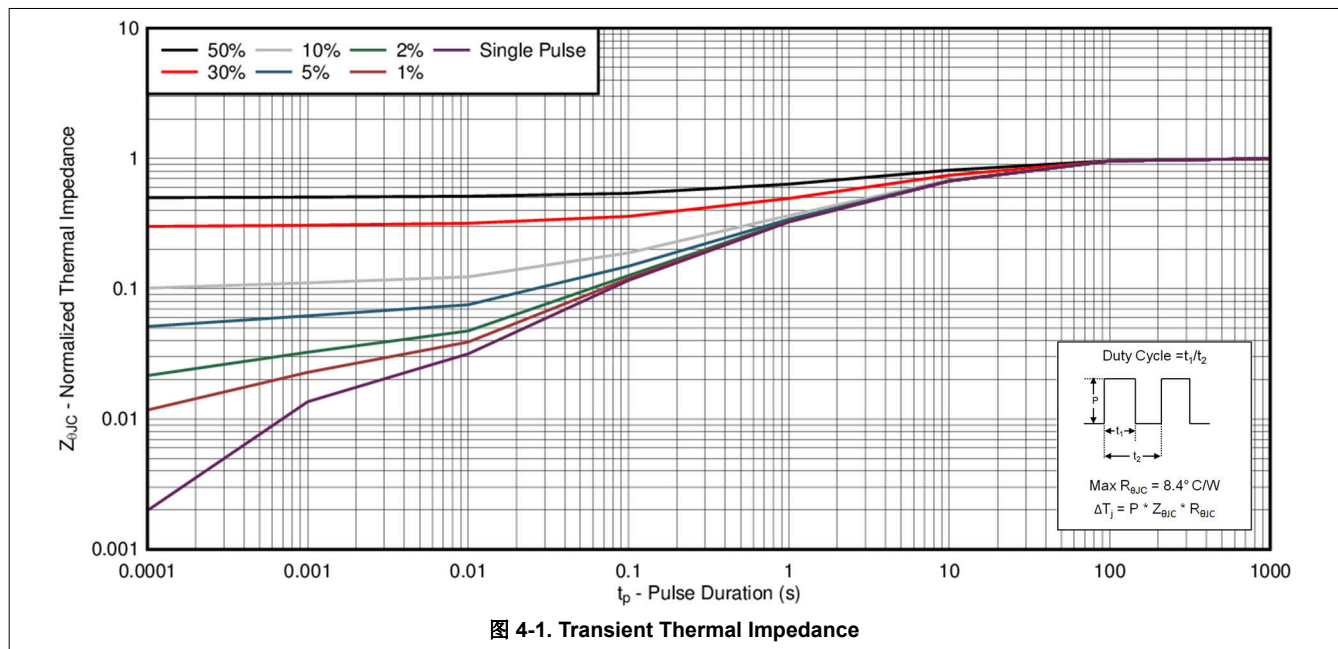

4.3 Typical MOSFET Characteristics (continued)

$T_A = 25^\circ\text{C}$ (unless otherwise specified)

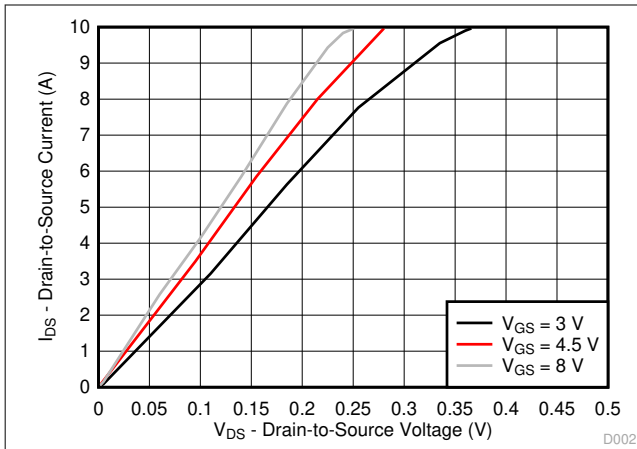


图 4-2. Saturation Characteristics

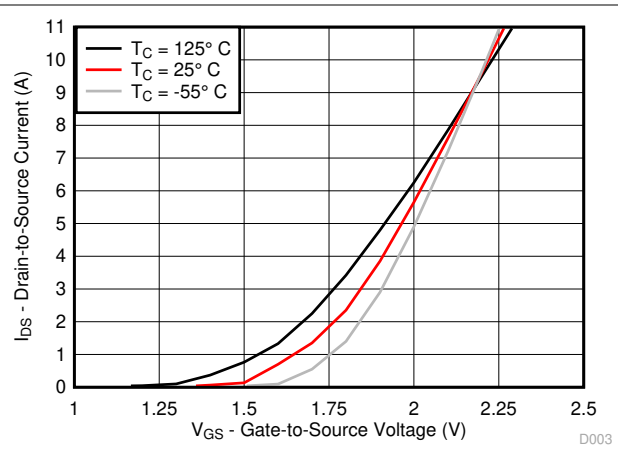


图 4-3. Transfer Characteristics

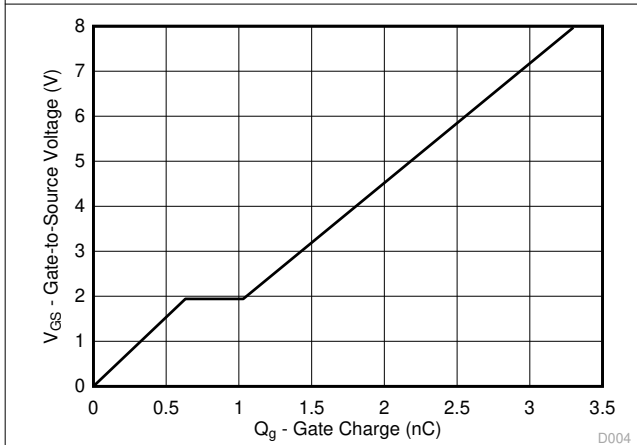


图 4-4. Gate Charge

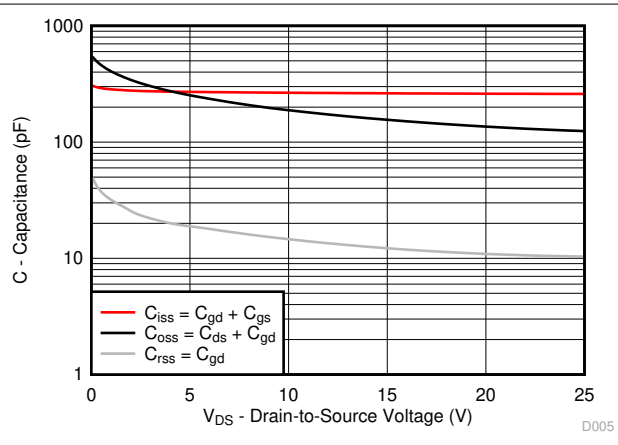


图 4-5. Capacitance

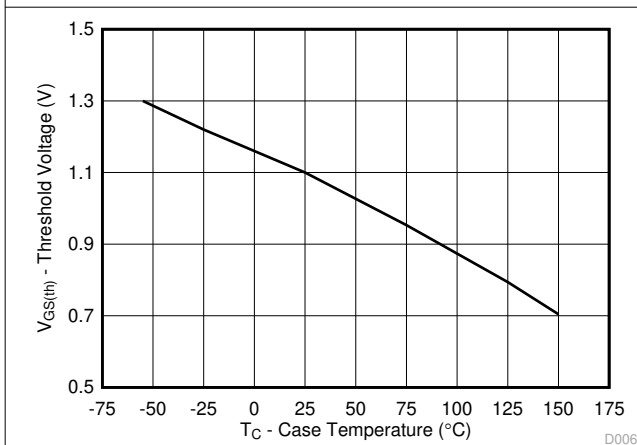


图 4-6. Threshold Voltage vs Temperature

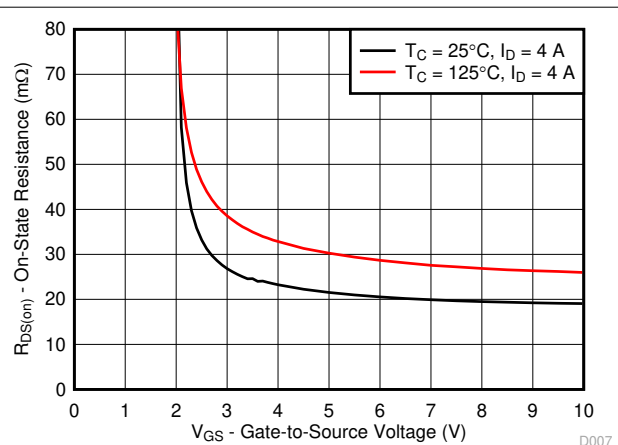


图 4-7. On-State Resistance vs Gate-to-Source Voltage

4.3 Typical MOSFET Characteristics (continued)

T_A = 25°C (unless otherwise specified)

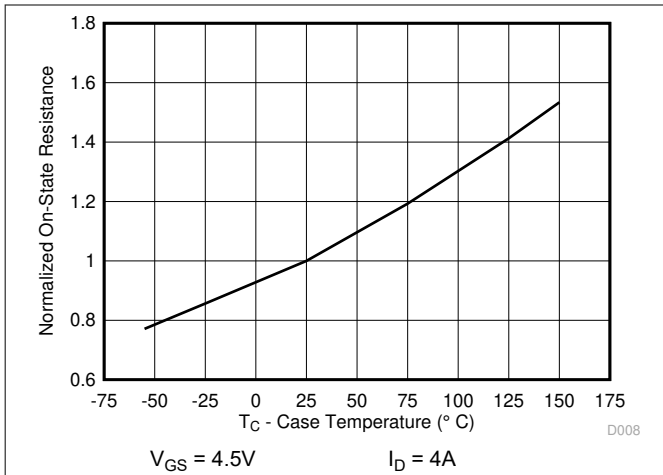


图 4-8. Normalized On-State Resistance vs Temperature

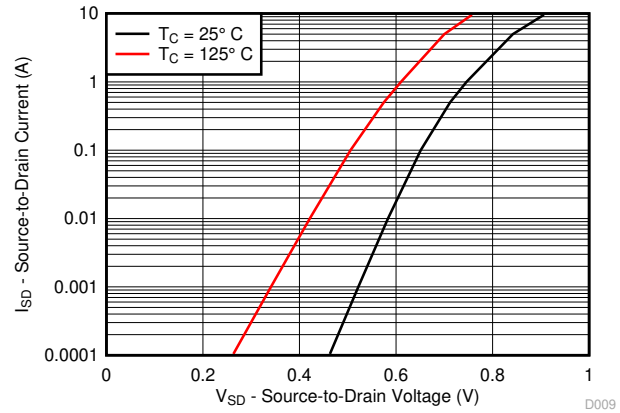


图 4-9. Typical Diode Forward Voltage

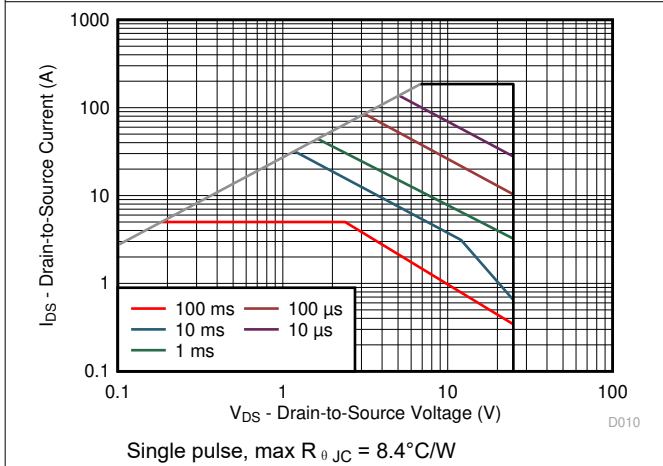


图 4-10. Maximum Safe Operating Area

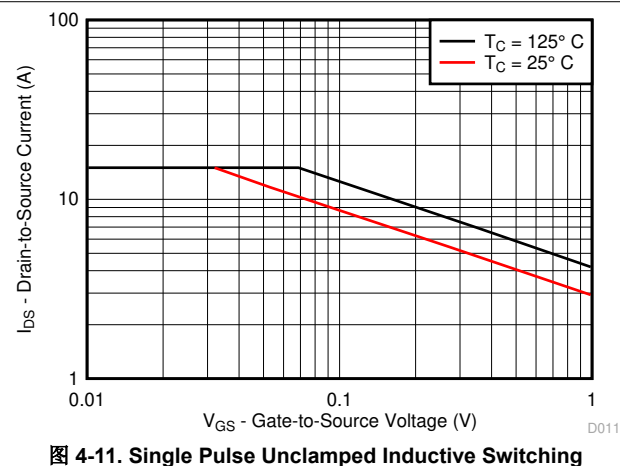


图 4-11. Single Pulse Unclamped Inductive Switching

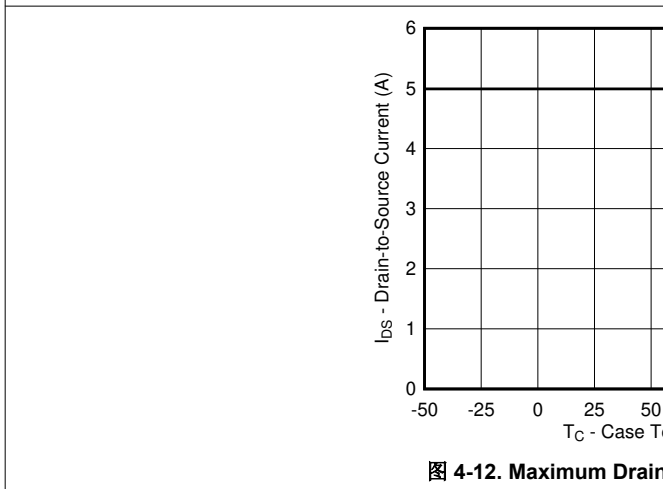


图 4-12. Maximum Drain Current vs Temperature

5 Device and Documentation Support

5.1 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](https://www.ti.com) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

5.2 支持资源

[TI E2E™ 中文支持论坛](#) 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

5.3 Trademarks

NexFET™ and TI E2E™ are trademarks of Texas Instruments.

所有商标均为其各自所有者的财产。

5.4 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

5.5 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

6 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision D (November 2016) to Revision E (March 2024)	Page
• 更新了整个文档中的表格、图和交叉参考的编号格式.....	1
• 删除了 CSD16301Q2T 小卷带选项.....	1
<hr/>	
Changes from Revision C (July 2011) to Revision D (November 2016)	Page
• 添加了 <i>器件和文档支持</i> 部分.....	1
• 更改了 <i>说明</i> 文本.....	1
• 将 <i>产品摘要</i> 表中的 Q_g 电压条件从 -4.5V 更改为 4.5V.....	1
• 向 <i>绝对最大额定值</i> 表中添加了受器件限制的持续漏极电流.....	1
• 向 <i>绝对最大额定值</i> 表中添加了 $T_C = 25^\circ\text{C}$ 时的最大功率耗散.....	1
• 更改了 <i>绝对最大额定值</i> 表中的注释 1 和注释 2.....	1
• Changed $R_{\theta JA}$ max from 69°C/W : to 65°C/W	3
• Changed 图 4-1 to reflect a transient $R_{\theta JC}$ curve.....	4
• Changed the safe operating area in 图 4-10 to reflect measured data.....	4
• Changed <i>MECHANICAL DATA</i> section to <i>Mechanical, Packaging, and Orderable Information</i> section.....	9
<hr/>	
Changes from Revision B (April 2010) to Revision C (July 2011)	Page
• 在“订购信息”表中添加了 7 英寸卷带选项.....	1
<hr/>	
Changes from Revision A (December 2009) to Revision B (April 2010)	Page
• Added title to 图 4-11 - Single Pulse Unclamped Inductive Switching.....	4
<hr/>	
Changes from Revision * (October 2009) to Revision A (December 2009)	Page
• Changed the Electrical Characteristics table - $V_{GS(th)}$ MAX value From: 1.4V To 1.55V.....	3

7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
CSD16301Q2	ACTIVE	WSON	DQK	6	3000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 150	1631	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

重要声明和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2024，德州仪器 (TI) 公司