


# 8-BIT INVERTING/NON-INVERTING SCHMITT-TRIGGER BUFFER WITH 3-STATE OUTPUTS

## FEATURES

- Operating Range of 2 V to 5.5 V  $V_{CC}$
- 8-Bit Inverting/Non-Inverting Outputs
- 20-Pin Thin Shrink Small-Outline Package [TSSOP (PW)] and 20-Pin Plastic Dual-In-Line Package [PDIP (N)]

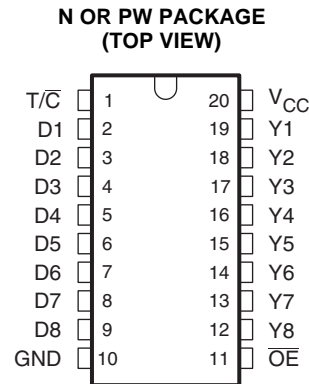

## DESCRIPTION

The SN74AHC8541 8-bit inverting/non-inverting buffers are ideal for driving bus lines or buffer memory address registers. These devices feature inputs and outputs on opposite sides of the package to facilitate printed circuit board layout.

All outputs are in the high-impedance state (disabled) when the output-enable ( $\overline{OE}$ ) input is high. When  $\overline{OE}$  is low, the respective gate passes the data from the D input to its Y output.

The  $T/\overline{C}$  input selects inverting or non-inverting data transfer. When the  $T/\overline{C}$  input is high, it provides non-inverting buffers. When the  $T/\overline{C}$  input is low, it provides inverting buffers when they are not in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.



**FUNCTION TABLE  
(EACH BUFFER)<sup>(1)</sup>**

INPUTS			OUTPUT Y
$\overline{OE}$	$T/\overline{C}$	D	
L	H	H	H
L	H	L	L
L	L	H	L
L	L	L	H
H	X	X	Z

- (1) L: Low-level  
H: High-level  
X: Irrelevant  
Z: High-impedance (off)



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

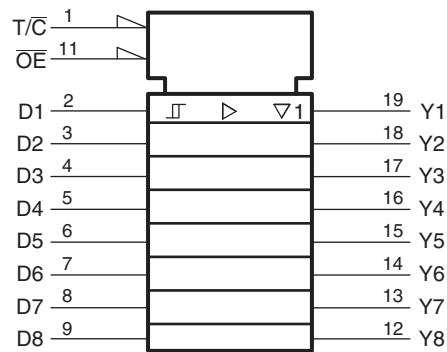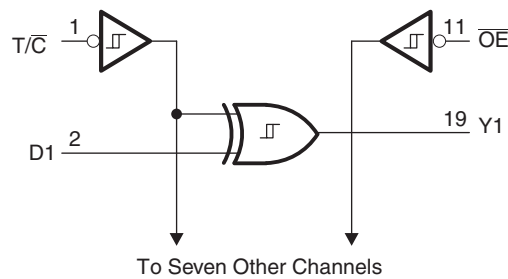**LOGIC SYMBOL****LOGIC DIAGRAM (POSITIVE LOGIC)****ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>**

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range		-0.5	7	V
$V_I$	Input voltage range <sup>(2)</sup>		-0.5	7	V
$V_O$	Voltage range applied to any output in the high-impedance or power-off state <sup>(2)</sup>		-0.5	7	V
	Output voltage range applied in the high- or low-state <sup>(2)(3)</sup>		-0.5	$V_{CC} + 0.5$	V
$I_{IK}$	Input clamp current	$V_I < 0$ V		-20	V
$I_{OK}$	Output clamp current	$V_O < 0$ V or $V_O > V_{CC}$		±50	mA
$I_O$	Continuous output current	$V_O = 0$ V to $V_{CC}$		±25	mA
	Continuous current through $V_{CC}$ or GND			±50	mA
$\theta_{JA}$	Thermal impedance <sup>(4)</sup>	N package		69	°C/W
		PW package		83	
$T_{stg}$	Storage temperature range		-65	150	°C

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

(3) This value is limited to 5.5 V maximum.

(4) The package thermal impedance is calculated in accordance with JESD 51-7.

## RECOMMENDED OPERATING CONDITIONS<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage		2	5.5	V	
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 2 V	1.5		V	
		V <sub>CC</sub> = 3.3 V ±0.3 V	V <sub>CC</sub> × 0.7			
		V <sub>CC</sub> = 5 V ±0.5 V	V <sub>CC</sub> × 0.7			
V <sub>IL</sub>	Low-level input voltage	V <sub>CC</sub> = 2 V		0.5	V	
		V <sub>CC</sub> = 3.3 V ±0.3 V		V <sub>CC</sub> × 0.3		
		V <sub>CC</sub> = 5 V ±0.5 V		V <sub>CC</sub> × 0.3		
V <sub>I</sub>	Input voltage		0	5.5	V	
V <sub>O</sub>	Output voltage	High or low state	0	V <sub>CC</sub>	V	
		3-state	0	5.5		
I <sub>OH</sub>	High-level output current	V <sub>CC</sub> = 2 V		−50	μA	
		V <sub>CC</sub> = 3.3 V ±0.3 V		−6	mA	
		V <sub>CC</sub> = 5 V ±0.5 V		−12		
I <sub>OL</sub>	Low-level output current	V <sub>CC</sub> = 2 V		50	μA	
		V <sub>CC</sub> = 3.3 V ±0.3 V		6	mA	
		V <sub>CC</sub> = 5 V ±0.5 V		12		
Δt/ΔV	Input transition rise or fall rate	T/ $\overline{C}$ , $\overline{OE}$	V <sub>CC</sub> = 3.3 V ±0.3 V	0	100	ns/V
			V <sub>CC</sub> = 5 V ±0.5 V	0	20	
		D	V <sub>CC</sub> = 3.3 V ±0.3 V	0	3	ms/V
			V <sub>CC</sub> = 5 V ±0.5 V	0	2	
t <sub>pa</sub>	Pulse reception time <sup>(2)</sup>	V <sub>CC</sub> = 3.3 V ±0.3 V	100		ns	
		V <sub>CC</sub> = 5 V ±0.5 V	60			
T <sub>A</sub>	Operating free-air temperature		−40	85	°C	

(1) All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation.

(2) Buffer inputs D1 to D8 might accept no pulse after  $t_{pa}$  period after receiving the first pulse edge. If the input state changes from H to L or L to H in this period, the corresponding output changes from L to H or H to L respectively, in  $t_{pa} + t_{pd}$  as delay time in worst-case scenario.

Maximum input frequency,  $f_{max}$ , is calculated by the following formula:

$f_{max} = \text{input pulse duty cycle} / (t_{pa(min)} + t_{pd(max)})$  when input pulse duty cycle <50%

$f_{max} = (1 - \text{input pulse duty cycle}) / (t_{pa(min)} + t_{pd(max)})$  when input pulse duty cycle >50%

## ELECTRICAL CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V <sub>CC</sub>	MIN	TYP <sup>(1)</sup>	MAX	UNIT
V <sub>T+</sub> Positive-going input threshold voltage	D	3.3 V			2.31	V
		5 V			3.5	
V <sub>T-</sub> Negative-going input threshold voltage	D	3.3 V	0.99			V
		5 V	1.5			
ΔV <sub>T</sub> Hysteresis (V <sub>T+</sub> – V <sub>T-</sub> )	D	3.3 V	0.33		1.32	V
		5 V	0.5		2	
V <sub>OH</sub> High-level output voltage	I <sub>OH</sub> = –50 μA	2 V	1.9			V
	I <sub>OH</sub> = –6 μA	3 V	2.48			
	I <sub>OH</sub> = –12 μA	4.5 V	3.8			
V <sub>OL</sub> Low-level output voltage	I <sub>OL</sub> = 50 μA	2 V			0.1	V
	I <sub>OL</sub> = 6 μA	3 V			0.44	
	I <sub>OL</sub> = 12 μA	4.5 V			0.55	
I <sub>I</sub> Input current	V <sub>I</sub> = 5.5 V or GND	0 V to 5.5 V			±1	μA
I <sub>OZ</sub> OFF-state output current	V <sub>O</sub> = V <sub>CC</sub> or GND	5.5 V			±5	μA
I <sub>CC</sub> Supply current	V <sub>I</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0 A	5.5 V			20	μA
C <sub>I</sub> Input capacitance	V <sub>I</sub> = V <sub>CC</sub> or GND	5 V		3		pF
C <sub>O</sub> Output capacitance	V <sub>O</sub> = V <sub>CC</sub> or GND	5 V		5		pF
C <sub>pd</sub> Power dissipation capacitance	f = 1 MHz, no load	5 V		15		pF

(1) All typical values are at T<sub>A</sub> = 25°C.

## SWITCHING CHARACTERISTICS

V<sub>CC</sub> = 3.3 V ±0.3 V, T<sub>A</sub> = –40°C to 85°C, see [Figure 1](#)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	MIN	TYP	MAX	UNIT
t <sub>pd</sub> Propagation delay time	D	Y	C <sub>L</sub> = 15 pF	1	15	29	ns
			C <sub>L</sub> = 50 pF	1	18	34	
	T/ $\overline{C}$		C <sub>L</sub> = 15 pF	1	16	30	
			C <sub>L</sub> = 50 pF	1	20	36	
t <sub>en</sub> Enable time	$\overline{OE}$	Y	C <sub>L</sub> = 15 pF	1	9	16	ns
			C <sub>L</sub> = 50 pF	1	11	20	
t <sub>dis</sub> Disable time	$\overline{OE}$	Y	C <sub>L</sub> = 15 pF	1	8	14	ns
			C <sub>L</sub> = 50 pF	1	11	18	

## SWITCHING CHARACTERISTICS

V<sub>CC</sub> = 5 V ±0.5 V, T<sub>A</sub> = –40°C to 85°C, see [Figure 1](#)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE	MIN	TYP	MAX	UNIT
t <sub>pd</sub> Propagation delay time	D	Y	C <sub>L</sub> = 15 pF	1	10	16	ns
			C <sub>L</sub> = 50 pF	1	12	20	
	T/ $\overline{C}$		C <sub>L</sub> = 15 pF	1	11	17	
			C <sub>L</sub> = 50 pF	1	13	21	
t <sub>en</sub> Enable time	$\overline{OE}$	Y	C <sub>L</sub> = 15 pF	1	6	10.5	ns
			C <sub>L</sub> = 50 pF	1	8	12.5	
t <sub>dis</sub> Disable time	$\overline{OE}$	Y	C <sub>L</sub> = 15 pF	1	6	10	ns
			C <sub>L</sub> = 50 pF	1	8	11.5	


## NOISE CHARACTERISTICS<sup>(1)</sup>

$V_{CC} = 5\text{ V}$ ,  $C_L = 50\text{ pF}$ ,  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$

PARAMETER	MIN	TYP	MAX	UNIT
$V_{OL(P)}$ Quiet output, maximum dynamic $V_{OL}$		0.4		V
$V_{OL(V)}$ Quiet output, minimum dynamic $V_{OL}$		–0.4		V
$V_{OH(V)}$ Quiet output, minimum dynamic $V_{OH}$		4.5		V
$V_{IH(D)}$ High-level dynamic input voltage	3.5			V
$V_{IL(D)}$ Low-level dynamic input voltage			1.5	V

(1) Characteristics are for surface-mount packages only.

## PARAMETER MEASUREMENT INFORMATION

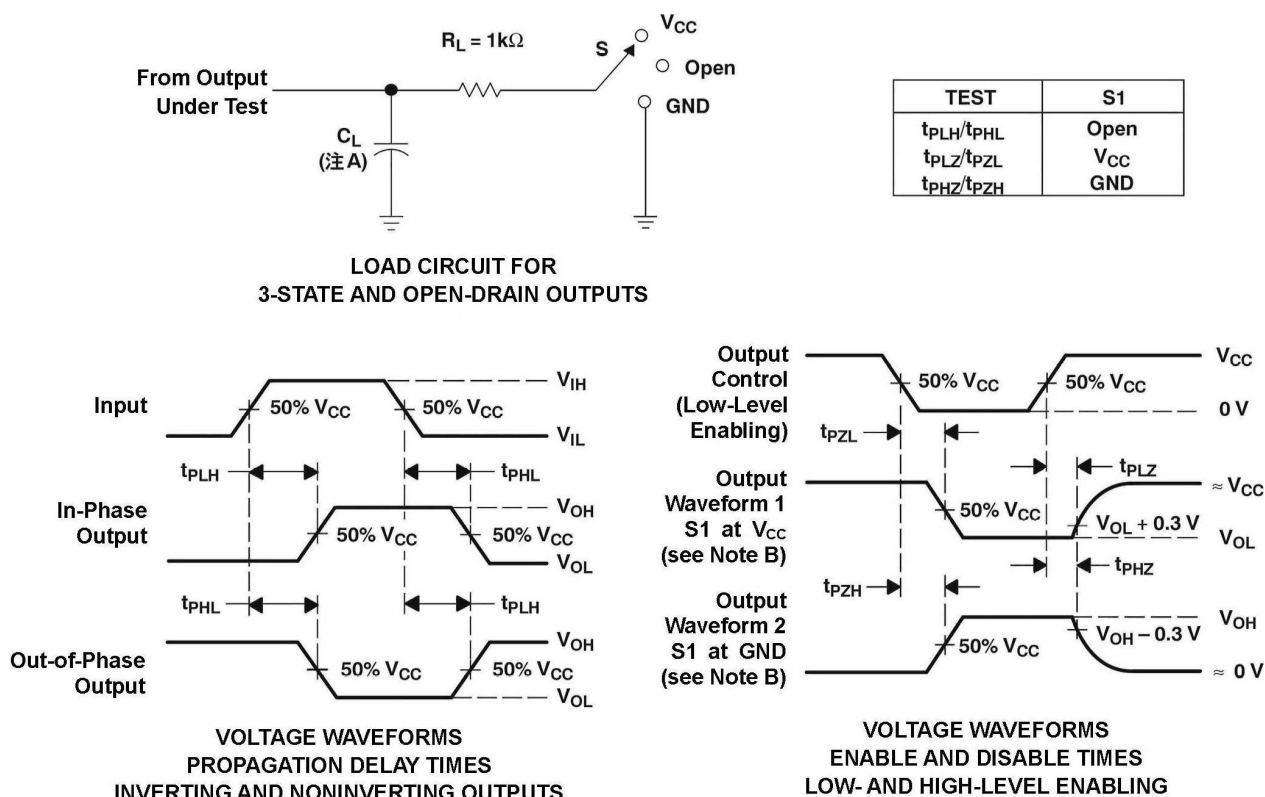

- $C_L$  includes probe and jig capacitance.
- Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.  
Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics:  $PRR \leq 1\text{ MHz}$ ,  $Z_O = 50\ \Omega$ ,  $t_r \leq 3\text{ ns}$ ,  $t_f \leq 3\text{ ns}$ .
- The outputs are measured one at a time with one transition per measurement.
- $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

Figure 1. Load Circuit and Voltage Waveforms

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
SN74AHC8541N	Active	Production	PDIP (N)   20	20   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	SN74AHC8541N
SN74AHC8541N.A	Active	Production	PDIP (N)   20	20   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	SN74AHC8541N

- (1) **Status:** For more details on status, see our [product life cycle](#).
- (2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- (4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TUBE



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
SN74AHC8541N	N	PDIP	20	20	506	13.97	11230	4.32
SN74AHC8541N.A	N	PDIP	20	20	506	13.97	11230	4.32

## N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE



PINS **	14	16	18	20
DIM				
A MAX	0.775 (19,69)	0.775 (19,69)	0.920 (23,37)	1.060 (26,92)
A MIN	0.745 (18,92)	0.745 (18,92)	0.850 (21,59)	0.940 (23,88)
MS-001 VARIATION	AA	BB	AC	AD



14/18 Pin Only  
20 Pin vendor option

4040049/E 12/2002

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - The 20 pin end lead shoulder width is a vendor option, either half or full width.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025