

# DS90UB983-Q1 4K DisplayPort/eDP to FPD-Link IV Bridge Serializer

## 1 Features

- DisplayPort receiver
  - DP/eDP v1.4 compatible
  - Supports data lane swap and polarity inversion
  - HBR3/HBR2/HBR/RBR link bit rates
  - Main link: 1, 2, or 4 lanes
  - Each lane up to 8.1Gbps
  - AUX CH 1Mbps
  - Hot plug detect (HPD)
  - Multi-display (MST) and SST support
  - Supports Symmetric and Asymmetric MST
  - Daisy chaining and splitting
  - SuperFrame unpacking capability
  - Suitable for 4K at 60Hz video resolution
- FPD-Link IV interface
  - Supports 13.5/12.528/10.8/6.75/3.375Gbps per channel; Up to 27Gbps over dual channels
  - Coax/STP interconnect support
  - Port splitting to enable Y-cable interfaces
  - MST and SuperFrame based data splitting to different FPD channels
- Ultra-low latency control channel
  - Three fast-mode plus I<sup>2</sup>C up to 1MHz (up to 3.4MHz for local bus access)
  - High speed GPIOs
- Backwards compatibility
  - IVI 94x and 92x product families
- Security and diagnostics
  - Link diagnostics
  - Voltage and temperature monitoring
  - Line fault detection
  - BIST and pattern generation
  - CRC and error diagnostics
  - ECC error correction for control bits
  - Replica mode for redundancy
- Advanced link robustness and EMC control
  - Spread Spectrum Clocking (SSC) input support
  - Spread Spectrum Clocking Generation (SSCG)
  - Data scrambling
- Low power operation
  - 1.8V and 1.15V dual power supply
- AEC-Q100 qualified for automotive applications
  - AEC-Q grade-level 2, –40°C to 105°C
  - 64 pin QFN wettable flanks 9mm × 9mm
  - ISO 10605 and IEC 61000-4-2 ESD compliant

## 2 Applications

- Automotive displays:
  - Central Information Displays (CID)
  - Rear Seat Entertainment (RSE)
  - Digital instrument clusters
  - Head units and HMI modules
  - Head Up Display (HUD)
  - Rear view and side mirror displays

## 3 Description

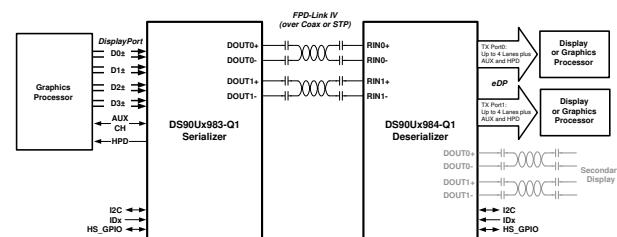
The DS90UB983-Q1 is a DisplayPort/eDP to FPD-Link III/IV bridge device. In conjunction with an FPD-Link IV deserializer, the chipset provides a high-speed serialized interface over low-cost 50Ω coax or STP cables. The DS90UB983-Q1 is a VESA DP Standard v1.4 compatible device that supports advanced features such as MST, HBR3, and SuperFrame formats. The device is capable of supporting video resolution up to 4K resolutions with 30-bit color. 8b10b encoded DP data is serialized onto an FPD-Link IV interface output. The FPD-Link IV interface supports video and audio data transmission and full duplex control, including I<sup>2</sup>C, and GPIO data over a single channel or dual channels. Consolidation of video data and control over FPD-Link IV lanes reduces the interconnect size and weight and simplifies system design. EMI is minimized by the use of low voltage differential signaling, data scrambling, SSCG, and randomization. In backward compatible mode, the device supports up to 720p and 1080p resolutions with 24 bit color depth over a single/dual link.

### Package Information

PART NUMBER	PACKAGE <sup>(1)</sup>	PACKAGING SIZE <sup>(2)</sup>
DS90UB983-Q1	RTD (VQFN, 64)	9mm × 9mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

(2) The package size (length × width) is a nominal value and includes pins, where applicable.



Simplified Application Diagram



An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

## Table of Contents

<b>1 Features</b> .....	<b>1</b>	4.3 Support Resources.....	<b>3</b>
<b>2 Applications</b> .....	<b>1</b>	4.4 Trademarks.....	<b>3</b>
<b>3 Description</b> .....	<b>1</b>	4.5 Electrostatic Discharge Caution.....	<b>3</b>
<b>4 Device and Documentation Support</b> .....	<b>3</b>	4.6 Glossary.....	<b>3</b>
4.1 Documentation Support.....	<b>3</b>	<b>5 Revision History</b> .....	<b>3</b>
4.2 Receiving Notification of Documentation Updates.....	<b>3</b>	<b>6 Mechanical, Packaging, and Orderable Information</b> .....	<b>4</b>

## 4 Device and Documentation Support

### 4.1 Documentation Support

#### 4.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, [Soldering Specifications](#) application note
- Texas Instruments, [Semiconductor and IC Package Thermal Metrics](#) application note
- Texas Instruments, [Leadless Leadframe Package \(LLP\)](#) application note
- Texas Instruments, [LVDS Owner's Manual](#)
- Texas Instruments, [I2C Communication Over FPD-Link III with Bidirectional Control Channel](#) application note
- Texas Instruments, [Exploring the Internal Test Pattern Generation Feature of 720p FPD-Link III Devices](#) application note
- Texas Instruments, [I2C Bus Pullup Resistor Calculation](#) application note
- Texas Instruments FPD-Link Learning Center, [FPD-Link Fundamental Material](#) video series
- Texas Instruments, [Ten tips for successfully designing with automotive EMC/EMI requirements](#)
- Texas Instruments, [Serial Line-Fault Detection](#) (Contact TI)

#### 4.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](http://ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

#### 4.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

#### 4.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

#### 4.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### 4.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 5 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
February 2024	*	Initial Release

## 6 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
DS90UB983RTDRQ1	Active	Production	VQFN (RTD)   64	2000   LARGE T&R	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 105	UB983
DS90UB983RTDRQ1.A	Active	Production	VQFN (RTD)   64	2000   LARGE T&R	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 105	UB983
DS90UB983RTDTQ1	Active	Production	VQFN (RTD)   64	250   SMALL T&R	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 105	UB983
DS90UB983RTDTQ1.A	Active	Production	VQFN (RTD)   64	250   SMALL T&R	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 105	UB983

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

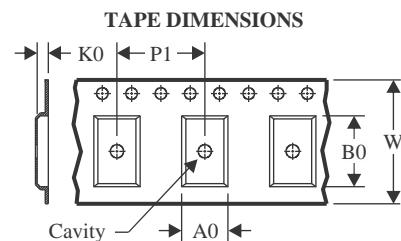
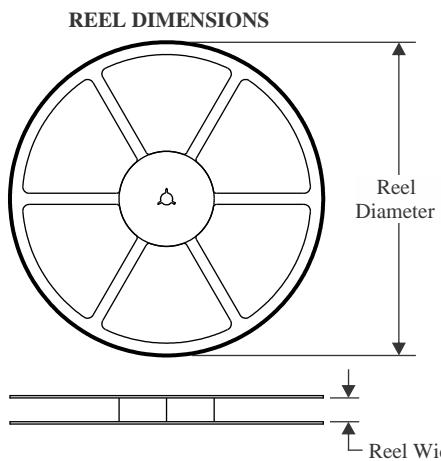
<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

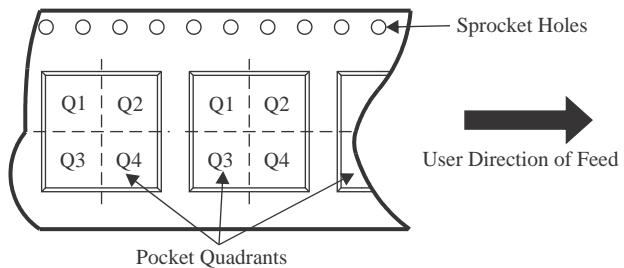
Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

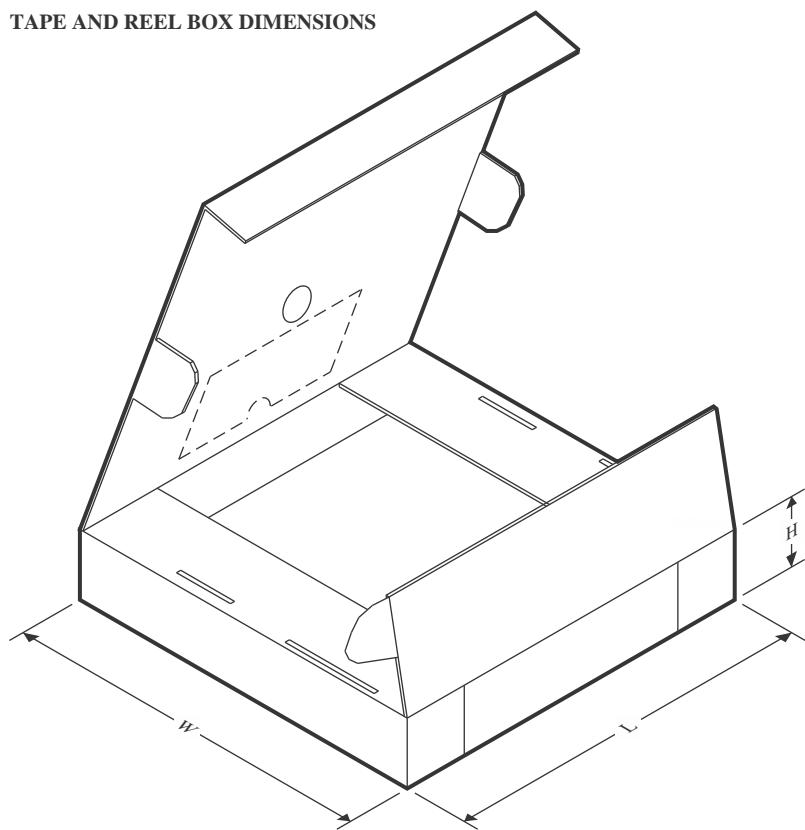
**TAPE AND REEL INFORMATION**


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DS90UB983RTDRQ1	VQFN	RTD	64	2000	330.0	16.4	9.3	9.3	1.1	12.0	16.0	Q2

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

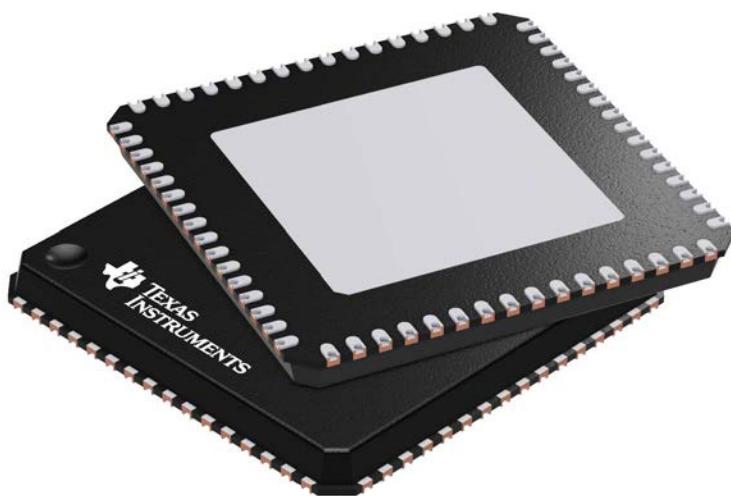
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DS90UB983RTDRQ1	VQFN	RTD	64	2000	367.0	367.0	35.0

## GENERIC PACKAGE VIEW

**RTD 64**

**VQFNP - 0.9 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD



Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4205146/D

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025