

# SN54LS323, SN74LS323 8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS


SDLS160

OCTOBER 1976 - REVISED MARCH 1988

- Multiplexed Inputs/Outputs Provide Improved Bit Density
- Four Modes of Operation:
  - Hold (Store) Shift Left
  - Shift Right Load Data
- Operates with Outputs Enabled or at High Z
- 3-State Outputs Drive Bus Lines Directly
- Can Be Cascaded for N-Bit Word Lengths
- Typical Power Dissipation . . . 175 mW
- Exceptionally Stable Shift (Clock) Frequency . . . 25 MHz
- Applications:
  - Stacked or Push-Down Registers, Buffer Storage, and Accumulator Registers
- SN54LS299 and SN74LS299 Are Similar But Have Direct Overriding Clear


SN54LS323 . . . J OR W PACKAGE  
SN74LS323 . . . DW OR N PACKAGE

(TOP VIEW)

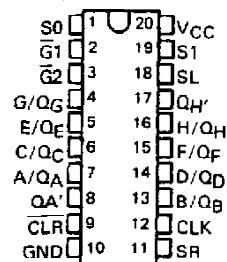

SN54LS323 . . . FK PACKAGE

(TOP VIEW)

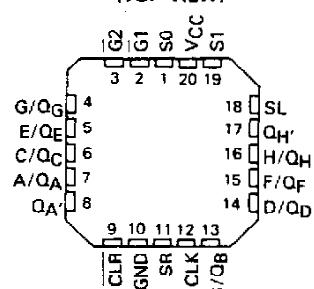

## description

These Low-Power Schottky eight-bit universal registers feature multiplexed inputs/outputs to achieve full eight-bit data handling in a single 20-pin package. Two function-select inputs and two output-control inputs can be used to choose the modes of operation listed in the function table. Synchronous parallel loading is accomplished by taking both function-select lines, S0 and S1, high. This places the three-state outputs in a high-impedance state, which permits data that is applied on the input/output lines to be clocked into the register. Reading out of the register can be accomplished while the outputs are enabled in any mode. The clear function is synchronous, and a low level at the clear input clears the register on the next low-to-high transition of the clock.

## FUNCTION TABLE

MODE	INPUTS					INPUTS/OUTPUTS								OUTPUTS					
	CLR	FUNCTION		CLK	SERIAL	A/QA B/QB C/QC D/QD E/QE F/QF G/QG H/QH								QA' QH'					
		SELECT	OUTPUT CONTROL			S1	S0	G1 <sup>t</sup>	G2 <sup>t</sup>	SL	SR	QAO	QBD	QCO	QDO	QE0	QFO	QG0	QHO
Clear	L	X	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
	L	L	X	L	L	L	L	X	X	L	L	L	L	L	L	L	L	L	L
	L	H	H	X	X	L	L	X	X	X	X	X	X	X	X	X	X	X	L
Hold	H	L	L	L	L	X	X	X	X	QAO	QBD	QCO	QDO	QE0	QFO	QG0	QHO	QA' QH'	QA' QH'
	H	X	X	L	L	L	X	X	X	QAO	QBD	QCO	QDO	QE0	QFO	QG0	QHO	QA' QH'	QA' QH'
Shift Right	H	L	H	L	L	L	L	X	H	H	QAn	QBn	QCn	QDn	QE <sub>n</sub>	QFn	QGn	H	QGn
	H	L	H	L	L	L	L	X	L	L	QAn	QBn	QCn	QDn	QE <sub>n</sub>	QFn	QGn	L	QGn
Shift Left	H	H	L	L	L	L	L	L	X	H	QBn	QCh	QDn	QE <sub>n</sub>	QFn	QGn	QHn	H	QBn
	H	H	L	L	L	L	L	X	L	X	QBn	QCh	QDn	QE <sub>n</sub>	QFn	QGn	QHn	L	QBn
Load	H	H	H	X	X	L	L	L	L	X	X	a	b	c	d	e	f	g	h

<sup>t</sup>When one or both output controls are high the eight input/output terminals are disabled to the high-impedance state; however, sequential operation or clearing of the register is not affected.

a . . . h = the level of the steady-state input at inputs A through H, respectively. These data are loaded into the flip-flops while the flip-flop outputs are isolated from the input/output terminals.


PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS  
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265


# SN54LS323, SN74LS323 8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS

## logic symbol<sup>†</sup>

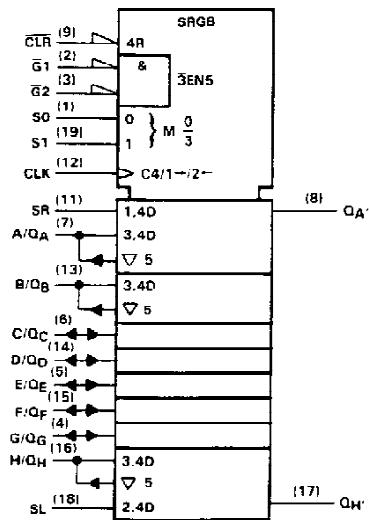

<sup>†</sup>This symbol is in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.  
Pin numbers shown are for DW, J, N, and W packages.

## logic diagram (positive logic)

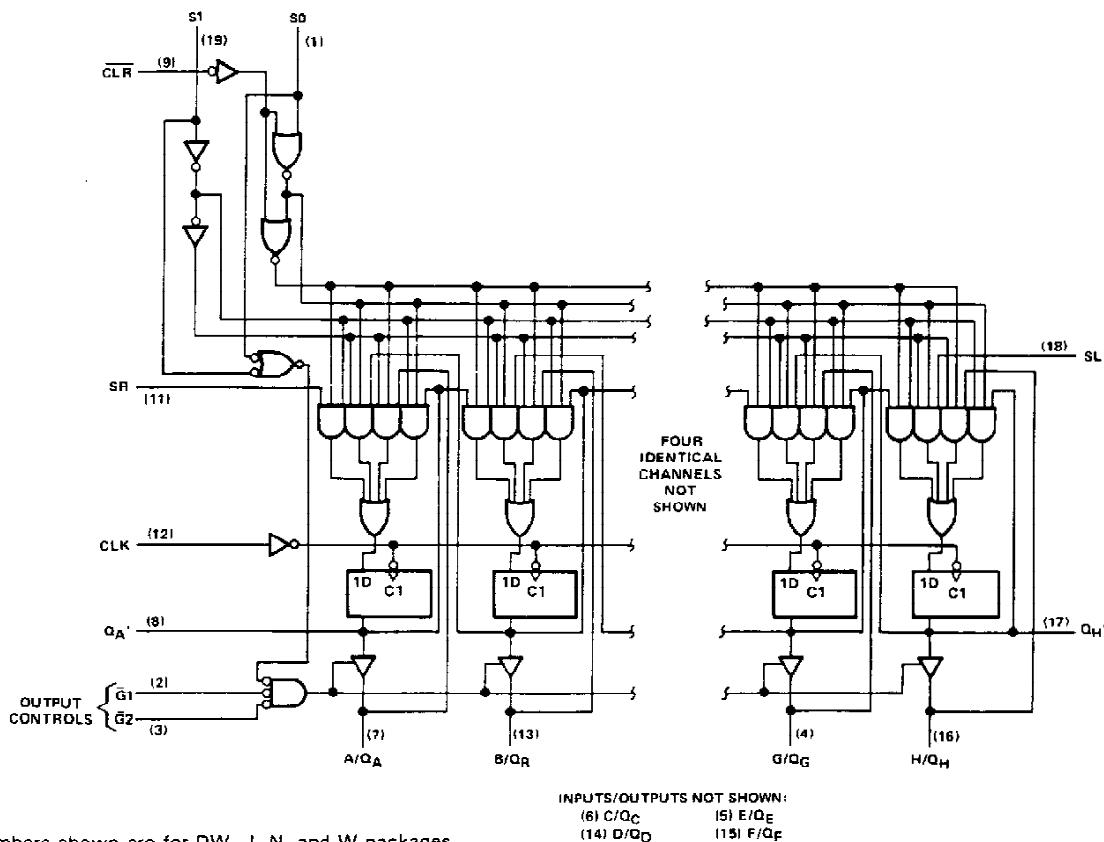

TEXAS  
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN54LS323, SN74LS323**  
**8-BIT UNIVERSAL SHIFT/STORAGE REGISTERS**

**schematics of inputs and outputs, absolute maximum ratings, recommended operating conditions, and electrical characteristics**

Same as SN54LS299 and SN74LS299, except  $t_{SU}$  (Clear Inactive) does not apply.

**switching characteristics,  $V_{CC} = 5$  V,  $T_A = 25^\circ C$**

PARAMETER <sup>†</sup>	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{max}$			See Note 1	25	35		MHz
$t_{PLH}$	CLK	$Q_A'$ or $Q_H'$	$C_L = 15 \text{ pF}, R_L = 2 \text{ k}\Omega$	22	33		
$t_{PHL}$				26	39		ns
$t_{PLH}$	CLK	$Q_A$ thru $Q_H$	$C_L = 45 \text{ pF}, R_L = 665 \Omega$	17	25		
$t_{PHL}$				25	39		ns
$t_{PZH}$	$\bar{G}_1, \bar{G}_2$	$Q_A$ thru $Q_H$	$C_L = 5 \text{ pF}, R_L = 665 \Omega$	14	21		
$t_{PZL}$				20	30		ns
$t_{PHZ}$	$\bar{G}_1, \bar{G}_2$	$Q_A$ thru $Q_H$	$C_L = 5 \text{ pF}, R_L = 665 \Omega$	10	20		
$t_{PLZ}$				10	15		ns

<sup>†</sup> $t_{max}$  = maximum clock frequency

$t_{PLH}$  = Propagation delay time, low-to-high-level output

$t_{PHL}$  = Propagation delay time, high-to-low-level output

$t_{PZH}$  = Output enable time to high level

$t_{PZL}$  = Output enable time to low level

$t_{PHZ}$  = Output disable time from high level

$t_{PLZ}$  = Output disable time from low level

NOTE 1: For testing  $f_{max}$ , all outputs are loaded simultaneously, each with  $C_L$  and  $R_L$  as specified for the propagation times. Load circuits and voltage waveforms are shown in Section 1.

**TEXAS**  
  
**INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">SN54LS323J</a>	Active	Production	CDIP (J)   20	20   TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	SN54LS323J
SN54LS323J.A	Active	Production	CDIP (J)   20	20   TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	SN54LS323J
SN54LS323J.A	Active	Production	CDIP (J)   20	20   TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	SN54LS323J
<a href="#">SNJ54LS323FK</a>	Active	Production	LCCC (FK)   20	55   TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	SNJ54LS 323FK
<a href="#">SNJ54LS323FK</a>	Active	Production	LCCC (FK)   20	55   TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	SNJ54LS 323FK
SNJ54LS323FK.A	Active	Production	LCCC (FK)   20	55   TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	SNJ54LS 323FK
SNJ54LS323FK.A	Active	Production	LCCC (FK)   20	55   TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	SNJ54LS 323FK

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

---

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

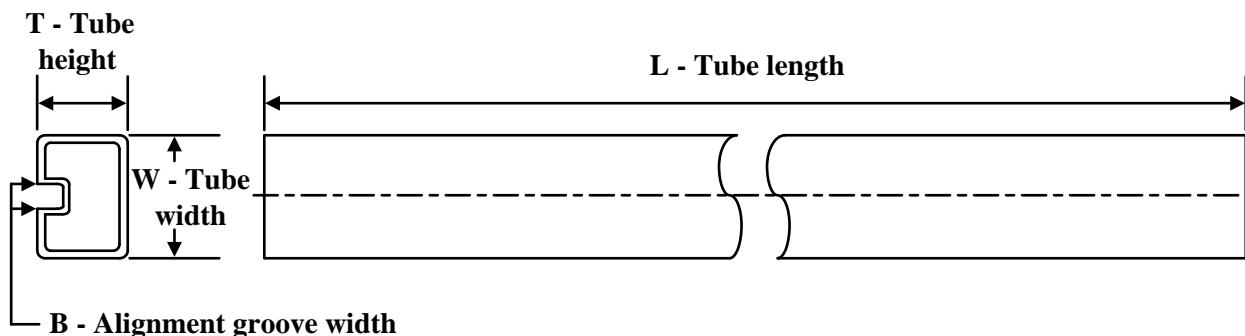**TUBE**


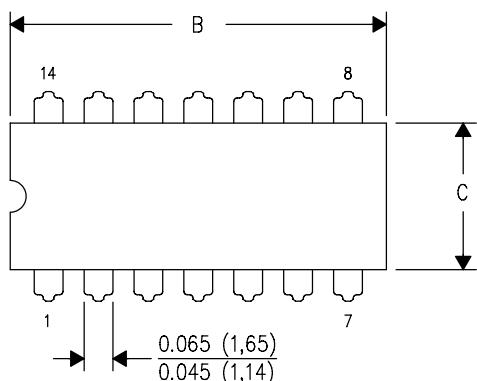
\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
SNJ54LS323FK	FK	LCCC	20	55	506.98	12.06	2030	NA
SNJ54LS323FK.A	FK	LCCC	20	55	506.98	12.06	2030	NA


J (R-GDIP-T\*\*)

14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE



PINS ** DIM	14	16	18	20
A	0.300 (7,62) BSC	0.300 (7,62) BSC	0.300 (7,62) BSC	0.300 (7,62) BSC
B MAX	0.785 (19,94)	.840 (21,34)	0.960 (24,38)	1.060 (26,92)
B MIN	—	—	—	—
C MAX	0.300 (7,62)	0.300 (7,62)	0.310 (7,87)	0.300 (7,62)
C MIN	0.245 (6,22)	0.245 (6,22)	0.220 (5,59)	0.245 (6,22)

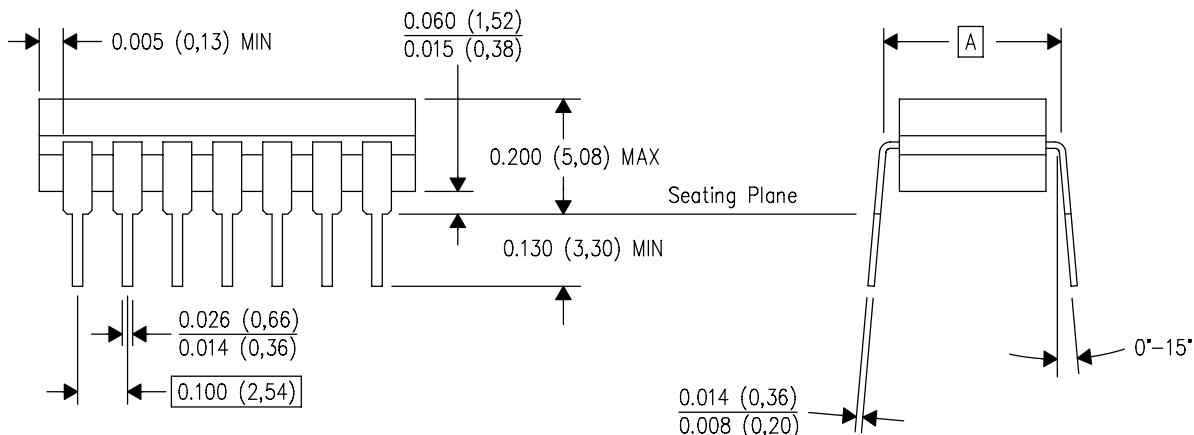

4040083/F 03/03

NOTES: A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.  
C. This package is hermetically sealed with a ceramic lid using glass frit.  
D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.  
E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

# GENERIC PACKAGE VIEW


**FK 20**

**LCCC - 2.03 mm max height**

**8.89 x 8.89, 1.27 mm pitch**

**LEADLESS CERAMIC CHIP CARRIER**

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

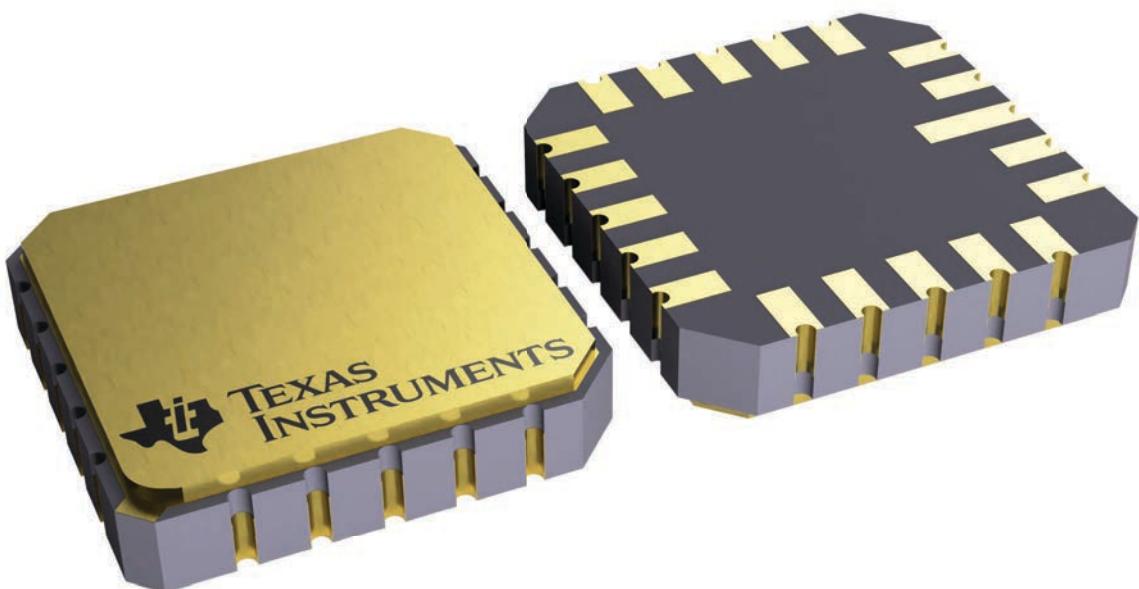

4229370VA\

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025